


Walkstation

Customer Needs:

The Walkstation is the first product in an entirely new category of products designed to help bring healthy habits to sedentary workers, while they are actually working. The Walkstation consists of a fully integrated electric height adjustable worksurface with an exclusively engineered, low speed, commercial grade treadmill.

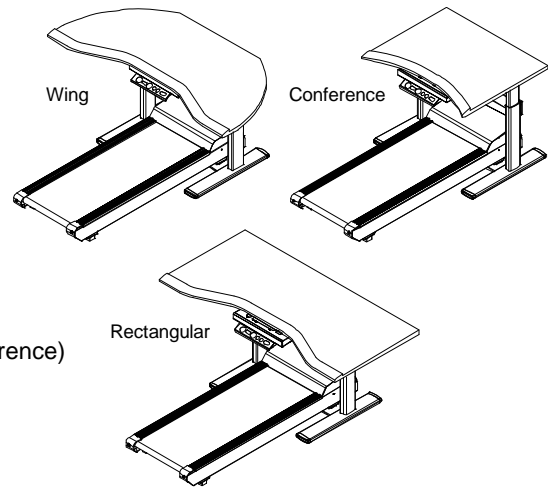

Product Features

Style Numbers: A7TG660606H (Wing), A7TR383030H (Conference) & A7TR663232H (Rectangular)

Size:	Worksurface Dimension	Overall Foot Print
A7TR660606H	W66" x D30"	W66" x D67"
A7TR383030H	W38" x D30"	W38" x D67"
A7TR663232H	W66" x D30"	W66" x D67"

Commercial Grade Treadmill Features

- The display console shows speed, calories burned, time and distance. Console may be visible or stored
- Controls are always out front and easily accessible
- Safety key is magnetic and always accessible
- Upper control parts are field replaceable via RJ-45 connectors
- High torque motor made to withstand the rigors of slow speeds for long periods of time
- Speed range: .3 mph - 2.0 mph with 0.1 mph speed adjustments
- Uses between 3 to 8 amps depending on the walking speed and load
- Plugs into a 110 volt outlet on a dedicated 20 Amp circuit
- Indicators on the belt to show movement and belt edge
- No incline
- Low step-up height
- Patented Soft System™ surface with Neoprene shock absorbers in front third of the deck
- Narrow frame design; Outer dimensions: W23-1/2" x D64" x H6". Belt area: W18" x L53"
- Treadmill finish: Black only
- Meets ETL requirements
- Treadmill frame: Powder coated welded steel
- Maximum weight capacity: 350 lbs.

Adjustable Worksurface Features

Adjustment:

- 3-stage synchronized lifting columns with integral shrouding
- Infinite height adjustment within the range
- 2.5" diameter glides have 1" of height adjustment for surface leveling on uneven floors
- Height adjustment on the treadmill key pad with three programmable presets

Performance & Specifications:

- 25-1/4" to 52" electric height adjustability range (assumes 1" glide adjustment)
Treadmill step up is 6"
- Travel speed is 1.7" per second
- Load capacity not dependent on weight distribution
- 360 lbs (2-leg) dynamic load bearing capacity per table (including worksurface)
- Lifting columns controlled by central control box to ensure synchronization
- Built-in limiter switches
- Soft stop motor eliminates abrupt starts and stops
- Electrical – 120V, 60Hz, Single phase, 10% duty cycle. May draw 5 amps maximum under full load, idle current is typically 20mA
- All assemblies meet or exceed ANSI/BIFMA standards
- More than just a worksurface; add the right worktools and it becomes a fully adjustable workstation

Top Construction:

- Core is 45 pound particle board
- Surface is High Pressure Laminate
- Urethane High Profile Edge is edge banded on the back and side to match the urethane finish on the front (user's) edge
- Reinforced where necessary with steel bars
- Worksurfaces have pre-drilled mounting holes for the base and display console
- Wire management is available
- Standard Steelcase Laminates
- Urethane High Profile Edge used for palm rest eliminates hard front edge and provides grip for balance
- Urethane High Profile Edge color: Black and Felt
- Front indent on worksurface gets user closer to the flat panel and keeps body aligned to treadmill base
- Worksurface proportioned for limited reach

Base Construction:

- Lifting column is steel. Feet and stretcher bar are extruded aluminum.
- Color: Black and Platinum
- Low profile column construction
- Precision balanced lifting columns minimize surface vibration
- Electronics are 100% tested
- Electronics are UL and CUL recognized components
- Internal DC motor housed inside lifting column ensures smooth, quiet operation and no magnetic interference with a monitor on the worksurface
- Wire management trough provided to manage excess controller wires

Base Construction: cont.

- 9 ft. power cord
- Ships K.D. – minimal tools required for assembly
- Metal Treadmill Receiver Plate between table feet insures stability (table will not tip over), keeps treadmill and table aligned and secures treadmill front to back

Terms & Conditions:

Warranty

- Lifetime warranty on feet and stretchers
- 12 year warranty on worksurfaces
- 5 years warranty on lifting column, electronics, and urethane profile.
- Treadmill frame has a lifetime warranty
- Treadmill parts and wear items are warranted for three (3) years.
- Treadmill service and labor are warranted for one (1) year.

Leadtime:

- Standard – 4 to 6 weeks upon order acknowledgement
- Specials – Anything not included in the above, including COL
All leadtimes subject to change based on business conditions

Returns: Standard returns policy applies

Freight: Pre-paid

Product ships K.D.: Final assembly and installation costs should be considered separately

Standard Urethane High Profile Edge Finishes:

- 6000 Black
- 6278 Felt

Standard Base Finishes:

- 0835 Black
- 4799 Platinum

Recommended Installation Specifications:

- Allow three feet from the outside edge of the treadmill base on both sides and rear. Only exception is if unit is pushed up against a plain, unobstructed wall on one side.
- Use of an FYI™ Flat Panel Monitor Arm is recommended.
- Use of a wireless keyboard without a palm rest and wireless mouse is recommended.
- Use of a telephone headset is recommended.
- Place unit clear of furniture and other obstructions.

For further information, please go to Steelcase.com
or call 888.783.3522

P.O. Box 1967 Grand Rapids, MI 49501-1967
©2013 Steelcase Inc. All rights reserved. 4/13