Avenir Systems Furniture Specification Guide

Availability

Electronic price list updated with release 190.A (U.S.) and 151.A (Canada), dated April 15, 2019.

Spec News is available on *village.steelcase.com*. Search Steelcase Marketing Resources (Adstock) and download the current release's Spec News.

Tip: Steelcase Marketing Resources is a new global platform for ordering Steelcase marketing materials that replaces Adstock.

View or download Steelcase Specification Guides at https://www.steelcase.com/resources/documents?tax-[doctype]=spec-guide.

Transitional products in this specification guide are maintained for existing customers only and are likely to be phased out over time. These products are indicated with a \blacksquare . Products that are scheduled to be culled are indicated with an \blacksquare , followed by the last order entry date.

Surface Materials

The surface materials team has announced the launch of the Finish Library, found at *http://finishlibrary.steelcase.com*.

► For a list of all trademarks, refer to the last page of this specification guide.

© 2019 Steelcase Inc.



For Canadian Pricing

Canadian factor can be found at steelcase.com/CADpricing.

Calculate in the following order to avoid rounding errors:

- Multiply the base price and each option by the Canadian factor.
- · Round each to the nearest dollar.
- · Add base and options for total list price.

Working With This Specification Guide	
Ten Tips: How to Get the Most Out of This Book	2
Things to Know About Avenir	4
Additional Resources	6
Related Products	7
Understanding	
Panels	9
Worksurfaces and Related Products	63
Storage	125
Lighting	163
Wiring and Cabling	181
Specifying	
Specifying Tips	204
Panels	207
Worksurfaces and Related Products	249
Storage	305
Lighting	339
Surface Materials	351
Resources	
Lock and Keying	374


This specification guide contains multiple Steelcase product lines which are designed into one specification guide for your convenience. Note that each product may be subject to different pricing terms and conditions.

376

Style Number Index

Ten Tips:

How to Get the Most Out of This Book



Watch the tabs on the right-hand edges of the pages. They'll always indicate which chapter you are in

Use the Statement of Line pages for an overview of the available components, their sizes, and page references for additional information. Each *Understanding* chapter includes a statement of line after the table of contents.


пе ep

Find cross references by looking for page numbers flagged with an arrow.

Tip

Study the product detail pages in the *Understanding* section to learn everything an expert knows about specific products. Each product detail page in this section contains the following features, where applicable:

- Product Drawing
- Actual Dimensions
- · Product Details
- Connections
- · Wiring and Cabling
- Surface Materials
- · Application Topics

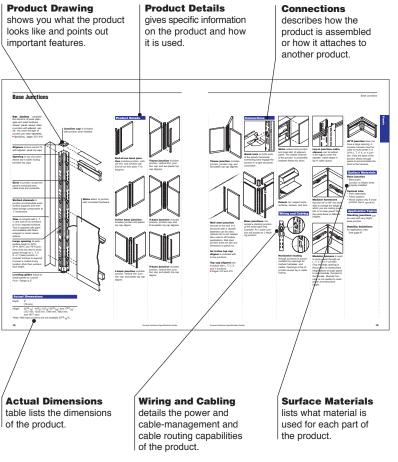

Tip 5

Refer to the specifying

pages for all the information needed to order a product. Each product specifying page contains a variety of elements to help you complete a specification:

- · Product Drawing
- · Standard Includes
- · Required to Specify
- Options
- · Related Products
- Specification Information
- Dimensions
- · Style Number
- Price

Standard Includes

(under the red or dark grey band) provides a list of what comes standard with the product.

(under the red or dark grey

band) itemizes the informa-

order the standard product

and the preferred sequence

for specification.

tion that you must provide to

Product Drawing

shows you what the product looks like.

Specification **Required to Specify** Information

(under the teal or light grey band) provides product dimensions, style numbers, and prices for the standard product and any surface material choices that are available.

• U.S. • Option • Base • Mold Str • Price • Sec Pric Change-o Height Top Cap

Options

(under the black band) lists all the options that apply to the product, their price, and what is required to specify.

Related Products

provide specification information for products that are directly related.

Tip 6

Specify with Customiz Stain

Italic typeface on specifying pages usually identifies wording that you should use in your order.


Tip 7

To determine how many skins are needed to complete a panel, consult the table at the right.

Tip: Remember to order skins for both sides of the panel buildup.

Watch for tips throughout the text that give you explanations and helpful instructions.

Tip 8



Learn what you cannot do by looking for drawings crossed out with an "X."

Tip 9

Use the surface materials listings in the Surface Materials section of this book to find surface material color numbers.

Tip 10


Style Number	Page
TS7042BL	131
TS7042S	130
T\$7048BL	131
TS7048S	130
TS7060BL	131
TS7060S	130
TS7072BL	131

Refer to the style number index when you know a style number and you need to find the page that has more details about the product.

Things to Know About Avenir

Panels

Panels are available to define spaces and create privacy for individuals and teams. Panels can be used to support shelves and storage bins and worksurfaces. Or worksurfaces can be freestanding.




Tackable acoustical panels comprise a steel frame and acoustical surfaces attached to each side.


Worksurfaces

Worksurfaces are available in four types:


- Avenir Universal worksurfaces
- Avenir 1½"-thick panel-supported worksurfaces
- · Curvilinear worksurfaces

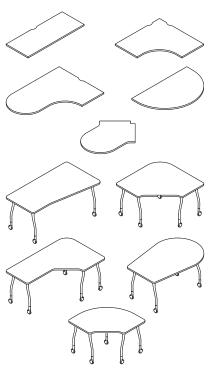

Avenir Universal worksurfaces are available in a broad range of shapes, including panel-hung and freestanding. Avenir Universal worksurfaces have a wood core and a laminate surface.



Avenir 1½"-thick worksurfaces are available in a broad range of shapes. Avenir 1½" Thick worksurfaces have a wood core and a wood or laminate surface



Curvilinear worksurfaces are available to allow a broader range of workstation layouts. The worksurfaces have a wood core with a laminate surface.

Storage

Storage with Avenir-style pulls includes fixed pedestals and lateral files.










(800 Series lateral files)


Storage with 200 Series pulls includes a broad array of choices, including fixed pedestals, worksurface-supported pedestals, mobile pedestals, and 200 Series lateral files.




(TS 200 Series lateral files)

Wiring and Cabling

Power distribution systems can be built using powerways in Avenir.



Powerways can be used to build power distribution networks within the bases of Avenir panels. A full range of components are available to allow power networks to go wherever there are panels and to provide access where the user needs it.



Internode components can be used to build power distribution networks and data/voice networks. These components attach above and below Avenir worksurfaces. Internode components cannot connect to Avenir powerways.

Additional Resources

Avenir is supported with an array of informational materials, tools, and software to help you plan an installation efficiently.

Product brochures and planning tools can

be ordered through your Steelcase area office by calling 1.800.784.0358 or through the Marketing Resouces web site at village.steelcase.com.

Product Brochures

Avenir

This brochure is designed to give you a general overview of Avenir, and ways to renew and refresh Avenir with Universal Storage and Universal Worksurfaces. Form number 05-0000976

Planning Tools

Quick Ship Guide

This handbook describes all Steelcase, Turnstone, and Coalesse products that are available for Rapid2 (ships in 2 days), Rapid5 (ships in 5-7 days), or Coalesse Rapid10 (ships in 10 days).

Printed Materials

Surface Materials Reference Manual

- This publication provides:An explanation of the surface materials
- · "Available on" matrices
- Vertical surface fabric and seating upholstery selection listing
- Technical data for surface materials
- Surface material care and cleaning instructions

Computer Tools

Electronic Catalog

Accurate sales quotations and purchase orders for Steelcase products are created with specification software that uses Steelcase Electronic Catalog data. Use the data to specify and price style numbers and options for every Steelcase product. The data is updated bimonthly by Steelcase and provided to software programs including: the Hedberg Business System, SmartTools- Steelcase's design and specification software (for more information on SmartTools, please email SmartTools@steelcase.com), the ProjectMatrix ProjectSymbols libraries, as well as 20-20 CAP Studio.

Furniture Symbol Graphic Data

Steelcase creates 2D and 3D furniture symbols (with attributes) for planning and initially specifying Steelcase products. This data is incorporated into several add-on software packages that work in either a Microstation or an AutoCAD drafting environment.

For more information about these and other software tools to help you plan effective work environments, please email fsl@steelcase.com.

Digital Publications

You can access these digital publications at www. steelcase.com or village. steelcase.com.

Product Comparison CD

This interactive tool is filled with basic product information and comprehensive data detailing how Steelcase and competitors position their products, enabling you to compare Steelcase products to the competition. Invaluable in helping to prepare bids, proposals, and presentations. Form number \$10847

Avenir Product Training

Basic training for Avenir is available as part of the Building Product Muscle (BPM) curriculum on the Steelcase University Web site at village.steelcase.com.

The Avenir BPM is a selfpaced, printable module designed to build knowledge of the Avenir's positioning, statement of line, features and benefits, competitive products, application, and sales presentation for Steelcase and dealer salespeople. The Avenir BPM is course SAL119.

Installation Training is

available for salespeople. This Avenir sales-focused product training gives hands-on learning opportunities on how products work and how to present features and benefits. The course code is SAL 133.

Enhancing Your Avenir Environments CD-ROM

This interactive CD tool helps customers leverage their existing Avenir products. Form number 04-0012964

Support

Steelcase Capabilities

Steelcase products are distributed, installed, and serviced through a network of more than 600 dealers worldwide. Steelcase is also represented with offices and corporate showrooms in 26 U.S. cities, 4 Canadian cities, and in France, Germany, Great Britain, and Japan. Every Steelcase product meets our exceptionally high standards of quality and durability and comes with the Steelcase assurance of excellence in service

For ordering or product assistance, please

call your local dealer, the Steelcase Solutions Resource Team, or the Steelcase Solutions Fulfillment Team at 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com.

Call the Steelcase Solutions Resource Team prior to placing an order, when working on a bid, or when you need information about product applications and specifications.

Call the Steelcase Solutions Fulfillment Team if you have submitted an order to Steelcase and you need to speak to your Solutions Fulfillment Team Representative about the order. Also call if you have any post-shipment quality or warranty concerns or service parts questions.

Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call 1.616.247.2500.

For information about Steelcase, the name of your nearest Steelcase dealer, or for product literature, call 1.800.333.9939, or visit our Web site: steelcase.com.


Related Products

Related Products

Steelcase and other manufacturers produce products that are ideal to use with Avenir. Some of them are listed here along with details about how to get product literature.




TS 200 Series storage products are equipped with pulls that match Avenir 200 Series drawer pulls. ▶ See *Storage Specification Guide*



800 Series lateral files are available with Avenir-style pulls. The Avenir-style pull is not identical to the actual Avenir pull; it is flush and does not have the radius lip on the top edge of the pull so it will allow the receding door to go back into the file.

See Storage Specification Guide




Steelcase worktools

include a full line of ergonomically designed products that enhances and improves the work setting. Product platforms include computer support tools, organizational worktools, and personal lighting.

For additional information refer to Steelcase Worktools Specification Guide.

Huddleboard products

were designed to complement the ways you work, individually or as a group. Huddleboard markerboards and photo album can be used either horizontally or vertically. These ultra-light boards attach to a panel, panel-mounted worktool rail, or can be used with any of the Huddleboard support tools. Huddleboard products offer new ways to manage your information by supporting the capture, transfer, and display of individual or group information. See Meeting Spaces Specification Guide.

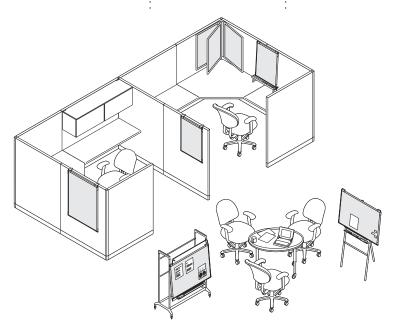


Panel

Understanding Panels

Statement of Line	10
Product Details	
Tackable Acoustical Panels	12
Cable-Management Panel Options	14
Transparent Panels	10
Half-Glass, Half-Fabric Transparent Panels	18
Panel Stackers	20
Panel Door with Frame	22
Related Products	
Top Caps	24
Panel Connectors	2
Change-of-Height Panel Connectors	3
Filler Packages	3
End-of-Run Fillers	34
Panel Bracket Packages	30
Panel Accessories	38
Base Power-Ins	40
2" x 2" Power Poles and Cable Poles	4
2" x 6" Power Poles and Cable Poles	42
18"W and 24"W Powerways	4
30"W to 60"W Powerways	40
Base Covers and Receptacles	48
Application Topics	
Receptacle Locations	50
Panel Creep	5
How Panel-Supported Components Fit	5
Solutions to Overhead Storage Problems Caused by PAB2 Bracket	s 5
How Connectors Affect Panel-Supported Components	50
How Connectors Affect Power Flow	5
Rules for Panel Stability	58
Rules for Panel Stacker Stability	60
Rules for Panel Stability with Components	6

Statement of Line

Panels




Understanding
► Page 12
Specifying
► Page 212

Tackable Acoustical

	18 ⁵ / ₁₆ "W	24 ⁵ / ₁₆ "W	30 ⁵ / ₁₆ "W	36 ⁵ / ₁₆ "W	42 ⁵ / ₁₆ "W	48 ⁵ / ₁₆ "W	60 ⁹ / ₁₆ "W
33"H	•	•	•	•	•	•	•
41"H	•	•	•	•	•	•	•
53"H	•	•	•	•	•	•	•
65"H	•	•	•	•	•	•	•
80"H	•	•	•	•	•	•	

Replacement surfaces are available. ▶See page 225.

Tip: Panel height varies according to the top cap selected.




Understanding
► Page 16
Specifying
► Page 216

Transparent

	24 ⁵ / ₁₆ "W	6"W 30 ⁵ /16	s"W 36 ⁵	3 ⁵ / ₁₆ "W	42 ⁵ / ₁₆ "W	48 ⁵ / ₁₆ "W
65"H	•	•	•	ı	•	•
80"H	•	•	•	ı	•	•

Tip: Panel height varies according to the top cap selected.



Understanding
► Page 18
Specifying
► Page 218

Half-Glass, Half-Fabric Transparent Panels

	245/16"W	30 ⁵ / ₁₆ "W	36 ⁵ / ₁₆ "W	42 ⁵ / ₁₆ "W	48 ⁵ / ₁₆ "W
65"H	•	•	•	•	•
80"H	•	•	•	•	•

Tip: Panel height varies according to the top cap selected.





fabric-covered panel stacker


Glass panel

Understanding
► Page 20
Specifying
► Pages 220–223

Panel Stackers

	18"W	24"W	30"W	36"W	42"W	48"W	60"W
11"H	•	•	•	•	•	•	•
12"H	•	•	•	•	•	•	•
15"H	•	•	•	•	•	•	•
24"H	•	•	•	•	•	•	•

Tip: Panel height varies according to the top cap selected.



Understanding
► Page 22
Specifying
► Page 224

Panel Door with Frame


425/16"W

80"H



* = Also available as frame only.

Tip: Panel door frame height varies according to the top cap selected.




Understanding ► Page 12 Specifying ► Page 225

Tackable Acoustical Fabric-Covered Replacement Skins

18"W	24"W	30"W	36"W	42"W	48"W	60"W	
•	•	•	•	•	•	•	
•	•	•	•	•	•	•	
•	•	•	•	•	•	•	
•	•	•	•	•	•	•	
•	•	•	•	•	•		
	•	• •					

Tip: 281/2"H replacement panel surfaces are used on 281/2"H straight transparent panels. 42"H replacement panel surfaces are used on 42"H tackable acoustical panels and also on 42"H straight transparent panels.

Tackable Acoustical Panels

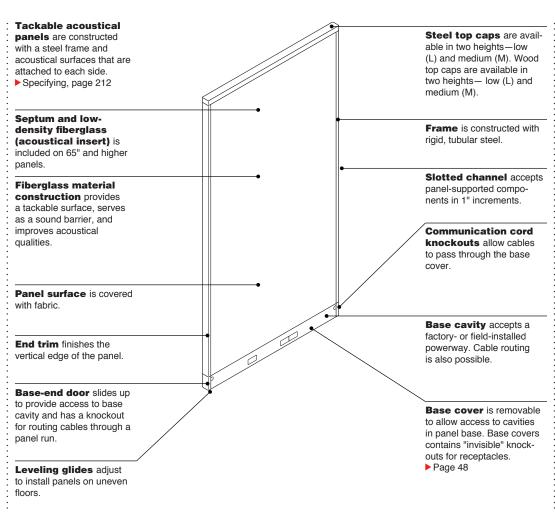


Actual Dimensions						
Depth (thickness)	2"					
Width		15/ ₁₆ ", 305/ ₁₆ ", 365/ ₁₆ ", 35/ ₁₆ ", or 60 ⁹ / ₁₆ "				
Low top cap height	5/8"					
Medium top cap height	1 ³ /8"					
Leveling glide range	1 1/16"					
Height	with low top cap	with medium top cap				
33"H panel	321/2"	33"				
41"H panel	401/2"	411/4"				
53"H panel	51 ⁵ /8"	523/8"				
65"H panel	6315/16"	64 ¹¹ / ₁₆ "				
80"H panel	793/4"	801/2"				






Top caps come in two height options that will alter the panel height according to the top cap selected. See dimensions table below. ▶ Page 24




Panel surface is removable for replacement with a new surface. The top cap, end trim, and base cover can remain intact during the replacement process. Special tools are not required. Adjacent panels are not disrupted.



Panel stabilizer feet are designed to provide additional support for panels when they aren't stabilized by components. Each foot extends 16" from the side of the panel.


Connections




Universal connector package, shipped with every panel, joins panels of the same height in a straight line or in L-, T-, Y-, or X-configurations. ▶Page 25

Connectors are available to attach panels to adjacent panels and walls.

► Pages 26–30



Change-of-height panel connector provides a finished edge when panels of varying heights are joined in a straight line, L-, T-, or X-configuration. It will not work with fillers, power poles, or cable poles that are in a T-configuration. ► Page 31




Panels can support components, including worksurfaces, shelves, and storage bins.


Panel-run stability recommendations vary depending on the width of the panel run and use of panelsupported components.

Pages 58-61

Wiring & Cabling




Base or end power-ins bring power to the panel run by connecting at a designated receptacle location or at the end of a powerway. ▶ Page 40




Power poles and cable poles attach to the panel end or at L-, T- and X-connections. They bring power or communication cables from the ceiling.

▶ Pages 41–43




Exception: 18"W panels accommodate pass-through powerways. These panels are shipped with two plain base covers. Pass-through powerways are shipped in a separate carton for field installation.

▶ Pages 44–47



Base cavity can be accessed on either side of the panel. It is easier to route cords and cables, and to field install powerways, on the surface-one side because the C-shape foot opens to that side.


Panel-base end grommet is available to fit in base-end door knockout to protect cords and cables.



Cable knockout allows cable routing through steel medium top caps. Exceptions: Wood top caps and low top caps do not allow for cable routing. Page 24

Cable-management panel option is available to allow vertical cable routing and worksurface-height receptacles.

▶Pages 14-15



Fillers aesthetically fill in the space at L-, T-, and X- connections. End-of-run fillers cover the exposed vertical edge of the last panel in a run. All fillers allow cables to run vertically.

▶ Pages 32-34

Wire separator is available factory installed, to separate telecommunication cables from the powerway. Field-installed wire separators are available from Service Parts

All panels are UL listed and CSA certified.

Surface Materials

Тор сар

- Paint (standard)
- Wood (option on low and medium top caps)
- Customiz stain (option on wood)

End trim

- · Paint (standard)
- Fabric (option)

Base cover

· Paint (standard)

Panel surface

Fabric

Tip: For most fabrics, fabric application is standard in the warp horizontal direction. See Specification Guide-

lines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Tip: If a panel has different surfaces, use these guidelines: the first surface you specify is considered to be surface one. The second surface you specify is surface two. End trims, left, right, or both, are specified while you're facing surface one. Factory-installed powerways are always installed with the green end of the powerway on the left-hand side as you face surface one.

Pages 44-47

Slotted channel

Black paint only

Leveling glides

Black only

Panel-base end grommet

Black plastic only

Pricing

To price a panel with surface materials at different prices, add the two prices together and divide by two.

Application Topics

Base Covers and Receptacles

Pages 48-49

Panel Creep

▶Page 51

How Connectors Affect Panel-Supported Components

Page 56

How Connectors Affect Power Flow

Page 57


Wiring and Cabling

Pages 181-201


Cable Capacities

▶ Pages 200-201

Cable-Management Panel Options

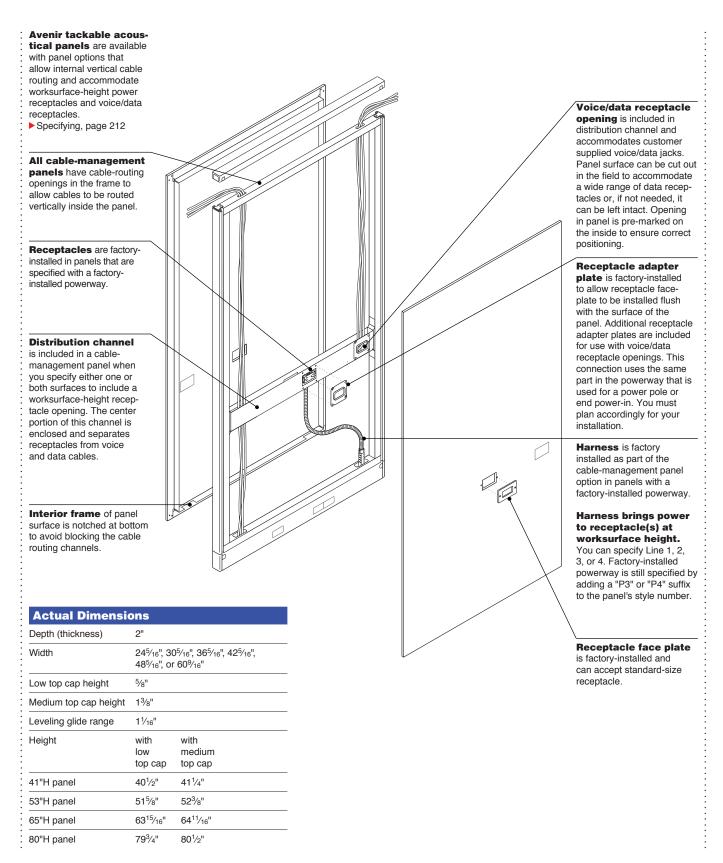


Product Details




Panel surfaces can be plain on both sides of the panel when only vertical cable routing is needed. For access to power at worksurface height, one surface can have a receptacle opening, or both surfaces can have receptacle openings.

Tip: In cases where you haven't specified a factory-installed receptacle opening, you can cut a receptacle opening in the surface of a cable-management panel in the field. Panel surfaces are removable for replacement with a new source.

Location of receptacle openings in cablemanagement panel is placed slightly off center to allow receptacles to be installed back to back without interference.



Openings in panel frame for vertical cable routing accommodate a wide variety of voice and data cables.



Harness attaches to the power pole/end power-in connector port in the power-way in the base of the panel. If power pole or end power-in and cable management panel are used together, you must plan accordingly for your installation.

Tip: 24" wide panel uses double-flag connector powerway. 24" wide panels cannot have both power pole and belt-high harness connections within panel. 30" wide and above panels with single-flag powerway connector can have power pole and belt-high harness connections within panel.

No receptacle locations are obstructed by the harness connection.

Chicago electrical code requires that all electrical connections be hard wired in the field. Order a non-powered cable-management panel with receptacle openings in one or both surfaces. Factory-installed distribution channel, face plate(s), and receptacle adapter plate(s) will be included. Have the electrician obtain conduit and receptacles (Leviton 5325) and make the connections in the field.

New York City versions of the cable-management panels are available to comply with the special installation requirements of the New York City electrical code.

Page 196

How to Specify

Cable-management
panel option is available
only on tackable accoustical
panels that are 24⁵/₁6"W or
wider. Cable-management
panel options are not available on 18⁵/₁6"W panels.
See Cable-Management
Panel Options for Tackable
Acoustical Panels, page 208.

Surface Materials

Receptacles and receptacle cover plates


Black plastic only

All other components of the cable-management panel option are concealed when properly installed.

All the surface material choices available on tackable acoustical panels remain unchanged.

For most fabrics, fabric application is standard in the warp horizontal direction.
▶ See Specification
Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions.
Warp vertical is available as an option.


Transparent Panels

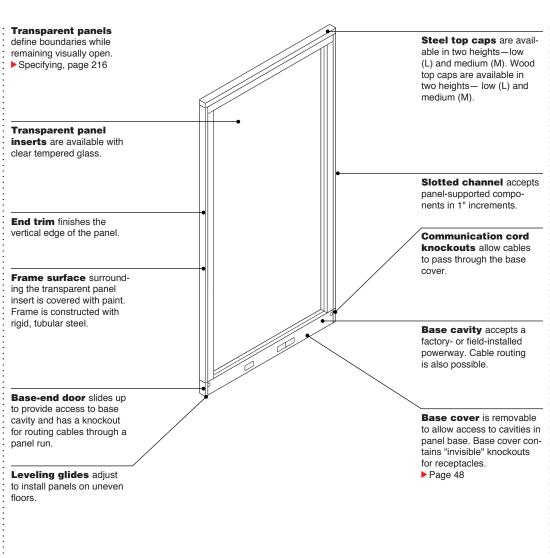

:	Pro	duc	et l	De	tai	ls	
	,						


Top caps come in two height options that will alter the panel height according to the top cap selected. See dimensions table below.

Page 24




Panel stabilizer feet are designed to provide additional support for panels when they aren't stabilized by components. Each foot extends 16" from the side of the panel. Page 38

15	
2"	
24 ⁵ / ₁₆ " or	485/16"
1/4"	
191/8", 25	1/8", 31 1/8", or 43 1/8"
55 ³ / ₁₆ " or	71"
5/8"	
13/8"	
11/16"	
with low top cap	with medium top cap
6315/16"	6411/16"
793/4"	801/2"
	2" 24 ⁵ / ₁₆ " or 1/ ₄ " 19 ¹ / ₆ ", 25 55 ³ / ₁₆ " or 5/ ₈ " 1 ³ / ₈ " 1 ¹ / ₁₆ " with low top cap 63 ¹⁵ / ₁₆ "



Connections




Universal connector package, shipped with every panel, joins panels of the same height in a straight line or in L-, T-, Y-, or X-configurations.

Page 25

Connectors are available to attach panels to adjacent panels and walls.

▶ Pages 26–30




Change-of-height panel connector provides a finished edge when panels of varying heights are joined in a straight line, L-, T-, or X-configuration. It will not work with fillers, power poles, or cable poles that are in a T-configuration.

Page 31

Panel-run stability recommendations vary depending on the width of the panel run and use of panel-supported components.
▶ Pages 58–61

Wiring & Cabling




Base or end power-ins bring power to the panel run by connecting at a designated receptacle location or at the end of a powerway. Page 40



Power poles and cable poles attach to the panel end or at L-, T- and X-connections. They bring power or communication cables from the ceiling.

Pages 41–43




Powerways can be factory or field installed in the base cavity. Three-circuit or four-circuit powerways are available. 18"W and 24"W powerways have two flag connectors. 30"W and wider powerways have one flag connector.

Pages 44–47


Base cavity can be accessed on either side of the panel. It is easier to route cords and cables, and to field install powerways, on the surface-one side because the C-shape foot opens to that side.

Panel-base end grommet is available to fit in base-end door knockout to protect cords and cables.




Cable knockout allows cable routing through steel medium top caps.
Exceptions: Wood top caps and low top caps do not allow for cable routing.

Page 24



End-of-run filler covers the exposed vertical edge of the last panel in a run. Fillers allow cables to run vertically at the end of a run of panels.

► Page 34



Fillers conceal cables running vertically and aesthetically fill in the space at L-, T-, and X- connections.

▶ Pages 32-34

Wire separator is available factory installed, to

separate telecommunication cables from the powerway. Field-installed wire separators are available from Service Parts.

All panels are UL listed and CSA certified.



Top cap

- Paint (standard)
- Wood (option on low and medium top caps)
- Customiz stain (option on wood)

Frame surface

Paint (standard)

End trim

- · Paint (standard)
- Fabric (option)

Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification
Guidelines for Vertical Fabric
Applications, page 370, for
details on these exceptions.
Warp vertical is available
as an option.

Base cover

· Paint (standard)

Panel insert

· 6500 Clear glass

Slotted channel

· Black paint only

Leveling glides

· Black only

Panel-base end grommet

Black plastic only

Application Topics

Base Covers and Receptacles

Page 48

Panel Creep

Page 51

How Connectors Affect Power Flow

Page 57


Wiring and Cabling

▶ Pages 181–201

Cable Capacities


Pages 200-201

Half Glass, Half Fabric Transparent Panels

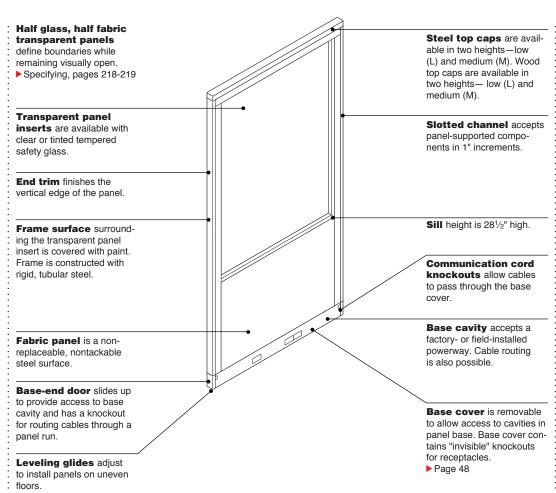




Top caps come in two height options that will alter the panel height according to the top cap selected. See dimensions table below. Page 24




Panel stabilizer feet are designed to provide additional support for panels when they aren't stabilized by components. Each foot extends 16" from the side of the panel. Page 38

Actual Dimensions						
Depth (thickness)	2"					
Width	24 ⁵ / ₁₆ " or	485/16"				
Insert depth (thickness) on glass	1/4"					
Insert width on glass	19½", 25 or 43½"	1/8", 311/8", 371/8",				
Insert height on glass	32 ¹ / ₁₆ " o	r 48½"				
Low top cap height	5/8"					
Medium top cap height	13/8"					
Leveling glide range	1 1/16"					
Height	with low top cap	with medium top cap				
65"H panel	6315/16"	64 ¹¹ / ₁₆ "				
80"H panel	793/4"	801/2"				

18




Connections



Universal connector package, shipped with every panel, joins panels of the same height in a straight line or in L-, T-, Y-, or X-configurations. Page 25

Connectors are available to attach panels to adjacent panels and walls.

▶ Pages 26–30




Change-of-height panel connector provides a finished edge when panels of varying heights are joined in a straight line, L-, T-, or X-configuration. It will not work with fillers, power poles, or cable poles that are in a T-configuration. ►Page 31


Panel-supported components should not be used on transparent panels.

Panel-run stability recommendations vary depending on the width of the panel run and use of panelsupported components. ▶ Pages 58–61


Wiring & Cabling




Base or end power-ins bring power to the panel run by connecting at a designated receptacle location or at the end of a powerway. ▶ Page 40



Power poles and cable poles attach to the panel end or at L-, T- and X-connections. They bring power or communication cables from the ceiling. ► Pages 41–42




Powerways can be factory or field installed in the base cavity. Three-circuit or four-circuit powerways are available. 18"W and 24"W powerways have two flag connectors. 30"W and wider powerways have one flag connector. ▶ Pages 44-47




Base cavity can be accessed on either side of the panel. It is easier to route cords and cables, and to field install powerways, using the open side of the C-shape foot.


Panel-base end grommet is available to fit in base-end door knockout to protect cords and cables



Cable knockout allows cable routing through steel medium top caps. Exceptions: Wood top caps and low top caps do not allow for cable routing. Page 24



End-of-run filler covers the exposed vertical edge of the last panel in a run. Fillers allow cables to run vertically at the end of a run of panels. Page 34




Fillers can conceal cables running vertically and aesthetically fill in the space at L-, T-, and X-connections.

Page 32

Wire separator is available factory installed, to separate telecommunication cables from the powerway. Field-installed wire separators are available from Service Parts.

All panels are UL listed and CSA certified.



Surface Materials

Тор сар

- Paint (standard)
- Wood (option on low and medium top caps)
- Customiz stain (option on wood)

Frame surface

Paint (standard)

End trim

- Paint (standard)
- Fabric (option)

Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Base cover

Paint (standard)

Panel insert 6500 Clear glass

Slotted channel

Black paint only

Leveling glides

Black only

Panel-base end arommet

Black plastic only

Application Topics

Base Covers and Receptacles

Page 48

Panel Creep

Page 51

How Connectors Affect Power Flow

Page 57

Wiring and Cabling

▶ Pages 181–201

Cable Capacities

▶Page 200

Panel Stackers


Tackable and Glass

Panel stackers provide visual privacy to existing panels.

Panel stackers are constructed of extruded, painted, aluminum frame. Choices include tackable—skin on each side covered with vertical surface fabric, and glass—single panel of clear, tempered safety glass on panel centerline.

Panel stackers are not designed to fit over Avenir panel doors or on the top of glass panels.
▶ Specifying, pages 220–223

Stackers are designed for single stacking. Panel stackers cannot be stacked on top of one another.

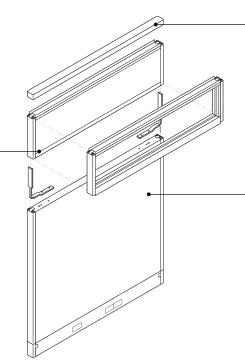

Top cap from base panel is used to trim the top of the stacker. Wood top caps can be field modified to fit onto stackers.

Stacker panels do not have slotted channels and thus are non-load bearing for components.

Product Details

Top caps are removed from the base panel and are used to trim the top of the stacker. Fabric panel surface is non-removable and non-replaceable.

Stacker panels are connected to the base panels with two attachment brackets that use existing holes in the Avenir panel frame. For panels manufactured prior to 1999, optional screws are required. They are included in the stacker hardware package. The top reveal from the base panel is removed and used on the top of the stacker.

Connections

Panel stackers are provided with a panel attachment bracket to align and connect stackers at the same height to adjoining panels or other panel stackers. The panel attachment bracket helps stabilize and align the stackers for proper fit and finish.

Actual Dimensions Depth (thickness) 2" Width 185/16", 245/16", 305/16", 365/16", 425/16", 485/16", or 609/16"

Height

 $11\frac{1}{8}$ ", $12\frac{5}{16}$ ", $15\frac{13}{16}$ ", or $23\frac{7}{16}$ "

Wiring & Cabling

Power and cables


cannot be routed vertically or horizontally or accessed in panel stackers. There is no change-of-height cable management available with panel stackers.

Surface Materials

The fabric specified for tackable fabric stackers is the same on both sides of the panel stacker. The glass stacker is offered in 6500 Clear Tempered glass and 6530 Frosted Glass (option).


For most fabrics, fabric application is standard in the warp horizontal direction. ▶ See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Application Topics

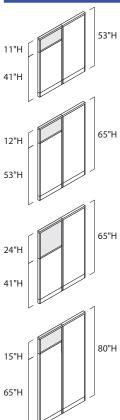

Panel stackers are available in four heights. 11" heights are used when aligning stackers on 42"H base panels to adjoining 53"H base panels. 12" heights are used when aligning 53"H base panels to adjoining 65"H base panels. 15" heights are used when aligning 65"H base panel to adjoining 80"H base panels. 24" heights are used when aligning 41"H base panels to adjoining 65"H base panels. In applications where the stackers are not aligning to adjacent base panels, any of the four heights can be used.

Hanging components cannot be used on panel stackers. Panel stackers are non-load bearing.



Panel stackers cannot be stacked on top of another panel stacker.


Panel stackers are UL-listed and CSA-certified.

Panel stackers are not designed to fit over Avenir panel doors or on the top of glass panels.

Rules for Panel Stacker Stability

► See Page 61

Panel Door with Frame

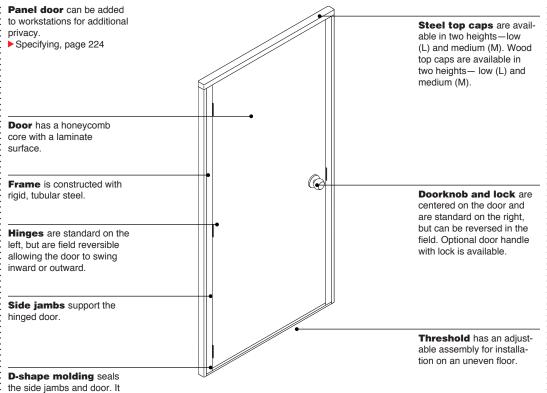



Top caps come in two height options that will alter the frame height according to the top cap selected. See dimensions table below. ▶ Page 24

Frame alone may be used with locally obtained, non-drilled door and hardware.

Door frame can be installed so that door swings in or out 180°.

Hinges, lock, and hardware are included in the package with the door.

Lock on the panel door is a Schlage brand lock. Knob and latch are heavy-duty residential grade with ³/₄"diameter latch.

Tip: A typical industrialgrade latch is 1" diameter and won't fit this door.




Width of door frame meets barrier-free standards.

Actual Dimensions Panel door Depth (thickness) 115/32" 35²⁵/32" Width 777/8" Height **Frame** 2" Depth (thickness) Width 425/16" Low top cap height 5/8" Medium top cap height 13/8" Height with low top cap 793/4" 801/2" Height with medium top cap Interior clearance Width 36" Height 785/16" Threshold adjustment range

also absorbs sound when

the door is opened and

closed.



Connections



Universal connector package, shipped with every door frame, joins panel doors in a straight line or in L- or T-configurations with adjacent 80"H panels.

Page 25

Panel run stability


recommendations vary depending on the use of adjacent panels or panel-supported components.

Pages 58–61

Building wall connection is not possible.

Panel stackers are not designed to fit over Avenir panel doors.

Wiring & Cabling



Cable knockout allows for cable routing through steel medium top caps. Exceptions: Wood top caps and low top caps do not allow for cable routing.

> Page 24

Surface Materials

Top cap

- · Paint (standard)
- Wood (option on low and medium top caps)
- Customiz stain (option on wood)

Frame

• Paint (standard)

Threshold

· Stainless Steel only

Door

- · Laminate (standard)
- See Surface Materials Reference Manual.
- Open Line laminate (option)
 A program including non-Steelcase laminates that are suitable for use on Steelcase products.
- See Surface Materials Reference Manual.

Hinge

· Brushed Chrome only

Doorknob

· Brushed Chrome only

Application Topics

A CAUTION

Panel door with frame cannot ship to customer locations in Canada. The frame only style number in conjunction with a locally obtained door should be used for customers in Canada in need of a swing door solution.

Recommended specifications for locally obtained doors are:

Thickness - 1½"
Width - 3525/32"
Height - 777/8"
Weight - 55 pounds

Hardware recommendations, when the frame is ordered alone and a locally obtained door is used, are as follows:

Orbit—Schlage F5IN Finish—626 Latch Bolt—16-107 Strike—10-026 McKinney Hinge—T-2714 Hagger Hinge—1279

Panel Creep

Page 51

Wiring and Cabling


▶ Pages 181–201

Cable Capacities


Page 200

Top Caps


Steel top caps are available in two heights—low (L) and medium (M). Wood top caps are available in two heights—low (L) and medium (M).

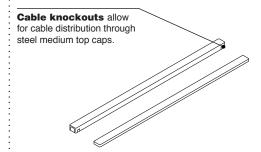


Product Details



Panel height varies depending on which of the two top cap heights you choose.



Wood or steel low top caps provide a clean profile
for use when no cabling is
required.



Steel medium top caps have a cavity that allows cords and cables to pass through on straight panels. Cable knockouts are available as an option. Wood medium top caps do not allow for cord and cable routing.


Connections




Continuous clip, located on the top of the panel, allows the steel top cap to snap into place. Wood top cap slides onto compression dowels.

Substituting different height top caps can be accomplished in the field.

Wiring & Cabling



Cable knockouts are optional on steel medium top caps to allow cables to be routed through a panel run or to exit the top cap. Exception: Wood top caps and low top caps are not equipped with knockouts.




Cable knockout filler package inserts in the top cap to fill the knockout holes when they are no longer needed.

Surface Materials

Тор сар

- Paint (standard)
- Wood (option on low and medium top caps)
- Customiz stain (option on wood)

Application Topics



Medium top cap cable knockout dimensions.

Actual Dimensions

Depth	2"
Width	$18^{17}/_{64}$ ", $24^{17}/_{64}$ ", $30^{17}/_{64}$ ", $36^{17}/_{64}$ ", $42^{17}/_{64}$ ", $48^{17}/_{64}$ ", or $60^{1}/_{2}$ "
Low top cap height	5/8"
Medium top cap height	13/8"

Panel Connectors

Universal Connector Package

Universal connector package is shipped with every panel. Additional packages are available through Service Parts.







Top connector plate for wood top cap



Bottom connector plate



Tear-drop filler




End filler



Pins





Connects panels of the

same height in straight, L-,

T-, Y-, or X-configurations.

Each panel is provided


with two connector plates,

fillers, mounting screws,


and pins.

Connections


Top connector plate attaches to tops of panels.




Bottom connector plate connects panels in the same way as the top connector plate.




Straight configuration




L-configuration




T-configuration



Y-configuration can be achieved at any angle when two universal connectors are used, because one panel can pivot from where it is attached. A Y-configuration with three 120° angles can be locked in place by using three connectors instead of two.




X-configuration



Tear-drop fillers continue the black reveal line below the top cap and create a uniform appearance at panel junctions.

Wood top caps are standard with a top connector plate that has countersunk holes for the screws so the connection is flush.



End fillers continue the black reveal line below the top cap and create a uniform appearance at the end of a panel run.

Surface Materials

Universal connector

· Black paint only

Application Topics

Power and cable poles can be attached in the recess that results when panels are joined with the connector in L- or T-configurations.

Panel Creep Page 51 **Solutions to Overhead** Storage Problems Caused by PAB2 **Brackets**

▶Page 53 **How Connectors** Affect Panel-Supported Components

► Page 56 **How Connectors Affect Power Flow**

Page 57

Varying-Height Connector Packages (PAB2)

Specifying, page 226



Right-hand straight connector



Left-hand straight connector



Right-hand angle connector




Left-hand angle connector



End Filler

Tip: See page 53 for details about relationships between PAB2 brackets and panel- supported overhead storage components.

Product Details




Three versions of both

of these connectors are available. You must specify the connector package that corresponds with the height of the shorter panel.


Connections




Straight connectors attach panels of varying heights in a straight configuration.




Angle connectors attach panels of varying heights and pivot to different angles.




Straight connectors attach to the top of the shorter panel, and hook into one or both sides of the taller panel in a straight line. Alternative connectors and mounting screws are shipped in each package.




Angle connectors attach to the top of the shorter panel, and hook into one side of the taller panel. Alternative connectors and mounting screws are shipped in each package.



Angle connector allows a panel to be positioned at any angle up to 90°.



Connector occupies two slots in the taller panel's slotted channel




Bottom connector plate, part of the universal connector package shipped with every panel, must be attached to the bottom of the shorter panel.

Surface Materials


Varying-height connectors

Paint

Application Topics



If you plan to attach overhead storage while using a straight connector, plan the storage location to avoid the connector position because a portion of the slotted channel is blocked on both sides of the taller panel.



If you plan to attach overhead storage while using an angle connector, plan overhead storage location to avoid the connector position.

Page 53

Power poles and cable poles can be attached in the recess that results when panels are joined with the

Change-of-Height Panel Connectors

angle connector.

Page 31

Panel Creep ▶ Page 51

Solutions to Overhead Storage Problems Caused by PAB2 Brackets

▶Page 53

How Connectors
Affect Panel-Supported
Components

Page 56


How Connectors Affect Power Flow

Page 57

Varying-Height Connector Packages (PAB5)


Specifying, page 227

PAB5A






PAB5B






PAB5C






PAB5D






PAB5E






PAB5F





PAB5G





Product Details


PAB5 connectors are available to join panels of different heights in T- and X-configurations without obstructing a panel's slotted channel which could block the installation of overhead storage components.

For details about these configurations, see

Connections



Attaches to the tops of the panels underneath the top caps. Mounting screws are included with each package.



Change-of-height panel connectors are used to join taller panels in configuration.

▶Page 31

Bottom connector

attaches to the bottom of the panels. Mounting screws are included.

Varying-height connector packages (PAB5) are used in conjunction with change-of-height panel

connectors. ▶Page 227

Wiring & Cabling

Powerway routing

through the base cavity is not blocked by the PAB5 connectors.

Cable routing through the top cap is not blocked by the PAB5 connectors.

Vertical cable routing can be accommodated

inside a filler.

Page 34

Surface Materials

Varying-height connector

· Black paint only

Application Topics

Solutions to Overhead Storage Problems Caused by PAB2 **Brackets**

▶Page 53



Varying-Height Perpendicular Connector Packages (PAB3)

► Specifying, page 226



Varying-height connector



Bottom connector plate



End Filler

Product Details




Three versions of this connector are available. You must specify the connector package that corresponds with the height of the shorter panel.


Connections



Connects shorter perpendicular panel to a straight panel run of taller panels. Any height combinations are possible.




Attaches to the top of the shorter panel and hooks into the slotted channels of the taller panels. Mounting screws are included in each package.



Bottom connector plate attaches to all three panels.

Wiring & Cabling




Powerway routing through the base cavity ends when it reaches the perpendicular panel. There are no passthrough or bridging capabilities.

Surface Materials

Varying-height perpendicular connector

Paint

Application Topics



Shorter perpendicular panel blocks a portion of the slotted channels and covers one inch of the surfaces of both adjacent panels. Some panel-supported components may fit depending on the height difference of the panels.

Change-of-height panel connector offers an alternative way to connect panels of different heights.

Page 31

Panel Creep

►Page 51

Solutions to Overhead Storage Problems Caused by PAB2 Brackets

▶Page 53

How Connectors Affect Panel-Supported Components


Page 56

How Connectors Affect Power Flow


▶Page 57

Closed-Configuration Connector Package (PAB9)

Specifying, page 228




L-connectors




T-connectors




Pins




Connects two perpendicular panels of the same height and forms a flush corner without the two-inch recess that results when you use a universal connector package in an L-configuration.



Package also contains hardware to form a flush T-configuration. Panels must be the same height.




Attaches to tops of the panels underneath the top caps. Mounting screws are included in each package.



Bottom connector attaches to the bottom of the panels. Mounting screws are included.

Wiring & Cabling



Powerway routing through the base cavity ends when it reaches the perpendicular panel.

Electrical routing is possible through lap joints. Shorter base covers are available upon request to complete this type of installation and to allow access to the base cavity.

Surface Materials

Closed-configuration connector

Black paint only

Application Topics



Slotted channel and two inches of the perpendicular panel's surface will be blocked. Plan location of panel-supported components accordingly.

Panel Creep

Page 51

Solutions to Overhead Storage Problems Caused by PAB2 Brackets

▶Page 53

How Connectors Affect Panel-Supported Components

► Page 56

How Connectors Affect Power Flow

Page 57

Perpendicular Connector Package (PAB4)

► Specifying, page 228



Top connector plate




Bottom connector plate


Connections




Connects a perpendicular panel to a straight panel run. Panels must be the same height.



Perpendicular connectors eliminate the twoinch gap that results when you use a universal connector in a T-configuration.




Attaches to the tops of panels underneath the top caps of panels. Mounting screws are included in each package.



Bottom connector plate attaches to all three panels.

Wiring & Cabling




Powerway routing through the base cavity ends when it reaches the perpendicular panel. There are no passthrough or bridging capabilities.

Surface Materials

Perpendicular connector

· Black paint only

Application Topics



Perpendicular panel

blocks the slotted channels and covers one inch of the surfaces of both adjacent panels. Plan location of panel-supported components accordingly.

Panel Creep

Page 51

Solutions to Overhead Storage Problems Caused by PAB2 Brackets

▶Page 53

How Connectors Affect Panel-Supported Components

Page 56


How Connectors Affect Power Flow

Page 57


Change-of-Height Panel Connectors

Change-of-height panel connector joins panels at varying heights in a straight line or at a 90° angle. The panel connector is divided into two pieces at the height of the lower panel. It attaches to the taller panel.

► Specifying, page 229




Product Details




Change-of-height panel connector can be field installed on all panels.

Change-of-height panel connector provides a cleaner look than the varying-height connector package (PAB2).

Connections




Straight-line or Lconfigurations can use the change-of-height panel connector.



T-configurations can use the change-of-height panel connector when the wings of the "T" are the same height and the perpendicular panel of the "T" is the higher panel.

A varying-height connector package (PAB2) must be used when the perpendicular panel of the "T" is shorter than the wings of the "T".



X-configurations require two change-of-height panel connectors and two varying-height connector packages (PAB2). The change-of-height panel connectors are used to connect a taller panel to a shorter panel at a 90° angle. The varying-height connector package (PAB2) joins these two 90° connections.


Surface Materials

Panel connector

- Paint (standard)
- · Fabric (option)

Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.




Upper storage can be attached anywhere to a panel when a change-of-height connector is used.

Varying-Height Connector Packages (PAB2)

Page 26

Solutions to Overhead Storage Problems Caused by PAB2 Brackets

▶Page 53

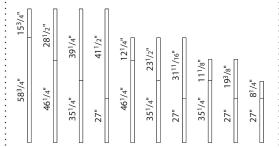

Actual Dimensions

Depth 5/8"
Width 2"

Filler Packages

Fillers close the gap that results when panels form L-, T-, and X-configurations. They also conceal cables that run between and vertically through panels of the same height or different heights. ► Specifying, page 230

Top cap, available in two heights, matches the height of the panel top cap and is available in wood or paint.

Top caps are available in two heights-low (L) and medium (M).

Wood top caps are available in two heights-low (L) and medium (M).

Carrier fastens to the edge of the panel and allows the cover to snap into place.

Filler package allows cables to be laid in before the cover is snapped into

Fillers are fabric covered.

Base cover matches the base of adjacent panels.

Actual Dimensions

Depth

Width

Height

80"H panel

15/8"


1%16"

with


793/4"

Product Details


Carrier must attach to specific panels in each configuration. In L-configurations, the carrier must attach to the tallest panel. In T-configurations, the carrier must attach to the center panel. In X-configurations, the carrier must attach to the panel opposite the lowest panel in the configuration.



Back filler closes the open segment of a filler when the filler extends above its carrier in some



Knockouts are provided routing through panels of varying heights.



Reusable doors in top cap can be removed to permit cable routing.

Carrier fastens to the end


of a panel with screws that

attach below the top cap.

fillers can be removed and relocated later.

Panel remains intact so

Connections



Base cover is attached to the filler.

Surface Materials

Filler cover

Fabric

Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Carrier

· Black paint only

Top cap

· Paint (standard)


- Wood
- · Customiz stain (option on wood)

Base cover


Paint (standard)

Application Topics

Panels with low or wood top caps have no cable routing capability.



to accommodate lay-in cable



Filler snaps onto the

carrier.


Top cap and reveal snap into the top of the filler.

medium low top cap top cap 41"H panel 401/2" 411/4" 53"H panel 515/8" 523/8" 6315/16" 65"H panel 6411/16"


801/2"

L-Configurations

Carrier always attaches to the tallest panel in an L-configuration.



Panels of same height




Panels of different heights


T-Configurations

Carrier must connect to center panel in a T-configuration.


Back filler is needed when the center panel of the Tconfiguration is exceeded in height by one or more other panels.



Panels of same height



Panels of different heights




Panels of different heights

X-Configurations


Carrier must attach to the panel opposite the lowest panel in an X-configuration.

Back filler is needed when the panel that the carrier is attached to is exceeded in height by one or more other panels.




Panels of same height

Top cap (without carrier, filler, or base cover) finishes X-configuration with panels of the same height.




Panels of different heights

Carrier attaches to panel opposite the shortest panel.



Panels of different heights

Filler is positioned against the panel opposite the shortest panel and is held in place beneath the top cap of the tallest panel. Back filler closes gap in filler.




Panels that form a gap

Filler fits in gap and is held in place with screws beneath the top cap of the tallest panel. Back filler closes gap in filler.

End-of-Run Fillers


End-of-run fillers cover the exposed vertical edge of the last panel in a run. They allow cables to run vertically at the end of a panel run. > Specifying, page 233

base of adjacent panels.



Fillers are fabric covered.

Product Details



Filler must match the height of the panel.

Base cover is attached to the filler.

Surface Materials

Filler cover

Fabric

Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification Guidelines for Vertical Fabric
Applications, page 370, for details on these exceptions.
Warp vertical is available as an option.


Carrier

· Black paint only


Top cap and base cover

Paint

Connections



Carrier fastens to the end of a panel with screws that attach below the top cap. Panel remains intact so filler can be removed and relocated later.



Filler snaps onto the carrier.

Top cap and reveal snap into the top of the filler.

Actual Dimensions Depth 13/4" Width 13/4" Medium top cap height 13/6" Height with medium top cap

411/4"

523/8"

6411/16"

801/2"

41"H panel

53"H panel

65"H panel 80"H panel


Panels

Panel Bracket Packages

Panel-to-Wall Bracket Package (PAB6)

► Specifying, page 234





Top bracket

Bottom bracket

Connections



Attaches the top and bottom of the panel perpendicular to concrete block or reinforced plaster walls. Mounting screws that connect the brackets to the panel are included in each package.

Also attaches to large storage units that are the same height or taller than the panel (excluding the top cap).

Bracket is 1/8" deep.

Surface Materials

Panel-to-wall bracket

• Black paint only

Panel-to-Furniture Bracket Package (PAB7)

Specifying, page 234







Left-hand bracket

Connections



Bracket screws to the back of freestanding furniture and hooks into the slotted channel of the panel. Mounting screws are provided.

Surface Materials

Panel-to-furniture bracket

• Black paint only

Application Topics




Bracket allows panels to be stabilized with freestanding furniture.

Rules for Panel Stability with Components Page 59

Anchor Bracket

► Specifying, page 234



Connections



Attaches to the panel glide located at the base of a panel.

Anchors a panel to the floor at the power entry point, such as a power pole or base power-in connection, to prevent panel movement and possible electrical wire damage.

Complies with the Office of Statewide Health Planning and Development Organization (OSHPD) requirements for 80"H panels that are used in health care occupancies in the state of California.

Surface Materials

Anchor bracket

Black paint only

Application Topics

Breakaway base powerin may eliminate the need for an anchor bracket on a powered panel if the panel is

Special Requirements for Los Angeles

▶ Page 197

65"H or shorter.


Panel Accessories

Panel Stabilizer Foot



► Specifying, page 235

Application



Increases the stability of panel runs when furniture or perpendicular panels are not available to provide stability.

Pairs provide the most stability.

Connections

Attaches to all panels, including curved panels. Non-handed design allows foot to attach to either side of the panel.

Tip: Panel-stabilizer foot must not be used as the sole source of support for panels.

Each foot extends 16" from the base of the panel.

Surface Materials

Foot

Paint

Application Topics

Stabilizes up to three panels if the panel run doesn't exceed 12'.

▶ Pages 58–59



Panel stabilizer foot must not be used as the sole source of support for panels.

Actual Dimensions


Depth	16"
Width	23/4"
Height	111/4"

Panel Coat Hook



► Specifying, page 235

Application



Provides a convenient place for hanging coats and similar light objects in workstations

Connections

Fits anywhere under the top cap reveal of panels with a painted top cap only. Panel coat hook cannot be used with wood top cap.

Surface Materials


Coat hook

Paint

Actual Dimensions


Depth	17/8"	
Width	1/2"	
Height	45/16"	

Markerboard and Tray



► Specifying, page 236

Application



Provides a writing surface on the side of a panel.

Laminate surface on board cleans easily.

Tray to hold pens and accessories is available as an option.

Connections

Markerboard attaches to panels at any height using brackets that are included.

Tray is built into the marker board bottom frame and is available as an option.

Surface Materials

Markerboard surface

White laminate only

Border and tray

· Black only

Application Topics

Wall channels are available to attach marker boards to interior walls.

Actual Dimensions

30" or 36"

77019		
Board		
Depth	3/4"	

Height 33"


Tray

Width

Depth 1½"


Width 29½" or 35½"

Tackboard




► Specifying, page 236

Application



Provides increased tackability between overhead storage and worksurface when non-tackable panels are used.

Connections



Wall channels are available to attach tackboards to interior walls.
▶ Page 153

Brackets, which are factory installed on the back of the tackboard, lock into the slotted channel of panels or into wall channels.

Surface Materials

Tackboard

Fabric

Tip: Horizontal application is standard. Vertical application is available as an option.

Hardware

· Black paint only

Actual Dimensions

Depth	3/4"	
Width	30", 36", 42", 48", 60", or 72"	
Height	17³/₄"	

Base Power-Ins

Base power-ins are field installed and connect the panel electrical system to the building power source. All five wiring schematics are available.

► Specifying, page 237

the panel.

Actual Dimensions

21/2"

51/2"

13/4"

6'

15/8"


Depth

Width

Height

Conduit diameter Conduit length

Elbow depth

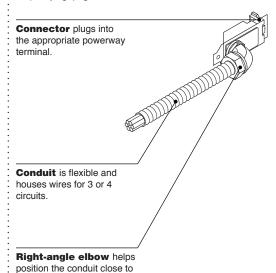


Product Details

Power-in brings power to panel run by connecting to a designated receptacle location or to the end of the powerway.

Three circuit shared neutral base power-in fits standard- or larger-size opening receptacles.

Three circuit separate neutral and all four circuit base power-ins can only fit in larger-size receptacle openings.

Conduit connects power-in to building's power source.



End power-ins interface the building power by entering at the end of a panel and connecting to a flag terminal on a powerway. End powerins occupy the same flag terminal as a power pole and worksurface height power. A receptacle opening is not used. If power pole or end power-in and power cable management panel are used together, you must plan accordingly for your installation. If power pole or end power-in and power cable management panel are used together, you must plan accordingly for your installation.

▶ Page 239

Connections



Attaches to the appropriate location on the powerway depending on powerway width.

Filler plates are available so a duplex-size power-in can be used in a larger-size opening.

Wiring & Cabling

All the components in an electrical distribution network must use the same wiring schematic. Components are color coded and

keyed to make it impossible to connect mismatched

Building power source can come from the floor, wall, or column

Conduit leads must be hardwired to the building wiring by a qualified electrician or engineer.

Power-ins are UL listed and CSA certified.

Local electrical codes

vary, so consult with your local authority having jurisdiction as they have final say if the products as installed are compliant with local code. Consult a qualified electrical contractor or engineer for proper installation of electrical equipment.

Chicago, New York City, and Los Angeles have special requirements. Pages 195-197

Understanding Building Wiring


▶ Page 198

Surface Materials


Conduit

Black plastic only

Application Topics



Breakaway power-in is mandated for use in health care occupancies in the State of California by the Office of Statewide Health Planning and Development Organization (OSHPD). With 50 pounds of pressure, the connection will come apart to separate live electrical current in the event of panel movement. Breakaway power-ins fit duplex- or oversized receptacle openings. Tip: This product is not available in Canada.



▶ Page 238

18"W panels cannot be connected to power-ins because these panels only accommodate pass-through powerways.

2" x 2" Power Poles and Cable Poles

Power poles bring building power from the ceiling to the powerways in the base cavity of panels. All five wiring schematics are available. They can also be used to run cables into the top cap or into the panel base cavity.

► Specifying, page 240


Flag connector attaches

to powerway at the desig-

Base cover matches the

base of adjacent panels.

nated terminal.

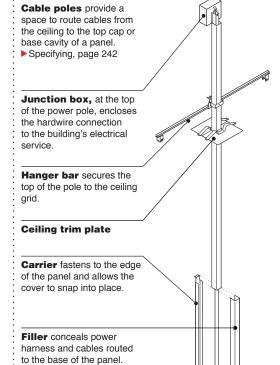

Actual Dimen	sions	
Depth	11/2"	
Width	15%"	
Hanger bar length	36"	

Product Details

Four pole heights are available to correspond to panel heights.


Ceiling heights up to 10'4" can be accommodated.

Connections

2" x 2" poles can connect to end-of-run or to an L- or T- configuration. Carrier must always attach to tallest panel. Carrier must attach to center panel in T-configuration.

Height of the pole must correspond with the height of the panel it is attached to so that it will connect under the top cap. Adjacent panels can be lower.


Alignment rod links upper and lower parts of pole to ensure straight connection.



Carrier fastens to the end of a panel with screws that attach below the top cap. Panel remains undamaged so power and cable pole can be removed and relocated later.

Wiring & Cabling

All the components in an electrical distribution network must use the same wiring schematic. Components are color coded and keyed to make it impossible to connect mismatched parts.



Flag connector on the power pole plugs into either end of the powerway. It does not interfere with a receptacle location. If power pole or end power-in and power cable management panel are used together, you must plan accordingly for your installation.

Exception: Flag connector on the power pole plugs into the green end only of a 24"W powerway.

Six to eight 3/8" diameter cables can be accommodated inside the 2" x 2" power pole or cable pole.

Surface Materials

Upper part of pole

Paint

Lower part of pole

• Fabric

Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Base

 Paint (must match upper part)

Ceiling trim plate

White paint only

2" x 6" Power Poles and Cable Poles

Power poles bring building power from the ceiling to the powerways in the base cavity of panels. All five wiring schematics are available. They can also be used to run cables into the top cap or into the panel base cavity.

► Specifying, page 241

Junction box, at the top of the power pole, encloses the hardwire connection to the building's electrical service.

Hanger bar secures the top of the pole to the ceiling

Ceiling trim plate

Filler conceals power harness and cables routed to the base of the panel.

Cover matches height of adjacent panels.

Power pole allows two 8-wire systems to be installed.


Two power harnesses are provided to supply power to two panel runs at the same time

Flag connector attaches to powerway at the designated terminal.

Actual Dimensions Depth 2" Width 6" Hanger bar length

Connector plate attaches to the top of a panel at the same height as the panel and to the bottom of the






Four pole heights are available to correspond to panel heights.

Ceiling heights up to 10'4" can be accommodated.


Connections



2" x 6" pole is used in-line with tackable acoustical or transparent panels. It can also be used in L, T, and X configurations.

Height of the pole must correspond with the height of the panel it is attached to so that it will connect under the top cap. Adjacent panels must be the same height.

Alignment rod links upper and lower parts of pole to ensure straight connection.




Connector plate attaches to the top of a panel at the same height as the panel and to the bottom of the panel.

Carrier fastens to the end of a panel with screws that attach below the top cap. Panel remains undamaged so power and cable pole can be removed and relocated later. Plate will be visible after installation

Wiring & Cabling

All the components in an electrical distribution network must use the same wiring schematic. Components are color coded and keyed to make it impossible to connect mismatched parts.



Flag connector on the power pole plugs into either end of the powerway. It does not interfere with a receptacle location. If power pole or end power-in and power cable management panel are used together, you must plan accordingly for your installation.

Exception: Flag connector on the power pole plugs into the green end only of a 24"W powerway.

Surface Materials

Upper and lower part of pole

Paint

Connector plate

Paint

Ceiling trim plate

· White paint only

Application Topics

2" x 6" power poles cannot be used in end-of-run applications.

2" x 6" power poles cannot be used in a panel change-of-height application.


Worksurfaces, storage bins, or shelves cannot be hung from a 2" x 6" power pole.

Corner fillers for use with 2" x 6" power poles are available, contact Specials for further information.

18"W and 24"W Powerways

Powerways that are installed in the panel base cavity allow power to be distributed wherever panels go. All five wiring schematics are available. ► Specifying, page 243 18"W and 24"W powerways have two color-coded flag connectors—a green end and a yellow end. 18"W powerways are available for pass-through power in 18"W panels. They **Green flag connector** cannot accommodate receptacles, base power-ins, end power-ins, power poles, or cable poles. Power pole, end pow-Yellow flag er-in, or cable-manconnector agement harness connector port Tip: Only one of these three Terminal for all base applications may be used at power-ins or any receptacle of any size of same wiring schematic. **Green flag** Powerblock termiconnector nals accept connector from adjacent powerway. Flag connector links to powerblock terminal on adjacent powerway of same wiring schematic. Terminal for three circuit with shared neutral base power-in or standard-size receptacle of same wiring schematic. Yellow flag connector

Product Details



Receptacles snap into terminals and are held in place with screws.

- 18"W pass-through powerways have no receptacle locations.
- 24"W powerways have one receptacle location on each side.
- ►Page 48

Color coding on 18"W and 24"W powerways


designates opposing ends of the powerway—green represents the power-in end. The yellow end can be used to extend the network to an adjacent powerway.

Green end of factoryinstalled powerways is tagged on the outside of the panel.

Connections


Two rules for joining 18"W and 24"W powerways apply to every installation:

- There must be at least one green end at each intersection.
- There can be no more than one yellow end at each intersection.




Flag from the green end of 24"W powerway

is inactive. It connects to parking station on 24"W adjacent powerway.




Flag from the green end of 24"W powerway

connects to the second powerblock terminal of 30"W or wider powerways.




Straight connection

is formed when a flag connector from the yellow end of one 24"W powerway attaches to the second powerblock terminal on the green end of the adjacent 24"W powerway.




Straight connection in a T-configuration

requires the flag connector to travel further. It connects from the yellow end of 24"W powerway to the first power-block terminal on the adjacent 24"W powerway. Flag from the green end of powerway is inactive and parked on adjacent 24"W powerway. Corner wire cover conceals flag connectors.




Straight connection in a T-configuration with 24"W and 30"W or wider powerways


requires flag connector to travel farther. Flag connector from the green end of 24"W powerway connects to first powerblock terminal of 30"W or wider powerway.



L-connection is formed when flag connector turns to left or right.




T-connection is formed by three flags—two forming an L-connection and the other a straight connection at the junction.




X-connection is formed by three flags that make right turns. Remaining connection is inactive.



End-of-run is terminated by folding the last flag back and connecting it to its own powerblock terminal.



In green-green connections the extra flag can snap onto the extra terminal instead of onto a parking station. This makes a redundant power connection that works the same as a parking station.



Although it is possible to power all four panels in an X-configuration with only green ends at the intersection, it is not recommended. One end of a powerway in the intersection should be yellow.

Wire separator is available to separate data and telecommunication cables from the powerway. It is available factory installed in tackable acoustical panels. It can be field installed in non-tackable, tackable acoustical, and transparent panels and is available from Service Parts.

Wiring & Cabling

All the components in an electrical distribution network must use the same wiring schematic. Components are color coded and keyed to make it impossible to connect mismatched parts.

All Steelcase electrical systems are designed in compliance with the National Electrical Code (NEC) and Canadian Electrical Code (CEC) to function as a multi-wire branch circuit. Installations should be made in accordance with the NEC or CEC provisions for multi-wire branch circuits.

Local electrical codes vary, so consult with your local authority having jurisdiction as they have final say if the products as installed are compliant with local code. Consult a qualified electrical contractor or engineer for the proper installation of electrical equipment.

Chicago, New York City, and Los Angeles have special requirements. Pages 195–197

Powerways are concealed when they are properly installed.

Application Topics


How Connectors Affect Power Flow

Page 57


Steps to Plan an Electrical Network

▶Page 193

30"W to 60"W Powerways

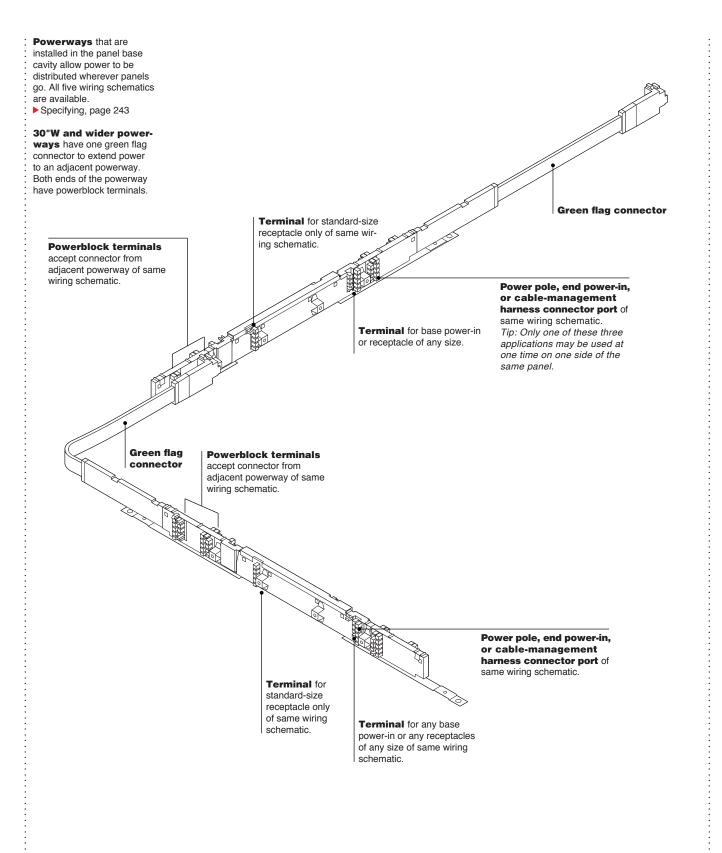

Product Details



Receptacles snap into terminals and are held in place with screws. 30"W and wider powerways have one receptacle location on each side. 36"W and wider powerways have two receptacle locations on each side.


Page 48

Green end of factory-installed powerways is tagged on the outside of the panel.


Connections

One rule for joining 30"W and wider powerways applies to every installation:


 There must be at least one green end at each intersection.




Flag from the green end of 30"W or wider powerway is connected to powerblock terminal on adjacent powerway.




Flag from the green end of 24"W powerway connects to the second powerblock terminal of 30"W or wider powerways.



Straight connection is formed when a flag connector from one 30"W or wider powerway attaches to the second powerblock terminal on the end of the adjacent 30"W or wider powerway.




Straight connection in a T-configuration of 30"W or wider powerways requires the flag connector to travel farther. It connects to the first powerblock terminal on the adjacent powerway. Corner wire cover conceals flag connectors.




Straight connection in a T-configuration with 24"W and 30"W powerways requires flag connector to travel farther. Flag connector from the green end of 24"W powerway connects to first powerblock terminal of 30"W or wider powerway.




L-connection is formed when flag connector turns to left or right.



T-connection is formed by two flags that make right turns.



X-connection is formed by three flags that make right turns.



End-of-run is terminated by folding the last flag back and connecting it to its own powerblock terminal.



Panel-to-panel connector can be used with 30"W and wider powerways to create a power link where no flag is available. It also can be used to correct planning and installation oversights without having to reconfigure.

Page 244

Wire separator is available to separate data and telecommunication cables from the powerway. It is available factory installed in tackable acoustical panels. It can be field installed in non-tackable, tackable acoustical, and transparent panels and is available from Service Parts.

Wiring & Cabling

All the components in an electrical distribution network must use the same wiring schematic. Components are color coded and keyed to make it impossible to connect mismatched parts.

All Steelcase electrical systems are designed in compliance with the National Electrical Code (NEC) and Canadian Electrical Code (CEC) to function as a multi-wire branch circuit. Installations should be made in accordance with the NEC or CEC provisions for multi-wire branch circuits.

Local electrical codes vary, so consult with your local authority having jurisdiction as they have final say if the products as installed are compliant with local code. Consult a qualified electrical contractor or engineer for the proper installation of electrical equipment.

Chicago, New York City, and Los Angeles have special requirements. Pages 195–197

Powerways are concealed when they are properly installed.

Application Topics


How Connectors Affect Power Flow

Page 57

Steps to Plan an Electrical Network

▶Page 193

Base Covers and Receptacles

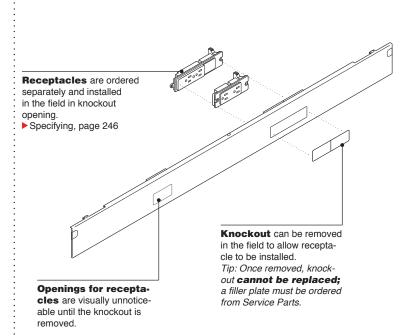

Product Details

Base cover is removable to allow access to cavities in panel base. Base cover contains "invisible" knockouts for receptacles.

Base covers have one standard-size opening on the left and a larger-size opening on the right. Exceptions: 24"W and 30"W base covers don't have enough space for two receptacles on each face, so they have a standard-size opening on one side of the panel and a larger-size opening on the reverse side. 18"W panels accommodate pass-through power only, so their base covers do not have receptacle knockouts.

Knockouts cannot be accidentally removed by kicking them or striking them with a vacuum cleaner because the pressure to remove the knockout must be applied from the back of the panel. Once removed, knockout cannot be replaced.

Reusable filler plates are available to replace the knockout or to fill the gap that results when you use a standard-size receptacle in an oversize opening. Filler plates are available through Service Parts. Receptacles are available in 15-amp and 20-amp versions and are designed to link to a specific circuit. All receptacles are duplex, meaning that they have two outlets, but some are designed to fit in the larger openings of Avenir base covers. As a result, specific lines may be limited to and fit only in specific receptacle locations in the base.



Standard size

Duplex receptacles are one of two sizes. Standard-size receptacles fit in the smaller-size openings (2³/₄"W x 1³/₈"H) of the base cover. The standard-size receptacles will also fit in the larger-size (5¹/₄"W x 1³/₈"H) openings with a filler.



Larger size


Oversized duplex receptacles with two outlets will only fit in the larger-size opening of the base cover (5½"W x 13%"H) in 36"W through 60"W panels.

3-Circuit,	Shared Size
1	Standard
2	Standard
3	Standard
3-Circuit,	
Separate	Neutrals
Line	Size
A	Standard
В	Standard
С	Larger size
3+D	
Line	Size
1	Standard
2	Standard
3	Standard
4	Larger size
3I+1	
Line	Size
1	Standard
2	Standard
3	Standard
4	Larger size
2+2	
Line	Size
1	Standard
2	Standard
3	Larger size
4	Larger size

Numbers printed on the receptacles indicate the line number. With the 3-circuit, separate neutral system these designations are with letters A, B, or C as compared to 1, 2, 3, or 4 in the other systems.

Label on receptacle indicates which circuit the

indicates which circuit the receptacle connects to, so the user can control which devices are on specific circuits.



Orange triangle indicates to users the receptacles that are connected to isolated grounds. The following receptacles have isolated ground circuits.

3 circuit, separate neutrals

Line A Line B


4 circuit, 3+D Line 4

4 circuit, 3I+1 Line 1 Line 2


Line 3
4 circuit, 2+2

Line 3 Line 4

Connections



Base covers are attached to panels with concealed clips and are removable.




Receptacles plug into terminals on powerway and are secured with screws.


Wiring & Cabling

Any circuit can be accessed at any receptacle location by using the appropriate receptacle. All five wiring schematics are available.


Tip: All the components in an electrical distribution network must use the same wiring schematic. Components are color coded and keyed to make it impossible to connect mismatched parts.



Cable grommets can be inserted in duplex-size receptacle openings to route cables from the panel base to the worksurface.



Cable knockouts at each end of every base cover allow cables to pass through.



Wire separator is available to separate telecommunication cables from the powerway. Wire separator is available factory installed in tackable acoustical panels. It can be field installed in non-tackable, tackable acoustical, and transparent panels and is available from Service Parts.

Surface Materials

Base covers

Paint (standard)

Receptacle

Plastic

Application Topics


18"W panels accommodate pass-through powerways only, so their base covers do not have receptacle openings.

Base power-ins are available to fit standard-size or larger-size openings. To avoid using a receptacle position for a base power-in, or power pole of same wiring schematic.


Page 40


Receptacle Locations

Straight Non-Tackable and Tackable Acoustical Panels



18"W








36"W through 60"W


Straight Transparent Panels



All panels can be part of a distribution network, but receptacles are available only in the base covers shown below. Standardsize receptacles can be positioned in any opening. Over-size receptacles fit in larger-size openings only.

18"W panels accommodate pass-through powerways only, so their base covers do not have receptacle openings.

Base covers can be moved to the other side of a straight panel in the field.



Gap that results when you use a standard-size receptacle, or a standard-size base power-in, in a larger-size opening must be closed with a filler plate. Filler plates are available through Service Parts.


Base power-ins are available to fit standard-size or larger-size receptacle openings. To avoid using a receptacle position for a base power-in, use an end power-in.


Page 40

Panel Creep

Small increments are added or deducted to the length of a run of panels because of the different ways that panels are connected to each other. The accumulation of these increments is called panel creep.

Deduct ⁵/₆₄" at each panel seam when panels are connected in line.







1211/64"

 $30^{5}/16" + 30^{5}/16" + 30^{5}/16" + 30^{5}/16" + 30^{5}/16" + -5/64" + -5/64" + 121^{1}/64"$


Add 1²⁷/₃₂" each time a perpendicular panel is joined to the end of a panel run with a universal connector.






 $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{5/16}$ " + $30^{$


Add 143/64" each time a perpendicular panel is inserted into a run of panels with universal connectors.






 $30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 30^{5/16"} + \\ ^{-5/64"} + ^{-5/64"} + 1^{27/32"} + 1^{27/32"} + 1^{43/64"} = 126^{29/64"}$


Add 21/32" each time a closed-configuration connector is used to join a perpendicular panel at the end of a panel run.






 $30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 30^{5/16"} + \\ ^{-5/64"} + ^{-5/64"} + ^{21/32"} + 2^{1/32"} = 125^{5/64"}$

Add 2¹/₁₆" each time a closed-configuration connector is used to insert a perpendicular panel into a run of panels.



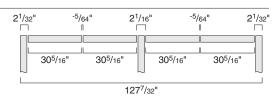


 $30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 30^{5/16"} + 21/32" + 21/32" + 21/16" = 127^{7/32"}$


How Panel-Supported Components Fit

Dimensions of panels and panel-supported components, such as worksurfaces, shelves, and overhead storage bins, don't match exactly. Panels are slightly larger to allow for the 5/32" overlap of perpendicular panels.

Page 51



Two smaller worksurfaces can fit in the space of a single large worksurface, but a slight gap will result where the worksurfaces meet. For example, two 30"W worksurfaces can be used in place of a single 60%2"W worksurface.




Worksurface fillers can be used to fill in the slight gaps that result in unusual configurations.

Tip: Because of different furniture applications and installation techniques, it is suggested that worksurface fillers be ordered after the worksurface installation.


Corner worksurfaces

are never wrapped by panels on both ends, like rectangular worksurfaces. Therefore, they are slightly larger to reduce or eliminate gaps.

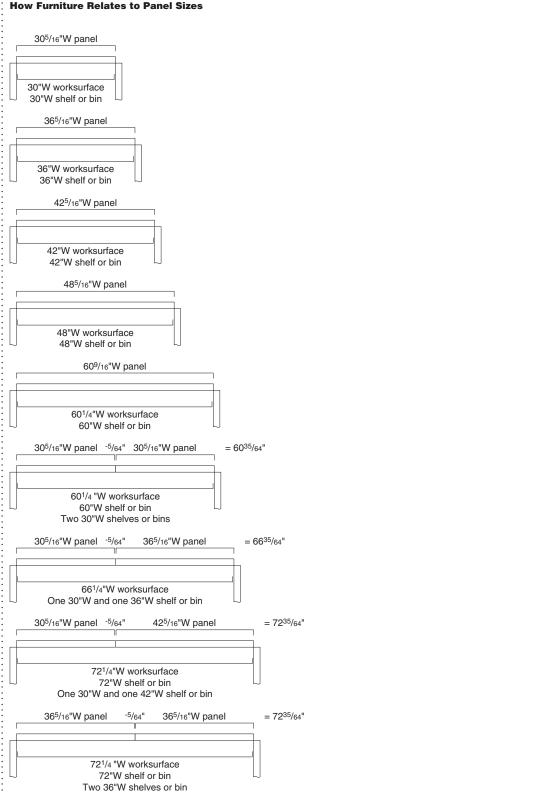


Solutions to Overhead Storage Problems Caused by PAB2 Brackets

Solutions to Overhead Storage Problems Caused by PAB2 Brackets



PAB2 brackets are used to connect panels of different heights. Because PAB2 brackets occupy a portion of the slotted channel in the taller panel, they prevent overhead storage cabinets and shelves from being attached in some configurations.


▶Page 26



When a PAB2 bracket

is used to attach a 53"H or 65"H panel to a taller panel, the slotted channel of the taller panel will be partially blocked and prevent the overhead storage component from being attached to the taller panel.

Tip: Mounting overhead storage components higher or lower than the standard height or mounting them on adjacent panels may be an acceptable solution in some installations.



Change-of-height panel connectors can be used instead of PAB2 connectors in many configurations to allow overhead storage components to be attached. ▶Page 31

Diagrams below and on the following pages

show how to configure change-of-height installations to avoid blocking the slotted channels. Most use one or more change-of-height panel connectors.

The style numbers are shown under the individual drawings. Some installations also require the special connector bracket. The frames and quantities of all the components needed are listed underneath the round detail drawings.

Straight Connections



1 Change-of-Height Panel Connector



PC6553



PC8053



PC8065

L-Connections



1 Change-of-Height Panel Connector










PC8065


Solutions to Overhead Storage Problems Caused by PAB2 Brackets, continued

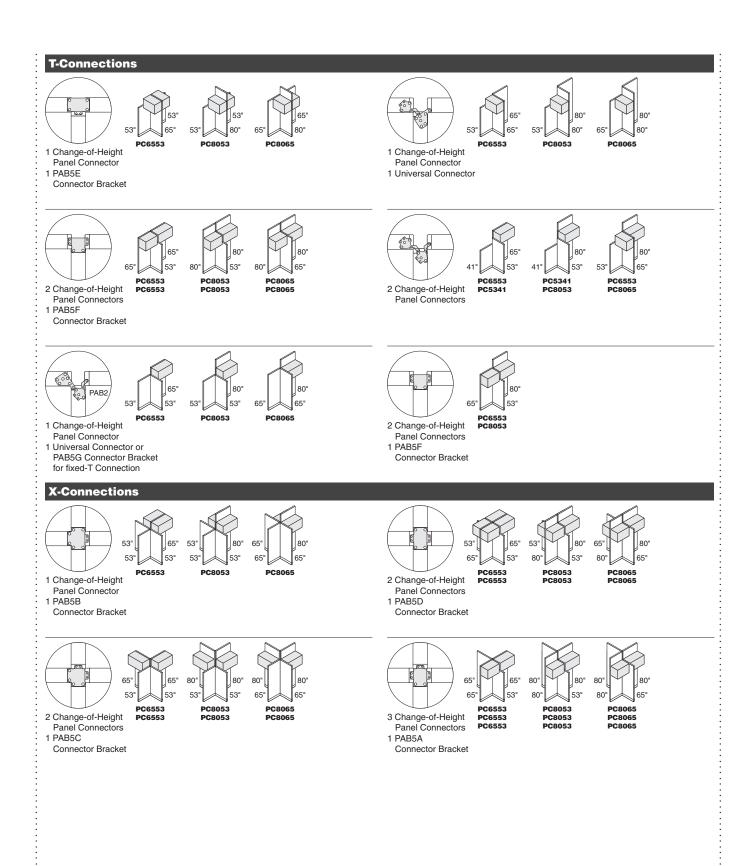





- Connector Bracket

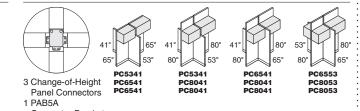






- 2 Change-of-Height Panel Connectors 1 PAB5D
- Connector Bracket



Connector Bracket

Connector Bracket




Connector Bracket


How Connectors Affect Panel-Supported Components

Panel's ability to support components is directly affected by the way panels are connected. Choose a connector that will accommodate your workstation's needs.

Straight Connections




Universal connectors do not interfere with panel-supported components.




Varying-height connector packages (PAB2) block a portion of the slotted channel on both sides of the taller panel.


L-Connections



Universal connectors do not interfere with panel-supported components.




Closed-configuration connector packages (PAB9) block the slotted channel on one side of the perpendicular panel.




Varying-height connector packages (PAB2) block a portion of the slotted channel on one side of the taller panel.


T-Connections




Universal connectors do not interfere with panel-supported components.



Closed-configuration connector packages (PAB9) block the slotted channel on both sides of the perpendicular panel.




Perpendicular connector packages (PAB4) block the slotted channels of the two in-line panels.




Varying-height perpendicular connector packages (PAB3) block a portion of the slotted channel on one side of each of the taller panels.


X-Connections



Universal connectors do not interfere with panel-supported components.



Perpendicular connector packages (PAB4) block the slotted channels of the two in-line panels.




Varying-height perpendicular connector packages (PAB3) block a portion of the slotted channel on each side of each of the taller panels.

How Connectors Affect Power Flow

Panel connections

affect how power flows through panels. Choose a connector that will accommodate your workstation's needs.

Straight Connections







Universal connectors do not interrupt power flow.

Varying-height connector packages do not interrupt power flow.

L-Connections








Universal connectors do not interrupt power flow.


Closed-configuration connector packages


do not interrupt power flow if lap joints and shorter base covers are used. They are available upon request.

Varying-height connector packages do not interrupt power flow.

T-Connections







Universal connectors do not interrupt power flow.

Closed-configuration connector packages


do not interrupt power flow if lap joints and shorter base covers are used. They are available upon request.


Perpendicular connector packages disrupt power flow in the perpendicular panel.

Varying-height perpendicular connector packages disrupt power flow in the perpendicular panel.

X-Connections







Universal connectors do not interrupt power flow.

Perpendicular connector packages disrupt power flow in both perpendicular panels.

Varying-height perpendicular connector packages disrupt power flow in both perpendicular panels.

Rules for Panel Stability

Avenir, when properly installed, is designed to be a very stable furniture system. The guidelines presented here are methods that will help you maximize the performance of workstations using panels alone or panel-supported components. To maximize performance and stability, the installation instructions that accompany each furniture should be strictly observed.



An "X" over a drawing means that this application is not recommended.



Panel doors and door frames follow the same stability rules as nontackable and tackable acoustical panels.



Change of height has no effect on these stability rules.


Rules for Non-Tackable and Tackable Acoustical Panels

Two-Panel Runs 8' maximum


Three-Panel Runs




Unstable. Requires additional support at end of panel run.



Stabilizer feet provide stability at end of panel run.



Perpendicular panel provides stability at end of panel run.



Furniture provides stability at end of panel run.

Tip: Not recommended on 80"H panels in a 12' run.


Four-Panel Runs




Unstable. Requires additional support at end of panel run.



Unstable. Requires a perpendicular panel or furniture as support at end of panel run.



Perpendicular panel provides stability at end of panel run.



Furniture provides stability at end of panel run. *Tip: Not recommended on* 80"H panels in a 16' run.

Five-Panel Runs



Unstable. Requires additional support.

Rules for Transparent Panels

Two-Panel Runs




Two transparent panels require additional support.



Two panels are stable if transparent panel is not at end of run.



Stabilizer feet provide stability at end of panel run.



Perpendicular panel provides stability at end of panel run.



Furniture used in front of transparent panels adds stability but blocks the view.

Three-Panel Runs




Unstable. Requires additional support at end of panel run.




Unstable. Requires a perpendicular panel or furniture as support at end of panel run.



Stabilizer feet provide stability if last panel is not a transparent panel.




Straight transparent perpendicular panel provides stability at end of a three-panel run of straight transparent panels.




Tackable acoustical panel provides stability if two transparent panels are not at the end of a run.



Unstable. Two transparent panels require additional support if they're at the end of a three-panel run.



Tackable acoustical panel provides stability if only one transparent panel is at the end of a run.



Furniture provides stability if transparent panel is not at the end of a run.

Tip: Not recommended on 80"H panels in a 12' run.




Furniture used in front of transparent panels adds stability but blocks the view.

Four-Panel Runs




Unstable. Transparent panels do not provide stability as a complete panel run.



Perpendicular panel provides stability at end of panel run.

Straight transparent panels can only be used in the first and second positions.



Furniture provides stability at end of panel run.

Straight transparent panels can only be used in the first and second positions.



Unstable. Transparent panel requires additional support at the end of a run.



Unstable. Transparent panel requires additional support at the end of a run.

Rules for Panel Stacker Stability

Avenir, when properly installed, is designed to be a very stable furniture system. The guidelines presented here are methods that will help you maximize the performance of workstations using panels alone or panel-supported components. To maximize performance and stability, the installation instructions that accompany each furniture should be strictly observed.




An "X" over a drawing means that this application is not recommended.

In general, the rules for panel stackers apply the same as if the stacker and base panel were one panel (See Rules for Panel Stability).

Maximum height.

Stackers are not designed to go from floor to ceiling. Consult local building codes when stacking above standard panel heights, especially above 72"H.

Rules for Glass and Fabric Panel Stackers




Unstable. Stackers do not mount above Avenir panel frames with doors.




Unstable. Door cannot be connected to a panel with a stacker.

Freestanding Applications



Unstable. Requires a connection to a perpendicular return stacker or panel for rigidity.




Perpendicular panel provides rigidity at end of stacker run.



Perpendicular panel provides rigidity at end of stacker run.

60"W Stacker Panels



For stackers on panels, minimum of 30"W same height return panels are required.

Rules for Panel Stability with Components*

Maximum panel stabil-

ity is always achieved when loads are counterbalanced by similar loads on the opposite side of the panels. The recommendations shown here apply to non-tackable. Components cannot be supported by straight transparent panels.



An "X" over a drawing means that this application is not recommended.

*Panel components

include storage bins,

shelves, worksurfaces,

Avenir Specification Guide

and worksurface-supported


Methods for Stabilizing Panels



Connect to a wall or a perpendicular run of panels at least 60"W.



Stabilizer feet should not be used when panels have panel-supported components.




Connect to perpendicular panels or a worksurface with at least one end panel or clear-access end panel.

Rules for Panel Stability

Panel runs with one


panel-supported component per panel require stability every three panels.





Panel runs with two

panel-supported components per panel require stability every two panels.






Panel runs with two

panel-supported components per panel can be extended for three panels, if the center panels only support one component and all loads are counterbalanced.












Tip: Not recommended on 80"H panels in a 16' run.

Fully loaded panels

must be counterbalanced. In addition, panel run-offs are required at both ends of the panel.



pedestals. panel run-offs

61

orksurfaces

Understanding Worksurfaces and Related Products

Product Details

Avenir Universal Systems Worksurfaces Avenir Worksurfaces 65 85

Understanding Avenir Universal Systems Worksurfaces

tatement of Line	66
roduct Details	
Avenir Universal Systems Worksurfaces	70
Worksurface Support Guidelines	73
Rules for Using Avenir Universal Systems Worksurfaces with Avenir Panels	75
Transaction Worksurfaces	76
Panel-Mounted Universal Systems Worksurface Supports for Avenir Panel Applications	78
Legs and Supports for Avenir Universal Systems Worksurfaces	80
Freestanding Guidelines for Systems Worksurfaces	82

Statement of Line

Worksurfaces


Worksurface dimensions shown

apply to laminate versions of each worksurface.



Understanding
► Page 70
Specifying
► Page 252


Straight Worksurfaces

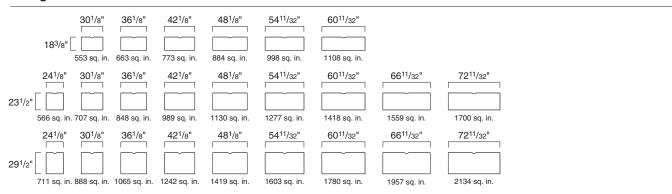



Understanding ▶ Page 70 Specifying
Page 254

Transition Worksurfaces*

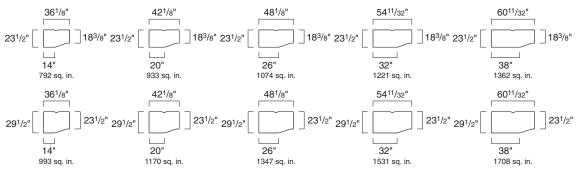


*Left-hand units shown. Right-hand units available.



Understanding
► Page 70
Specifying
► Page 256

Corner, Curved-Front Worksurfaces

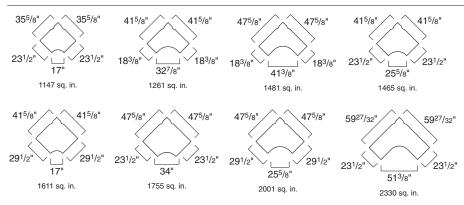


Statement of Line Worksurfaces, continued



Understanding
► Page 70
Specifying
► Page 258

Extended Corner, Curved-Front Worksurfaces*

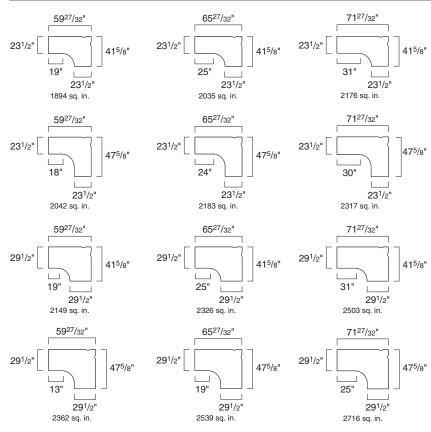

^{*}Left-hand units shown. Right-hand units available.



Understanding
► Page 70
Specifying
► Page 260



Understanding
► Page 70
Specifying
► Page 261

Spanner Worksurfaces



For Panel-Supported Applications


Bullet Peninsula Worksurfaces





Understanding
► Page 70
Specifying
► Page 262

Jetty Worksurfaces*

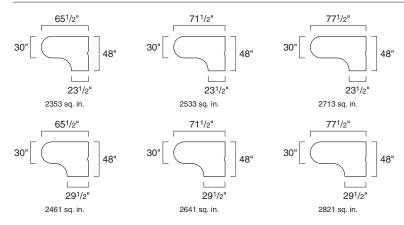

^{*}Left-hand units shown. Right-hand units available.

Tip: For P-edge worksurfaces, add $^{3}/_{8}$ " to $23^{1}/_{2}$ " and $29^{1}/_{2}$ " depths shown at left.







Understanding
► Page 76
Specifying
► Page 266


Visitor Worksurfaces*

24"	30"	36"	42"	48"
533 sq. in.	674 sq. in.	815 sq. in.	956 sq. in.	231/2"
	30"	36"	42"	48"
	837 sq. in.	1014 sq. in.	1185 sq. in.	291/2"

^{*}Left-hand units shown. Right-hand units available.

Tip: For P-edge worksurfaces, add $^3\!/_{\!8}"$ to $23^1\!/_{\!2}"$ and $29^1\!/_{\!2}"$ depths shown above.

Transaction Worksurfaces




Avenir Universal Systems Worksurfaces



Cable scallops allow cords and plugs to pass behind the worksurface. An option to omit cable scallops is available.

Avenir Universal Systems worksurfaces

are available in three depths. 183/e"D worksurfaces match the depth of Universal proud front storage components. 231/2"D and 291/2"D worksurfaces match the depth of return panels, end panels, and Universal proud front storage components.

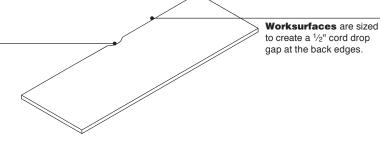

Worksurface has a wood core with laminate surface and is 13/16" thick.

Product Details

High-Pressure Laminate Worksurfaces




3 mm edge profile

PVC-free, 3 mm edge profiles are proprietary polyolefin blend for all solid colors and 7 woodgrain finishes. Matching 1 mm side and back edges are also PVC-free. See surface material listing in this book for specific PVC-free availability.


Edge profile finishes are specified separately

from laminate color.



Spanner worksurfaces

with 2" notch accommodate Avenir panels. Legs and cantilevers or adjustable column and cantilevers must be used for support.

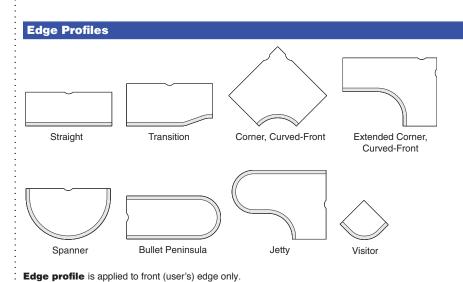




Bullet peninsula and jetty worksurfaces

require three supports:

- Cantilever
- · Side support bracket
- Adjustable column or legs




Visitor worksurfaces must be supported by a cantilever, a side support bracket, and a leg.

Connections


Worksurfaces can be used freestanding or in panel-supported installations.

Supports are ordered separately and installed in the field.



For panel-supported installations you can use:

- Side support brackets
- Cantilever with tie plateEnd panel
- · Support plate
- Adjustable column or legs
- See page 78 for Panel-Mounted Universal Systems Worksurface Supports.
- Avenir pedestal with filler
- ▶Page 79



For freestanding installations you can use:

- Post legs
- Double post C-leg
- Adjustable legs
- Adjustable column
- Support plate
- See page 80 for Legs and Supports for Universal Systems Worksurfaces. Tip: Pedestal can also

Tip: Pedestal can also be used in freestanding installations.




Worksurface spans greater than 54" require


greater than 54" require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

▶ Page 269

Wiring & Cabling




Worksurface depth is ½" less than nominal and allows cords and cables to pass over at any point. Cable scallops provide space for plugs to pass over the back edge of the worksurface.



Cable scallop allows cord plugs to easily pass below the worksurface. Worksurface wire managers are available to convert cable scallops into grommets in freestanding applications. Wire managers for use with laminate worksurface must be ordered separately.

▶ Page 247



Corner worksurfaces have scallops located 12½" from the rear corner of the worksurface to the center of the scallop. Scallops are centered on the rear edge of all other worksurfaces that include them.

Cable management
devices are available to
help manage conventional
and fiber-optic cables
beneath the worksurface.
▶ See Worksurface Power
and Communication
in Montage Solutions
Specification Guide.

•

Surface Materials

High-Pressure Laminate Worksurfaces

- Laminate
- See Surface Materials Reference Manual.
- Open Line laminate (option)
 A program including non-Steelcase laminates which are suitable for use on Steelcase products.
- See Surface Materials Reference Manual.

Front (user's) edge(s)

Plastic

Back and side edges


 Plastic color default to match user's edge

Application Topics

Avenir Universal Systems Worksurfaces

follow the same application rules as Avenir curvilinear worksurfaces. Not all installations can be panel wrapped.

See Rules for Using Avenir Universal Systems Worksurfaces with Avenir Panels, page 75.



Screens mount to worksurfaces in privacy position or below the worksurface for modesty.

See Answer Solutions Specification Guide.

Worksurfaces used in panel-supported

installations must follow applicable panel stability guidelines.

Page 58



Do not use an Avenir Universal Systems
Worksurface as a top for storage that matches the worksurface width.
Universal Systems
Worksurfaces are sized for Avenir panel-wrapped applications and will not fit over full-width storage. Use field-installed storage tops for this type of application.

See Storage Specification

Guide.

Shipping

Palletizing streamlines unloading and staging of worksurfaces. Identical worksurfaces ordered on the same line item are packed on pallets containing 5-50 worksurfaces depending on worksurface size. Remaining worksurfaces are packed individually in cartons. If palletizing is not desired, order in quantities of four or less per line item. For maximum unload efficiency, utilize pallet handling equipment at job site whenever possible. Wood veneer worksurfaces cannot be palletized.

Worksurface Support Guidelines


Worksurface spans greater than 54" require a brace or additional support to the floor. Spans greater than 72" wide cannot be supported only by a reinforcing channel, and require additional supports to the floor. Calculate span distance by measuring from edge of one end of worksurface to edge of other end of worksurface.

Exception: When using pedestals or lateral files to support a worksurface, measure from the inside edge of the storage unit.


Worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

▶ Page 269


Exception: Knife edge worksurfaces require support on spans greater than 48"W.




Reinforcing channel is not required on worksurfaces with spans less than 54"W.



Lightly loaded applications typically include a workstation with monitors, lighting, limited organizational tools, and personal items.



Reinforcing channel or additional support is required for worksurfaces with spans greater than 54"W and less than 72"W in light use applications and on worksurfaces with spans greater than 54"W and less than 60"W in heavy load applications.



Worksurface span cannot be supported solely by a reinforcing channel. Additional to the floor supports are required.

Tip: Reinforcing channels add 1"D below the worksurface.

Tip: For maximum effectiveness, place the reinforcing channel in the middle of the worksurface span. **Calculate span distance** by measuring from edge of one end of worksurface to edge of other end of worksurface. To determine size of reinforcing channel needed, deduct the amount listed in the matrix below from the measured span. Deduction in inches is based on combination of the left-hand and right-hand supports.

Example: 72"W measured span, with application of cantilever for left-hand support and end panel for right-hand support, has a span deduction of 6" for a reinforcing channel size of 66" (72"-6" = 66"). For this application, use reinforcing channel TS7WKSPT66.


Worksurface Span Deductions for Determining Reinforcing Channel Size		Right-Hand Support								
		End Panel	FrameOne Leg	FrameOne Leg-Table Application	Intermediate Support	DBL Post Leg	Cantilever	All other Legs/Supports		
	End Panel	-6"	-6"	-9"	-9"	-6"	-6"	-6"		
	FrameOne Leg	-6"	-6"	-9"	-9"	-6"	-6"	-6"		
Left-	FrameOne Leg-Table Application	-9"	-9"	-12"	-12"	-9"	-9"	-9"		
Hand Support	Intermediate Support	-9"	-9"	-12"	-12"	-9"	-9"	-9"		
Сирропо	DBL Post Leg	-6"	-6"	-9"	-9"	-6"	-6"	-6"		
	Cantilever	-6"	-6"	-9"	-9"	-6"	-6"	-6"		
	All other Legs/Supports	-6"	-6"	-9"	-9"	-6"	-6"	-6"		


Note: Not all supports shown work effectively with this panel system. Please check with your field sales representative for clarification and understanding prior to ordering.

Reinforcing Channel Sizes						
Style Number	Nominal	Actual				
TS7WKSPT39	39"W	39.231"W				
TS7WKSPT48	48"W	47.547"W				
TS7WKSPT51	51"W	50.547"W				
TS7WKSPT54	54"W	53.547"W				
TS7WKSPT	57"W	56.547"W				
TS7WKSPT60	60"W	59.547"W				
TS7WKSPT63	63"W	62.547"W				
TS7WKSPT66	66"W	65.547"W				
TS7WKSPT72	72"W	71.547"W				

Note: If the deducted span distance falls between two reinforcing channel sizes, select the smaller of the two sizes.

Support Requirements for Peninsula Worksurfaces






Peninsula worksurfaces smaller than 60"W do not require a reinforcing channel. Location of leg or column support, determined by pilot holes, meets the requirements for worksurface support every 54". Sizes 60"W or greater require a reinforcing channel. Determining brace size for peninsula worksurfaces: If worksurface is supported by a single column or legs, subtract 21" from span of worksurface to determine reinforcing channel size.


Example: 72"W measured span has a span deduction of 21" for a reinforcing channel size of 51" (72"–21" = 51"). For this application, use reinforcing channel TS7WKSPT51.


Worksurfac


Rules for Using Avenir Universal Systems Worksurfaces with Avenir Panels


Rules for Using Avenir Universal Systems Worksurfaces with Avenir Panels











Perpendicular panels intrude slightly into the neighboring space. Avenir Universal Systems Worksurfaces are special sizes to align with panel dimensions in typical applications.

For more information, see understanding Panel Creep, page 51.

Corner and extended corner worksurfaces fit flush with panels.

The ends of the worksurface that are not panel wrapped can be supported by an end panel or a pedestal with filler. Any individual worksurface can be wrapped on one side only. To wrap both sides, replace the single worksurface with two smaller ones, or use a conventional Avenir worksurface.

Tip: In many cases, Universal Systems Worksurfaces that are sized to fit Answer panels will allow this type of application


fit Answer panels will allow this type of application. See Answer Solutions Specification Guide. Panel wrapping any two worksurfaces in-line is possible because the worksurfaces are sized to account for the exact amount of panel creep occurs.

Transaction Worksurfaces

Transaction worksur-

face provides a surface that can be used by standing visitors or serve as a shelf

► Specifying, page 266

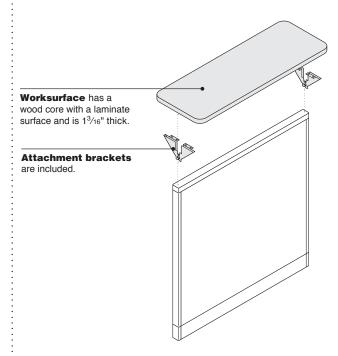



Actual Dimensions							
Α	В						
15"	30 ¹⁵ / ₆₄ "						
15"	36 ¹⁵ / ₆₄ "						
15"	42 ¹⁵ / ₆₄ "						
15"	48 ¹⁵ / ₆₄ "						
15"	60 ¹⁵ / ₆₄ "						

Product Details

Laminate Worksurfaces



3 mm

edge profile


PVC-free, 3 mm edge

profiles are a proprietary
polyolefin blend for all solid
colors and 7 woodgrain
finishes.

See surface material listing in this book for specific PVC-free availability.


Edge profile finishes are specified separately from laminate color.

Connections




Transaction worksurface support brackets connect to the vertical upright.

Spanning two panels is possible.




Top view

Width of transaction worksurface is the same width of corresponding panel.



Panels on both sides of the transaction worksurface must be the same height or lower than the panel that supports the transaction worksurface.

Recommended standing height for transaction worksurface is achieved by attaching it to 41"H panels. Tip: Transaction worksurfaces can only be used with 41"H panels.



Utility2 shelf lights can be installed beneath transaction worksurfaces using screws and keyhole slots in light fixture.



Transaction worksurface must be centered on the panel.

Surface Materials

Laminate Worksurfaces

- Laminate
- See Surface Materials
- Reference Manual.

 Open Line laminate (option)
- A program including non-Steelcase laminates which are suitable for use on Steelcase products.
- See Surface Materials
 Reference Manual


Edges

Plastic

Support brackets


Paint

Panel-Mounted Universal Systems Worksurface Supports for Avenir Panel Applications

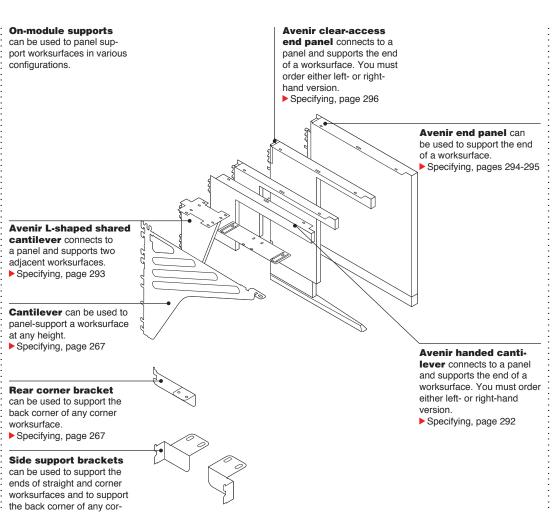




On-module worksurface supports engage the slots in the vertical uprights of Avenir panels.



Side support brackets support worksurfaces at

support worksurfaces at any height in 1" increments. Brackets ship as a left-and right-hand pair and are ordered separately.



Side support brackets can be used to support the end of a worksurface that is wrapped by a panel with the same width dimension that matches the worksurface depth.


Actual Dimensions						
	Universal cantilever	Avenir cantilever	End panel			
Height	121/4"	125/8"	28½"*			
Depth	15½"	17 ⁵ / ₁₆ ", 23 ¹⁵ / ₁₆ ", or 29 ³ / ₄ "	17 ⁵ / ₁₆ ", 23 ³ / ₄ ", or 29 ³ / ₄ "			

*Height dimensions include the thickness of a worksurface.


ner worksurface.

► Specifying, page 291


79




Single side support bracket can be used to support the rear corner of corner, extended corner worksurfaces.




Single side support bracket can be used to support the user's side rear corner of visitor and jetty worksurfaces.






Cantilevers support worksurfaces at any height in 1" increments. Universal cantilever is non-handed and can be used to support either end of a worksurface, or shared to support two worksurfaces at the same height simultaneously. One tie plate ships with each cantilever.


Avenir Specification Guide



30"D straight and transition cantilevered worksurfaces require additional floor support along the front edge, such as a pedestal, end panel, leg, side support bracket, or an adjacent return worksurface.




Avenir clear-access end panel is an alternative to a cantilever in supporting longer runs of worksurfaces for additional panel stability. Refer to the applicable panel stability guidelines for specific requirements.




End panels can be used to support the end of a worksurface for additional panel stability. Refer to the applicable panel stability guidelines for specific requirements.

End panels are available in seated heights, and cannot be used in freestanding applications.

All panel mounted supports can be removed and repositioned later without any permanent damage to panels or skins.



Avenir pedestals with a filler can be used to support the end of a worksurface in place of an end panel.



Worksurface spans greater than 54"

require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

Surface Materials

Side support bracket

· Black paint only

Cantilever

Paint

Application Topics


Worksurfaces used in panel-supported installations must follow applicable panel stability guidelines.

Page 58

: :

Legs and Supports for Avenir Universal Systems Worksurfaces

Without Alignment Tab

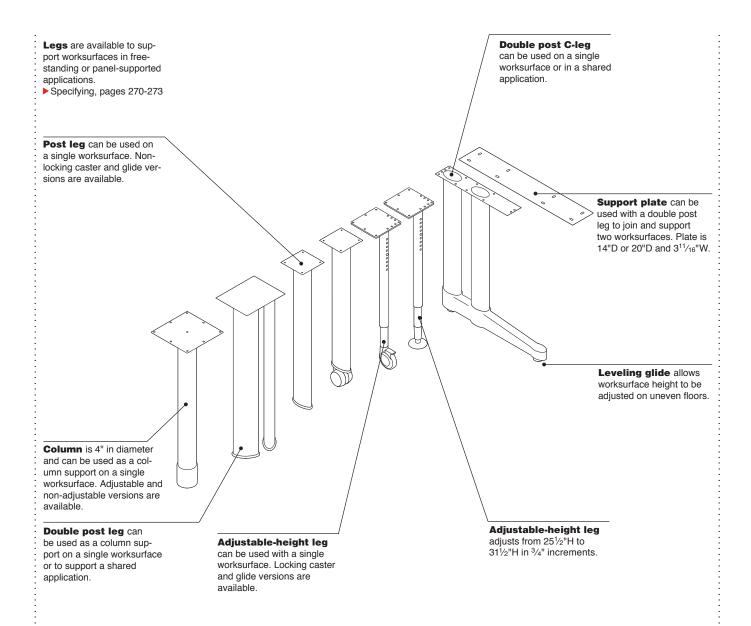

	Column	Adjustable column	Double post leg	Post leg	Adjustable- height leg	Double post C-leg	Support plate
Height*	281/2"	281/2"-315/8"	28½" or 40½"	26", 28½", or 40½"	25½"-31½"	281/2"	N.A.
Glide range, for legs equipped with glides	1½"	31/8"	3/4"	3/4"	3/4"	3/4"	N.A.

*Height dimensions include the thickness of a worksurface.

Product Details

Legs support Systems Worksurfaces at 26"H nesting, 281/2"H standard, 407/8"H standing or 251/2"H to 311/2"H adjustable heights.

Legs for Systems Worksurfaces do not include alignment tabs. Pilot holes help the installer locate the proper leg position under the worksurface.



45° orientation

Post legs are always installed at a 45° orientation.



26"H nesting height

legs allow worksurfaces to nest underneath an adjacent worksurface supported with 281/2"H legs or a panel-supported worksurface.




Double post leg can be used in a shared application with a support plate, or it can be used as a column support for spanner, jetty, and bullet peninsula worksurfaces in panelmounted applications.




Post leg, in conjunction with a side support bracket, can be used to support the end of a visitor worksurface.



Two post legs can be used in place of one double post leg as column support for spanner, jetty, and bullet peninsula worksurfaces for added stability.



Standing-height post or double post legs can be used as column support in panel-mounted applications only.



Column can be used on spanner, bullet peninsula, linking peninsula, and jetty worksurfaces in panel supported applications. For freestanding desk applications, column can be used on bullet peninsula and jetty worksurfaces. Adjustable and non-adjustable versions are available.

Column cannot be used in a shared application.



Column

Bottom View Post Leg


Column is not recommended for applications that include post legs because it has a round shape, while post legs are more of an elliptical shape. Use single or double post legs as a column support in applications that include other post legs.





Adjustable-height

legs adjust from 251/2"H to 311/2"H in 3/4" increments. Legs can be used to support the primary worksurface, or legs can support a worksurface in a nesting application.



Worksurface spans greater than 54"

require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

► Specifying, page 269.

Surface Materials Post legs, C-leg,

adjustable-height leg, and adjustable column

Post leg caster

· Black plastic only

Support plate and reinforcing channel

· Black paint only

Application Topics


Freestanding Guidelines for Systems Worksurfaces

Pages 82-83


Freestanding Guidelines for Systems Worksurfaces

The following section on freestanding worksurfaces gives some guidelines to be used with common freestanding configurations.

There are several ways to support the ends of a freestanding worksurface:

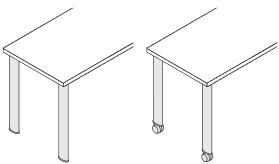


With single post legs or single post legs with casters. Nesting post legs can also be used.




With a double post C-leg.




With adjustable-height legs.



With a pedestal. Other storage products can be used. Counterweights are required in each pedestal or lateral file in a freestanding desk unless the desk is attached to another worksurface in an L-configuration.




Double post C-legs can be used on a single worksurface or in a shared application.

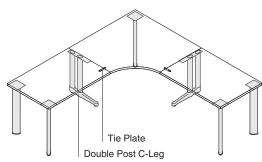


Tie plate is recommended to align worksurfaces.


48"W corner worksurface can be used in freestanding applications; however, it must be supported by adjacent worksurfaces on both sides.




18"D straight and transition worksurfaces must be connected to an adjacent worksurface for additional support.




Combined worksurfaces can give each other support when joined with a double post leg and support plate. Use 14"D support plate on 18"D and 24"D worksurfaces and 20"D support plate on 30"D worksurface. Tie plate is recommended to align the worksurfaces.

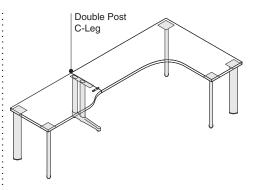

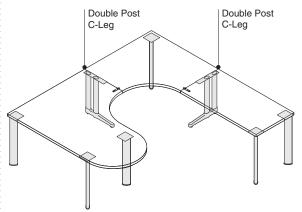

Double post C-leg can be used to support a corner or extended corner worksurface and adjacent worksurfaces.



Double post C-leg can be used to support an extended corner worksurface and adjacent worksurfaces.

Understanding Avenir Worksurfaces


Statement of Line

Product Details	
Avenir-Style 1½"-Thick Panel-Supported Worksurfaces	
Panel-Supported Radius-End Tables	90
Transaction Worksurfaces	92
Curvilinear Worksurfaces	
Rules for Using Curvilinear Worksurfaces with Avenir Panels	94
Directional Laminate Grain Directions for Avenir Curvilinear	95
Corner and Extended Corner Curvilinear Worksurfaces	96
Corner Split-Top Curvilinear Worksurfaces	98
Transitional Curvilinear and Straight Curvilinear Worksurfaces	100
Jetty Curvilinear Worksurfaces	102
Visitor, Linking, and Spanner Curvilinear Worksurfaces	104
Worksurface Supports	106
Related Products	
Worksurface Accessories	114
Grommets	116
Grommet Locations	117
Center Drawer Fit and Grommet Obstruction	120
Worksurface Wiring and Cabling	121

Statement of Line

Worksurfaces

1½"-Thick Panel-Supported Worksurfaces







Understanding
► Page 92
Specifying
► Page 278

Panel-Supported Radius-End Tables 60"W 66"W 72"W

	60"W	66"W	72"W
30"D	•	•	•
36"D	•	•	•

|--|


	30 ¹ / ₄ "W	36 ¹ / ₄ "W	42 ¹ / ₄ "W	48 ¹ / ₄ "W	60 ¹⁵ / ₃₂ "W			
165%"D	•	•	•	•	•			





Understanding
► Pages 96, 98
Specifying
► Pages 279–280


Corner Curvilinear and Corner Split-Top Curvilinear Worksurfaces

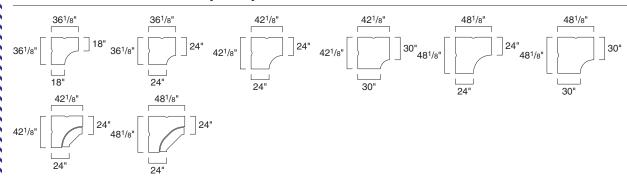



Understanding
► Page 96
Specifying
► Page 284

Extended Corner Curvilinear Worksurfaces*

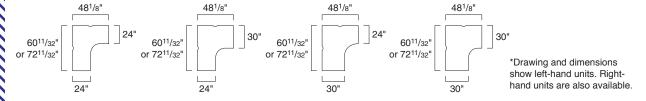


1½"-Thick Panel-Supported Worksurfaces, continued



Understanding
► Page 100
Specifying

Page 286


Transitional Curvilinear Worksurfaces*





Understanding
► Page 100
Specifying
► Page 282

Straight Worksurfaces for Use with Curvilinear Worksurfaces






Understanding Page 102

Specifying ▶ Page 287

Jetty Curvilinear Worksurfaces*

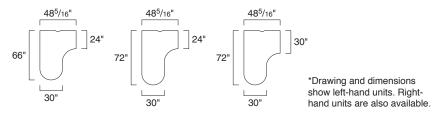


Statement	٥f	I ine	Worksurfaces,	continued
Otatomont	Οī		Worksurfaces,	CONTINUE

1¹/₂"-Thick Panel-Supported Worksurfaces, continued



Understanding
► Page 104
Specifying
► Page 288

Visitor Curvilinear Worksurfaces*



*Drawing and dimensions show left-hand units. Righthand units are also available.



Understanding ► Page 104 Specifying ► Page 289




Understanding ► Page 104 Specifying ► Page 290

Linking Curvilinear Worksurfaces



Spanner Curvilinear Worksurfaces



Statement of Line

ices

Panel-Supported Radius-End Tables

1½"-Thick

Actual Dimensions

Height with adjustable

column support

Column diameter

Thickness

30" or 36"


11/2"

60", 66", or 72"

261/8" to 301/8"

Depth

Width

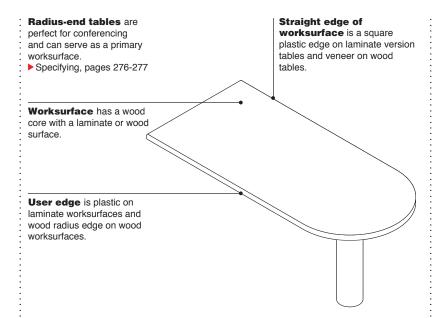




Locking side supports attach the worksurface to a panel with a springactivated safety catch to prevent it from accidentally disengaging.

Page 106




Support plate from adjacent worksurface ensures alignment.

▶Page 110



Column support is adjustable within a range of 4"H.



Worksurface fillers are available as transition fillers for radius-edge worksurfaces in a perpendicular or straight-line application.

Page 115

Tip: Because of different furniture applications and installation techniques, it is suggested that worksurface fillers be ordered after the worksurface installation.



Grommet is available, factory-installed, to allow cords and cables to pass through the worksurface.

Page 116

Worksurface

- Laminate (standard)
 See Surface Materials Reference Manual.
- Open Line laminate (option) A program including non-Steelcase laminates that are suitable for use on Steelcase products.
- See Surface Materials
 Reference Manual.
- Wood
- Customiz stain or full-fill finish (option on wood)

User edge

- Plastic (standard on laminate worksurface)
- Wood (standard on wood worksurface)

Column support

- · Paint (standard)
- 9201 Polished Chrome (option)

Locking side support

Black paint only

Shipping

Palletizing streamlines unloading and staging of worksurfaces. Identical worksurfaces ordered on the same line item are packed on pallets containing 5-50 worksurfaces depending on worksurfaces size. Remaining worksurfaces are packed individually in cartons. If palletizing is not desired, order in quantities of four or less per line item. For maximum unload efficiency, utilize pallet handling equipment at job site whenever possible. Wood worksurfaces cannot be palletized.

Transaction Worksurfaces

13/16"-Thick

Transaction worksur-

faces provide a surface that can be used by standing visitors or serve as a shelf.
► Specifying, page 278


Worksurface has a wood core with a laminate surface.

Plastic radius T-mold edge is located on the front and back.

Plastic edge is located on the sides of the worksurfaces.

Support brackets attach the transaction worksurface to a panel.







Utility2 shelf lights fit under either side of a straight transaction worksurface.

Page 168

Connections



Supports, included, attach transaction worksurface to any panel. The worksurface may be panel wrapped by a higher panel on one or both sides.



Perpendicular panels cannot be higher than the transaction worksurface.

Recommended standing height (42½"H) for transaction worksurfaces is achieved by attaching them to 41"H panels.

Tip: Transaction worksur-

Tip: Transaction worksurfaces can only be used with 41"H panels.




Actual Dimensions

Depth 165/8"

Width 301/4", 361/4", 421/4", 481/4", or 6015/32"

Thickness 13/16"



Panel top caps remain in place beneath the transaction worksurfaces. Two support bracket types are available—one for use with low top caps and one for medium top caps. Transaction worksurfaces cannot be attached to panels with high top caps.

Wiring & Cabling

Cable routing through medium top caps is not impaired.

Surface Materials

Worksurface

- · Laminate (standard)
- See Surface Materials
- Reference Manual.

 Open Line laminate
- (option)
 A program including nonSteelcase laminates that are suitable for use on
 Steelcase products.
- See Surface Materials Reference Manual.


Front and back edges


Plastic


Support brackets


Paint

Rules for Using Curvilinear Worksurfaces with Avenir Panels









Perpendicular panels

intrude slightly into the neighboring space. Curvilinear worksurfaces, and the straight and transitional worksurfaces that are used with them, are special sizes to align with panel dimensions in typical applications.

Directional laminates

➤ For grain direction, see page 95.
➤ For laminate availability,

For laminate availability, see page 359.

➤ For plastic edge color default, see pages 364-365.

Corner and extended corner worksurfaces fit flush with panels.

The ends of the worksurface that are not panel wrapped can be supported by an end panel or a pedestal with filler. Any individual worksurface can be wrapped on one side only. To wrap both sides, replace the single worksurface with two smaller ones, or use a conventional Avenir worksurface. Panel wrapping any two worksurfaces in-line is possible because the worksurfaces are sized to account for the exact amount of panel creep occurs.

Directional Laminate Grain Directions for Avenir Curvilinear

For Straight, Transitional, Corner, Extended Corner, Spanner, Visitor, Linking, Jetty, and Enterprise Worksurfaces

Left

Hand

Directional Laminate Grain Directions for Avenir Curvilinear

Directional laminates

are standard with the grain directions shown.



Straight Worksurface



Transition Worksurface



Straight Corner Worksurface



Curved Corner Worksurface

Right

Hand



Extended Corner Worksurface




Spanner Worksurface and Table



Visitor Worksurface



Linking Worksurface




Jetty Worksurface

Make a sketch of the grain direction on adjacent worksurfaces to be sure they

worksurfaces to be sure the are suitable for your installation.


Examples:












Corner and Extended Corner Curvilinear Worksurfaces

1¹/₂"-Thick

Curvilinear worksurfaces Plastic straight edge are available to allow a broader is located on the back and range of workstation layouts sides of the worksurface. with Avenir. ► Specifying, pages 279 and 284-285 Worksurface has a Cable scallops are wood core with a laminate included to allow cords and surface cables to pass behind the worksurface. Rear corner bracket is included with extended corner and corner worksurfaces to support back corner. Radius edge is located on the user's front edge of the worksurface. This edge is a plastic T-mold. **Additional supports** are available and must be ordered separately. **Actual Dimensions**

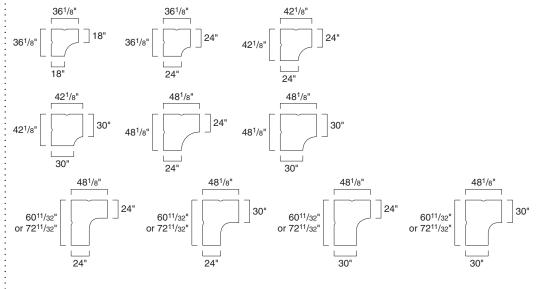

Product Details

11/2"-thick straight Avenir worksurfaces with radius edge can be used with curvilinear worksurfaces. Fit between worksurfaces will not be snug. Tip: Avenir non-curvilinear worksurfaces have a laminate edge and curvilinear worksurfaces have a T-mold




User's edge(s) of the worksurface are finished with a plastic T-mold radius edge detail that can be specified to match or contrast with the laminate worksurface. Color of these edges must be specified separately, unlike the edges of other Avenir worksurfaces which are defaults determined by the laminate color that you select.

See page 364 for a list of suggested plastic T-mold edge colors.

Plastic edge finishes the sides and back of worksurfaces. The color of these edges are determined by the laminate color you select. See page 364 for a list of default plastic edge

Articulated keyboard shelf can be installed


beneath curvilinear worksurfaces.



Field-installed center drawer can be installed beneath curvilinear worksurfaces wherever space permits-requires 191/2"D x 21"W.

Connections


Straight segment of extended corner worksurface varies depending on worksurface size. Refer to the following chart to determine if one or more pedestals will fit. When straight segment is 15"W, it can accommodate a pedestal without the curved portions of the user's edge of the worksurface overhanging the pedestal. 30"W straight segment will accommodate two pedestals side by side.




A	В	C	D	E
24"	24"	60"	48"	18 ²⁹ / ₆₄ "
30"	30"	60"	48"	12 ²⁹ / ₆₄ "
24"	30"	60"	48"	12 ²⁹ / ₆₄ "
30"	24"	60"	48"	18 ²⁹ / ₆₄ "
24"	24"	72"	48"	3029/64"
30"	30"	72"	48"	24 ²⁹ / ₆₄ "
24"	30"	72"	48"	24 ²⁹ / ₆₄ "
30"	24"	72"	48"	3029/64"

Tip: Illustration and dimensions show left-hand unit. Right-hand units have the same dimensions.


Pedestals support extended corner curvilinear worksurfaces at 28½"H. ▶ Page 130




End panel connects to a panel and supports either a left- or right-hand end of a worksurface at 28½"H.



Cantilever connects to a panel and supports the end of a worksurface. You must order either the left- or right-hand version. Triangular-shaped cantilever can also be used to support curvilinear worksurfaces.



Shared cantilever connects to a panel and supports two adjacent worksurfaces. Triangular-shaped shared cantilever can also be used to support curvilinear worksurfaces.



Side-support brackets can be used to support the ends of worksurfaces when they are wrapped by panels with a width dimension that matches the Worksurfaces depth. Side-support brackets are shipped in pairs.

See Rules for Using Curvilinear Worksurfaces with

Center support is

Avenir Panels. page 94


included and must be used to provide additional support for worksurfaces wider than 60".

Wiring & Cabling



Cable scallops are included in the back edges of these worksurfaces to provide space for plugs to pass over the back edge of the worksurface.

Worksurfaces are installed with a $^3/_{16}$ " gap separating the back of the worksurface from the supporting panels. This small space permits cord movement. Worksurface supports have stop tabs to ensure proper installation.



Cable management devices are available to help manage conventional and fiber-optic cables beneath the worksurface.

Surface Materials

Directional laminates and wood veneer are not available on curvilinear worksurfaces.

Worksurface

- Laminate (standard)
- See Surface Materials
 Reference Manual.
- Open Line laminate (option)
- A program including non-Steelcase laminates that are suitable for use on Steelcase products.
- See Surface Materials
 Reference Manual.

User's edge(s)

- Plastic T-mold Tip: The color of these edges must be specified separately.
- See page 364 for a list of suggested plastic T-mold edge colors.

Back and side edges

- · Plastic default
- See page 364 for a list of default plastic edge colors.

Pedestals

- Paint
- **End panel**
- Paint

Cantilever and shared cantilever

• Paint

Side-support brackets and corner brackets

Paint


Shipping

Palletizing streamlines unloading and staging of worksurfaces. Identical worksurfaces ordered on the same line item are packed on pallets containing 5-50 worksurfaces depending on worksurface size. Remaining worksurfaces are packed individually in cartons. If palletizing is not desired, order in quantities of four or less per line item. For maximum unload efficiency, utilize pallet handling equipment at job site whenever possible. Wood worksurfaces cannot be palletized.

Corner Split-Top Curvilinear Worksurfaces

1¹/₂"-Thick

surface.

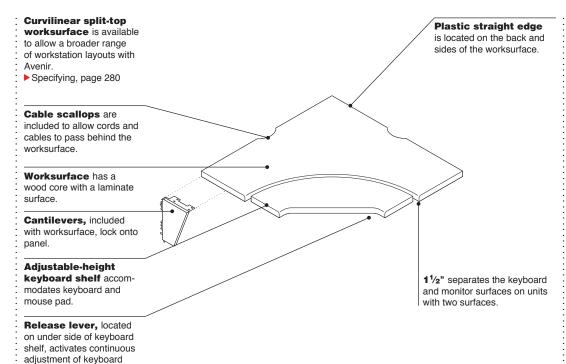

Product Details 1½"-thick straight

1½"-thick straight (PWR) Avenir worksur-

faces can be used with curvilinear worksurfaces. Fit between worksurfaces will not be snug. Tip: Avenir non-curvilinea

Tip: Avenir non-curvilinear worksurfaces have a laminate edge and curvilinear worksurfaces have a T-mold edge.




User's edge(s) of the worksurface are finished with a plastic T-mold radius edge detail that can be specified to match or contrast with the laminate worksurface. Color of these edges must be specified separately, unlike the edges of other Avenir worksurfaces which are defaults determined by the laminate color that you select.

See page 364 for a list of suggested plastic T-mold edge colors.

Plastic edge finishes the sides and back of worksurfaces. The color of these edges are determined by the laminate color you select.


See page 364 for a list of default plastic edge colors.




Keyboard worksurface

is supported by a spring mechanism that allows it to adjust to positions up to 6" higher or 5" lower than the monitor worksurface.

Actual Dimensions								
	42"W	48"W						
Depth	24"	24"						
Width	421/8"	481/8"						
Front edge width	241/2"	323/4"						
Thickness	11/2"	11/2"						





One-inch space separates sides of keyboard surface from adjacent furniture to prevent pinching.

Connections




Cantilever connects to a panel and supports only the corner worksurface. Adjacent worksurfaces must be supported separately.

Wiring & Cabling



Cable scallops are included in the back edges of these worksurfaces to provide space for plugs to pass over the back edge of the worksurface.

Worksurfaces are installed with a $^3/_{16}$ " gap separating the back of the worksurface from the supporting panels. This small space permits cord movement. Worksurface supports have stop tabs to ensure proper installation.



Cable management devices are available to help manage conventional and fiber-optic cables beneath the worksurface.

Surface Materials

Directional laminates and wood veneer are not available on curvilinear worksurfaces.

Worksurface

- · Laminate (standard)
- See Surface Materials Reference Manual.
- Open Line laminate (option)
 A program including non-Steelcase laminates that are suitable for use on Steelcase products.
- See Surface Materials
 Reference Manual.

User's edge(s)

- Plastic T-mold Tip: The color of these edges must be specified separately.
- ➤ See page 364 for a list of suggested plastic T-mold edge colors.

Back and side edges


- · Plastic default
- ► See page 364 for a list of default plastic edge colors.

Cantilevers

Paint

Transitional Curvilinear and Straight Curvilinear Worksurfaces

1¹/₂"-Thick

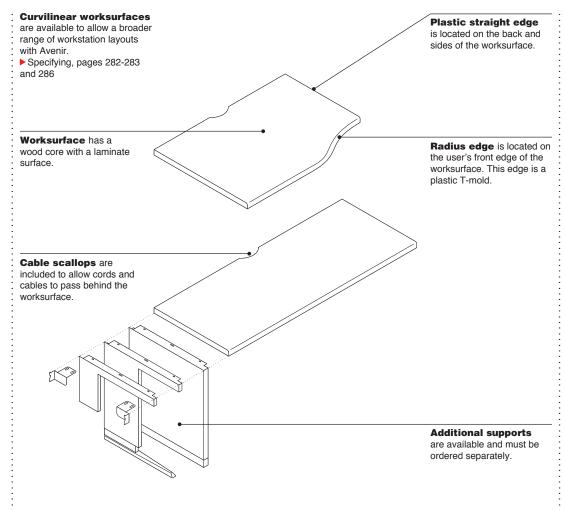

Product Details

$1\frac{1}{2}$ "-thick Avenir worksurfaces with radius

edge can be used with curvilinear worksurfaces. Fit between worksurfaces will not be snug. Tip: Avenir non-curvilinear worksurfaces have a laminate edge and curvilinear worksurfaces have a T-mold



User's edge(s) of the worksurface are finished with a plastic T-mold radius edge detail that can be specified to match or contrast with the laminate worksurface. Color of these edges must be specified separately, unlike the edges of other Avenir worksurfaces which are defaults determined by the laminate color that you select.

See page 364 for a list of suggested plastic T-mold edge colors.

Plastic edge finishes the sides and back of worksurfaces. The color of these edges are determined by the laminate color you select.


See page 364 for a list of default plastic edge colors.



Field-installed center drawer can be installed beneath curvilinear worksurfaces wherever space permits—requires 19½"D x 21"W.

36¹/₈" 42¹/₈" 48¹/₈" 24" 24" 30" 30¹/₂" 30¹/₂" 36¹/₈" 42¹/₈" 42¹/₈" 42¹/₈" 42¹/₈" 42¹/₈" 42¹/₈"

Actual Dimensions



6011/32"	6611/32"	72 ¹¹ / ₃₂ "
24"	24"	24"
or 30" L	or 30" L	or 30" L


Connections

Pedestals are available to support the end of a straight worksurface. They can be used at either end and will support these worksurfaces at 28½"H.


▶ Page 130




End panel connects to a panel and supports either a left- or right-hand end of a worksurface at 28½"H.



Cantilever connects to a panel and supports the end of a worksurface. You must order either the left- or right-hand version. Triangular-shaped cantilever can also be used to support curvilinear worksurfaces



Shared cantilever connects to a panel and supports two adjacent worksurfaces. Triangularshaped shared cantilever can also be used to support curvilinear worksurfaces.



Side-support brackets

can be used to support the ends of worksurfaces when they are wrapped by panels with a width dimension that matches the Worksurfaces depth. Side-support brackets are shipped in pairs.

See Rules for Using Curvilinear Worksurfaces with Avenir Panels, page 94

Side support bracket is included and must be

is included and must be used to provide additional support for worksurfaces wider than 60".

Wiring & Cabling



Cable scallops are included in the back edges of these worksurfaces to provide space for plugs to pass over the back edge of the worksurface.


Worksurfaces are installed with a $^3/_{16}$ " gap separating the back of the worksurface from the supporting panels. This small space permits cord movement. Worksurface supports have stop tabs to ensure proper installation.



66" or 72"

Worksurface edges that are 66"W or wider

have two scallops. Scallops are located 20" from the center of the scallop to the ends of the worksurface.



Cable management devices are available to help manage conventional and fiber-optic cables beneath the worksurface.

Surface Materials

Directional laminates and wood veneer are not available on curvilinear worksurfaces.

Worksurface

- Laminate (standard)
- See Surface Materials
 Reference Manual.
- Open Line laminate (option)
 A program including non-Steelcase laminates that are suitable for use on Steelcase products.
- See Surface Materials
 Reference Manual.

User's edge(s)

- Plastic T-mold Tip: The color of these edges must be specified separately.
- ➤ See page 364 for a list of suggested plastic T-mold edge colors.

Back and side edges

- · Plastic default
- ► See page 364 for a list of default plastic edge colors.

Pedestals

• Paint

End panel

Paint

Cantilever and shared cantilever

Paint

Side-support brackets


Paint

Shipping

Palletizing streamlines unloading and staging of worksurfaces. Identical worksurfaces ordered on the same line item are packed on pallets containing 5-50 worksurfaces depending on worksurface size. Remaining worksurfaces are packed individually in cartons. If palletizing is not desired, order in quantities of four or less per line item. For maximum unload efficiency, utilize pallet handling equipment at job site whenever possible. Wood worksurfaces cannot be palletized.

Jetty Curvilinear Worksurfaces

1¹/₂"-Thick

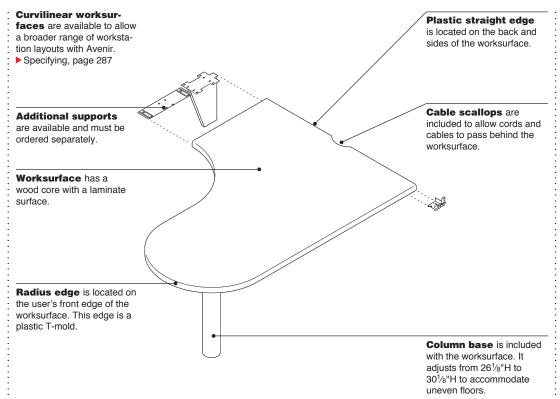

Product Details

1½"-thick Avenir worksurfaces with radius edge can be used with curvilinear worksurfaces. Fit between worksurfaces will not be snug. Tip: Avenir non-curvilinear


Tip: Avenir non-curvilinear worksurfaces have a laminate edge and curvilinear worksurfaces have a T-mold edge.



User's edge(s) of the worksurface are finished with a plastic T-mold radius edge detail that can be specified to match or contrast with the laminate worksurface. Color of these edges must be specified separately, unlike the edges of other Avenir worksurfaces which are defaults determined by the laminate color that you select.


See page 364 for a list of suggested plastic T-mold edge colors.

Plastic edge finishes the sides and back of worksurfaces. The color of these edges are determined by the laminate color you select.
▶ See page 364 for a list of default plastic edge colors.




Field-installed center drawer can be installed beneath curvilinear worksurfaces wherever space permits—requires 19½"D x 21"W.

Actual Dimensions

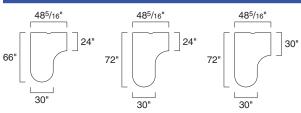

Connections



Shared cantilever

connects to a panel and supports two adjacent worksurfaces. Triangularshaped shared cantilever can also be used to support curvilinear worksurfaces.

Pedestals should not be installed below jetty worksurfaces. Use adjacent worksurfaces instead.


Wiring & Cabling



Cable scallops are included in the back edges of these worksurfaces to provide space for plugs to pass over the back edge of the worksurface.

Worksurfaces are

installed with a $^3/_{16}$ " gap separating the back of the worksurface from the supporting panels. This small space permits cord movement. Worksurface supports have stop tabs to ensure proper installation.



Cable management devices are available to help manage conventional and fiber-optic cables beneath the worksurface.

Surface Materials

Directional laminates and wood veneer are not available on curvilinear worksurfaces.

Worksurface

- · Laminate (standard)
- See Surface Materials
- Reference Manual.
 Open Line laminate (option)
- A program including non-Steelcase laminates that are suitable for use on Steelcase products.
- See Surface Materials Reference Manual.

User's edge(s)

- Plastic T-mold
 Tip: The color of these
 edges must be specified
 separately.
- See page 364 for a list of suggested plastic T-mold edge colors.

Back and side edges

- · Plastic default
- See page 364 for a list of default plastic edge colors.

Column support

Paint

Shared cantilever


Paint

Shipping


Palletizing streamlines unloading and staging of worksurfaces. Identical worksurfaces ordered on the same line item are packed on pallets containing 5-50 worksurfaces depending on worksurface size. Remaining worksurfaces are packed individually in cartons. If palletizing is not desired, order in quantities of four or less per line item. For maximum unload efficiency, utilize pallet handling equipment at job site whenever possible. Wood worksurfaces cannot be palletized.

Visitor, Linking, and Spanner Curvilinear Worksurfaces

1¹/₂"-Thick

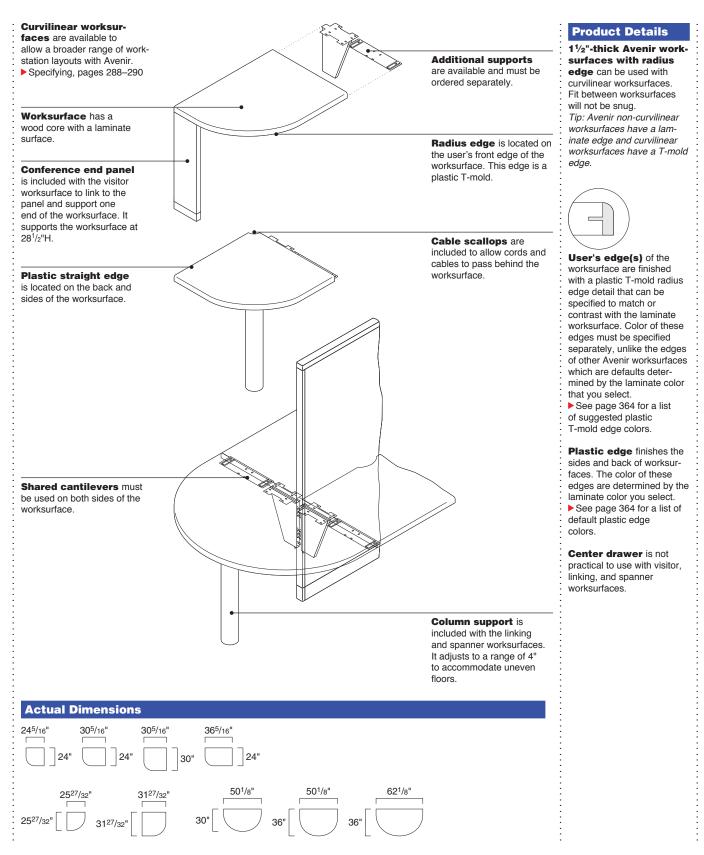

Connections




Shared cantilever

connects to a panel and supports two adjacent worksurfaces. Triangular shaped shared cantilever can also be used to support curvilinear worksurfaces.

Pedestals should not be installed below these worksurfaces. Use adjacent worksurfaces instead.


Wiring & Cabling



Cable scallops are included in the back corner of the linking worksurface to provide space for plugs to pass over the back edge of the worksurface.

An L-configuration filler package may be modified in the field to fit in the cable scallop of a linking worksurface.

Cable scallop is not included in the visitor or spanner worksurfaces. Use adjacent worksurfaces to route cables.



Cable management devices are available to help manage conventional and fiber-optic cables beneath the worksurface.

Surface Materials

Directional laminates and wood veneer are not available on curvilinear worksurfaces.

Worksurface

- · Laminate (standard)
- See Surface Materials
- Reference Manual.
 Open Line laminate
- (option)
 A program including nonSteelcase laminates that are suitable for use on
 Steelcase products.
- See Surface Materials
 Reference Manual.

User's edge(s)

- Plastic T-mold Tip: The color of these edges must be specified separately.
- See page 364 for a list of suggested plastic T-mold edge colors.

Back and side edges

- · Plastic default
- See page 364 for a list of default plastic edge colors.

Conference end panel

Paint

Column support

Paint

Shared cantilever


Paint

Shipping

Palletizing streamlines unloading and staging of worksurfaces. Identical worksurfaces ordered on the same line item are packed on pallets containing 5-50 worksurfaces depending on worksurface size. Remaining worksurfaces are packed individually in cartons. If palletizing is not desired, order in quantities of four or less per line item. For maximum unload efficiency, utilize pallet handling equipment at job site whenever possible. Wood worksurfaces cannot be palletized.

Worksurface Supports

Side Support



► Specifying, page 291

Product Details




Side supports hold up a straight worksurface that is the same dimension as the panel it is linked to.

Panel width must equal the worksurface depth.

Side supports are ordered separately.

Connections

Side supports can be used to support Avenir worksurfaces.



Side supports hook into the panel at any height and fasten to the worksurface with screws.


One pair of side supports is used to support the front and the back of the worksurface on the same end. You can use an alternative support at the other end of the worksurface.

Surface Materials

Side support


Grey V2 paint only

Locking Side Support




► Specifying, page 291

Product Details



Locking side supports attach the worksurface to a panel when the worksurface is not panel wrapped and is supported by a pedestal on the opposite end.


Locking side supports are ordered separately.



Panel-supported tables are standard with locking side supports.
▶ Page 90

Connections

Locking side supports can be used to support Avenir worksurfaces.




Locking side support hooks into a panel and fastens to the worksurface with screws

Surface Materials


Locking side support
Black paint only

L-Shaped Cantilevers




► Specifying, page 292

Product Details



Cantilevers support worksurfaces and leave the floor unobstructed.


Cantilevers are ordered separately.



Return panel must be the same width as the worksurface depth. Side supports must be used.


Connections

Cantilevers can be used to support Avenir worksurfaces.




Cantilever hooks into a panel at any height and fastens to the worksurface with screws.

S




Cantilever depth must correspond with the depth of the worksurface.

Spring-activated safety catch automatically locks the worksurface supports onto the panel to secure the worksurface.



Cantilever-to-cantilever clamp is used to align side-by-side worksurfaces of the same height that are supported by a pair of cantilevers.



Change-of-height cantilever-to-cantilever clamp aligns worksurfaces at different heights that are supported by cantilevers. Change of height is three inches.

Surface Materials

Cantilever

Paint

Cantilever-tocantilever clamp

· Black paint only

Application Topics

Alternative worksurface supports can be used at the opposite end of the worksurface.



30"D worksurfaces cannot be supported by two cantilevers. Support one end with side support, end panel, clearaccess end panel, or a pedestal to achieve adequate

Corner Worksurfaces

Page 96


stability.



Actual Dimensions


Depth	17 ¹⁵ / ₁₆ ", 23 ¹⁵ / ₁₆ ", or 29 ⁷ / ₈ "	
Width (thickness)	3/4"	
Height	125/8"	

Triangular-Shaped Cantilevers




►Specifying, page 292

Product Details



Cantilevers support worksurfaces and leave the floor unobstructed.


Cantilevers can be used on all Avenir worksurfaces. They must be ordered separately.



Return panel must be the same width as the worksurface depth. Side supports must be used.


All cantilevers are ordered separately.

Connections



Cantilever hooks into a panel at any height and fastens to the worksurface with screws.


18", 24", or 30"D



Cantilever can be used on 18"D, 24"D, and 30"D worksurfaces.

Safety catch locks the worksurface supports onto the panel to secure the worksurface.

Non-handed so it can accommodate left- and right-hand applications.



Tie plate is used to align side-by-side worksurfaces of the same height that are supported by a pair of cantilevers.

Surface Materials

Cantilever


Paint

Tie plate

· Grotto paint only

Application Topics

Alternative worksurface supports can be used at the opposite end of the worksurface.



30"D worksurfaces cannot be supported by two cantilevers.


Support one end with side support, end panel, clear-access end panel, or a pedestal to achieve adequate stability.

Corner Worksurfaces


Page 96

Actual Dimensions Depth 16" Width (thickness) 1" Height 12"

L-Shaped Shared Cantilevers

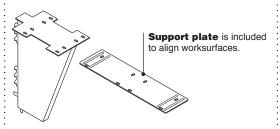


► Specifying, page 293



Actual Dimensions

Depth	8 ⁹ / ₁₆ " or 14 ⁹ / ₁₆ "			
Height	129/16"			
Support plate	14"D x 3 ¹¹ / ₁₆ "W			

Product Details



Shared cantilevers support adjacent worksur-


support adjacent worksurfaces at the same height.

Two versions of the shared cantilever are available for 24"D and 30"D worksurfaces.

Shared cantilevers are ordered separately.

Connections

Shared cantilever can be used to support other Avenir worksurfaces.



Shared cantilever hooks into a panel at any height and fastens to the worksurface with screws.

Spring-activated safety catch automatically locks the worksurface supports onto the panel to secure the worksurface.

Surface Materials

Shared cantilever

• Paint

Support plate


Black paint only

Application Topics

Corner Worksurfaces

Page 96

Triangular-Shaped Shared Cantilever

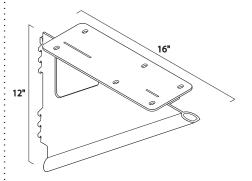

► Specifying, page 293

Product Details



Cantilevers support two adjacent worksurfaces and leave the floor unobstructed.

Cantilevers can be used on all Avenir worksurfaces and curvilinear worksurfaces.

Connections

Cantilever hooks into a panel at any height and fastens to the worksurfaces with screws.

Alignment plate is included to join adjacent worksurfaces at the same level

18", 24", or 30"D

Cantilever can be used on 18"D, 24"D, and 30"D worksurfaces.

Worksurface supports lock onto the panel to secure

the worksurface.

Surface Materials

Shared cantilever

Paint


Alignment plate

Grotto paint only


Actual Dimensions

Depth	16"
Height	12"
Top plate depth	11¾"
Top plate width	4½"

Support Plates



Product Details



Support plate joins worksurfaces at the same height and allows adjacent worksurfaces to provide support at a 90° angle.


Three support plate

sizes are available to correspond with the three worksurface depths. Each plate is 4" less deep than the worksurface depth: 14"D on an 18"D worksurface, 20"D on a 24"D worksurface, and 25 $^{15}\!\!/_{16}\text{"D}$ on a 30"D worksurface.

Support plates are ordered separately.

Connections

Support plates can be used to support 11/2"-thick worksurfaces.



Support plate attaches to adjacent worksurface with screws.

Surface Materials

Support plate

· Black paint only

Application Topics

Adjacent worksurface must be supported at both


Panel-Supported Tables

►Page 90

Actual Dimensions

Depth 14", 20", or 25¹⁵/₁₆"

Width 311/16"




▶Specifying, page 294

Actual Dimensions

Depth	18", 24", or 30"
Width (thickness)	15/16"
Height	27"
Leveling glide range	1"

Product Details




End panels support 11/2"-thick worksurfaces at an overall height of 281/2".

End panels are ordered separately.

Connections

End panels can be used to support 11/2"-thick worksurfaces.



Panel-attachment hardware is fastened to the end panel in the field to accommodate left- or righthand applications. They are not freestanding units.

End panel hooks into the panel and fastens to the worksurface with screws.

Surface Materials


End panel

Paint

Leveling glides

· Black only

End Panels without Base




▶ Specifying, page 294

Actual Dimensions

Depth	24" or 30"
Width (thickness)	1"
Height	27"
Leveling glide range	1"


Product Details



End panels without base support 1½"-thick worksurfaces at an overall height of 28½".

End panels are ordered separately.

Connections



hardware is fastened to the end panel in the field to accommodate either left- or right-hand applications,

right-hand applications, but should not be used to support both. They are not freestanding units.

End panel hooks into the panel and fastens to the worksurface with screws.

Surface Materials


End panel

Paint

Leveling glides

· Black only

Floor-Support End Panels

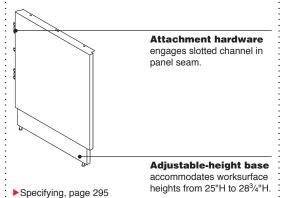

Actual Dimensions				
Depth	24" or 30"			
Width (thickness)	15/16"			
Height	25" to 28 ³ / ₄ "			
Leveling glide range	1/4"			

Product Details

Left- and right-hand versions of the floor-support end panels are available.

Depth of floor-support end panel corresponds to either 24"D or 30"D worksurfaces.

Surface Materials

End panel

Paint


Leveling glides

Black only

Clear-Access End Panels


Right- and left-hand versions of the clear-access end panel are available.

► Specifying, page 296

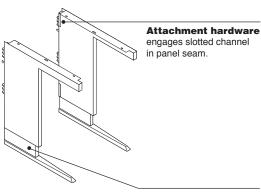

Adjustable-height base accommodates worksurface heights from $26^{1}/4$ " to $29^{3}/4$ ".

Product Details



Clear-access end panel supports a worksurface and provides kneespace.

Clear-access end pan-

els provide more support and stability than cantilevers, but still allow users to swivel their chairs without running into the worksurface supports.

Clear-access end panels are ordered separately.

Connections

Clear-access end panels can be used to support 1½"-thick worksurfaces.

Clear-access end panels hook into the panel and fasten to the worksurface with screws. They are not freestanding units.


Spring-activated safety catch automatically locks the worksurface supports onto the panel to secure the worksurface.

Surface Materials

Clear-access end panel
Paint

Leveling glides

Black only




Leveling glide range

Actual Dimensions Depth 24" or 30" Width (thickness) 15/1e" Height 26¼" to 29¾"

Worksurfaces

Worksurface Accessories

Metal Center Drawers



► Specifying, page 298

Actual Dimensions

Depth	181/8" or 23"
Inside depth	14½" or 19½"
Width	21½"
Inside width	19½"
Height	23/8"
Inside height	2"

Product Details

Metal center drawer

provides convenient personal storage beneath the worksurface.

Tray for pencils and paper clips is included.

Locks are not available on center drawers. For secure storage, use pedestals and other lower storage with locks.

Connections

Fits on all 24"D and 30"D panel-supported worksurfaces and 24"D, 30"D, and 36"D desks. Tip: 24"D desk can only use the 181/6"D center drawer.

Installation is in the field.

Drawer frame and attaching hardware are included for field installation.

Wiring & Cabling

Grommets cannot be used over center drawers. ▶ Page 116

Surface Materials

Center drawer


Paint

Tip: Drawer will match the color of the supports. If you want a complementary color, you should order the drawer separately for field installation.

Application Topics

Drawer should be placed approximately 4" from the left or right end to allow for the attachment of cantilevers or end panels.

23" minimum



Kneespace clearance needed is 23"W.

Plastic Center Drawer



► Specifying, page 298

Pencil spaces

Paper clip spaces

Actual Dimensions

Depth	19"
Inside depth	14 ⁷ / ₈ " (includes pencil tray)
Width	21"
Inside width	19"
Height	11/2"
Inside height	13/8"
Overall height installed	2"

 $2^{7}/8$ "D x $7^{1}/2$ "W

1"D x 33/4"W

Product Details

Light-duty, plastic center drawer can be added beneath the worksurface to store pens, pencils, paper, and other lightweight personal tools.

Low profile ensures that drawer is not visually prominent and occupies little kneespace.

Locks are not available on center drawers. For secure storage, use pedestals and other lower storage with locks.

Connections

Plastic center drawer can be used with 1½"-thick worksurfaces.

Field install center drawer wherever space is available beneath the worksurface. Minimum area required is 19½"D x 21"W. A 27"H or higher clearance is recommended.

Installation template and attaching hardware are included for field installation.

Wiring & Cabling

Grommets cannot be used over center drawers.

Page 116

Surface Materials


Drawer

· Black textured plastic only

Slides


· Black plastic only


Worksurface Fillers



► Specifying, page 297

Product Details





Worksurface fillers are used to fill in the slight gaps that may result when worksurfaces are connected in perpendicular or straight-line applications.

Connections

Worksurface fillers are available for use with 1½"-thick worksurfaces.



Perpendicular configurations require a worksurface filler that conforms to a radius worksurface edge on one side and a straight worksurface edge on the other side.



Straight-line configurations require a worksurface filler that accommodates straight worksurface edges on both sides.

Worksurface filler sizes are available to correspond with worksurface depths.

Surface Materials

Worksurface filler,

- 1½"-thick
 Plastic
- ▶ Page 361

Application Topics

Order worksurface fillers after the worksurface installation because different furniture applications and installation techniques may not require a worksurface filler or worksurface filler may not fit.


How Panel-Supported Components Fit

Page 52

Actual Dimensions

Depth	24" or 30"
Width	5/16"
Height	1½"


Grommets



Product Details



Grommets are factory installed to allow cords and cables to pass through the worksurface.



Snap-out cover allows numerous cords and cables to pass through the worksurface. Three-prong plugs will fit through the opening. The cover holds cords in place when replaced.

Surface Materials

Grommet

Plastic

Tip: If a plastic color is not specified, 6000 Black will be provided.

Page 361

Application Topics



Center drawers will block access to grommets, so avoid specifying center grommets when installing center drawers.



Pedestals will block access to some grommets, so avoid left and right grommets when specifying worksurfaces that will have pedestals installed beneath the grommets.

Grommet Locations

►Page 117

Center Drawer Fit and Grommet Obstruction


▶ Page 120

Actual Dimensions	;
Depth	21/8"
Width	31/2"
Height	13/16"
Opening depth	15/8"
Opening width	3"
Size of pass-through hole	³ / ₄ " x ⁷ / ₈ "

Grommet Locations

Panel-Supported Rectangular Worksurfaces, Credenzas, and Returns


Any combination of up to nine grommet locations is available.

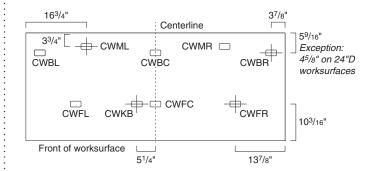

Exception: On the worksurfaces shown below, only select grommet locations are available.

	30"W	36"W	42"W	48"W
18"D		•	0 0 0	0 0 0
24"D	00	0	0 0 0	0 0 0
30"D	0	0	0 0 0	

Corner Worksurfaces

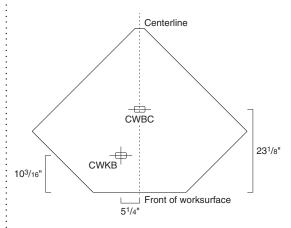

Back center grommet (CWBC) is available on all corner worksurfaces.

Keyboard grommet (CWKB) is available on corner worksurfaces with front edge more than 25"W.














Corner Worksurface with Adjustable Keyboard Shelf

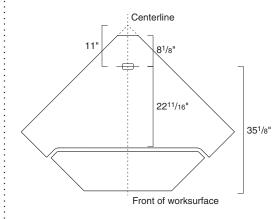

Centerline

81/8"


2615/16"

393/8"

42" Corner Worksurface

48" Corner Worksurface

Radius-End Tables

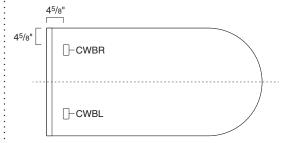

Center Drawer Fit and Grommet Obstruction

Panel-Supported Worksurfaces								
:		30"W	36"W	42"W	48"W	60"W	66"W	72"W
Panel-supported worksurfaces with center drawer attached in the center.	24"D		••					
Tip: 18"D worksurfaces cannot accommodate center drawers.	30"D	••	0					0 00
Panel-supported worksurfaces with center drawer attached 4" from the left edge.	24"D				•••	• • • •		
Tip: 30"W and 36"W worksurfaces can only accommodate center-attached center drawers.	30"D						•	
Panel-supported worksurfaces with center drawer attached 4" from the right edge.	24"D					0 0 0		0 00 8
Tip: 30"W and 36"W worksurfaces can only accommodate center-attached center drawers.	30"D					0 00 -	0 00 0	0 00
Desks								
Desks with center drawer attached in the center.	24"D							
	30"D ar	nd 36"D						
Desks with center drawer attached 111/4" from pedestal on left.	24"D							• • •
Pedestals block grommets located above them.	30"D ar	nd 36"D						
Desks with center drawer attached 111/4" from pedestal on right.	24"D							
Pedestals block grommets located above them.	30"D ar	nd 36"D						
• • •	□ White	dot indicate	s that gromn	net is accessib	le.			
	■ Black	dot indicate	s that gromn	net is obstructe	d.			


Worksurface Wiring and Cabling


Power and Communication Spheres and Port


Power and communication spheres and port

provide convenient desktop access to power outlets and data jacks. Spheres and ports are field installed only.

Power spheres have four electrical outlets and two 6' cords with plug or conduit for hardwired applications.







► Specifying, page 301




includes faceplate for four customer-supplied voice/ data jacks.

► Specifying, page 302



Power and communication port has a lowprofile cover that is almost flush with worksurface.






Power and communication port includes two outlets and two adapters to accommodate customer supplied standard voice/ data jacks.

Power and Communication Spheres and Port, continued

Product Details



Power and communication spheres are field installed. Use a 3"-diameter drill to cut mounting hole at desired location.

Round power and communication port

contains an opening in one side of lower port that allows excess wire and cable cords to drop beneath the worksurface, leaving the port clear.


Specifying, page 302



Port is field installed. Use a 3½"-diameter drill to cut mounting hole at desired location.




Lid of port in up position allows low-profile routing.



Lid can drop down when port is not in use, and conceal outlets. Twist lid until legs line up with slots and push down until lid is flush with housing.

Wiring & Cabling

6' power cord is included on power and communication spheres and port.



Hardwired version of power and communication sphere is available with 6' Greenfield conduit. Tip: Hardwiring must be done by a licensed electrician.

Chicago, New York City, and Los Angeles have special requirements.

Underwriters Laboratory (UL) and Canadian **Standards Association** (CSA) listed. These products have been designed to meet U.S. and Canadian national electrical and energy codes and most local building codes. Local electrical codes vary, so consult with your local authority having jurisdiction as they have final say if the products as installed are compliant with local code. Consult a qualified electrician or electrical engineer for proper installation of all electrical equipment.

Surface Materials

Power spheres, communication spheres, and round power and communication port

· Black plastic only

Cable and Fiber Reel

Cable and fiber reel is

available to store excess fiber-optic cable lengths. It is also suitable for storing power cables.

Specifying, page 299

Key-shaped mounting

hole allows quick installation and removal of reel mounted horizontally to underside of worksurface.


Mounting slots allow installation of reel vertically beneath worksurface.

Inner reel accommodates copper wire and other cables that can be wound tightly.

Outer reel accommodates the preferred bend radius of fiber-optic cables.

Tabs prevent cables from slipping off reel.

Product Details



Capacity of reel is approximately 12' of standard power or communication cable on outer reel and 18' of telephone-type cord on inner reel depending on the specific cable used. Neatness of installation can affect capacities. In critical situations, you should conduct a test using the specific cable types your installation requires.

Connections



Reel can be field installed vertically or horizontally in the kneespace of panel-supported worksurfaces.

Wiring & Cabling

Chicago, New York, and Los Angeles have special requirements.

Local electrical codes vary. Consult a qualified electrician or electrical engineer for the proper installation of electrical equipment.

Surface Materials

Reel

· Black plastic only

Actual Dimensions

Depth	11/4"	
Width	8"	
Height	85/16"	


Termination Plate

Termination plate is


available for field installation to accommodate junction boxes for connections of fiber-optic cables and other cable types.

► Specifying, page 299

to termination device.

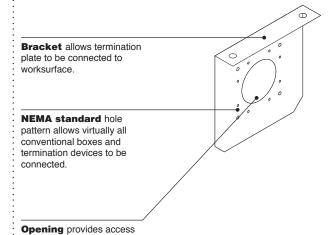

Product Details



Faceplates and junction boxes can be added to support fiber-optic or ordinary voice/data networks.



Termination plate is field installed beneath the worksurface in any position needed. Usually, it is located at the back of the worksurface so it doesn't obstruct kneespace.

Wiring & Cabling

Chicago, New York, and Los Angeles have special requirements.

Local electrical codes vary. Consult a qualified electrician or electrical engineer for the proper installation of electrical equipment.

Surface Materials

Termination plate


· Black plastic only

Actual Dimensions Depth 3/4" 71/8" Width Height 71/8" Center opening 23/4" diameter

126

Understanding Storage

Statement of Line




Steelcase 800 Series lateral files are available with an Avenir-style pull to make these products compatible with Avenir. The Avenir-style pull complements the Avenir pull, but it is not identical. The Avenir-style pull is flush so it will allow the lateral file receding door to go back into the file.

Product Details	
Pedestals with Avenir Pulls	130
Accessories for Pedestals	132
Overhead Bins and Shelves	
Universal Sliding Door Bins	134
Universal Over the Case Bins	138
Universal In the Case Bins	142
Hutch Kits	146
Universal Shelves and Universal Personal Shelves	148
Bracket Application Rules	150
Accessories	152
Slim Shelves	155
800 Series Products	
800 Series Lateral Files	156
Application Topics	
Storage Capacities	159

Statement of Line

Storage




Understanding
► Page 130
Specifying
► Pages 306–309

Pedestals with Avenir Pulls

15"W 23½"D


29½"D




Understanding
► Page 134
Specifying
► Pages 313–315

Universal Sliding Door Bins

For Use with Avenir






Understanding
► Page 138
Specifying
► Page 316

Universal Over the Case Bins with Flat Fronts

For Use with Avenir

	24"W	30"W	36"W	42"W	48"W	60"W	66"W	72"W
	24 VV	30 W	30 W	42 VV	40 VV	00 VV	00 VV	12 VV
15¾"D	•	•	•	•	•	•	•	•




Understanding
► Page 138
Specifying
► Page 318

Universal Over the Case Bins with Radius Fronts

L∩r I	ICA	with	// / / /	nır
i ui i	コシに	with	AVE	

	24"W	30"W	36"W	42"W	48"W	60"W	66"W	72"W
15 ³ / ₄ "D	•	•	•	•	•	•	•	•




Understanding
► Page 142
Specifying
► Page 320

Universal In the Case Bins with Steel Flat Fronts

For Use with Avenir

		• • • • • • • • • • • • • • • • • • • •						
	24"W	30"W	36"W	42"W	48"W	60"W	66"W	72"W
15¾"D	•	•	•	•	•	•	•	•



Understanding
► Page 142
Specifying
► Page 322

Universal In the Case Bins with Laminate Flat Fronts

For Use with Avenir

	24"W	30"W	36"W	42"W	48"W	60"W	66"W	72"W
15 ³ ⁄ ₄ "D	•	•	•	•	•	•	•	•

Statement of Line Storage, continued




Understanding
► Page 142
Specifying
► Page 324

Universal In the Case Bins with Wood Flat Fronts

For Use with Avenii

	***************************************	01111							
	24"W	30"W	36"W	42"W	48"W	60"W	66"W	72"W	
15¾"D	•	•	•	•	•	•	•	•	




Understanding

► Page 146 Specifying

▶ Page 326

Hutch Kits

For Use with Universal Sliding Door Bins, Universal Over the Case Bins, and Universal In the Case Bins



Understanding ► Page 148 Specifying ► Page 329

Universal Shelves

For Use with Avenir

	24"W	30"W	36"W	42"W	48"W	60"W	72"W
14¾"D	•	•	•	•	•	•	•



Understanding
► Page 148
Specifying
► Page 330

Universal Personal Shelves

For Use with Avenir

	24"W	30"W	36"W	42"W	48"W
13 ¹ / ₁₆ "D	•	•	•	•	•




Understanding
► Page 155
Specifying
► Page 334

Slim Shelves

•								
	24"W	30"W	36"W	42"W	48"W	60"W	72"W	96"W
6"D	•	•	•	•	•	•	•	•

800 Series Products




Understanding
► Pages 156
Specifying
► Pages 336

Lateral Files

	30"W	36"W	42"W
28"H	•	•	•
40"H	•	•	•
52"H	•	•	•
65½"H	•	•	•

Pedestals with Avenir Pulls

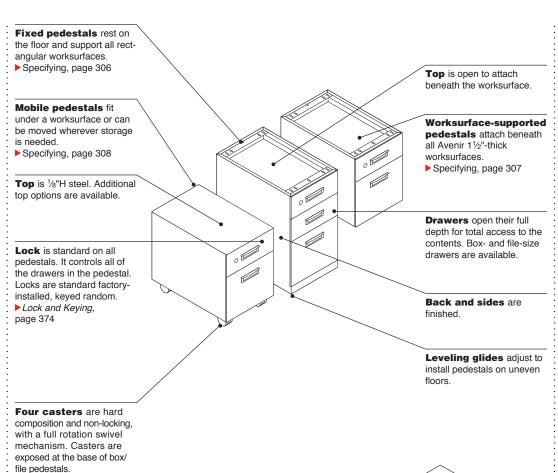



Steelcase 730 Series storage cabinets and 800 Series lateral files are available with an Avenirstyle pull to make these products compatible with Avenir. The Avenir-style pull complements the Avenir pull, but it is not identical. The Avenir-style pull is flush so it will allow the lateral file receding door to go back into the file.

Avenir-Style



Box drawers are a welded steel construction with proud fronts. One divider is included with each box drawer.



File drawers are a welded steel construction with proud fronts. Drawer body sides are full-height and accommodate front-to-back filing of hanging letter-size file folders. Optional rails accommodate side-to-side filing of letter-, A4-, and legal-size hanging folders.




Mobile pedestal cushion top provides a temporary seat ideal for informal gatherings. Handle can be extended to easily transport mobile pedestal. Available factory-installed.


Page 310




Actual Dimensions						
	Fixed pedestal	Worksurface- supported pedestal	Mobile pedestal	Mobile pedestal with factory- installed cushion top		
Depth	23½" or 29½"	23½" or 28½"	231/2"	231/2"		
Width	15"	15"	15"	15"		
Height	27"	18½"	21"	231/4"		
Leveling glide range	17/8"	N.A.	N.A.	N.A.		



Drawer fronts can be removed and changed in the field to create a different aesthetic or to replace damaged drawer fronts.




Pencil tray to hold small office supplies is included with each box/file or box/box/file pedestal.



Locks are available factory- or field-installed. Factory-installed locks are standard and available keved random only. Optional field-installed locks are available with consecutive, specific, and random keying options. Master-keyed locks are also available. Fieldinstalled lock cylinders must be specified separately. Lock and Keying, page 374

Individual drawer locks

are available on file/file pedestals for applications where you want to limit access to each drawer. Pedestals include a security shield above each drawer to prevent unauthorized access. Individual locking drawers are available with field-installed lock cylinders. Consecutive, specific, and random keying options are available. Master-keyed locks are also available. Field-installed lock cylinders must be specified separately. Lock and Keying, page 374



Veneer top

1³/₁₆"H


Steel, laminate, and wood veneer tops are available in place of standard 1/8"H steel tops. 1"H steel tops, 13/16"H laminate with square edge profile, 17/16"H laminate with bullnose edge profile on the front edge, and 13/16"H wood veneer with square edge profile.

Safety interlock system on mobile pedestals

allows only one drawer to be opened at a time for added stability.


Counterweights are

included on mobile pedestals to provide added stability. All pedestals are shipped with a factory-installed counterweight package that meets or exceeds standards for the industry.



Handle of mobile pedestal cushion top

is retractable. In the stowed position, handle is flush with mobile pedestal front. In the travel position, the handle is completely extended and articulates upward for transport.



Field-installed accessories are available, includ-


ing pencil trays, dividers, and rails

▶Pages 311-312

Connections




Fixed pedestals attach anywhere underneath a rectangular worksurface. They cannot attach to panel-supported tables. Attachment hardware is shipped with each fixed pedestal.



Worksurface-supported pedestals can be suspended beneath panelsupported 11/2" thick worksurface. Order pedestals separately and install them

Side supports are not required when pedestals support the worksurface.

in the field.



A 1/2" gap between the panel and the back of the pedestal allows for cord routing and storage behind the pedestal.

A filler is included with each pedestal to conceal the gap and to provide panel stability for configurations that are not panel-wrapped. Tip: The filler can be omitted for applications where the gap is not visible, or additional panel stability is not reauired.

Wiring & Cabling



Left and right grommet locations are blocked when pedestals are installed under them. ▶ Page 120

Surface Materials

Pedestal

Paint

Wood veneer top

- Wood veneer-Open-pore finishes
- Customiz stain (option)

Laminate top

Laminate


Open Line laminate (option)

Square edge profile on laminate top

Plastic edge default Tip: Bullnose edge tops have a default plastic edge on the sides and back.

Drawer pulls

Paint



Color of the pull and pull cover can match or complement the pedestal color.

Lock

- · 9201 Polished Chrome (standard)
- 9250 Ember Chrome (option)

Casters and glides

· Black only

Mobile pedestal cushion top

Upholstery

Mobile pedestal cushion top handle Black only

Application Topics

Storage Capacities

Page 159

Accessories for Pedestals

Pencil Tray and Reference Shelf

▶ Specifying, page 312

Product Details


Pencil tray and reference shelf are

used in:


- Fixed pedestals (manufactured after February 22, 2004)
- Worksurface-supported pedestals (manufactured after February 22, 2004)
- Mobile pedestals (manufactured after February 22, 2004)

Tip: For pedestals manufactured on or before February 22, 2004, see Service Parts catalog.

- · Universal towers
- Universal workstation verticals



Pencil tray is available to hold small office supplies. Tip: Pencil trays are standard in box drawers of pedestals. One pencil tray per pedestal is included.



Reference shelf protects reference papers in box drawers. Shelf rests on top of drawer edges and can slide the entire depth of the drawer. A clear plastic insert is standard with each reference shelf.

Surface Materials

Pencil tray, file drawer stationery insert, dividers, and reference shelf

Black

Insert for reference shelf

· Clear plastic

Actual Dimensions Pencil Tray Depth 4½"

11⁷/8"

Height 1½"

Width

Refere	ence Shelf
Depth	91/2"

 $\frac{\text{Width}}{\text{Height}} \frac{11^{7}/8"}{3/8"}$

Rails




► Specifying, page 311

Product Details

Rails accommodate both front-to-back and sideto-side filing of letter-, A4 international-, and legalsize hanging folders.

Rail packages are available in quantities of two or four rails.



Rails can be used for sideto-side filing in 12"H file drawers of:

- Fixed pedestals (manufactured after February 22, 2004)
- Worksurface-supported pedestals (manufactured after
- February 22, 2004)

 Mobile pedestals
- Mobile pedestals (manufactured after February 22, 2004)

Tip: For pedestals manufactured on or before February 22, 2004, see Service Parts catalog.

Surface Materials

Rails

Black

Actual Dimensions

For use with drawers


Width 15"

Dividers



► Specifying, page 311

Product Details



Dividers are available for use in 6"H box drawers and 12"H file drawers of:

- Fixed pedestals (manufactured after February 22, 2004)
- Worksurface-supported pedestals (manufactured after February 22, 2004)
- Mobile pedestals (manufactured after February 22, 2004)

Tip: For pedestals manufactured on or before February 22, 2004, see Service Parts catalog.

12"H drawer dividers

are available in letter-width 15".

Dividers ship in a package of two.

Surface Materials

Dividers

Black

Actual Dimensions

For use in 6"H drawers

Width 15"

For use in 12"H drawers

Width 15"


Universal Sliding Door Bins

For Use with Avenir


Universal sliding door

bins attach to panels with an on-module bracket and provide overhead storage in the work space. Door is available in steel or wood.

► Specifying, pages 313-315

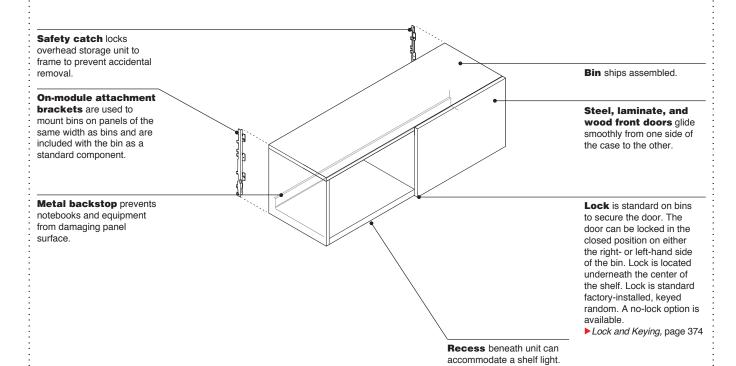


▶ Page 168

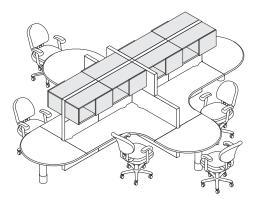

Actual Dimensions					
Depth	15¾"				
Width	36", 42", 48", 60", 66", and 72"				
Height	161/4"				

Product Details

On-module attachment brackets are independent of the storage bins and unique to the panel system they are used on. If the storage bin needs to be attached to a different panel in the future, additional on-module attachment brackets can be purchased through Service Parts.




Vertical off-module brackets, optional, can be used to mount one or two sides of an overhead bin off-module on Answer, Kick, Avenir, and Montage with vertical slot patterned panels. To mount an overhead bin with one side off-module specify with one vertical off-module bracket. To mount an overhead bin with two sides off-module. specify with two vertical off-module brackets. Both of these brackets attach to the on-module bracket that comes standard with the overhead bin

Vertical off-module brackets are used with bins up to 12" wider than the panel, allowing them to overhang the panel seam.




Upmount brackets, optional, are for use on Answer, Kick, Avenir, and Montage. Brackets enable overhead storage to be used on lower panel heights. Bins using an upmount bracket must be installed on a panel of the same width.




Two upmount bin brackets can be hung side-by-side in an in-line, T- or X- application. Universal in the case bins can be up-mounted over or adjacent to a slatwall.

Omit brackets option must be specified when bin is being used in hutch kit or when attaching bin to a horizontal wall attachment bracket. Order hutch kit separately.




Universal sliding door bin may be mounted at desk height elevations or lower if another panel mounted component prevents it from being seated upon.




Lock in bin is concealed from view beneath the shelf. Locks are available factory or field-installed. Factory-installed locks are standard and available keyed random only. Optional field-installed locks are available with consecutive, specific, and random keying options. Master- keyed locks are also available. Field-installed lock cylinders must be specified separately.

► Lock and Keying, page 374




Shelf lights are available for use beneath bins. Lights recess into the bottom of the overhead storage unit.

▶ Page 168




Dividers are available as an option for use on bins. Dividers ship in a package of four.




Back of storage bin is open to allow panel surface to show. Metal backstop prevents contents of bin from damaging panel surface.

Overhead storage bin height accepts standard and A4 binders.

When mounting on Answer or Kick panels, top of bin cannot be loaded.




Steel support hooks on end supports insert into the slotted channel of a panel or wall channel and lock into place with a safety catch



Width of overhead bin must match the width of the panel or panels that it is attached to when using an on-module bracket. Bin may span up to two frames.

Additional support for stability may be required when overhead bins are attached to panels. Counterbalancing loads on opposite sides of the panels increases stability.




Horizontal wall attachment brackets are available to attach storage bins to wall of building. Specify as separate style number.

Tip: Select the omit brackets option when ordering the bin.




wall channels are available to attach bins to concrete or block walls. Wall channels can be used to attach bins and tackboards to wood, dry wall, or plaster walls if the wall is reinforced.

Page 153



Wall channel horizontal brace is required with wall channels to support bins that are wider than 48".
▶ Page 153

Wiring & Cabling



Vertical wire managers are available to conceal cords that are routed from light mounted beneath overhead storage.

> Page 179

Surface Materials

Overhead bin

- Paint
- · Laminate door (optional)
- Wood door (optional)

Locks

- 9201 Polished Chrome
- 9250 Ember Chrome (optional)

On-module and vertical off-module attachment brackets

· Black paint only

Horizontal off-module attachment brackets for Montage

· Paint to match bin


Upmount brackets

Paint

Dividers

· White plastic

Application Topics



Clearance between Avenir and Avenir curvilinear worksurfaces and bottom of overhead bins is 19½16" when storage unit is installed in the highest position on a 65"H panel and glides are adjusted all the way into the panel.

Storage Capacities and Dimensions

▶ Page 159

Bracket Application

▶ Page 150

Rules for Panel Stability with Components


Page 61


Universal Over the Case Bins

For Use with Avenir

Universal over the case bins can be attached to panels with an on-module bracket and provide overhead storage in the work space.

► Specifying, pages 316–319

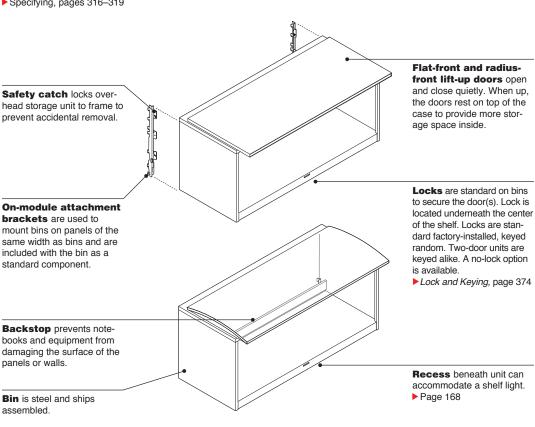



Actual Dimensions

Depth 153/4"


Width 24", 30", 36", 42", 48", 60", 66", and 72"

Height 16¹/₄"

Product Details


On-module attachment brackets are independent of the storage bins and unique to the panel system they are used on. The following style number suffixes indicate the panels they attach to:

TAK = Answer and Kick AVR = Avenir MON = Montage If the storage bin needs to be attached to a different panel in the future, additional on-module attachment brackets can be purchased through Service Parts.




Vertical off-module brackets, optional, can be used to mount one or two sides of an overhead bin off-module on Answer, Kick, Avenir, and Montage with vertical slot patterned panels. To mount an overhead bin with one side off-module, specify with one vertical off-module bracket. To mount an overhead bin with two sides off-module, specify with two vertical off-module brackets. Both of these brackets attach to the on-module bracket that comes standard with the overhead bin.

Vertical off-module brackets are used with bins up to 12" wider than the panel, allowing them to overhang the panel seam.



Upmount brackets


are optional for use on Answer, Kick, Avenir, and Montage. Brackets attach the bin near the top of 53"H panel to enable overhead storage to be used on lower panel heights. Bins using an upmount bracket must be installed on a panel of the same width.



Two upmount bin brackets can be hung side by side in an in-line, T- or X-application. Universal over the case bins can be upmounted over or adjacent to a slatwall.

Omit brackets option

must be specified when bin is being used in hutch kit or when attaching bin to a horizontal wall attachment bracket. Order hutch kit separately.



Picture frame door, optional, is available on Universal over the case and in the case bins with flat steel fronts only, and is an aluminum door frame with acrylic or glass inserts. An omit insert option is also available which allows custom material to be field installed in the aluminum door frame.

The acrylic door insert


is a white acrylic. A door assist mechanism is not available as an option on a bin with an acrylic door insert due to the light weight door.

The glass door insert

is tempered translucent glass. If a glass door insert option is specified and a door assist mechanism is also required, an assist mechanism must be specified as a separate option to the storage bin. Due to the weight of the glass door insert, it is recommended to specify the optional door assist mechanism.


The omit insert custom material must be ordered from a material vendor. If an omit insert option is specified and a door assist mechanism is also required, an assist mechanism must be specified as a separate option to the storage bin. The weight of a custom insert on a Universal over the case bin can not exceed 101/2 pounds. An insert for a Universal over the case storage bin door with an assist mechanism must weigh within the range of $7\frac{1}{4}$ pounds to $10\frac{1}{2}$ pounds or the assist mechanism will not function correctly. Custom materials being installed in a door insert must comply with local building codes. Consult with local authorities to determine compliance requirements. The use of safety glass is required if installing custom glass in a door insert. To install customer provided material in a picture frame door with the insert omitted, make sure the material is cut precisely to the sizes listed on the dimensions matrix.

See Dimensions for Custom Field-Installed Picture Frame Door Inserts, page 141




Door assist mech-

anism, optional, consists of a gas cylinder and spring that provides an assisted open and close of the door. When opening the door, the spring pulls the door to the fully recessed position. When closing the door, the assist mechanism will slowly close the door. Universal over the case bins ship with two assist mechanisms per door when specified.




Lock in bin is concealed from view beneath the shelf. Locks are available factory-or field-installed. Factory-installed locks are standard and available keyed random only. Two-door units are keyed alike. Optional field-installed locks are available with consecutive, specific, and random keying options. Master-keyed locks are also available. Field-installed lock cylinders must be specified separately.

► Lock and Keying, page 374




Shelf lights are available for use beneath bins. Lights recess into the bottom of overhead bins.

▶ Page 168



Divider is available as an option on overhead bins. Dividers ship in a package of four.

► Page 154




Back of storage bin is open to allow panel surface to show. Metal backstop prevents contents of bin from damaging panel surface.

Overhead storage bin height accepts standard and A4 binders


Connections

Steel support hooks on end supports insert into the slotted channel of a panel or wall channel and lock into place with a safety catch.




Width of overhead bin must match the width of the panel or panels that it is attached to when using an on-module bracket. Bin may span up to two frames.


Additional support for stability may be required when overhead bins are attached to panels. Counterbalancing loads on opposite sides of the panels increases stability.



Horizontal wall attachment brackets are available to attach storage bins to wall of building. Specify as a separate style number. Tip: Select the omit brackets option when ordering the bin.



Wall channels are available to attach bins to concrete or block walls. Wall channels can be used to attach bins and tackboards to wood, dry wall, or plaster walls if the wall is reinforced. ▶ Page 153



Wall channel horizontal brace is required with wall channels to support bins that are wider than 48".
▶ Page 153

Wiring & Cabling

Vertical wire managers are available to conceal cords that are routed from light mounted beneath overhead storage. Page 179

Surface Materials

Overhead bin

Paint

Lock

- 9201 Polished Chrome9250 Ember Chrome
- 9250 Ember Chrome (optional)

On-module and vertical off-module attachment brackets

· Black paint only

Horizontal off-module attachment brackets for Montage

· Paint to match bin

Upmount brackets

• Paint

Dividers

· White plastic

Application Topics



Clearance between Avenir and Avenir curvilinear worksurfaces and bottom of overhead bins is 19½6" when storage unit is installed in the highest position on a 65"H panel and glides are adjusted all the way into the panel.

Storage Capacities and Dimensions

Page 159

Bracket Application Rules

▶ Page 150

Rules for Panel Stability with Components

►Page 61

For Universal	Over the Case Bins	Custom P	e Door Inserts		
· Bin Width	· Door Width	• Height +/-0.02"	Width +/-0.02"	Thickness +/-0.02"	
<u>.</u> 24"	24"	15.933"	23.314"	0.138"	
25"	25"	15.933"	24.314"	0.138"	
30"	30"	15.933"	29.314"	0.138"	
35"	35"	15.933"	34.314"	0.138"	
36"	36"	15.933"	35.314"	0.138"	
42"	42"	15.933"	41.314"	0.138"	
45"	45"	15.933"	44.314"	0.138"	
48"	48"	15.933"	47.314"	0.138"	
60"	30" (per door)	15.933"	29.314"	0.138"	
66	33" (per door)	15.933"	32.314"	0.138"	
70"	35" (per door)	15.933"	34.314"	0.138"	
72"	36" (per door)	15.933"	35.314"	0.138"	
75"	371/2" (per door)	15.933"	36.314"	0.138"	


Tip: A custom insert cannot be factory installed. Custom insert must be ordered from a material vendor and will not be handled like a Steelcase Customer's Own Material. In selecting materials for customer supplied inserts, consider material characteristics, such as effects from thermal changes, humidity changes, aging characteristics, and strength of material. Do not use materials that allow the overall size of the custom insert to deviate by amounts larger than the acceptable tolerances listed in the matrix.


Universal In the Case Bins

For Use with Avenir

Universal in the case

bins, attach to panels with an on-module bracket and provide overhead storage in the work space. Door is available in steel or wood. ► Specifying, pages 320–324

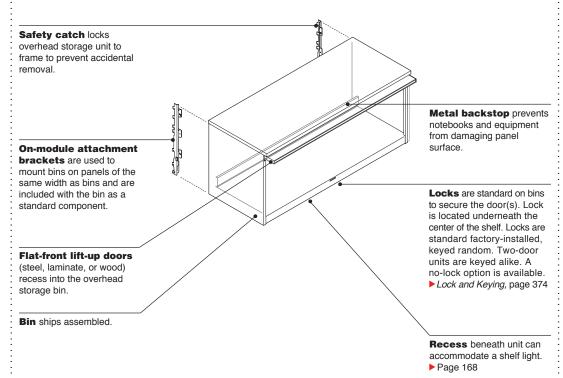

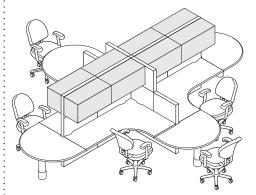


Actual Dimensions

Depth	15¾"
Width	24", 30", 36", 42", 48", 60", 66", and 72"
Height	161/4"

Product Details

On-module attachment brackets are independent of the storage bins and unique to the panel system they are used on. The following style number suffixes indicate the panels they attach to:

TAK = Answer and Kick AVR = Avenir MON = Montage If the storage bin needs to be attached to a different panel in the future, additional on-module attachment brackets can be purchased through Service Parts.



Vertical off-module brackets, optional, can be used to mount one or two sides of an overhead bin off-module on Answer, Kick, Avenir, and Montage with vertical slot patterned panels. To mount an overhead bin with one side off-module, specify with one vertical off-module bracket. To mount an overhead bin with two sides off-module, specify with two vertical off-module brackets. Both of these brackets attach to the on-module bracket that comes standard with the overhead bin.


Vertical off-module brackets are used with bins up to 12" wider than

the panel, allowing them to overhang the panel seam.




Upmount brackets,

optional, are for use on Answer, Kick, Avenir, and Montage. Brackets attach the bin near the top of 53"H panel to enable overhead storage to be used on lower panel heights. Bins using an upmount bracket must be installed on a panel of the same width.



Two upmount bin brackets can be hung side-by-side in an in-line, T- or X- application. Universal in the case bins can be upmounted over or adjacent to a slatwall.

Omit brackets option must be specified when bin is being used in hutch kit or when attaching bin to a horizontal wall attachment bracket. Order hutch kit separately.



Picture frame door, optional, is available on Universal over the case and in the case bins with flat steel fronts only, and is an aluminum door frame with acrylic or glass inserts.

An omit insert option is also available which allows custom material to be field installed in the aluminum door frame.


The acrylic door insert

is a white acrylic. A door assist mechanism is not available as an option on a bin with an acrylic door insert due to the light weight door.

The glass door insert

is tempered translucent glass. If a glass door insert option is specified and a door assist mechanism is also required, an assist mechanism must be specified as a separate option to the storage bin. Due to the weight of the glass door insert, it is recommended to specify the optional door assist mechanism.


The omit insert custom material must be ordered from a material vendor. If an omit insert option is specified and a door assist mechanism is also required. an assist mechanism must be specified as a separate option to the storage bin. The weight of a custom insert on a Universal in the case bin can not exceed 91/2 pounds. An insert for a Universal in the case storage bin door with an assist mechanism must weigh within the range of 51/2 pounds to 91/2 pounds or the assist mechanism will not function correctly. Custom materials being installed in a door insert must comply with local building codes. Consult with local authorities to determine compliance requirements. The use of safety glass is required if installing custom glass in a door insert. To install customer provided material in a picture frame door with the insert omitted make sure the material is cut precisely to the sizes listed on the dimensions matrix. ▶ See Dimensions for Custom Field-Installed




Picture Frame Door

Inserts, page 145

Door-assist mechanism, optional, consists of a gas cylinder and spring that provides an assisted open and close of the door. When opening the door, the spring pulls the door to the fully recessed position. When closing the door, the assist mechanism will slowly close the door. Universal in the case bins ship with one assist mechanism per door when specified.




Lock in bin is concealed from view beneath the shelf. Locks are available factoryor field-installed. Factoryinstalled locks are standard and available keyed random only. Two-door units are keyed alike. Optional field-installed locks are available with consecutive, specific, and random keying options. Master-keyed locks are also available. Fieldinstalled lock cylinders must be specified separately. Lock and Keying, page 374



Shelf lights are available for use beneath bins. Lights recess into the bottom of the overhead storage unit.

▶ Page 168


Dividers are available as an option for use on bins. Dividers ship in a package of four.




Back of storage bin is open to allow panel surface to show. Metal backstop prevents contents of bin from damaging panel surface.


Overhead storage bin height accepts standard and A4 binders.

When mounting on Answer or Kick panels, top of bin cannot be loaded.






Steel support hooks on end supports insert into the slotted channel of a panel or wall channel and lock into place with a safety



Width of overhead bin must match the width of the panel or panels that it is attached to when using an on-module bracket. Bin may span up to two frames.


Additional support for stability may be required

stability may be required when overhead bins are attached to panels. Counterbalancing loads on opposite sides of the panels increases stability.



Horizontal wall attachment brackets are available to attach storage bins to wall of building. Specify as separate style number.


Tip: Select the omit brackets option when ordering the bin



Wall channels are available to attach bins to concrete or block walls. Wall channels can be used to

concrete or block walls. Wall channels can be used to attach bins and tackboards to wood, dry wall, or plaster walls if the wall is reinforced.


Page 153



Wall channel horizontal

brace is required with wall channels to support bins that are wider than 48".

▶ Page 153



Vertical wire managers are available to conceal

cords that are routed from light mounted beneath overhead storage.

▶ Page 179

Surface Materials

Overhead bin

- Paint
- · Laminate door (optional)
- · Wood door (optional)

Locks

- 9201 Polished Chrome
- 9250 Ember Chrome (optional)

On-module and vertical off-module attachment brackets

· Black paint only

Horizontal off-module attachment brackets for Montage

· Paint to match bin

Upmount brackets

Paint

Dividers

· White plastic

19¹/₁₆" Clearance

Application Topics

Clearance between

Avenir and Avenir curvilinear worksurfaces and bottom of overhead bins is 19¹/16^{II} when storage unit is installed in the highest position on a 65^{II}H panel and glides are adjusted all the way into the panel.

Storage Capacities and Dimensions

► Page 159

Bracket Application Rules

►Page 150

Rules for Panel Stability with Components

►Page 61


For Univer	sal In the Case Bins	Custom P	icture Fram	ne Door Inserts
Bin Width	• Door Width	+/-0.02"	Width +/-0.02"	Thickness +/-0.02"
24"	24"	15.000"	23.164"	0.138"
25"	25"	15.000"	24.164"	0.138"
30"	30"	15.000"	29.164"	0.138"
35"	35"	15.000"	34.164"	0.138"
36"	36"	15.000"	35.164"	0.138"
42"	42"	15.000"	41.164"	0.138"
45"	45"	15.000"	44.164"	0.138"
48"	48"	15.000"	47.164"	0.138"
60"	30" (per door)	15.000"	29.164"	0.138"
66	33" (per door)	15.000"	32.164"	0.138"
70"	35" (per door)	15.000"	34.164"	0.138"
72"	36" (per door)	15.000"	35.164"	0.138"
75"	37 ¹ / ₂ " (per door)	15.000"	36.664"	0.138"

Tip: A custom insert cannot be factory installed. Custom insert must be ordered from a material vendor and will not be handled like a Steelcase Customer's Own Material. In selecting materials for customer supplied inserts, consider material characteristics, such as effects from thermal changes, humidity changes, aging characteristics, and strength of material. Do not use materials that allow the overall size of the custom insert to deviate by amounts larger than the acceptable tolerances listed in the matrix.


Hutch Kits

211/8"


Height

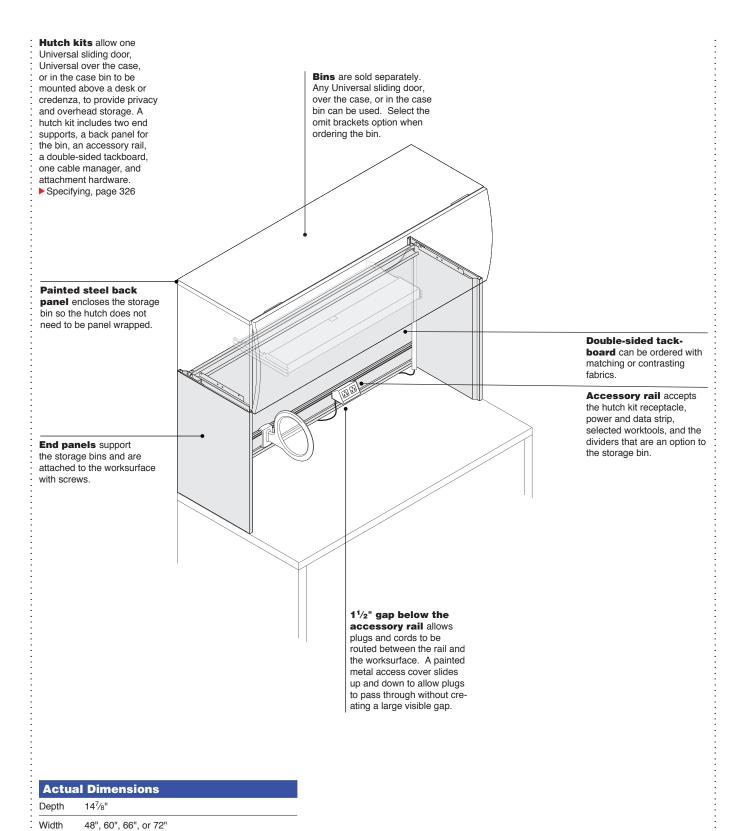

Product Details




Double-sided tackboards are standard with hutch kits. They divide space, increase privacy, and provide a display surface




Accessory rail accepts the dividers that are available as an option to the storage bin and the hutch kit receptacle. The rail also accepts selected worktools. A 11/2" gap below the accessory rail allows plugs and cords to be routed between the rail and the worksurface. A painted metal access cover slides up and down to allow plugs to pass through without creating a large visible gap.

Power receptacles and power and data strip are available for field installation on the accessory rail, providing access to power at worksurface height.


Connections




Hutches can be used on full-depth corner and extended corner worksurfaces.



Hutch end supports attach to the worksurface using screws that are shipped with the hutch kit.




Hutch connector bracket is available to connect two or more hutch kits side by side. See Desk Stability Guidelines in the Answer Solutions Specification Guide.



Shelf lights are available to recess into the bottom of storage bins.

Wiring & Cabling



Light cords can be routed through a hutch vertical cable manager, and then through the gap between the accessory rail and the worksurface. One non-handed. painted steel vertical cable manager is shipped with each hutch kit. Additional cable managers ordered separately, are available.

Surface Materials

End supports, back panel, vertical cable manager, and accessory rail

Paint

Tackboard

Vertical surface fabric

Power receptacle


· Black plastic only


Pricing

Tip: To price a tackboard with fabrics in two different price groups on opposite sides, add the two prices together and divide by two.

Application Topics

Clearance between the worksurface and the bin is 211/8".





Hutch end panels must be located immediately above a floor support that stabilizes the front and back edges of the worksurface, such as a pedestal, an end support, or a pair of legs.

Steelcase Worktools

are available for use on accessory rail including letter tray, pencil cup, double square cup, shallow dish, office in a file, mini shelf, personal shelf, and slatshelves. For product information, see Steelcase Worktools Specification Guide

Shipping

Hutch kits are assembled in the field

Universal Shelves and Universal Personal Shelves

Universal shelves_

supported by Answer, Kick, Avenir, and Montage provide overhead storage in the work space.

► Specifying, page 329

Universal personal

shelves provide a wall-supported surface that attaches to Answer, Kick, and Avenir.


► Specifying, page 330

Metal backstop on Universal shelves prevents notebooks and equipment from damaging panel surface. Universal personal shelves do not have a backstop.

On-module attachment hooks are integral to the end supports and are used to mount shelves on panels of the same width as bins.

Safety catch locks shelf units to frame to prevent accidental removal.


Shelves are steel and ship ready to assemble.

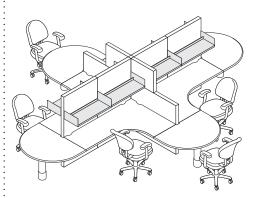

Actual Dimensions					
	Universal shelves	Universal personal shelves			
Depth	143⁄4"	1311/16"			
Width	24", 30", 36", 42", 48", 60", and 72"	24", 30", 36", 42", and 48"			
Height	71/2" (Kick, Answer, and Avenir)	1 ¹¹ / ₁₆ " (thickness of shelf)			



Shelf lights are available for use beneath shelves.
Lights recess into the bottom of the overhead storage unit.
▶ Page 168




Dividers are available field installed for use on Universal shelves. Dividers ship in a package of four. Dividers cannot attach to Universal personal shelves.

A 1½" gap exists between the personal shelf and the panel to allow for cable routing.


The height dimension of the bracket (from top of personal shelf to the bottom of the bracket) is 6½"H.

Connections




Steel support hooks on end supports insert into the slotted channel of a panel or wall channel and lock into place with a safety catch

On-module attachment hooks cannot be attached to upmount brackets.




Width of shelf must match the width of the panel or panels that it is attached to with the on-module brackets. Shelves may span up to two frames.



Wall channels are available to attach shelves to concrete or block walls. Wall channels can be used to attach shelves to wood, dry wall, or plaster walls, if wall is reinforced.
▶ Page 153

Wiring & Cabling



Vertical wire managers conceal cords and cables that are routed vertically outside of the panels.

Page 179

Surface Materials

Shelf

Paint

Application Topics

Storage Capacities and Dimensions

▶ Page 159

Bracket Application Rules

Page 150

Rules for Panel Stability with Components


► Page 61

Bracket Application Rules

For TS 200 Series Bins, Universal Sliding Door Bins, Universal Over the Case Bins, Universal In the Case Bins, and Universal Shelves


Bracket Application Matrix							
Panels	TS 200 Series Bins, Universal Bins, and Universal Shelves— On-Module	Universal Bins— Single Side Vertical Off- Module	Universal Bins— Two Sided Vertical Off- Module	Universal Bins— Horizontal Off- Module (for use with Montage only)	Universal Bins— Upmount		
Answer	•	•	•		•		
: Kick	•	•	•		•		
Avenir	•	•	•		•		
Montage	•	•	•	•	•		

On-Module Brackets and Hooks



On-module brackets and hooks are used to mount overhead bins and Universal shelves to panels with vertical slot patterns. Answer, Kick, Avenir, and Montage panels can support on-module attachment brackets.

Universal personal shelves can attach on-module to all panels except Montage.




Width of overhead storage unit must match the width of the panel or panels that it is attached to. Storage bins or shelves may span up to two panels.

Additional support for stability may be required when shelves and overhead storage bins are attached to panels. Counterbalancing loads on the opposite sides of the panels increases

Tip: See Stability Guidelines in each corresponding specification guide.

stability.




On-module attachment brackets install in panel seams.


On-module brackets can be used above and adjacent to slatwall on Answer and Montage panels.

On-module brackets can be used with a panel stacker on Answer, Kick, and Montage panels. Follow standard panel stacker guidelines for each panel.

Off-module brackets are used with bins up to 12" larger than the panel, allowing them to overhang the panel seam.

Off-Module Brackets






Vertical off-module brackets, optional, can be used to mount one or two sides of the overhead bin off-module on Answer, Kick. Avenir, and Montage with vertical-slot-patterned panels. Both of these brackets attach to the on-module bracket that comes standard with the overhead bin. Vertical off-module brackets allow bins to be installed a maximum of 12" off-module Vertical off-module brackets can be used with 30"W to 60"W Montage bins only.

Vertical off-module brackets can be used above and adjacent to slatwall on Answer and

Montage panels.

panel.

Vertical off-module brackets can be used with a panel stacker on Answer, Kick, and Montage panels. Follow standard panel stacker guidelines for each



brackets, optional, accommodate off-module installations of overhead storage bins on panels with horizontal slot patterns. Enhanced off-module Montage frames can support horizontal off-module brackets. Horizontal off-module brackets can be used with 24"W to 48"W Montage bins only.


Horizontal off-module brackets can be used above and adjacent to slatwall on Montage panels.

Horizontal off-module

brackets can be used with a panel stacker on Montage panels. Follow standard panel stacker guidelines for each panel.

Enhanced off-module Montage frames have horizontal slot patterns and must be specified for horizontal off-module Montage configurations.

Horizontal off-module brackets push bin out from panel 5/8" on enhanced off-module Montage panels.



Horizontal off-module brackets cannot span a vertical or joint where two frames come together on enhanced off-module Montage panels. Shift the bin to avoid the joint.

Only two pairs of off-module brackets and associated storage can be mounted per frame.

Upmount Brackets



Upmount brackets, optional, can be used with Universal sliding door, Universal over the case, and Universal in the case bins. Brackets attach bins near the top of 54"H pan-els. TS 200 Series bins and Universal shelves cannot be attached to upmount brackets.

Upmount bin width must match the width of the panel or panels that it attaches to. Upmounted bins and shelves cannot be supported off-module.

Omit Brackets

Omit brackets option must be specified when bin is used in hutch kit or when

attaching bin to a horizontal wall attachment bracket. Order hutch kit separately.

Hutch kit supports bin at 66" height.

Accessories

Horizontal Wall Attachment Brackets


For Use with Universal Sliding Door, Universal Over the Case, and Universal In the Case Bins Introduced in March 2007



Horizontal wall attachment brackets can attach to wall of building to accept Universal Sliding Door, Universal Over the Case, and Universal In the Case storage bins. Brackets will not accept bins introduced prior to March 2007 or TS 200 Series bins. Specifying, page 331 Tip: Specify as a separate


style number.

Product Details



Horizontal wall attachment brackets must match the width of the storage bin.

Tip: Select the omit brackets option when ordering the




Horizontal wall attachment brackets include brackets and a steel back to enclose the storage bin.


Horizontal wall attachment brackets can be positioned on wall at height needed.

Connections

Horizontal wall attachment brackets can be used to attach Universal Sliding Door, Universal over the case, and Universal in the case bins to a building wall. TS 200 Series cannot attach to horizontal wall attachment brackets.




Shelves can not hang off horizontal wall attachment brackets.



Mounting of horizontal wall attachment brackets must include attachment to at least two wall studs, but it is recommended to attach to all studs in wall behind the storage bins. Storage bins that are 24"W or 25"W can only be mounted with horizontal wall attachment brackets if wall is constructed with 16" stud centers.

Field install:

- Concrete walls with Hilti type anchors.
- Drywall or plywood with 5/8" thick Toggler R-type 3/16" wall anchors with countersunk flat head screw.
- Wood studs with #10 wood screws of appropriate length with countersunk flat head screw.
- Steel studs with #10 sheet metal screws of appropriate length with countersunk flat head screw.



Limit of one bin for each horizontal wall attachment bracket.

Attaching worksurfaces to horizontal wall

faces to horizontal wall attachment brackets is not possible.

Horizontal wall attachment brackets allow overhead storage bin to fit flush to wall.

Actual Dimensions

Width 24", 30", 36", 42", 48", 60", and 72".

Surface Materials

Brackets and steel back

Paint


Accessories

Wall Channels


For Use with Overhead Storage

Slotted steel channel

accepts shelves, overhead storage bins, worksurfaces, or tackboards. Channel will accept all Universal bins and shelves, TS 200 Series bins, and bins and shelves introduced prior to March 2007.

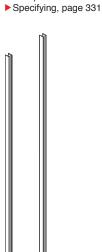

Product Details



Wall channel can be positioned on wall at varying heights.

Order wall channel height according to its intended use. Cutting wall channels is not recommended.


Connections

Wall channels can be used to support shelves, storage bins, worksurfaces, and tackboards.

Field install on:


- Concrete walls: Hilti type anchors
- Drywall or plywood: 5/8" thick
 Toggler type 3/16" wall
 anchor
- Steel and wood studs: #10 sheet metal or wood screws of appropriate

length
Anchors must be used on
each screw hole location of
the wall channel




Components attach at 1" increments, but screws block some slot locations.

Screw hole positions

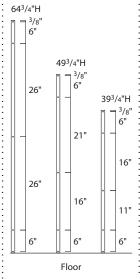


Actual Dimensions

	ar Difficulture	
Depth	11/8"	
Width	15/16"	
Height	39¾", 49¾", or 64¾"	



Component limits for each pair of wall channels are as follows:


- · Two bins or shelves
- One worksurface and two shelves
- One worksurface and one bin



Horizontal brace is available to reinforce vertical wall channels that support storage bins, shelves, or worksurfaces that are attached to walls. Bins and shelves that are 48"W or less do not require a horizontal brace.

All worksurfaces require horizontal braces.

▶Page 332



brace is required for each


storage bin or shelf that is wider than 48". The brace should be positioned at the top location of each bin or shelf on the vertical wall channel.

Width of horizontal

brace must match width of shelf of storage bin.

Wall channel horizontal

brace is also available in 42" and 48" widths and can be used in applications where there is concern regarding the strength of the wall. These braces must also be used with wall-mounted worksurfaces.



Worksurfaces may be attached to wall channels with L-shaped cantilevers, subject to the following application guidelines:

- All worksurfaces must be 24"D or less
- Worksurfaces must be supported by an L-shaped cantilever or legs every 42 or 48 inches. Cantilevers can be shared when worksurfaces are adjacent.
- Wall channel horizontal braces must be installed directly behind all wall-mounted worksurfaces, and also at the top of the wall channels.
- Triangular cantilevers and Avenir universal cantilevers may not be used.
- Worksurface-supported pedestals cannot be hung from a wall-mounted worksurface.

Surface Materials

Wall channel

• Paint


Wall channel horizontal brace

• Paint

Tip: Horizontal brace will be visible until hidden by contents of shelf or storage bin.

Application Topics

B = Distance between center lines



A = Width of storage component

A	В	Α	В	
233/4"	22 ¹⁵ / ₁₆ "	413/4"	40 ¹⁵ / ₁₆ "	
293/4"	28 ¹⁵ / ₁₆ "	473/4"	46 ¹⁵ / ₁₆ "	
353/4"	34 ¹⁵ / ₁₆ "			

Accessories


For Overhead Bins and Shelves

Dividers



▶ Specifying, page 332

Product Details



Divides space in panel-supported bins and Universal shelves. Dividers will not work in bins and shelves introduced prior to March 2007.

Divider can be used on hutch kit.

Specifying

A carton of four dividers is available as an option on overhead bins and Universal shelves.

Surface Materials

Divider

· White plastic only

	Actua
	ACCION.
-	

 $\begin{tabular}{lll} \hline Depth & 7 \begin{tabular}{l} 7 \begin{tabular}{l} 7 \end{tabular} \\ \hline Width & 1 \begin{tabular}{l} 4 \end{tabular} \\ & 1 1 \begin{tabular}{l} 2 \end{tabular} \\ \hline \end{tabular}$

Dimensions


Height 61/2"

Slim Shelves

Slim shelves provide a panel-supported surface that attaches to Answer, Kick, Avenir, and Montage with panel-specific brackets.


Specifying, page 334

Slim shelf is an extruded aluminum shelf that provides storage for small items.

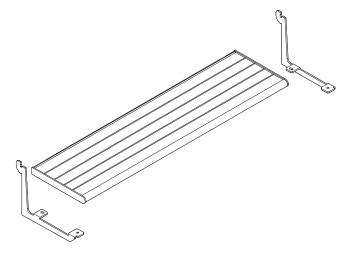


Product Details

Slim shelves attach to Answer, Kick, Avenir, and Montage with panel-specific brackets.



Gap at back of slim shelf allows routing of shelf light cord.



Slim shelves can be mounted off-module. No more than 12" overhang on either side of panel is recommended. Brackets attach on vertical seams of panel, while the shelf adjusts off-module on the brackets.

Two attachment

brackets are included with shelves less than or equal to 48"W. Two attachment brackets and a mid-span support are included with shelves wider than 48"W.

Surface Materials

Slim shelves


Paint


Attachment brackets

· Painted to match shelf


Actual Dimensions Slim Shelves Depth 63/8" Width 24", 30", 36", 42", 48", 60", 72", 96"

800 Series Lateral Files

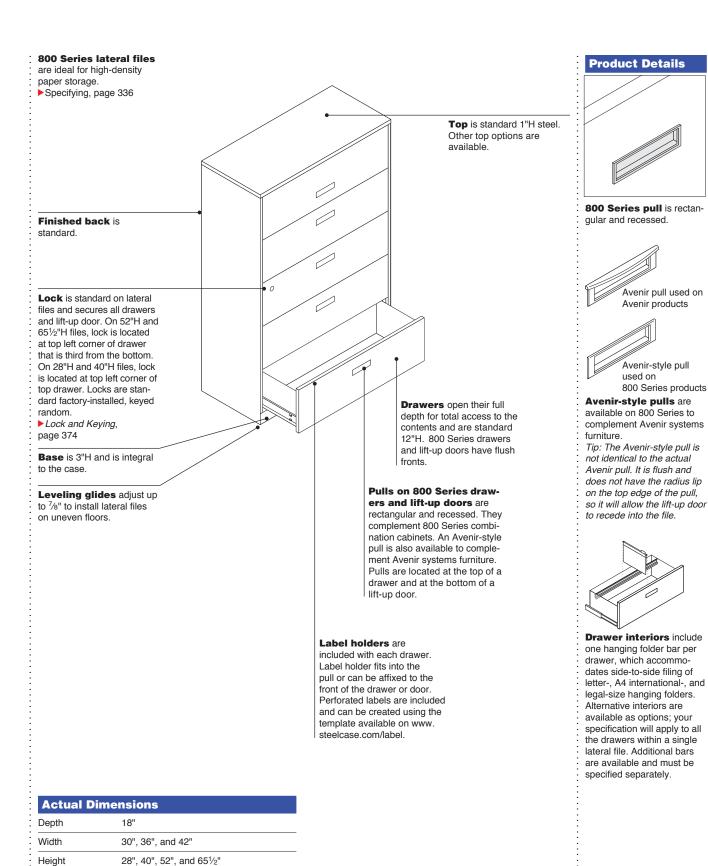



Rails accommodate front-to-back filing of letter-, A4 international-, and legal-size hanging folders. Rail packages accommodate two rows of letter-size files in 30"W and 36"W drawers and three rows of letter-size files in 42"W drawers. See Storage Capacities for additional details. Additional rails are available and must be specified separately.




Dividers accommodate side-to-side filing of expandable folders and other objects. Divider packages include three dividers and one hanging folder bar per drawer. Additional dividers are available and must be specified separately.




Lift-up door with fixed shelf is standard in the top position of 65½"H cases. Door is 13½"H to accommodate standard-height binders. Door recesses inside the

Lift-up door is available with an optional roll-out shelf in place of the standard fixed shelf.



Roll-out shelf includes three dividers and one hanging file folder bar to function as a backstop.

Safety interlock system allows only one drawer or roll-out shelf to be opened at a time.



Locks are available factory- or field-installed. Factory-installed locks are standard and available keyed random only. Optional field-installed locks are available with consecutive, specific, and random keying options. Master-keyed locks are also available. Field-installed lock cylinders must be specified separately.

Lock and Keying,


page 374

Individual drawer locks are available as an option for applications where you want to limit access to each drawer. Lateral files include a security shield above each drawer to prevent unauthorized access. In 651/2"H cases, the lock in the drawer below controls the lift-up door in the top position. Individual locking drawers are only available with field-installed locks Consecutive, specific, and random keying options are available. Field-installed lock cylinders must be specified separately. Lock and Keying,

page 374



No-top lateral files are available for installations where cases will be installed under a worksurface or beneath a common top shared among several lateral files. Hardware is included to attach case to worksurface. No-top option reduces height of file by 1".



Laminate and wood veneer tops with square-edge profiles are available in place of standard 1"H steel tops. Laminate and wood veneer tops are $^3/_{16}$ " taller than steel tops and will add that dimension to the overall height of the lateral file.




Security top is available as an option for installations where the file will be installed beneath a worksurface, but not physically attached. Thin steel top prevents unauthorized access to the contents of the cabinet. Security top is not structural and can be specified on 28"H files only. Security top reduces overall height of file to approximately 27"H


Counterweight packages must be specified as an option for lateral files that are not ganged to another case, attached to a worksurface, or bolted to the floor or wall. Counterweights can also be ordered separately.

Page 338

Connections




Ganging hardware is included to increase stability and maintain alignment by joining adjacent components side by side, back to back, or both. Lateral files can also be bolted to the floor, or attached to a worksurface or wall for stability.





Laminate Laminate with square edge profile profile

Field-installed tops are available in three choices—wood veneer with square edge profile, laminate with square edge profile, and laminate with bullnose edge profile on the front edge or on the front and back edge. Tops can be used on an individual lateral file, or larger tops can be used to connect files to make a credenza.




Field-installed accessories are available, including drawer accessories and counterweight packages.

Page 159

Anchor bracket secures file to floor in compliance with the California Office of Statewide Health Planning and Development (OSHPD) rules to reduce the risk of hazards during earthquakes. To comply, all files which have the bottom of their top opening at 60"H or higher must use an anchor bracket. Note: Local seismic requirements vary.

Compliance with local code requirements is the responsibility of the customer or their authorized agent.

Page 234



Overfile cabinets are separate components that are field installed on top of lateral files, combination cabinets, storage cabinets, and wardrobe cabinets to provide space for additional files, ring binders, or miscellaneous storage.


Surface Materials

Lateral file, including steel top, drawer fronts, lift-up door, fixed shelf, and integral pulls

Paint

800 Series pull

9201 Polished ChromePaint (option)



Door/drawer pull

paint color can match or complement the cabinet color, while the pull cover always matches the cabinet color.

Avenir-style pull

Paint

Wood veneer top

- Wood veneer—
 Open pore finishes
- Customiz stain (option)

Laminate top

- Laminate
- Open Line laminate (option)

Lock

- 9201 Polished Chrome
- 9250 Ember Chrome (option)

Drawer bodies, roll-out shelves, hanging folder bars, rails, and dividers • Black

Application Topics S

Storage Capacities and Dimensions

▶Page 159

Shipping

Lateral files are normally shipped in heavy-duty, recyclable stretch wrap to reduce the amount of corrugated board needed.

Counterweight packages ship separately from case and must be field-installed.

Storage Capacities

Pedestals with Avenir and 200 Series Pulls







Fixed

Worksurfacesupported

Mobile

Tip: Drawer capacities for mobile pedestals are the same as the 24"D pedestal drawer capacities.

Box Drawers,		Inside Dimensions			
15"W x 6"H		D	W	н	
	24"D Pedestal (nominal)	18 ²³ / ₃₂ "	123/4"	47/32"	
	30"D Pedestal (nominal)	24 ²³ /32"	123/4"	47/32"	

File Drawers, 15"W x 12"H	Size	Inside D	Dimensio W	ons H	Letter- Storage		Legal-Size Storage	Letter- and Legal-Size Storage
	24"D Pedestal (nominal)	181⁄4"	121/16"	93/8"	181/4"	12 ¹ / ₈ "+ 5 ¹ / ₄ "	121/16"	2 ¹ / ₄ " letter and 12 ¹ / ₁₆ " legal
	30"D Pedestal (nominal)	241/4"	12½16"	93/8"	24½"	12½"+ 11½"		8½" letter and 12½" legal

Overhead Bins and Shelves

Universal	
Over the Case Bins	



Size	Inside	Dimens	ions
	D	W	н
24"W bin	13 ³ ⁄8"	2313/16"	1311/16"
25"W bin	133/8"	2413/16"	1311/16"
30"W bin	13 ³ ⁄8"	2913/16"	1311/16"
35"W bin	13 ³ ⁄8"	34 ¹³ /16"	1311/16"
36"W bin	13%"	3513/16"	1311/16"
42"W bin	13%"	41 13/16"	1311/16"
45"W bin	13%"	4413/16"	1311/16"
48"W bin	133/8"	4713/16"	1311/16"
60"W bin	133/8"	5913/16"	1311/16"
70"W bin	133/8"	6913/16"	1311/16"
72"W bin	13%"	7113/16"	1311/16"

Universal In The Case Bins and Universal Sliding **Door Bins**



Size	Inside Dimensions			
	D	W	Н	
24"W bin	133/8"	2313/16"	121/4"	
25"W bin	13%"	2413/16"	121/4"	
30"W bin	13%"	2913/16"	121/4"	
35"W bin	13%"	3413/16"	121/4"	
36"W bin	13%"	3513/16"	121/4"	
42"W bin	13%"	4113/16"	121/4"	
45"W bin	13%"	4413/16"	121/4"	
48"W bin	13%"	4713/16"	121/4"	
60"W bin	13 ³ / ₈ "	59 ¹³ / ₁₆ "	121/4"	
70"W bin	133/8"	69 ¹³ / ₁₆ "	121/4"	
72"W bin	13 ³ / ₈ "	71 ¹³ / ₁₆ "	121/4"	

Universal sliding door bin width dimensions is reduced by $^3\!4$ " due to center divider.

Universal Shelves For Avenir



Size	Inside D	Dimens W	ions H
24"W shelf	133/8"	2313/16"	51/2"
25"W shelf	13¾"	2413/16"	51/2"
30"W shelf	13 ³ ⁄8"	2913/16"	51/2"
35"W shelf	13 ³ ⁄8"	34 ¹³ /16"	51/2"
36"W shelf	133/8"	3513/16"	51/2"
42"W shelf	133/8"	4113/16"	51/2"
45"W shelf	133/8"	4413/16"	51/2"
48"W shelf	133/8"	4713/16"	51/2"
60"W shelf	133/8"	59 ¹³ / ₁₆ "	51/2"
70"W shelf	13¾"	6913/16"	51/2"
72"W shelf	13¾"	71 ¹³ / ₁₆ "	51/2"

Drawers

Steel Center Drawers	Size	Inside	Inside Dimensions			
		D	W	Н		
	181/8"D Drawer	141/2"	19 ¹ / ₂ "	2"		
	23"D Drawer	19 ¹ /2"	19 ¹ /2"	2"		

Plastic Center Drawer

Tip: Inside depth does not include pencil tray. Depth is 147/8" when pencil tray is included in dimensions.

Inside Dimensions
D W H

12" 19" 1%s"

ghting

164

Understanding Lighting

Statement of Line and Comparison

Product Details	
Shelf Lights	168
LED Shelf Lights	170
LED Linear Shelf Lights	172
LED Personal Task Lights	176
Application Topics	
Daisy Chaining	178
Related Products	
Vertical Wire Managers	179

Underwriters Laboratory (UL) and Canadian Standards Association (CSA) listed. These lights have been designed to meet all U.S. and Canadian national electrical and energy codes and most local building codes. Local electrical codes vary, so you should consult a qualified electrical contractor or engineer for proper installation of all electrical equipment.

Statement of Line and Comparison

Shelf lights mount into the recessed bottom of storage shelves and bins to illuminate the worksurface. Five types of shelf lights are available to control the quality of light for specific applications. Each type is compatible with Steelcase systems furniture.

Shelf Lights

Storage-Mounted Lights

Standard Shelf Light







	<u> </u>	*
Mounting Options	 Universal mounting package (standard) Flush mount Competitive mounting package	Universal and flush mounting package (standard)
	Understanding ► Page 168 Specifying ► Page 340	Understanding Page 168 Specifying Page 342
Depth	91/4"	67/8"
Width	25", 37", or 49"	25", 37", or 49"
Lamp	T8 Fluorescent	T8 Fluorescent
Watts/Lumens/Efficacy	25"W – 17 Watts/ 1343 Lumens/ 79 Efficacy 37"W – 25 Watts/ 2150 Lumens/ 86 Efficacy 49"W – 32 Watts/ 2899 Lumens/ 90.6 Efficacy	25"W – 17 Watts/ 1343 Lumens/ 79 Efficacy 37"W – 25 Watts/ 2150 Lumens/ 86 Efficacy 49"W – 32 Watts/ 2899 Lumens/ 90.6 Efficacy
Color Temperature	3500K	3500K
Description	The right choice for the majority of people in today's workplace who switch frequently from task to task throughout the day.	Designed for use in display areas, service centers, under transaction tops, and other applications where glare control is not a primary consideration.
Optics	Faceted, white reflector	Silver reflector
	Contrast sleeve that can be manually rotated to vary light	Prismatic lens — flat acrylic diffuser intensity
Ballasts	Electronic ballast High power factor ballast	Electronic ballast High power factor ballast Normal-power-factor ballast
Electronic Dimmer	Not available	Not available
Lens Options	• None	Batwing lens option
Average Rated Lamp Life	• 20,000 hours	• 20,000 hours
Warranty	Ballast - 5 years Fixture - 12 years	Ballast - 5 years Fixture - 12 years

Shelf lights offer end users added control and adjustability to place the proper amount of shelf lighting to create a holistic work setting. Ideally suited for recessed mount applications to bottom of bin or shelf.

LED Shelf Light

Storage-Mounted Lights

LED Shelf Light



LED Linear Shelf Lights



Mounting	 Standard includes magnetic mount for steel bins and shelves. Optional fastener kit for wood shelves are available. 		Standard includes magnetic mount for steel bins and shelves. Each light length comes with set quantity of mounting brackets for both steel and wood applications.					
	Understanding ▶ Page 170 Specifying ▶ Page 344	Unders Page 1 Specify Page 3	ying					
Depth	21/2"	2"						
Width	18"	17", 31	", 44", or	58"				
Number of LEDs	102 LEDs	17"W 24 47	31"W 48 94	44"W 72 141	58"W 96 188	Standard Output LEDs High Output LEDs		
Watts/Lumens/Efficacy	9.6 Watts/ 522 Lumens/ 54 Efficacy	17"W 7.8 444 57 17"W 10.9	31"W 17.6 980 55.6 31"W 23.4	44"W 25.9 1412 54.5 44"W 34.3	58"W 33.6 1791 53.3 58"W 43.5	Standard Output Watts Lumens Efficacy High Output Watts		
		744 68	1590 68	2290 67	2807 64.5	Lumens Efficacy		
Color Rendering Index	87	84						
Color Temperature	3500K	3500K						
Description	The most environmentally-friendly light in the portfolio. Consumes only 11 watts of power, contains no harmful metals (mercury), and has a useful life of over 50,000 hours. Ideally suited for recessed mount applications to bottom of bin or shelf.	With its low profile and available four widths, the LED linear lig will fit in a variety of shelving and overhead storage applications. Beneficial features of this fixture include: energy efficien LEDs, continous dimming, automatic turn off after 10 hours, and optional occupancy sensor.						
Finish Options	Bottom surface clear anodized aluminum only. Plastic cover Arctic White (6009) or Black (6000).					c White (6009) end caps or 0) end caps.		
Optics	Polycarbonate matte film	• Polyca	rbonate n	natte film	ı			
Ballasts	Energy saving low-voltage power supply	• Energy	saving lo	ow-voltag	ge power	supply		
Electronic Dimmer	Standard on all lights	• Standa	ard on all	lights				
Average Rated Lamp Life	• 50,000 hrs.	• 50,000	hrs.					
Warranty	Power supply - 5 years Fixture - 12 years		supply - (- 12 yea	,				

Statement of Line and Comparison, continued

Personal task lights

offer end users added control and adjustability to place the proper amount of personal lighting to create a holistic worksetting. Ideally suited for rail-mount, desk, or freestanding applications.

LED Lights

Rail-Mounted and Non Rail-Mounted

LED Personal Task Lights





М			

· Rail-mounted attaches directly to rail systems in Ology, c:scape, FrameOne, Elective Elements, turnstone Campfire big table, and SOTO Rail. The non railmounted version attaches to most freestanding desks and tables.

Tip: Non rail-mounted LED personal task lights will not work on worksurfaces with knife edge that is longer than 11/4", or with modesty panels or modesty screens closer than 6" from the back edge.

Understanding Page 176 Specifying ▶ Page 348

Depth Width 30"

Number of LEDs 120 LEDs Watts/Lumens/Efficacy 12.6 Watts/ 414 Lumens/ 44.1 Efficacy

Color Rendering Index

3500K

Temperature **Description**

Intended to be a primary light source, LED personal task light covers the user's active work zone with a smartly-designed array of light. The light is specifically designed to direct light where it is needed. Energy efficient at only 12.6 watts, LED personal task light is engineered to have a useful life of over 50,000 hours. It attaches directly to the rail systems of Ology, c:scape, FrameOne, Elective Elements, turnstone Campfire big table, and SOTO Rail. A non-rail mounted version attaches to freestanding desks and tables.

Finish Options

• Fixture and stanchions, paint: 4231 Arctic White, 4710 Low Gloss Black, 4799 Platinum Metallic Plastic cover Arctic White (6009) only

Optics

· Polycarbonate matte film

Ballasts

· Energy saving low-voltage power supply

Electronic Dimmer

· Standard on all lights

Average Rated Lamp Life

• 50,000 hrs.

Warranty

· Power supply - 5 years

· Fixture - 12 years

Statement of Line and Comparison

Shelf Lights

Standard and Utility2

► Specifying, pages 340 and 342

Length is maximum allowed

by U.S. National Electrical

Code. Cord with circuit breaker is available to meet the requirements of the Chicago code.

Plug is flat so it remains close to the receptacle. Plug is factory installed.

Housing is painted black. Optional paint colors are available.

On-off switch is centered on the front edge of the Standard shelf light and on the right-hand side of the Utility2 shelf light.

Cord exits from the center of the back of the light for Standard shelf light and from the right hand-side of the Utility2 shelf lights.

Product Details

Shelf light includes the lamp, ballast, and either a 9' cord with three-prong plug or daisy-chain cords.



Plug configuration allows two Standard shelf lights to engage adjacent


allows two Standard shelf lights to engage adjacent outlets in one receptacle.

Energy-saving T8 lamps have triphosphor coating for balanced color and pleasing light.

Connections

Shelf light mounts recessed or flush

depending on design of overhead storage bin or shelf. Installation is done in the field



Universal bracket allows shelf light to be installed without tools under most metal overhead storage bins and shelves.


Specify Underline task light or LED shelf light for use under 24" wide bins. Standard, Utility2, and Bottomline 24" wide lights do not fit under 24" wide bins.



Daisy chain starter cord

must be ordered separately when used with Standard shelf lights in a daisy chain application.

Daisy chain starter light with cord must be ordered when Utility2 shelf lights are used in a daisy chain application.




Daisy chain cords have modular connectors to link Standard shelf lights together. 78" daisy chain jumper cord is standard with select Utility2 lights.

Actual Dimensions


	Standard	Utility2
Depth	9 ¹ / ₄ " (235 mm)	6 ⁷ / ₈ " (175 mm)
Width	24 ⁵ / ₈ ", 36 ⁵ / ₈ ", or 48 ⁵ / ₈ " (625 mm, 930 mm, or 1235 mm)	24 ⁵ / ₁₆ ", 36 ⁵ / ₁₆ ", or 48 ⁵ / ₁₆ " (617 mm, 922 mm, or 1227 mm)
Height	1 ³ / ₄ " (44 mm)	15/8" (41 mm)

Width	Lamp width	Lamp wattage	Replacement lamps
245/8"	24"	17 watts	F17T8-TL735
365/8"	36"	25 watts	F25T8-TL735
485/8"	48"	32 watts	F32T8-TL735



Keyhole slots in housing of fixture allow shelf light to be mounted beneath wood or laminate overhead storage bins and shelves using screws provided. Keyhole slots are also used to mount lights to overhead storage bins and shelves manufactured prior to August 1991.

Standard shelf competitive mounting package provides attachment hardware to mount Steelcase shelf lights on all major competitive furniture lines. Package includes screws and installation instructions.



Shelf light can be mounted anywhere from side to side beneath over-head storage bin or shelf. The cord length is the only limitation.

Wiring & Cabling

Power drawn is approximately $\frac{1}{2}$ amp.

Daisy chaining permits interconnecting up to six Standard shelf lights from a single power outlet. Utility2 light daisy chaining allows up to 10 fixtures.

▶ Page 178

Starter cord for Standard and starter light for Utility2 powers first light in a daisy chain and allows you to convert any daisy chain light for independent operation.

Electronic high-powerfactor ballast that is roughly 45% more efficient than a normal-powerfactor ballast is available on Standard and Utility2.

Normal-power-factor electronic ballasts are available on Utility2 shelf lights.

Batwing lens is available as an option on Utility2 shelf lights for applications where moderate improvement to light distribution is needed.

Surface Materials

Housing

- · Black paint (standard)
- · Paint colors (option)

Reflector

 White on Standard and silver on Utility2 shelf lights

Cord

Black plastic only

End cap cord manager

Black plastic only


Phot	Photometric Data									
	Standard Initial horizontal footcandles for LSM24K Worksurface rear									
3"	88	85	78	67	55	42	31	22		
6"	93	90	82	70	57	43	31	23		
9"	91	88	81	69	56	41	30	21		
12"	82	80	72	62	50	38	28	20		
15"	69	67	61	53	43	33	24	18		
18"	56	55	49	43	36	28	21	16		
21"	41	40	37	32	27	22	17	13		
24"	29	28	26	23	19	16	13	10		
27"	19	19	18	16	14	12	10	8		
30"	13	13	12	11	10	9	7	6		
	CL	3"	6"	9"	12"	15"	18"	21"		
			Wo	orksurface t	front					

Utility2Initial horizontal footcandles for LSB24K2
Worksurface rear

3"	113	109	98	84	65	49	36	25
6"	129	123	112	93	73	53	37	26
9"	135	129	117	96	75	53	38	26
12"	127	119	107	89	68	49	36	25
15"	104	99	89	74	58	43	32	22
18"	78	76	68	56	44	34	26	19
21"	55	51	48	41	34	26	21	15
24"	36	36	31	29	24	18	15	11
27"	25	24	21	19	17	14	11	9
30"	17	16	15	13	11	10	8	7
	CI	3"	6"	9"	12"	15"	18"	21"

Worksurface front

LED Shelf Lights

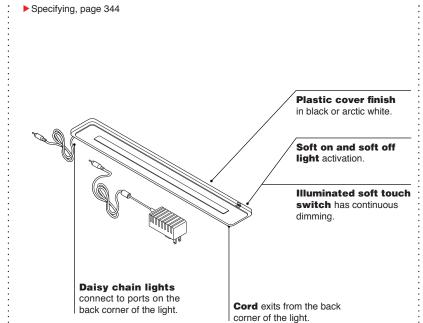

Product Details

Shelf light includes the lamp and power supply with cord set. Daisy chain primary light includes lamp and larger power supply to support up to three lights. Daisy chain secondary light includes lamp and daisy chain cord set.



An 18 watt power supply, is used on the LED standard light; it is 9' long with a two prong driver plug.


Tip: Energy saving mini-LEDs greatly reduce power use.




Power supply for LED daisy chain starter light uses an 11' 60 watt modular cord with standard two prong plug, an integrated low voltage cord, and a connector to attach to light.


Connections

Shelf light mounts recessed or flush depending on design of overhead storage bin or shelf. Installation is done in the field.





Magnetic mounting allows shelf light to be installed without tools under most metal overhead storage bins and shelves. This mounting allows the light to be mounted to most competitive steel bins and shelves.



Optional fastener kit allows shelf light to be mounted to wood shelves.

Specify Underline task light or LED shelf light for use under 24" wide bins. Standard, Utility2, and Bottomline 24" wide lights do not fit under 24" wide bins.

Actual Dimensions

Depth	25%"	
Width	181/8"	
Height	1/2"	

Power Supply 18 Watt Cord

- 9' with two prong driver plug

Power Supply 60 Watt Cord Set (11')

- Line voltage cord: 6'

Low voltage cord: 5'

Wiring & Cabling

Shelf light includes the lamp and power supply with cord set. Daisy chain starter light includes lamp and larger power supply to support up to three lights. Daisy chain secondary light includes lamp and daisy chain cord set.

Power supply for LED daisy chain starter light uses a 60 watt modular cord with standard two prong plug, an integrated low voltage cord, and a connector to attach to light. An 18 watt power supply is used on the LED standard light, it is 9' long with a two prong driver plug.

Tip: Daisy chain starter light comes with a 60 watt power supply to support up to three lights. Daisy chain secondary lights do not come with a power supply, but instead come with a daisy chain cord set.

Surface Materials

Housing

- 6000 Black
- · 6009 Arctic White

Reflector

 Clear anodized aluminum only

Cord

Black plastic only


Photometric Data									
	LED Shelf Light Initial horizontal footcandles for LSL18 Worksurface rear								
3"	83	80	71	58	45	32	23	17	
6"	94	90	78	64	48	34	24	18	
9"	98	94	81	65	49	35	25	17	
12"	93	89	75	61	46	34	24	17	
15"	78	74	63	53	40	30	22	15	
18"	59	57	50	43	32	25	18	14	
21"	40	41	36	32	25	19	15	11	
24"	28	27	24	22	18	14	11	9	
27"	18	17	16	14	12	10	8	7	
30"	11	10	10	9	8	7	6	5	
	CL	3"	6"	9"	12"	15"	18"	21"	

Worksurface front

LED Linear Shelf Lights

A properly diffused light source under the linear head provides a softly blended light pattern that reduces eye strain.

> Specifying, pages 346-347

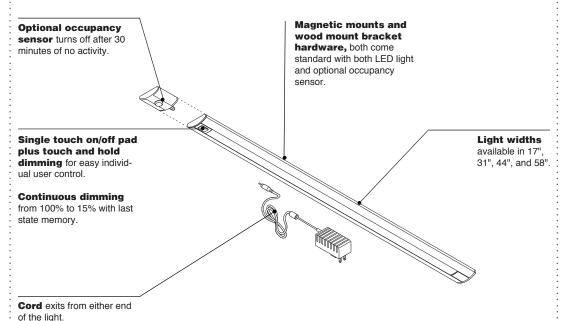

Actual Dimensions Light Occupancy Sensor Depth 2" Width 17", 31", 44", or 58" 23/10" Height ½" 7/10"

Product Details

LED linear stand alone and daisy chain starter lights include the lamp, power supply, and both magnetic mounts, and wood bracket hardware with adhesive cord managers.

LED linear daisy chain lights include the lamp, daisy chain cords, and both magnetic mounts, and wood mount bracket hardware with adhesive cord managers.

Optional occupancy sensor is a separate component that connects to the light fixture and activates in 30 minutes when no movement is detected to conserve energy.

Average rated lamp life of LED linear shelf lights is 50,000 hours.

Color temperature of LEDs is 3500K.

Color rendering index of LEDs is 84.

Automatic turn off after 10 hours (+/- 15 mins.); standard with both models.

Connections

Lights mount recessed or flush depending on design of overhead storage bin or shelf. Installation is done in the field.

Magnet mounts allow shelf lights to be installed without tools under most metal overhead storage bins or shelves.

Wood mount brackets allow shelf lights to be mounted to wood shelves.

Light width	Number of LEDs in Standard Output/ High Output	System Wattage Standard Output High Output			
17"	24 / 47	7.8 / 10.9			
31"	48 / 94	17.6 / 23.4			
44"	72 / 141	25.9 / 34.3			
58"	96 / 188	33.6 / 43.5			

Wiring & Cabling

Light is standard with single touch on/off and touch control dimming.

User adjustable touch and hold dimming pad includes continuous dimming range of 100% to 15%.

Power supply for 17" linear stand alone only uses a straight plug with a 9' 18 watt 24 volt wall transformer.

Power supply for 31", 44", 58", or 17" starter light; 60 watt compact in-line brick straight plug. The cord is 11', 6' from power supply to power outlet and 5' from power supply to fixture. Tip: Daisy chain starter light comes with a 60 watt power supply to support up to a limited number of lights refer to chart for daisy chaining fixtures. Daisy chain secondary lights do not come with a power supply, but instead come with two daisy chain jumper cords, one 8" and one 30" set. ►Page 174

Surface Materials

Housing

- · 4321 Arctic White
- 0835 Black

Cord

· Black plastic only

Ph	Photometric Data															
1	17"W Standard Output Linear Shelf Light Measured from 18" Shelf Light Worksurface rear Above worksurface Worksurface rear															
12"	11	19	28	33	28	19	11		12"	17	31	46	54	46	31	17
6"	15	30	50	60	50	30	15	•	6"	26	51	83	100	83	51	26
CL	17	36	62	76	62	36	17	•	CL	30	62	107	130	107	62	30
6"	15	30	50	60	50	30	15	•	6"	26	51	83	100	83	51	26
12"	11	19	28	33	28	19	11		12"	17	31	46	54	46	31	17
18" 12" 6" CL 6" 12" Worksurface front						18"	•		18"	12" Wo	6" orksur	CL face f	6" ront	12"	18"	

31"W Standard Output Linear Shelf Light

		VVC	rksur	race r	ear		
12"	28	43	55	59	55	43	28
6"	44	73	96	104	96	73	44
CL	53	91	121	131	121	91	53
6"	44	73	96	104	96	73	44
12"	28	43	55	59	55	43	28
	18"	. —	-	CL face fi	-	12"	18"

44"W Standard Output Linear Shelf Light

Worksurface rear

12"	48	61	69	71	69	61	48
6"	80	104	116	119	116	104	80
CL	99	129	144	148	144	129	99
6"	80	104	116	119	116	104	80
12"	48	61	69	71	69	61	48
	18"	12" Wo	-	CL ace f	-	12"	18"

58"W Standard Output Linear Shelf Light

Worksurface rear

	18"	12"	-	CL ace f	-	12"	18"
12"	63	70	74	74	74	70	63
6"	106	117	122	123	122	117	106
CL	131	145	150	151	150	145	131
6"	106	117	122	123	122	117	106
12"	63	70	74	74	74	70	63

31"W High Output Linear Shelf Light

Worksurface rear 12" 46 71 90 97 90 71 46 6" 73 121 158 171 158 121 73 CL 87 149 198 213 198 149 87 6" 121 158 171 158 121 73 12" 46 71 90 97 90 71 18" 12" 6" CL 6" 12" 18" Worksurface front

44"W High Output Linear Shelf Light

Worksurface rear

	10		o" rksur		-	12"	18.
	10"	10"	6"	CI	GII	10"	10"
12"	78	99	112	116	112	99	78
6"	131	170	190	196	190	170	131
CL	160	211	235	244	235	211	160
6"	131	170	190	196	190	170	131
12"	78	99	112	116	112	99	78

58"W High Output Linear Shelf Light

Worksurface rear

	18"		-	CL face f	-	12"	18"
12"	100	112	119	121	119	112	100
6"	169	118	198	200	198	188	169
CL	210	232	242	245	242	232	210
6"	169	188	198	200	198	188	169
12"	100	112	119	121	119	112	100

Chart for Daisy Chaining Fixtures


	Standard Output Linear Shelf Light										
Light fixture widths	Ma	Maximum number of fixtures allowed with daisy chain starter light									
17"	6	4	3	2	2	1	1	-	-	-	-
31"	-	1	-	2	-	2	1	3	1	1	-
44"	-	-	1	-	-	-	1	-	1	-	2
58"	-	-	-	-	1	-	-	-	-	1	-

	High Output Linear Shelf Light										
Light fixture widths	xture Maximum number of fixtures allowed with daisy chain starter light										
17"	4	2	1	-							
31"	-	1	-	2							
44"	-	-	1	-							

- A 60 watt power supply is required for daisy chaining.
- Total system wattage of all fixtures together cannot meet or exceed 60 watts, see chart.
- · Cannot daisy chain standard output and high output together.
- Cannot daisy chain 58" high output fixtures.
- Occupancy sensor must be positioned between the power supply and the first starter fixture.
- Only need one sensor when daisy chaining.


Tip: Each column is the maximum number of fixtures that can be daisy chained together.

Occupancy Sensor



- · Turns off after 30 minutes of no activity
- 360° lens view
- 90° outward detection angle
- 30" diameter coverage if mounted 15" above worksurface
- 36" diameter coverage if mounted 18" above worksurface
- Connects to fixture with one end-to-end connector. 8" or 30" jumper cords

LED Personal Task Lights

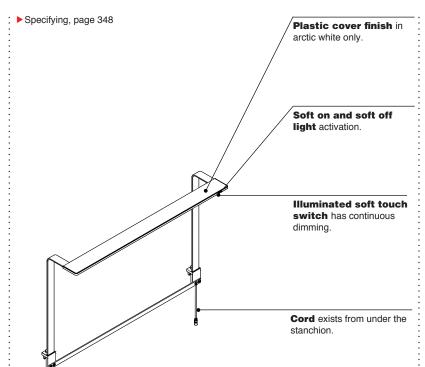

Product Details

Personal task light

includes the lamp and power supply with cord set. Railmounted version includes rail brackets. Non rail-mounted version includes Universal Mounting brackets.




Power supply is an 18 watt two prong driver plug with 9' black cord. *Tip: Energy saving mini-LEDs greatly reduce power use.*

When specified with Height-Adjustable Series Benching or power and data tray, flexible receptacles are recommended.

Connections



LED personal task light mounts directly to the rail systems of Ology, c:scape, FrameOne, Elective Elements, turnstone Campfire big table, and SOTO rail.



Non rail-mounted LED personal task lights will not work on worksurfaces with knife edge that is longer than 1¹/₄", or with modesty panels or modesty screens closer than 6" from the back edge.

Wiring & Cabling

Personal task light

includes the lamp and power supply with cord set.

Power supply uses a modular cord with standard two prong plug, an integrated low voltage cord, and a connector to attach to light.

Surface Materials

Housing

 6009 Arctic White plastic only

Fixture and Stanchions

- · 4231 Arctic White
- · 4710 Low Gloss Black
- 4799 Platinum Metallic

Cord

· Black plastic only

Actual Dimensions

Power Supply Cord (9')

Depth 6"
Width 30"
Height 17"

Photon	Photometric Data												
LED Personal Task Lights Initial horizontal footcandles for LPTL30 and LPTL30NR Worksurface rear													
0"	15	14	13	12	11	9	6	6	5	4	3	2	2
3"	21	20	18	17	15	13	11	8	6	5	3	3	2
6"	31	31	29	26	23	19	15	12	9	7	5	3	2
9"	51	50	46	42	36	29	23	18	13	9	6	4	3
12"	82	79	73	64	53	43	32	23	16	11	7	5	3
15"	109	105	96	83	68	53	39	27	19	12	8	6	4
18"	105	102	93	81	66	51	37	27	18	12	9	6	4
21"	76	75	69	59	50	39	30	22	16	11	7	5	4
24"	48	47	44	39	33	27	21	16	12	9	6	5	3
27"	29	28	27	24	21	17	14	11	9	7	5	4	3
30"	18	18	17	16	14	12	10	8	7	5	4	3	2
	CL	3"	6"	9"	12" W	15" /orksu	18"	21"	24"	27"	30"	33"	36"

Daisy Chaining


For Standard and Utility2 Lights

Daisy chaining shelf lights together extends

power from one fixture to another within workstations to help keep receptacles clear for other uses.


For Standard shelf lights, starter cord is required with daisy chain

required with daisy chain cords to bring power to the first shelf light in a daisy chain so there's no need to designate where each fixture will be used within the chain.

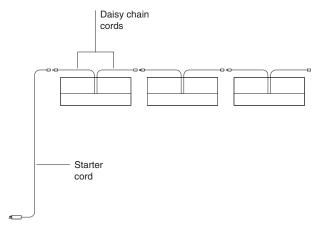


Power will not be

interrupted in a chain even if one of the shelf lights is turned off or its lamp has burned out. That's because the path of power through the chain doesn't pass through the lamps or switches.

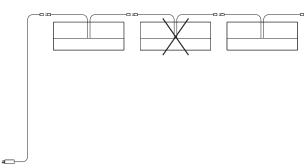


Additions to a chain are possible at any time by adding a jumper cord.

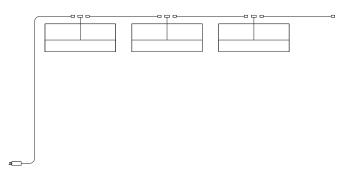

For Utility2 lights,

connect the power cord 1 between the first light and the wall receptacle. Connect the jumper cord 2 between the lights. Maximum distance between receptacles for 78" jumper is 74". Tip: Connect up to 10 fixtures maximum. Voltage and current rating of fixture is 120 volt, .75 amps.

Starter light is required with daisy chain lights to bring power to the first light in the daisy chain.

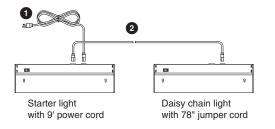

Tip: Daisy chaining is not allowed in Chicago. Local electrical codes vary, so you should consult a qualified electrical contractor or engineer for proper installation of all electrical equipment.

Tip: Overhead cabinets and shelves provide a recessed area for shelf lights. They are not designed to conceal cords when daisy chaining.


Tip: When using upmount brackets with overhead storage and daisy chaining lights, use the open design upmount bracket for better cord management.

Vertical Wire Managers


Vertical wire managers

conceal cords and cables that are routed along the edge of panels.

► Specifying, page 349




Product Details




Top cap covers the cable knockouts on the side of steel medium panel top caps.

Exception: Version for use between a shelf or storage bin and a worksurface ships without a top cap or reveal.



Four different sizes of wire managers are available for use between the panel top cap and the worksurface—10⁷/₁₆"H, 21⁹/₁₆"H, 33⁷/₈"H, and 49¹¹/₁₆"H.



17½"H wire manager is available for use between the bottom of a shelf or storage bin and a worksurface. It doesn't have a top cap or reveal.

■ ∶ Plastic wire manager

is available to cut to special lengths for other applications. It is not available fabric covered.

Tip: Use the plastic wire manager to conceal cords going to a junction box because the wire manager has to be cut to fit.

Wire manager can also be used below the worksurface.

Connections

Snaps into the slotted channel of the panel.

Surface Materials

Cover

- Fabric
- Plastic

Top cap

- Paint (standard on fabric-covered vertical wire manager)
- Plastic to match color of plastic cover

Application Topics

Plastic version can be cut to length. Fabric-covered version must be ordered to fit height dimension of panel or clearance between storage and worksurface.

Actual Dimensions

	Fabric- covered	Plastic
Depth	5/8"	1/2"
Width	13/8"	1 ⁵ / ₁₆ "
Height	10 ⁷ / ₁₆ ", 17 ¹ / ₂ ", 21 ⁹ / ₁₆ ", 33 ⁷ / ₈ ", or 49 ¹¹ / ₁₆ "	49 ¹¹ / ₁₆ "
Medium top cap height	19/16"	19/16"

iring & Cabling

Understanding Wiring and Cabling

//////////////////////////////////////	182
Statement of Line	102
Wiring and Cabling Product Details	
Wiring and Cabling: Interface	184
Wiring and Cabling: Distribution	186
Wiring and Cabling: Access and Storage	188
Application Topics	
Steps to Plan an Electrical Network	190
Steps to Specify Powered Panels with Different Surface Materials	191
Circuit Choices	192
Circuit Specifications	193
How to Calculate Power Needs	194
Special Requirements for Chicago	195
Special Requirements for New York City	196
Special Requirements for Los Angeles	197
Understanding Building Wiring	198
Cable Capacities	200

All Steelcase electrical systems are designed in compliance with the National Electrical Code (NEC) to function as a multiwire branch circuit. Installations should be made in accordance with the NEC provisions for multiwire branch circuits.

Local electrical codes

vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical equipment.


Statement of Line

Wiring and Cabling



Base Power-In

- Understanding Page 40
- Specifying
- Page 237



Breakaway Base Power-Ins

- Understanding
- Page 40
- Specifying
- ►Page 238



End Power-Ins

- Understanding
- ►Page 40 Specifying
- Page 239



2" x 2" Power Pole

- Understanding
- Page 41
- Specifying
- ▶Page 240



2" x 6" Power and **Cable Pole**

- Understanding
- ► Page 42 Specifying
- Page 241



2" x 2" Cable Pole

- Understanding
- Page 41 Specifying
- ▶Page 242




18"W and 24"W **Powerways**

- Understanding
- ► Page 44
- Specifying
- ▶ Page 243



30"W to 60"W **Powerways**

- Understanding
- ▶ Page 46
- Specifying Page 243



Panel-to-Panel Connector

- Understanding
- ► Page 47
- Specifying Page 244



Base Cover

- Understanding
- Page 48
- (Factory-installed on panel)



Corner Wire Cover

- Understanding
- ▶Page 187
- Specifying Page 244



Cable Grommets

- Understanding
- Page 49
- Specifying ▶ Page 245



Panel-Base End Filler

- Specifying
- Page 245



Wire Separator

- Understanding
- Page 187
- (Factory-installed on panel)



Filler

- Understanding
- Page 32
- Specifying
- Page 230



Receptacle

- Understanding Page 48 Specifying
- Page 246

182



Panel-Supported Receptacle

- Understanding ▶ Page 188
- Specifying ▶ Page 247



Cable and Fiber Reel

- Understanding
- ▶ Page 123
- Specifying
- ▶ Page 299



Termination Plate

- Understanding
- ▶ Page 124 Specifying
- Page 299



Cord Reel

- Understanding
- ► Page 189
- Specifying
- Page 299



Cable Storage Tray

Understanding ▶ Page 189 Specifying Page 300



Wire Guide Clips

Understanding ▶Page 189 Specifying ▶ Page 300



Grommet Convenience Receptacle

Understanding ► Page 189 Specifying ► Page 300





Power and Communication Spheres

Understanding

► Page 121 Specifying ► Page 301



Communication Sphere

Understanding ▶ Page 121 Specifying ►Page 302



Round Power and Communication Port

Understanding ▶ Page 121 Specifying ►Page 302



Vertical Wire Manager


Understanding ▶ Page 179 Specifying Page 349




Shelf Lights

Understanding
Page 168 Specifying
Page 340

Wiring and Cabling: Interface

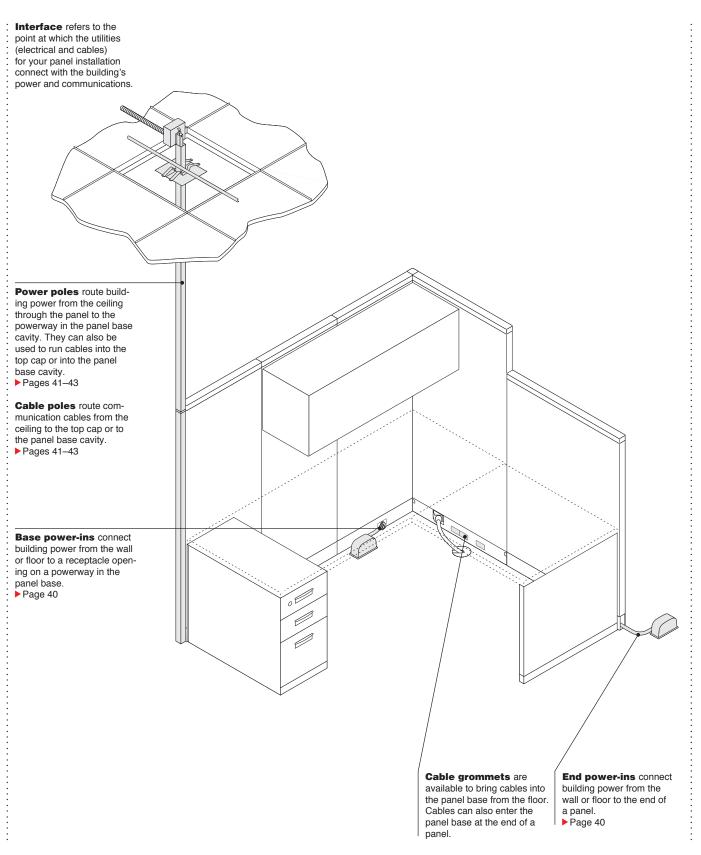


Product Details




2" x 2" power pole is equipped with one electrical harness. The 2" x 6" power pole has two electrical harnesses. Both poles have an inner sleeve that separates power from communication cables.

Power pole circuit can be specified as 3-circuit or 4-circuit models.



Base power-ins supply building power to a panel run by connecting to the powerway at the receptacle location on the green end only. The 3-circuit and 4-circuit models are available to fit standard- or larger-size openings with filler plate. Breakaway models, that fit either size opening, are available for use in California.


Page 40



End-entry power-ins

connect directly to the green end of the powerway, without taking up a receptacle opening. They are available in 3-circuit and 4-circuit models.

Page 40




Cable grommets can be used to route cables from a floor source to the panel base cavity.

Connections


Power or cable poles can attach at the end of a panel run, or at an L-, T-, or X-junction. A pole must be specified to match the height of the panel it is attached to.

▶ Pages 41-43




Ceiling attachment kit secures the power pole or cable pole to the suspended ceiling grid. Junction box at the top of a power pole can be hardwired to building power.


Ceiling heights up to 10' 4" can be accommodated by a power or cable pole. The ceiling attachment kit adjusts for lower ceilings.



L-junction allows the power or cable pole to attach to either panel.



T-junction allows the power or cable pole to attach to, and run power into, the center panel.



Panels of different heights at a junction require a varying height connector package (PAB2) to attach to either type of pole. Change-of-height end trim cannot be used.

Application Topics

Some locations have electrical codes that vary from the national code and impose special requirements.

Pages 195-197

Steps to Plan an Electrical Network Page 190

•


Understanding Building Wiring

Page 198

Avenir Cable-Management Guide Form number S270.

► TechnoLogical Binder Form number S2402.


Wiring and Cabling: Distribution

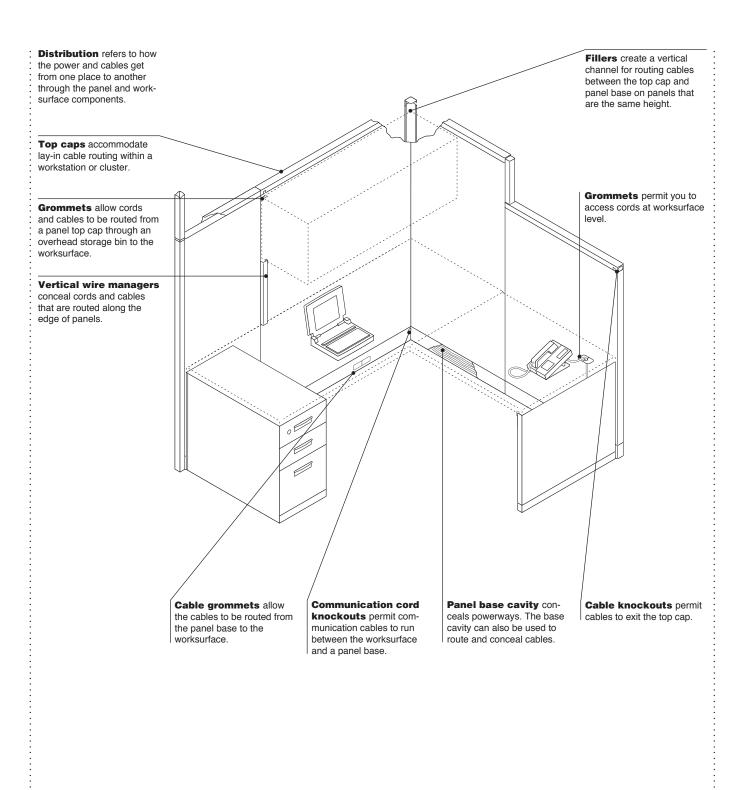



Powerways, within the panel base cavities, connect to route power through a cluster of workstations and provide terminals for receptacles or base power-ins.


▶ Pages 44–47



Wire separator can be specified for the panel base to provide a separate, isolated space for routing data and telecommunication cables. It also serves as a metallic barrier between low-voltage communication wires and 120-volt electricity.


Tip: For use on tackable acoustical and high-performance panels manufactured after September 10, 1990, and non-tackable panels manufactured after March 15, 1999.

Tip: Wire separators for use with Avenir non-tackable panels and panels manufactured prior to September 10, 1990, must be ordered from Service Parts.




Medium steel top caps create a space for routing cables from panel to panel, and include cable knockouts to let cables in or out.


Page 24



Corner wire covers conceal cables and powerways in the panel base cavity at L- and T-connections.




Fillers conceal cables running vertically and aesthetically fill in the space at L-, T-, and X-connections.
▶ Page 32




Vertical wire managers snap into the panel's slotted channel. They conceal cables or task light cords or harnesses running to the worksurface or base receptacles. They come with a cap to conceal a cable knockout.


Page 179



Cable grommets can be inserted in duplex-size receptacle openings to route cables from the panel base to the worksurface.



Communication cord knockouts allow cables to pass from the panel base to the worksurface.

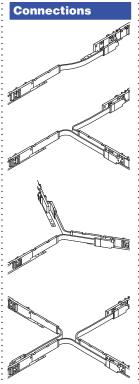

Powered panels may be joined to form straight line, L-, T-, Y-, or X-configurations. Some panel connections can affect how power flows or cables are routed from panel to panel.

▶ Pages 44–47

18"W panels do not have receptacles, but power and cabling can pass through them.

Application Topics

Steps to Plan an Electrical Network
Page 190


Circuit Choices

▶Page 192


Circuit Specifications
Page 193

Cable Capacities
▶ Page 200

Wiring and Cabling: Access and Storage

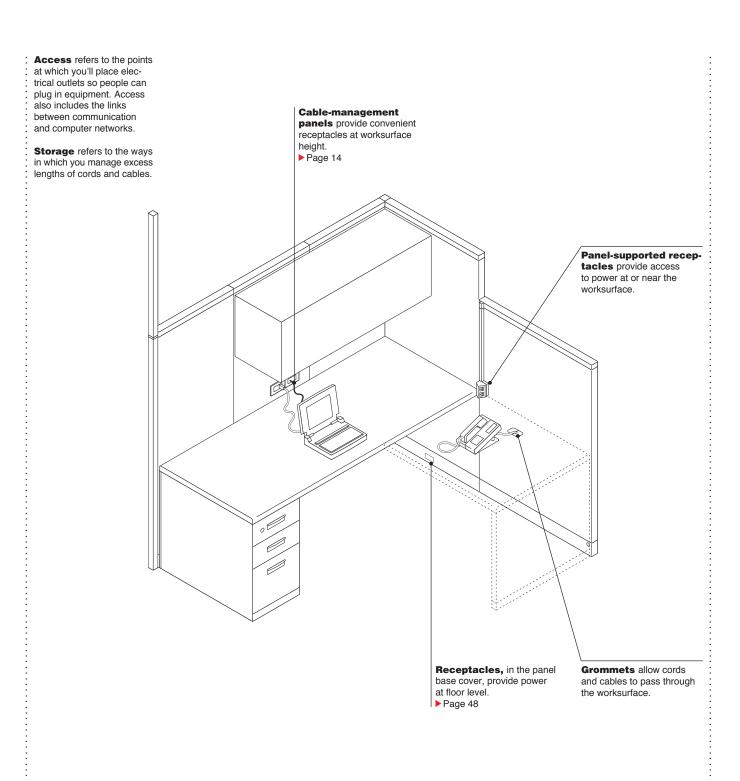

Product Details




Receptacles, installed in the panel base, are available in standard-size or oversize with three circuits or four circuits. Each 36"W or wider powered panel has up to four receptacle openings, accepting up to eight outlets (four per side). Page 48


18"W panels accommodate pass-through powerways only, so their base covers do not have receptacle openings.




Grommets in standard worksurfaces have removable covers to admit three-prong plugs. They can be specified in a range of locations to avoid conflict with center drawers and pedestals. ► Page 116



Grommet convenience receptacle can be used to provide access to power wherever there is a grommet.




Cable and fiber reel stores lengths of excess fiber-optic cable or conventional cables. ▶ Page 123



Termination plate accommodates the oversized junction boxes used for installation of fiber-optic cables.

►Page 124



Cable storage trays assist with horizontal routing and conceal large quantities of cords and cables under a worksurface.



Cord reel takes up excess cord or cable under the worksurface.



Wire guide clip has an adhesive back to allow it to stick to painted metal components under a worksurface for routing and managing cords.


Application Topics

Steps to Plan an Electrical Network


► Page 190

Chicago, New York City, and Los Angeles have special requirements. Pages 195-197

Steps to Plan an Electrical Network

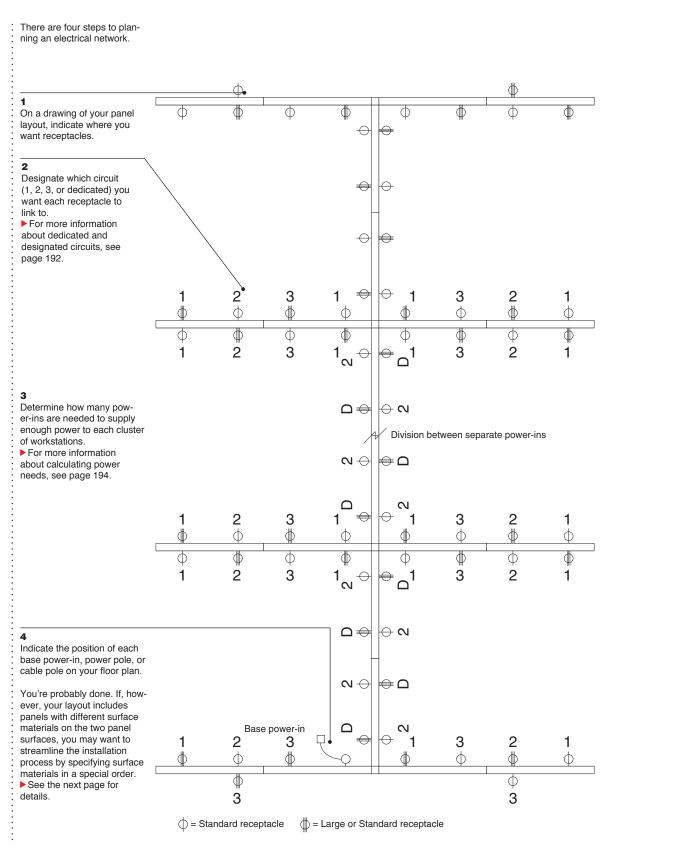


Steps to Specify Powered Panelswith Different Surface Materials

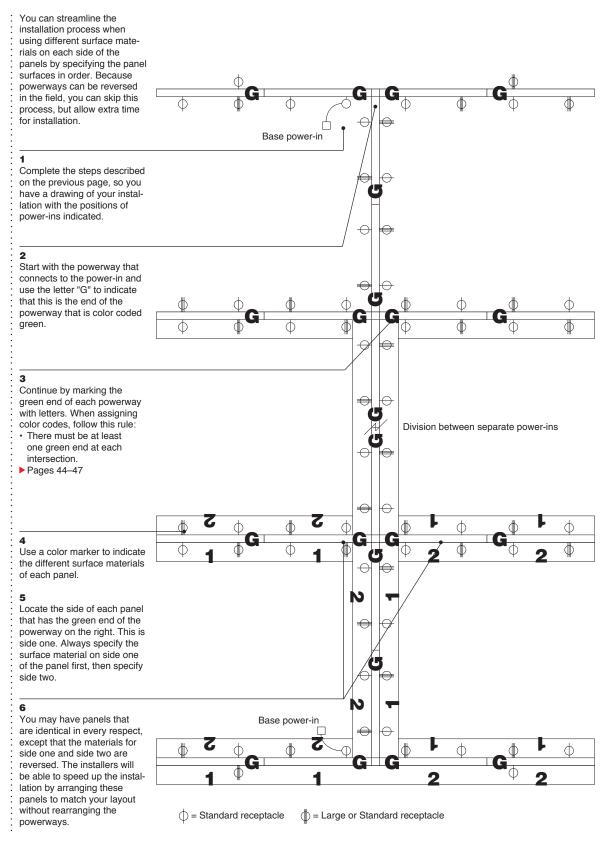


Circuit Choices

Powerways and Strategies for Using Them




Powerways added to the base of panels allow you to distribute power wherever



Standard 3-circuit powerways have five wires—three hot wires carry power, one shared neutral completes the circuit, and one ground for safety.

Tip: 30"W or wider powerway
is shown. 24"W powerways have double flag connectors.



All other powerways

have eight wires. Tip: 30"W or wider powerway is shown. 24"W powerways have double flag connectors. ► See page 193 for alternative wiring schematics.

Wiring & Cabling

Circuit Specifications

Detailed Information for the Electrical Engineer

Five wiring schematics are available for Avenir—two 3-circuit systems and three 4-circuit systems.

All the components in an electrical distribution network must use the same wiring schematic. The components (power poles, base power-ins, powerways, and receptacles) snap together and are keyed to make it impossible to connect mismatched parts. Color-coded and labeled components make it easy for installers to identify which wiring schematic each component is dedicated to.


Color coding

- 3 circuits shared = Black
- 3 circuits separate = White
- 4 circuits 3+D = Black
- 4 circuit 3I+1 = Tan4 circuit 2+2 = Grey

Overview


Three-circuit electrical components with shared neutrals are standard with 5 wires to provide three circuits that share one oversized neutral and one ground. This is the traditional 3-circuit power alternative that is specified by adding the suffix P3 to the panel style number.

3 Circuit Shared Neutral, 5 Wires



Three-circuit with separate neutrals have 8 wires providing three circuits, each with its own separate neutral. The first two circuits share an isolated ground; the third uses the system ground.


3 Circuit Separate Neutral, 8 Wires

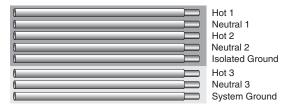

Four-circuit 3+D are standard with 8 wires to provide four circuits. Three of these circuits share an oversized neutral and a system ground while the remaining circuit has its own neutral and isolated ground. This is the traditional 4-circuit power, also known as 3+D, that is specified by adding the suffix P4 to the panel style number.


d d

4 Circuit 3+D, 8 Wires

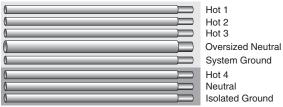


Four-circuit, 3I+1 again have 8 wires but with three circuits that share an oversized neutral and isolated ground. The fourth circuit has its own neutral and is attached to the system ground. This electrical system is like the standard 3+D, but the grounds are switched, providing three isolated circuits and one general purpose circuit as compared to one isolated circuit and three general purpose circuits.

4 Circuit 3I+1, 8 Wires

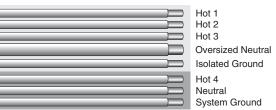

Four-circuit 2+2 also have 8 wires but provide two circuits that share an oversized neutral and a system ground and an additional two circuits with a second oversized neutral and an isolated ground.

4 Circuit 2+2, 8 Wires

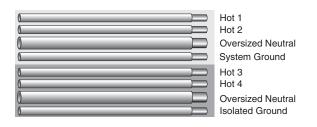

How to Calculate Power Needs

Use This to Determine How Many Power-Ins You'll Need

When planning a power network, you must calculate the amperage requirements of all your electrical components so you can provide sufficient electricity to power them.

If your usage is not known in advance:

The National Electrical Code (NEC) allows a maximum of 13 receptacles on each 20-amp circuit. This provides up to 30 receptacles for each 3-circuit power-in and 40 receptacles for each 4-circuit power-in.

If your usage is known in advance:

Add up the amperage used by each piece of equipment in the workstation. Whenever you reach 60 amps (20 amps times 3 circuits) or 80 amps (20 amps times 4 circuits) from items that are likely to be used at the same time, you have reached the limit for a single power-in. Specify another power-in and continue until all equipment is powered.

If the circuits will normally be subject to a continuous load (three or more hours of continuous use, such as lights or computers), the NEC requires that circuit capacity be "de-rated" by 20 percent. Therefore, treat circuits used for continuous loads as if they were rated at 16 amps instead of the regular 20 amps.

Try to anticipate future increases in power requirements and build some excess capacity into your plan.

See table at right for typical and actual amperage usages for components.

To calculate amperage when the wattage of a device is known, divide watts by 120.

Some appliances, such as large copiers, coffee makers, or space heaters require most of the current available on a 20-amp circuit. It is recommended that such devices be supplied with their own receptacle/circuit, directly from the building. This leaves the capacity of the furniture circuits available for the more dynamic requirements of the office equipment.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper planning of electrical circuits in your locale.

Approximate power consumption for common devices

:	devices				
	• Device : :	• Wattage	• Amperage	• Voltage	Number of Devices Supported on Single 20 Amp Circuit*
:	Laptop	90	0.8	110	20
	CPU/Desktop Computer	120	1.1	110	15
:	Monitor	60	0.5	110	29
	Phone	5	0.0	110	352
	High Power Tablet (e.g. Surface Pro)	40	0.4	110	44
	Low Power Tablet (e.g. iPad Air)	15	0.1	110	117
	Desktop Printer	40	0.4	110	44
	42" LCD Screen	210	1.9	110	8
	DVD Player	25	0.2	110	70
	Projector	175	1.6	110	10
	Desktop Lamp	19	0.2	110	93
	Large Printer/ Copier (high)	1900	17.3	110	1
	Large Printer/ Copier (low)	850	7.7	110	2
:	Paper Shredder	360	3.3	110	5
:	Desktop Fan	20	0.2	110	88
	Standing Fan	180	1.6	110	10
	Coffee Maker (high)	1200	10.9	110	1
	Coffee Maker (low)	600	5.5	110	3
	Microwave (high)	400	13.6	110	1
	Microwave (low)	150	5.5	110	3
	Refrigerator (high)	1500	3.6	110	4
	Refrigerator (low)	200	1.4	110	12
	Vacuum (high)	1500	13.6	110	1
:	Vacuum (low)	200	1.8	110	9
	Space Heater (high)	1500	13.6	110	1
	Space Heater (low)	750	6.8	110	2

Tip: These calculations are estimations and are meant solely for informational purposes. It is important to conduct proper power planning for each installation to prevent overloading a circuit.


Special Requirements for Chicago

Panel Requirements

Chicago code requires hardwiring of all electrical components.

Chicago code

Panels must be hardwired in the field.



Electrician hardwires

all receptacle boxes and conduits into panel bases in the field.

Tip: Panel depth prohibits use of standard device boxes for back-to-back receptacles in Chicago. If back-to-back receptacles are required or if additional circuits are required, contact the Steelcase Solutions Resource Team at 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com for additional information on how to order back-to-back hardware junction boxes.

Specification:

- · Order panels with factoryinstalled power base covers with receptacle knockouts where you intend to install receptacles
 - Tip: Chicago code doesn't require a special base cover with different receptacle locations.
- Receptacles in Chicago are supplied by electrician. Because these receptacles will be duplex size, you must order a filler plate to occupy the remaining space in largersize openings. Reusable filler plates are available from Service Parts.

Tip: Because receptacles in Chicago cannot be installed back to back, you may want to avoid powered panels that are 30"W or less. These panels only have one receptacle location on each side. so these panels can only accommodate one duplexsize receptacle.

· Order corner fillers for L-, T-, and X-configurations separately to conceal electrical conduits.

Electrician will supply:

- · Connection to building power supply
- Wires
- Fittings
- Duplex receptacle (Leviton 5325-Decora style)
- · Electrical components

Lighting Requirements

overload protection.

Cords must include integral · Order Chicago version of shelf lights.


Special Requirements for New York City

Panel Requirements

New York City code requires that all electrical components be field installed.

New York City code

Powerways must be installed in the field.



New York City-version of the base power-in is required. It is comprised of a junction box and a powerway connector. Special power pole is not required.

Specification:

- · Order panels with factoryinstalled power base covers with receptacle knockouts where you intend to install receptacles. If duplex receptacle, or base power-in, is to be installed in oversized receptacle opening, order a filler plate to occupy the remaining space. Reusable filler plates are available from Service Parts.
- · Order powerways for field installation.
- **Order New York City**version of base power-in.
- · Order Steelcase receptacles.

Electrician will supply:

· Connection to building power supply

Worksurface Requirements

Utility modules must be hardwired in the field.

Code does not allow use of cord-and-plug devices in commercial buildings. This includes:

- Power strips
- · Grommet convenience receptacles
- Panel-supported receptacles

- · Order hardwire-version · Face plate of utility module.

 - Wires
 - Fittings
 - Connection to building power

Lighting Requirements

Lights cannot require tools

Light harnesses are prohibited.

- · Order shelf lights, which require no tools to install.
- · Order special hardware package to install Utility2 shelf lights beneath transaction worksurfaces without the use of tools. Available from Customer Service.



Special Requirements for Los Angeles

Including California OSHPD

Los Angeles			
	Los Angeles code	Specification:	Electrician will supply:
Panel Requirements	Code prohibits concealed cords.		
Worksurface Requirements	Utility modules must be hardwired in the field. Code does not allow use of cord-and-plug devices in commercial buildings. This includes: Power strips Grommet convenience receptacles Panel-supported receptacles	Order hardwire-version of utility module.	Face plate Wires Fittings Connection to building power
Lighting Requirements	Lights cannot require tools to install.	Order shelf lights, which require no tools to install.	
	Light harnesses are prohibited.		

California OSHPD


California OSHPD

Panel Requirements

In California, the Office of Statewide Health Planning and Development (OSHPD) requires special power-in connections that will reduce the chance of a hazard if panels are disturbed during an earthquake. The rules are mandated for healthcare facilities only. There are two products that can be used to meet OSHPD requirements.



Breakaway base powerin features a connector that interrupts the power supply if the panel tips.



Anchor bracket attaches to panel glide and secures the panel to the floor at a power entry point-where the power pole or power-in is attached. Anchor bracket prevents panel movement and possible damage to the electrical connection.


Specification:

- **Order breakaway** base power-in for panels connected to power-ins.
- **Order anchor bracket** for panels that are 75"H and are connected to power poles or power-ins.

Understanding Building Wiring

System Characteristics Advantages Disadvantages Comments Fixed Wall and Column Common to most buildings. · Low cost for initial · Must be used with other · Workstation layout depends on location of wall receptainstallation. systems to reach areas away from walls. cles and must be carefully · Power and telecommunica-8 tion run through permanent · Provides power in corridors planned. walls to wall receptacles. and small rooms. Moving wall receptacles is difficult and expensive. · Usually used with other 8 systems such as poke through or flat wiring. **Poke Through** Wiring concealed in ceiling · More flexible than under-· High relocation costs. Not accepted by some local space of floor below and fed floor duct because wires fire codes through holes in floor. can be pulled up at any · Moving junction boxes location. requires cutting a hole · May weaken floor slab. Electrical receptacles and through the floor-a telecommunications outlets process called coring. Flexibility dependent on located in floor-attached building structure. monuments. · Moving junction boxes can · Pedestals can conceal disrupt work on two floors. monuments · Monuments can cause people to trip. **Underfloor Duct** Ducts or continuous chan-· Flexibility limited to specific · Increasing wire and cable · Low life-cycle costs. nels encased in floor slab. access points. requirements may exceed · Easy access for relocation. capabilities of existing system. · Relocation causes little disruption.

Cellular Floor




- Underfloor system with large-capacity, divided distribution cells for electrical and telecommunication wiring.
- Wiring runs perpendicular to the trench header, a special duct that cuts across all the cells and provides access.
- · Inconspicuous.
- Electrical and telecommunications systems run together to the workstation.
- Protects voice and data systems from interference and damage.
- System can add to required length of wire or cable because of trench headercell configuration.
- Carpet tiles ease access to trench.

198 Avenir Specification Guide

Steelcase April 2019

System Characteristics Advantages Disadvantages Comments **Access Flooring** · Developed for mainframe · Ease of access and · May be noisy when · Smoke alarms and fire protection sprinklers may walked on. computer rooms. rearrangement of wiring be required. systems. Modular floor panels raised · Requires stairs and ramps above the slab on 6" to 36" on building floor when · Use only carpet tiles or high supports, and conduit added to existing facility. area rugs. and cables run beneath these

Flat Wiring



 Access from wall or column.
 Power and signal cables run to workstation via flat wire and cable sandwiched between slab and carpet.


Access through monument

floor panels.

fixtures.

- Outlets in transition boxes on top of carpet.
- · Easy relocation.
- · Flexible.
- Meets most capacity requirements.
- Elements sold as one package.
- Heavy wheel traffic can cause signal interruption in data transmission wiring.
- Should not be used in areas susceptible to extreme dampness or water spillage.
- Slab-on-grade installations, where concrete is poured directly on the ground, require careful preparation per manufacturer's instructions to ensure that moisture doesn't damage the system.

In-Ceiling Wiring



- Conduit and cables run in space above suspended ceiling and are distributed to panels by power and cable poles.
- Low initial cost.
- · Very easy to move.
- Little disruption during move.
- Space usually accommodates large capacities.
- Power and cable poles used to route cables can detract from open-plan aesthetics.
- Cost for installation increases when ceiling space is used as return air plenum to meet fire-protection codes.
- Ceiling-suspended cable trays should be considered for communications wiring.

Cable Capacities

Test and verify capacities for your individual situation. We recommend that testing be conducted using your specific cable as well as the furniture configuration you are considering. Cable capacities in this table are based on non-plenum-rated cables installed by a cable contractor under ideal conditions. Figures are approximations. Actual capacities may vary slightly depending on which manufacturer produced the cable and the specific field conditions.


	Cat	6 Te	st C	abl	es
--	-----	------	------	-----	----


- Systimax Solutions 1071 OD=0.215"
- B Systimax Solutions 1081 OD=0.250"
- **9** Systimax Solutions **2071 Plenum** OD=0.195"
- Systimax Solutions 2081 Plenum OD=0.240"
- Belden/Nordx Media Twist 1872A OD=0.365" x 0.165"
- Belden/Nordx Media Twist 1874A Plenum OD=0.365" x 0.165"
- Berk-Tek Lan-Mark 1000 OD=0.230"
- Berk-Tek Lan-Mark 1000 Plenum
- CommScope UltraMedia OD=0.240"
- General Cable Command LINX 6 OD=0.250"
- Mohawk GigaLAN
 OD=0.240"
- Nordx 4812LX OD=0.245"
- Mordx 4813X Plenum OD=0.230"

Cat 5 Test Cables

Berk-Tek
24 AWG CMR
4-Pair UTP*
OD=0.190"

	A	₿	0	O	3	3	G	•	0	0	K	•	•	0
Straight														
Cable routing at top of panel	43 Hi 24 Med	38 Hi 16 Med	43 Hi 22 Med	38 Hi 19 Med	42 Hi 19 Med	45 Hi 20 Med	44 Hi 23 Med	38 Hi 19 Med	38 Hi 17 Med	37 Hi 19 Med	35 Hi 17 Med	40 Hi 21 Med	44 Hi 22 Med	56 Hi 30 Med
Cable routing at base of panel with powerway	13	11	14	12	11	12	13	12	10	10	13	10	12	25
Cable routing at base of panel without powerway¹	50	45	50	47	50	51	43	48	43	40	42	41	45	53
Change-of-height cable routing at top of panel	33 Hi 18 Med	22 Hi 13 Med	30 Hi 17 Med	27 Hi 13 Med	25 Hi 17 Med	24 Hi 16 Med	23 Hi 15 Med	21 Hi 16 Med	23 Hi 14 Med	28 Hi 14 Med	23 Hi 13 Med	26 Hi 15 Med	30 Hi 17 Med	40 Hi 24 Med
Vertical cable routing inside cablemanagement panel	13	11	13	12	13	13	12	9	9	10	12	8	9	30
L, T, and X Cable routing at top	19 ^{∟,⊤}	18 ^{∟,⊤}	17 ^{∟, ⊤}	16 ^{L, T}	15 ^{∟,⊤}	15 ^{∟,⊤}	13 ^{L, T}	12 ^{L, T}	17 ^{∟,⊤}	17 ^{∟,⊤}	13 ^{L, T}	15 ^{∟, ⊤}	19 ^{∟, ⊤}	30 ^{L, T}
of panel	19 Hi 44 ^X	18 Hi 35 ^x	17 Hi 44 ^X	39 ^x	43 ^x	Hi 46 ^x	36 ^x	12 Hi 38 ^x	17 Hi 38 ^x	17 Hi 38 ^x	13 Hi 33 ^x	Hi 43 ^x	19 Hi 46 ^x	30 Hi
	Hi 14 ^{∟,⊤}	Hi 11 ^{L,⊤}	Hi 12 ^{L, ⊺}	Hi 11 ^{∟,⊤}	Hi 10 ^{∟, ⊤}	Hi 12 ^{∟,⊤}	Hi 12 ^{L,⊺}	Hi 12 ^{∟,⊤}	Hi 12 ^{∟,⊤}	Ні 12 ^{L, Т}	Hi 11 ^{∟,⊺}	Hi	Hi 12 ^{∟,⊤}	Ні 16 ^{L, Т}
	Med 25 ^x Med	Med 18 ^X Med	Med 26 ^x Med	Med 18 ^x Med	Med 21 ^x	Med 21 ^x Med	Med 20 ^x Med	Med 20 ^X	Med 19 ^X Med	Med 19 ^X Med	Med 18 ^X	Med 20 ^x Med	Med 23 ^X Med	Med 16 ^x Med
Cable routing at base of panel with powerway	13 ^L 13 ^T 26 ^X	11 ^L 11 ^T 22 ^X	10 ^L 14 ^T 28 ^X	10 ^L 12 ^T 24 ^X	11 ^T	11 ^L 11 ^T 22 ^X	12 ^L 12 ^T 25 ^X	12 ^L 12 ^T 24 ^X	10 ^L 10 ^T 20 ^X	12 ^L 13 ^T 22 ^X	10 ^L 12 ^T 24 ^X	11 ^L 11 ^T 22 ^X	12 ^L 12 ^T 24 ^X	13 ^L 13 ^T 13 ^X
Cable routing at base of panel without powerway	40 ^L 50 ^T 60 ^X	34 ^L 45 ^T 54 ^X	38 ^L 50 ^T 60 ^X	35 ^L 47 ^T 57 ^X	48 ^L 50 ^T 60 ^X	48 ^L 50 ^T 60 ^X	35 ^L 47 ^T 60 ^X	34 ^L 48 ^T 58 ^X	34 ^L 43 ^T 52 ^X	31 ^L 45 ^T 54 ^X	35 ^L 47 ^T 57 ^X	34 ^L 45 ^T 54 ^X	35 ^L 48 ^T 60 ^X	40 ^L 40 ^T 40 ^X

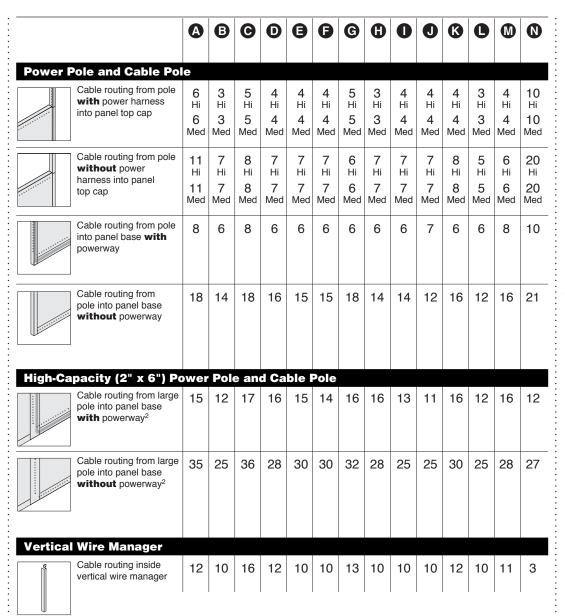

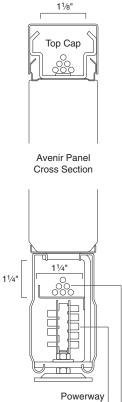

Wire separator shown in the above drawing must be specified.

space Cable-routing

Notes:

OD = Outside diameter
Hi = Capacities with high
top cap.
Med = Capacities with
medium top cap.
1 = Capacities include
powerway space and
cable-routing space.
2 = Capacities can be
doubled if routed in two
directions. Capacity figures
are based on routing in
one direction.

venir

Specifying Avenir

Specifying Tips

204

Specifying Tips

General Tips


Standard Includes

- Worksurface: laminate
 End panels, back panel, and pede
- Drawer pulls: paint
 Center drawer, if selected: paint
- Lock, if selected, keyed randomly: 9201 Polished Chrome
- 9201 Polished Chrome
 One convenience tray in desks witho
 drawer: 6000 Black plastic only
 One reference shelf per desk: 6000 E
 One partition per drawer: black paint
 One compressor per file drawer: black


Review the features that are standard for each product before you begin to specify. You only need to include specifications for options, surface materials, and colors when you want a substitute for the standard.

To ensure that you do not overlook anything, approach the specifying process in a consistent order every time. Here are three common methods:

Specify products according to their order on the specifying pages.



Specify all workstations using a formulated pattern, such as starting at the entrance to a workstation and moving clockwise.



Specify each type of workstation in your installation and then determine how many of each type are needed.

Panels

Specify style numbers and surface materials for all panels.

Tip: For most fabrics, fabric application is standard in the warp horizontal direction.


► See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.


Keep track of panels that require power and list panels with power separately because they'll have a different style number.

Specify panel connector packages, fillers, and change-of-height panel connectors when an application requires them.

Worksurfaces

Specify style numbers and surface materials for all worksurface packages. Some supports can be ordered by changing the worksurface style number suffix. Other supports must be ordered separately with their own style number. Also specify options such as grommets, worksurface wiring and cabling accessories, and any specific keying information.

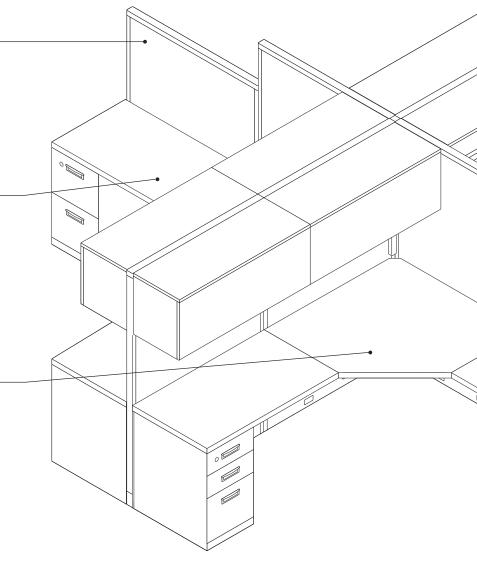

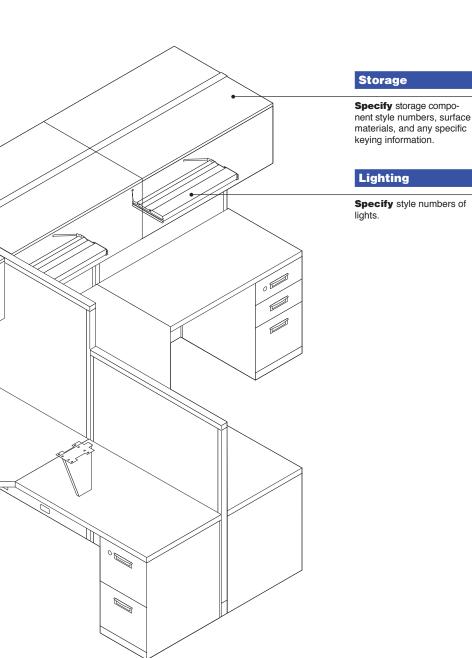

If you specified with power as you ordered your panels, the only things left to specify are power-ins, power and cable poles (if desired), and receptacles.

Wiring & Cabling

Example of Order

Here's what the specification would be like for the installation shown at the left.

Qty. Style No. Description	Qty.	Style No.	Description
----------------------------	------	-----------	-------------

Panels

2

2 MPNTM6530 $64^{11}/_{16}$ "H x $30^{5}/_{16}$ "W non-tackable

panels

sides 1 & 2: fabric, 5610 frame: paint, 4700

MPNTM5330 523/8"H X 305/16"W non-tackable

panels

sides 1 & 2: fabric, 5610 frame: paint, 4700

MPTAM6530P4 64¹¹/₁₆"H X 30⁵/₁₆"W tackable

acoustical panel with factoryinstalled powerways side 1: fabric, 5610 side 2: fabric, 5610 frame: paint, 4700

2 PC6553 Change-of-height panel connector

trim: paint, 4700

Worksurfaces

B PWRC3024 30"W x 24"D straight worksurfaces:

laminate, 2759

4 PCWRC3624 36"W x 24"D corner curvilinear

worksurfaces: laminate, 2759

8 PCSB18S shared cantilevers: paint, 4700

Storage

4 MU2824FF file/file pedestals: paint, 4700

MU2824BBF box/box/file pedestals: paint, 4700

8 MBB3016 overhead storage bins:

paint, 4700

Lighting

8 LSM24KD 25"W standard shelf lights with

daisy chain cords, black

: 4 LS1FSC daisy chain starter cords

Wiring and Cabling

1 ctn 986831DA15S line 1 duplex receptacles: 6000

1 ctn 986832DA15S line 2 duplex receptacles: 6000

1 ctn 986833DA15S line 3 duplex receptacles: 6000

1 98669 base power-in

4 VWM18 vertical wire managers:

plastic, 6655

1 ctn 98767 cord reels

Panels

Specifying Panels

Pane	els	
	Cable-Management Panel Options for Tackable Acoustical Panels	208
	Tackable Acoustical Panels	212
	Transparent Panels	216
	Half-Glass, Half-Fabric Transparent Panels	218
	Tackable Fabric-Covered Panel Stackers	220
	Glass Panel Stackers	222
	Panel Door with Frame	224
	Tackable Acoustical Fabric-Covered Replacement Skins	225
Pane	el Connectors	226
Fille	r Packages	230
Pane	el Brackets	234
Pane	el Accessories	235
Pane	el Wiring and Cabling	237


Cable-Management Panel Options for Tackable Acoustical Panels

Product Details

With Powerway in Base

Cable-Management Panel Option Choices

Choice 1: Vertical cable routing only

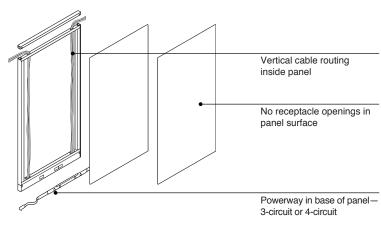

Use

 Use this choice in applications where you want to route cables vertically inside the panel and where you want to extend a power distribution network through a run of panels, but do not need receptacle openings at worksurface height.

How to Specify


- 1 Specify a tackable acoustical panel *with* factory-installed powerway (suffix P3 or P4).
- 2 Next, select options and then choose surface options.
- 3 Next, select cablemanagement surfaces.

4 Next, select plain cable-management surfaces.

Tip: Plain surfaces on cable-management panels have no receptacle openings, but the surface is notched at the bottom to avoid blocking the cable routing channels.

Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.

Not for use in NYC See page 196

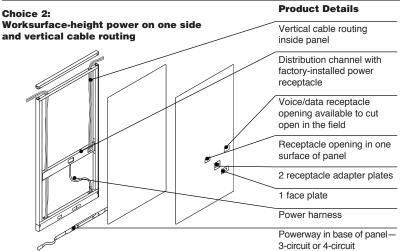

Use

 Use this choice in applications where you want desk-height power on one side of the panel.

How to Specify

- 1 Specify a tackable acoustical panel with factory-installed powerway (suffix P3 or P4).
- 2 Next, select options and then choose surface options.
- 3 Next, select cablemanagement surfaces.
- 4 Next, select surface 1.

- 5 Next, select power cable-management surface-1.
- 6 Next, select line options.
 7 Next, select line 1, 2, 3,
 or 4.
- 8 Next, select plain cable-management surface-2.

Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.

Not for use in NYC ▶See page 196

Cable-Management Panel Option Choices Choice 3: **Product Details** Worksurface-height power on two sides Vertical cable routing and vertical cable routing inside panel Distribution channel with factory-installed power receptacles Voice/data receptacle openings available to cut open in the field Receptacle openings in both surfaces of panel 4 receptacle adapter plates 2 face plates Power harness Powerway in base of panel-3-circuit or 4-circuit

Use

Use this choice in applications where you want desk-height power on both sides of the panel.

How to Specify

- 1 Specify a tackable acoustical panel with factory-installed powerway (suffix P3 or P4).
- 2 Next, select options and then choose surface options.
- 3 Next, select cablemanagement surfaces.
- 4 Next, select surface 1.
- 5 Next, select power cable-management surface-1.
- 6 Next, select line options.
- 7 Next, select line 1, 2, 3, or 4. 8 Next, select surface 2.

- 9 Next, select power cable-management surface-2.
- 10 Next, select line options.
- 11 Next, select line 1, 2, 3, or 4.

Tip: When choosing Line options 1, 2, 3, or 4 for cable management surface, line option must be the same for both sides of the nanel.


Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.

Not for use in NYC

►See page 196

Choice 4: Vertical cable routing only



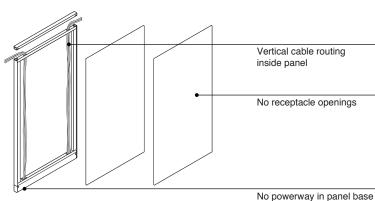

Use

· Use this choice in applications where you need to route cables vertically inside a panel, but power distribution and receptacles are not needed.

How to Specify

- 1 Specify a tackable acoustical panel without factory-installed powerway.
- 2 Next, select options and then choose surface options.
- 3 Next, select cablemanagement surfaces.
- 4 Next, select plain cable-management surfaces on both sides of the panel.

Tip: Plain surfaces on cable-management panels have no receptacle openings, but the surface is notched at the bottom to avoid blocking the cable routing channels.

Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.

Without Powerway in Base, continued

Cable-Management Panel Option Choices Choice 5: **Product Details** Worksurface-height power on one side Vertical cable routing inside and vertical cable routing panel Distribution channel with no power receptacles Voice/data receptacle opening available to cut open in the field Receptacle opening in one surface of panel 2 receptacle adapter plates 1 face plate No powerway in panel base

Use

Use this choice in locations such as Chicago, where the electrical code requires that power in the base of the panel and the harness bringing energy to worksurfaceheight must be hardwired in the field.

How to Specify

- Specify a tackable acoustical panel without factory-installed powerway (suffix P3 or P4)
- 2 Next, select options and then choose surface options.
- 3 Next, select cablemanagement surfaces.
- 4 Next, select surface 1. 5 Next, select **power**
- cable-management surface-1.
- 6 Next, select surface 2.

7 Next, select plain cable-management surface-2.

Tip: Plain surfaces on cable-management panels have no receptacle openings, but the surface is notched at the bottom to avoid blocking the cable routing channels.

Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.

Not for use in NYC ►See page 196

Choice 6: **Product Details** Worksurface-height power on two sides Vertical cable routing inside and vertical cable routing panel Distribution channel with no power receptacles Voice/data receptacle opening available to cut open in the field Receptacle openings in both surfaces 4 receptacle adapter plates 2 face plates No powerway in panel base

Use

Use this choice in locations such as Chicago, where the electrical code requires that power in the base of the panel and the harness bringing energy to worksurfaceheight must be hardwired in the field.

How to Specify

- Specify a tackable acoustical panel without factory-installed powerway (suffix P3 or P4)
- 2 Next, select options and then choose surface options.
- 3 Next, select cablemanagement surfaces. 4 Next, select surface 1.

- 5 Next, select power cable-management surface-1.
- 6 Next, select surface 2.
- 7 Next, select **power** cable-management surface-2.

Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.

Not for use in NYC ►See page 196

cable-management pan-

openings, but the surface

avoid blocking the cable

is notched at the bottom to

els have no receptacle

8 Next, select line 1, 2, 3,

or 4.

routing channels. Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.

Options for New York City with No Powerway in Base

Cable-Management Panel Option Choices Choice 7:

Worksurface-height power on one side and vertical cable routing

Product Details

Vertical cable routing inside panel

Distribution channel with no power receptacles

Voice/data receptacle opening available to cut open in the field

Receptacle opening in one surface of panel

2 receptacle adapter plates

1 face plate

Power harness

No powerway in panel base

Use

Use this choice in New York City, where the electrical code requires that power in the base of the panel must be installed in the field.

- 1 Specify a tackable acoustical panel without factory-installed powerway.
- then choose surface options.
- management surfaces.
- power cablemanagement surface-1.
- line options.
- schematic.

- 9 Next, select surface 2.

How to Specify

- 2 Next, select options and
- 3 Next, select cable-
- 4 Next. select surface 1. 5 Next select New York
- 6 Next, select wiring and
- 7 Next, select a wiring
- Use this choice in New York City, where the electrical code requires that power in the base of the panel must be installed in the field.

How to Specify

- 1 Specify a tackable acoustical panel without factory-installed powerway.
- 2 Next, select options and then choose surface options.
- 3 Next, select cablemanagement surfaces.
- 4 Next, select surface 1.
- 5 Next, select New York power cablemanagement surface-1.
- 6 Next, select wiring and line options.
- 7 Next, select a wiring schematic.

- 8 Next, select line 1, 2, 3, or 4.
- 9 Next. select surface 2.
- 10 Next, select New York power cablemanagement surface-2.
- 11 Next, select wiring and line options.
- 12 Next, select a wiring schematic.
- 13 Next, select line 1, 2, 3, or 4.

Tip: When choosing Line options 1, 2, 3, or 4 for cable management surface, line option must be the same for both sides of the panel.

Tip: Remember to order cable knockouts for medium top caps to accommodate cable routing.


Choice 8: **Product Details** Worksurface-height power on two sides Vertical cable routing inside and vertical cable routing panel Distribution channel with no power receptacles Voice/data receptacle opening available to cut open in the field Receptacle openings in both surfaces 4 receptacle adapter plates 2 face plates Power harness No powerway in panel base

Tackable Acoustical Panels

► Need help?

page 12

Product details,



Tip: To price a panel with two surface materials in different price groups, add the two fabric price group option prices together and divide by 2; then add the result to the panel base price.

Tip: If you want the panel fabric to match the fabric on panel end trim, change-of-height panel connectors, power poles, cable poles, or fillers, check to see that the fabric you want is available on that product before you specify the panel fabric. Some fabrics are not available because they are not suitable for wrapping thin pieces.

*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification
Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions.
Warp vertical is available as an option.

Tip: Replacement panel surfaces are available as standard product. The top cap, end trim, and base cover can remain in place during the replacement process. Special tools are not required. Adjacent panels are not disrupted.

Tip: 80½"H fabric-covered end trims are available in the warp vertical application only.

Standard Includes

Fabric direction with horizontal application*: fabric price group 1

- 80½"H panel, fabric direction with vertical application: fabric price group 1
- Top cap, end trim, and base covers with receptacle knockouts: all paint price groups
- · Top cap height: medium
- · Universal connector package

Required to Specify

- 1 Style number
- 2 Fabric color number for surface 1
- 3 Fabric color number for surface 2
- 4 Paint color number for top cap, end trim, and base covers
- 5 Options, if selected (see below)
- See Surface Materials, page 354.

	- Package		
	Options	U.S. Price	Required to Specify
Surface	Panel surface		
Materials	 Fabric price group 1 	No cost	Specify fabric color number.
	 Fabric price group 2 	+\$ 38	Specify fabric color number.
	Fabric price group 3	+\$100	Specify fabric color number.
	Fabric price group 4	+\$162	Specify fabric color number.
	Fabric price group 5	+\$252	Specify fabric color number.
	Fabric price group COM	+\$ 32	See Surface Materials Reference Manual
	p g		to specify.
	Fabric direction on panel		
	 Vertical application 	No cost	Specify with vertical application.
	Top cap, end trim, and base		Openitor illustration and advantage
	 Wood group 1 on low or medium top cap only 	+\$160	Specify with wood top cap and select wood color number.
	 Customiz stain on wood top cap 	No cost	See Surface Materials Reference Manual.
	Fabric-covered end trim	+\$ 75 per side	Specify with fabric-covered end trim left-
		, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	hand, right-hand, or both and select fabric color number.
	Fabric direction on end trim	1	
	 Horizontal application 	No cost	Specify with horizontal application.
	(standard)Vertical application	No cost	Specify with vertical application.
Тор Сар	Height		
Page 24	Low (reduces panel height	No cost	Replace second M in style number with L .
Page 24	by ³ / ₄ ")		
	Knockouts		
	Cable knockout on medium top cap	No cost	Specify top cap with knockout.
Electrical	Factory-installed powerway	1	
Pages 40-48	 3-circuit powerway with shared neutral 	+\$238	Add suffix P3 to panel style number.
	 3-circuit powerway with 	+\$286	Add suffix P3 to panel style number and
	separate neutral		specify with separate neutral.
	 4-circuit (3+D) powerway 	+\$280	Add suffix P4 to panel style number.
	 4-circuit (3I+1) powerway 	+\$335	Add suffix P4 to panel style number and
			specify with 3I+1 wiring.
	 4-circuit (2+2) powerway 	+\$335	Add suffix P4 to panel style number and
			specify with 2+2 wiring.
	Field-installed powerway		
	For use in New York City	No cost	Must specify powerway for field installation only, page 243, and specify non-powered panel with power base covers.
	Factory-installed wire sepa	rator	
		+\$ 30	Specify with wire separator.

▶Options, continued on next page

*

For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

See page 1 for details.

▶Options, continued from previous page

Tip: Cable-management option is not available on 18⁵/₁₆"W panels.

Tip: Remember to order cable knockouts for medium top caps (see previous page) to accommodate cable routing.

Tip: 33"H panels are not available with cable management options.

	Options	U.S. Price	Required to Specify
Cable- Management Panel with Powerway Page 208	Choice 1: Vertical cable routing only	+\$ 10	 ① Specify a panel with factory-installed powerway in the base (see previous page). ② Specify plain cable-management surfaces on both sides of the panel.
, and the second	Choice 2: Worksurface- height power on one side and vertical cable routing	+\$149	① Specify a panel with factory-installed powerway in the base (see previous page). ② Specify power cable-management surfaces on one side of the panel. ③ Specify line 1, 2, 3, or 4.
	Choice 3: Worksurface- height power on two sides and vertical cable routing	+\$288	 Specify a panel with factory-installed powerway in the base (see previous page). Specify cable-management surfaces on both sides of the panel. Specify line 1, 2, 3, or 4 (must be the same for both sides).
Cable- Management Panel without Powerway Page 209	Choice 4: Vertical cable routing only	+\$ 10	① Specify a panel without factory- installed powerway. ② Specify <i>plain</i> <i>cable-management surfaces on both</i> <i>sides of the panel.</i>
r ago zoo	Choice 5: Worksurface- height power access on one side and vertical cable routing	+\$109	① Specify a panel without factory-installed powerway. ② Specify power cable-management surface on one side and plain cable-management surface on the other side of the panel.
	Choice 6: Worksurface- height power access on two sides and vertical cable routing	+\$208	① Specify a panel without factory-installed powerway. ② Specify power cable-management surface on both sides of the panel.
New York City Cable- Management Panel Page 211	Choice 7: Worksurface- height power access on one side and vertical cable routing	+\$142	 Specify a panel without factory-installed powerway. Specify New York power cablemanagement surface on one side and plain cable-management surface on the other side of the panel. Designate wiring option. Specify line 1, 2, 3, or 4.
	Choice 8: Worksurface- height power access on two sides and vertical cable routing	+\$274	 ① Specify a panel without factory-installed powerway. ② Specify New York power cablemanagement surface on both sides of the panel. ③ Designate wiring option. ④ Specify line 1, 2, 3, or 4 (must be the same for both sides).

Related Products

Panel connectors ▶ Page 226

Panel brackets


▶ Page 234

Panel accessories

▶ Page 235

Panel wiring and cabling

▶ Page 237





For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ► See page 1 for details.

·Width	• Style Number	·U.S. Base Price
	33"H	
185/16"	MPTAM3318	\$ 781
245/16"	MPTAM3324	\$ 792
305/16"	МРТАМ3330	\$ 848
365/16"	мртам3336	\$ 903
425/16"	MPTAM3342	\$ 989
485/16"	МРТАМ3348	\$1077
60%16"	МРТАМ3360	\$1348

Number	Base Price
41½"H	-
MPTAM4118	\$ 781
MPTAM4124	\$ 792
MPTAM4130	\$ 848
MPTAM4136	\$ 903
MPTAM4142	\$ 989
MPTAM4148	\$1077
MPTAM4160	\$1348

.11 6

. Style

Number	Base Price
523/8"H	
MPTAM5318	\$ 878
MPTAM5324	\$ 882
MPTAM5330	\$ 943
MPTAM5336	\$ 993
MPTAM5342	\$1086
MPTAM5348	\$1175
MPTAM5360	\$1456


·U.S.

Style

▶ Specification Information, continued on next page

▶ Specification information, continued from previous page

Width	• Style Number	· U.S. Base Price	· Style Number	·U.S. Base Price
·	64 ¹¹ /16"H	<u> </u>	80 ¹ / ₂ "H	•
185/16"	MPTAM6518	\$ 991	MPTAM8018	\$1375
245/16"	MPTAM6524	\$ 999	MPTAM8024	\$1385
305/16"	MPTAM6530	\$1074	MPTAM8030	\$1470
365/16"	MPTAM6536	\$1132	MPTAM8036	\$1570
425/16"	MPTAM6542	\$1236	MPTAM8042	\$1723
485/16"	MPTAM6548	\$1339	MPTAM8048	\$1862
60%16"	MPTAM6560	\$1663		





anels

Transparent Panels



Tip: If you want the panel fabric to match the fabric on change-of-height panel connectors, power poles, cable poles, or fillers, check to see that the fabric you want is available on that product before you specify the panel fabric. Some fabrics are not available because they are not suitable for wrapping thin

*Tip: For most fabrics, fabric application is standard in the warp horizontal direction. See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available

Tip: 801/2"H fabric-covered end trims are available in the warp vertical application only.

as an option.

Standard Includes

- · Panel insert: 6500 Clear tempered glass
- Top cap, frame surface, end trim, and base covers with receptacle knockouts: all paint price groups
- Top cap height: medium
- · Universal connector package

Required to Specify

- 1 Style number
- 2 Paint color number for top cap, frame surface, end trim, and base covers
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

Options U.S. Price Required to Specify

Surface **Materials**

► Need help?

page 16

Product details,

Top cap, frame surface, end trim, and base covers

- · Wood group 1 on low or medium top cap only
- Customiz stain on wood
- top cap Fabric-covered end trim
- No cost
- +\$160
- +\$ 75 per side
- Specify with wood top cap and select wood color number.
- See Surface Materials Reference Manual.

Specify with fabric-covered end trim lefthand, right-hand, or both and select fabric color number.

Fabric direction for end trim on 6411/16"H and shorter panels*

- · Horizontal application No cost (standard)
- · Vertical application No cost
- Specify with horizontal application.
- Specify with vertical application.

Top Cap

Page 24

- Height · Low (reduces panel height by 3/4")
 - No cost
- - Replace second M in style number

Knockouts

- Cable knockout on medium
- No cost
- Specify top cap with knockout.

Electrical

▶ Pages 40-48

- **Factory-installed powerway**
- 3-circuit powerway with +\$238 shared neutral
- 3-circuit powerway with +\$286 separate neutral
- · 4-circuit (3+D) powerway +\$280 · 4-circuit (3I+1) powerway +\$335
- · 4-circuit (2+2) powerway +\$335
- Add suffix P3 to panel style number.
- Add suffix P3 to panel style number and specify with separate neutral.
- Add suffix **P4** to panel style number. Add suffix P4 to panel style number and specify with 3I+1 wiring.
- Add suffix P4 to panel style number and specify with 2+2 wiring.

Field-installed powerway

- · For use in New York City No cost
- ► Must specify powerway for field installation only, page 243, and specify non-powered panel with power base covers.

Factory-installed power base covers

- · For use in Chicago
- No cost
- Specify with Chicago power base covers. (For 30"W panels only.)

Factory-installed wire separator

Specify with wire separator.

Related **Products**

- · Panel connectors
- Panel brackets
- · Panel accessories · Panel wiring and cabling

- ▶ Page 226
- ▶ Page 234
- ▶ Page 235 ▶ Page 237

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.






·Width	• Style Number	· U.S. Base Price	• Style Number	·U.S. Base Price
-	64 ¹¹ /16"H	·	80½"H	•
245/16"	MPSGM6524	\$1444	MPSGM8024	\$1707
305/16"	MPSGM6530	\$1578	MPSGM8030	\$1852
365/16"	MPSGM6536	\$1705	MPSGM8036	\$1996
425/16"	MPSGM6542	\$1835	MPSGM8042	\$2139
485/16"	MPSGM6548	\$1966	MPSGM8048	\$2283



Half-Glass, Half-Fabric Transparent Panels



Tip: If you want the panel fabric to match the fabric on change-of-height panel connectors, power poles, cable poles, or fillers, check to see that the fabric you want is available on that product before you specify the panel fabric. Some fabrics are not available because they are not suitable for wrapping thin pieces.

*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.
▶ See Specification
Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions.
Warp vertical is available as an option.

Tip: 80"H fabric-covered end trims are available in the warp vertical application only. If they are specified, be sure to select vertical application on the panel surfaces.

Standard Includes

Required to Specify

- ► Need help? Product details, page 18
- Panel with two surfaces, fabric direction with horizontal application*: fabric price group 1
- · Panel insert: 6500 Clear tempered glass
- Top cap, frame surface, end trim, and base covers with receptacle knockouts: all paint price groups
- · Top cap height: medium
- · Universal connector package

- 1 Style number
- 2 Paint color number for top cap, frame surface, end trim, and base covers
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify				
Surface	Panel surface						
Materials	 Fabric price group 1 	No cost	Specify fabric color number.				
	 Fabric price group 2 	+\$ 38	Specify fabric color number.				
	 Fabric price group 3 	+\$100	Specify fabric color number.				
	 Fabric price group 4 	+\$162	Specify fabric color number.				
	 Fabric price group 5 	+\$252	Specify fabric color number.				
	 Fabric price group COM 	+\$ 32	See Surface Materials Reference Manual				
	Fabric direction on panel	s					
	Vertical application No cost Specify with vertical application.						
	Top cap, frame surface, o	end trim, and base o	overs				
	 Wood group 1 on low or 	+\$160	Specify with wood top cap and select				
	medium top cap only		wood color number.				
	 Customiz stain on wood top cap 	No cost	► See Surface Materials Reference Manual				
	Fabric-covered end trim	+\$ 75 per side	Specify with fabric-covered end trim left- hand, right-hand, or both and select fabric color number.				
	Fabric direction for end trim on 64 ¹¹ / ₁₆ "H and shorter panels*						
	 Horizontal application (standard) 	No cost	Specify with horizontal application.				
	 Vertical application 	No cost	Specify with vertical application.				
Тор Сар	Height						
► Page 24	 Low (reduces panel height by ³/₄") 	No cost	Replace second ${\bf M}$ in style number with ${\bf L}$.				
	Knockouts						
	 Cable knockout on medium top cap 	No cost	Specify top cap with knockout.				

▶ Options, continued on next page



▶Options, continued from previous page

	Options	U.S. Price	Required to Specify			
Electrical	Factory-installed powerw	<i>r</i> ay				
Pages 40-48	 3-circuit powerway with shared neutral 	+\$238	Add suffix P3 to panel style number.			
	 3-circuit powerway with separate neutral 	+\$286	Add suffix P3 to panel style number and specify with separate neutral.			
	 4-circuit (3+D) powerway 	+\$280	Add suffix P4 to panel style number.			
	• 4-circuit (3I+1) powerway	+\$335	Add suffix P4 to panel style number and specify with 3I+1 wiring.			
	 4-circuit (2+2) powerway 	+\$335	Add suffix P4 to panel style number and specify with 2+2 wiring.			
	Field-installed powerway					
	For use in New York City	No cost	Must specify powerway for field installation only, page 243, and specify non-powered panel with power base covers.			
	Factory-installed power base covers					
	For use in Chicago	No cost	Specify with Chicago power base covers (For 30"W panels only.)			
	Factory-installed wire se	parator				
		+\$ 30	Specify with wire separator.			
Related	Panel connectors		▶ Page 226			
Products	 Panel brackets 		▶ Page 234			
	 Panel accessories 		▶ Page 235			
	 Panel wiring and cabling 		▶ Page 237			

Width	• Style Number	·U.S. Base Price
<u>. </u>	64 ¹¹ / ₁₆ " H	
24 ⁵ / ₁₆ "	MPHGM6524	\$1807
305/16"	MPHGM6530	\$1940
365/16"	MPHGM6536	\$2065
425/16"	MPHGM6542	\$2283
485/16"	MPHGM6548	\$2405

Style Number	· U.S. Base Price	
80½"H	•	
MPHGM8024	\$2058	
MPHGM8030	\$2187	
MPHGM8036	\$2349	
MPHGM8042	\$2471	
MPHGM8048	\$2610	





► See page 1 for details.

Tackable Fabric-Covered Panel Stackers

► Need help? Product details,

page 20



*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

► See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Standard Includes

Required to Specify

- · Tackable stacker with two of the same fabric surfaces, fabric direction with horizontal application*: fabric price group 1
 - Trim: all paint price groups
 - Two stacking attachment brackets

- 1 Style number
- 2 Fabric color number for panel surface
- 3 Paint color number for trim
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Panel surface		
Materials	 Fabric price group 1 	No cost	Specify fabric color number.
	 Fabric price group 2 	+\$ 41	Specify fabric color number.
	 Fabric price group 3 	+\$101	Specify fabric color number.
	 Fabric price group 4 	+\$163	Specify fabric color number.
	 Fabric price group 5 	+\$253	Specify fabric color number.
	Fabric price group COM	+\$ 38	See Surface Materials Reference Manual to specify.
	Fabric direction • Vertical application	No cost	Specify with vertical application.
Related Products	Tackable acoustical panels		▶Page 212

Specification Information				
·Width	·Style	·U.S.		
	Number	Base		
-		Price		

11"H Stackers (For Stacking 41"H Base Panel to 53"H Base Panel)

18"	MPTAS1118	\$720
24"	MPTAS1124	\$740
30"	MPTAS1130	\$745
36"	MPTAS1136	\$762
42"	MPTAS1142	\$771
48"	MPTAS1148	\$783
60"	MPTAS1160	\$798
:	:	

12"H Stackers (For Stacking 53"H Base Panel to 65"H Base Panel)

18"	MPTAS1218	\$721
24"	MPTAS1224	\$741
30"	MPTAS1230	\$750
36"	MPTAS1236	\$764
42"	MPTAS1242	\$773
48"	MPTAS1248	\$786
60"	MPTAS1260	\$804
	•	•

▶ Specification Information, continued on next page



Panels

▶ Specification Information, continued from previous page

Specification Information			
·Width	· Style	·U.S.	
:	Number	Base	
:	:	Price	



15"H Stackers (For Stacking 65"H Base Panel to 80"H Base Panel)

		g
18"	MPTAS1518	\$730
24"	MPTAS1524	\$754
30"	MPTAS1530	\$757
36"	MPTAS1536	\$773
42"	MPTAS1542	\$783
48"	MPTAS1548	\$796
60"	MPTAS1560	\$813
:		

24"H Stackers (For Stacking 41"H Base Panel to 65"H Base Panel)

18"	MPTAS2418	\$773
24"	MPTAS2424	\$796
30"	MPTAS2430	\$798
36"	MPTAS2436	\$840
42"	MPTAS2442	\$850
48"	MPTAS2448	\$852
60"	MPTAS2460	\$875
:	:	

Glass Panel Stackers



Standard Includes Required to Specify Need help? • Glass insert: 6500 Clear tempered glass 1 Style number Product details, page 20 • Trim: paint price group 1 2 Paint color number for trim • Two stacking attachment brackets 3 Options, if selected (see below) • See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Glass • Frosted Glass	+\$131	Specify 6530 Frosted Glass.
Related Products			▶ Page 212

Width	• Style Number	· U.S. Base Price
11"H S	tackers (For St	acking 41"H Base Panel to 53"H Base Panel)
18"	MPSGS1118	\$783
24"	MPSGS1124	\$801
30"	MPSGS1130	\$823
36"	MPSGS1136	\$837
42"	MPSGS1142	\$865
48"	MPSGS1148	\$870
60"	MPSGS1160	\$892
12"H S	tackers (For St	acking 53"H Base Panel to 65"H Base Panel)
18"	MPSGS1218	\$789
24"	MPSGS1224	\$810
30"	MPSGS1230	\$829
36"	MPSGS1236	\$842
	MPSGS1242	\$875
42"		
42" 48"	MPSGS1248	\$880

18"	MPSGS1518	\$827
24"	MPSGS1524	\$860
30"	MPSGS1530	\$869
36"	MPSGS1536	\$886
42"	MPSGS1542	\$915
48"	MPSGS1548	\$921

Avenir Specification Guide

42" MPSGS1542 \$915 48" MPSGS1548 \$921 60" MPSGS1560 \$954

[▶] Specification Information, continued on next page



222

15"H Stackers (For Stacking 65"H Base Panel to 80"H Base Panel)

Panels

▶ Specification Information, continued from previous page

Specification Information			
Width	· Style	·U.S.	
	Number	Base	
	:	Price	
	:	:	



24"H Stackers (For Stacking 41"H Base Panel to 65"H Base Panel)

		- 3	
18"	MPSGS2418	\$ 863	
24"	MPSGS2424	\$ 883	
30"	MPSGS2430	\$ 912	
36"	MPSGS2436	\$ 940	
42"	MPSGS2442	\$ 981	
48"	MPSGS2448	\$ 991	
60"	MPSGS2460	\$1035	

Panel Door with Frame



For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Standard Includes

Required to Specify

► Need help? Product details, page 22

Specification Information

- Panel door: laminate price group 1Top cap and frame: all paint price groups
- · Threshold: stainless steel only
- · Door knob with lock: brushed chrome only
- Top cap height: mediumUniversal connector package

- 1 Style number
- 2 Laminate color number for door
- 3 Paint color number for top cap and frame
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Top cap and frame	0.1.0.7	Openitor illustration and salest
Materials	 Wood group 1 on low or medium top cap only 	+\$167	Specify with wood top cap and select wood color number.
	 Customiz stain on wood top cap 	No cost	See Surface Materials Reference Manual.
	Door		
	Laminate price group 2Open Line laminate	See information at left +\$ 74	Specify laminate color number. See Surface Materials Reference Manual.
	Open Line laminate	plus cost of laminate	See Surface materials neterefice maritial.
Тор Сар	Height		
Page 24	 Low (reduces frame height by ³/₄") 	No cost	Replace second M in style number with L .
	Knockouts		
	 Cable knockout on medium top cap 	No cost	Specify top cap with knockout.
Door Handles	Pair of handles and latch mechanism: Brushed Chrome only	+\$174	Specify with handles.
Related Products	Panel wiring and cabling		▶ Pages 237–247

• Dime W	nsions H	· Style Number	·U.S. Base Price	
Pane	l Door	with Frame		
425/16"	801/2"	MPDFWDM8042	\$3649	
Fram	e Only			
425/16"	801/2"	MPDFM8042	\$1618	

Tip: Panel door with frame style number cannot ship to customer locations in Canada. Frame only style number should be used for Canadian customers.

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Pane

Tackable Acoustical Fabric-Covered Replacement Skins



Tip: Remember to order replacement skins for both sides of the panel.

Tip: Avenir panels manufactured after September 1990 have removable panels skins. Replacement skins will not fit pre-September 1990 panels.

*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.
▶ See Specification
Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions.
Warp vertical is available as an option.

Standard Includes

Required to Specify

- ► Need help? Product details, page 12
- 33"H–65"H skins, fabric direction with horizontal application*: fabric price group 1
- 80"H skin, fabric direction with vertical application: fabric price group 1
- 1 Style number
- 2 Fabric color number for skin surface
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Panel surface		
Materials	 Fabric price group 1 	No cost	Specify fabric color number.
	 Fabric price group 2 	+\$ 19	Specify fabric color number.
	 Fabric price group 3 	+\$ 50	Specify fabric color number.
	 Fabric price group 4 	+\$ 81	Specify fabric color number.
	Fabric price group 5	+\$126	Specify fabric color number.
	Fabric price group COM	+\$ 16	See Surface Materials Reference Manual to specify.


Fabric direction on 65"H and shorter skins

Vertical application
 No cost
 Specify with vertical application.

Width	• Style Number	·U.S. Base Price	•Style Number	·U.S. Base Price	Style Number	· U.S. Base Price
	33"H Pane	ls	41"H Pane	ls	53"H Pane	ls
8"	RSTA3318	\$158	RSTA4118	\$197	RSTA5318	\$212
24"	RSTA3324	\$175	RSTA4124	\$217	RSTA5324	\$229
30"	RSTA3330	\$192	RSTA4130	\$242	RSTA5330	\$255
36"	RSTA3336	\$213	RSTA4136	\$265	RSTA5336	\$276
12"	RSTA3342	\$229	RSTA4142	\$288	RSTA5342	\$298
18"	RSTA3348	\$251	RSTA4148	\$308	RSTA5348	\$321
60"	RSTA3360	\$283	RSTA4160	\$355	RSTA5360	\$345
	65"H Pane	ls	80"H Pane	ls	<u> </u>	
18"	RSTA6518	\$245	RSTA8018	\$332		
24"	RSTA6524	\$266	RSTA8024	\$354		
30"	RSTA6530	\$292	RSTA8030	\$374		
36"	RSTA6536	\$311	RSTA8036	\$400		
12"	RSTA6542	\$336	RSTA8042	\$417		
18"	RSTA6548	\$357	RSTA8048	\$444		
80"	RSTA6560	\$382				

Panel Connectors


Varying-Height Connector Packages (PAB2)



	Standard Includes	Required to Specify
Need help? Product details, page 26	Connector package: all paint price groups	1 Style number 2 Paint color number for connector ► See Surface Materials, page 354.

Specif	Specification Information				
Lower Panel Height	• Style Number	·U.S. Price			
33"	PAB233	\$50			
41"	PAB241	\$51			
53"	PAB253	\$51			
65"	PAB265	\$51			
:	•	•			

Varying-Height Perpendicular Connector Packages (PAB3)



	Standard Includes	Required to Specify
Need help? Product details, page 28	Connector package: all paint price groups	1 Style number2 Paint color number for connector▶ See Surface Materials, page 354.

Specification Information			
Lower Panel Height	• Style Number	·U.S. Price	
33"	PAB333	\$50	
41"	PAB341	\$51	
53"	PAB353	\$51	
65"	PAB365	\$51	
:	•	•	



Varying-Height Connector Packages (PAB5)

	Standard Includes	Required to Specify
Need help? Product details, page 27	Connector package: black paint only	Style number

Specification Information				
Description	• Style Number	·U.S. Price		
1 low, 3 high	PAB5A	\$50		
3 low, 1 high	PAB5B	\$50		
2 low, 2 high	PAB5C	\$50		
2 low opposite, 2 high opposite	PAB5D	\$50		
2 low opposite 1 high	PAB5E	\$50		
1 low, 2 high	PAB5F	\$50		
 2 low, 1 high	PAB5G	\$50		
















Closed-Configuration Connector Package (PAB9)



	Standard Includes	Required to Specify
Need help? Product details, page 29	Connector package: black paint only	Style number

Specification Information				
Style Number	· U.S. Price			
PAB9	\$51			

Perpendicular Connector Package (PAB4)



	Standard Includes	Required to Specify
Need help? Product details,	Connector package: black paint only	Style number

Specification Information				
Style Number	·U.S. Price			
PAB4	\$51			



Change-of-Height Panel Connectors

\blacktriangleright	Need help?
	Product details
	page 31

• Panel connector: all paint price groups

Standard Includes

Required to Specify

- 1 Style number 2 Paint color number for connector
- 3 Options, if selected (see below) ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify		
Surface Materials	Fabric-covered connect • All fabric price groups	ors +\$71	Specify fabric color number.		
	Fabric direction on fabric-covered connectors*				
	 Horizontal application (standard) with exceptions 	No cost	Specify with horizontal application.		
	Vertical application	No cost	Specify with vertical application.		

*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification
Guidelines for Vertical Fabric
Applications, page 370, for
details on these exceptions.
Warp vertical is available
as an option.

Tip: If highest panel is 80"H then connector will be in the vertical application.

Specification Information				
Lower Panel Height	· Higher Panel Height	• Style Number	·U.S. Base Price	
33"	41"	PC4133	\$92	
33"	53"	PC5333	\$92	
33"	65"	PC6533	\$92	
33"	80"	PC8033	\$92	
41"	53"	PC5341	\$92	
41"	65"	PC6541	\$92	
41"	80"	PC8041	\$92	
53"	65"	PC6553	\$92	
53"	80"	PC8053	\$92	
65"	80"	PC8065	\$92	

For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

229


Filler Packages

► Need help?

page 32

Product details,


L Filler Packages



*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

► See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Tip: Wood top caps on fillers are solid and have no cable routing capability.



Tip: Filler height must match the height of the tallest panel in the configuration.

Standard Includes

- 41"H-65"H filler uprights, fabric direction with horizontal application*: all fabric price groups
- 80"H filler upright, fabric direction with vertical application: all fabric price groups

 Top cap and base cover: all paint price groups
- Top cap height: medium
- · Carrier: black paint only

Required to Specify

- 1 Style number
- 2 Fabric color number for filler upright
- 3 Paint color number for top cap and base cover
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.


	Options	U.S. Price	Required to Specify			
Surface	Fabric direction on 65"H and shorter fillers					
Materials	 Vertical application 	No cost	Specify with vertical application.			
	Top cap					
	 Wood group 1 on low or medium top cap only 	+\$37	Specify with wood top cap and select wood color number.			
	 Customiz stain on wood top cap 	No cost	See Surface Materials Reference Manual.			
Top Cap	Height					
	• Low	No cost	Replace M in style number with L .			
Specificati	ion Information					

L-Configuration Fillers

41"	PJLM41	\$373
53"	PJLM53	\$373
65"	PJLM65	\$373
80"	PJLM80	\$373

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

T Filler Packages



application is standard in the warp horizontal direction. See Specification Guidelines for Vertical Fabric

Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Tip: Wood top caps on fillers are solid and have no cable routing capability.





Tip: Carrier must always attach to center panel in T-configuration.

Tip: If highest panel is 80"H, then filler will be in the warp vertical application.



For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Standard Includes

- · Filler upright, fabric direction with horizontal application*: all fabric price groups
- · Top cap and base cover: all paint price groups
- Top cap height: medium
- · Carrier: black paint only

Required to Specify

- 1 Style number
- 2 Fabric color number for filler upright
- 3 Paint color number for top cap and base cover
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Fabric direction • Vertical application	No cost	Specify with vertical application.
	Top cap • Wood group 1 on low or medium top cap only	+\$37	Specify with wood top cap and select wood color number.
	 Customiz stain on wood top cap 	No cost	► See Surface Materials Reference Manual.
Тор Сар	Height • Low	No cost	Replace M in style number with L .
Specificat	ion Information		

Perpendicular Panel	· Highest · Panel	· Style Number	·U.S. Base	
Height	Height	:	Price	
:	:	:	:	

T-Configuration Fillers

► Need help?

page 32


Product details,

N.A.	41"	PJTM41	\$373
N.A.	53"	PJTM53	\$373
N.A.	65"	PJTM65	\$373
N.A.	80"	PJTM80	\$373
1		:	

T-Configuration Fillers with Back Filler

41"	53"	PJTM4153	\$399
41"	65"	PJTM4165	\$399
41"	80"	PJTM4180	\$399
53"	65"	PJTM5365	\$399
53"	80"	PJTM5380	\$399
65"	80"	PJTM6580	\$399
			•


X Filler Packages

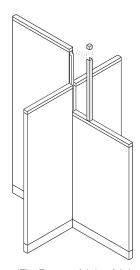

*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

► See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Tip: Wood top caps on fillers are solid and have no cable routing capability.



Tip: Back filler must attach to panel opposite the shortest panel in the X-configuration.

Tip: If highest panel is 80"H, then filler will be in the warp vertical application.

Standard Includes

Required to Specify

► Need help? · Filler upright, fabric direction with horizontal Product details, application*: all fabric price groups page 33

- · Top cap: all paint price groups
- · Carrier: black paint only

- 1 Style number
- 2 Fabric color number for filler upright
- 3 Paint color number for top cap
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

Options	U.S. Price	Required to Specify
Fabric direction • Vertical application	No cost	Specify with vertical application.
Тор сар		
 Wood group 1 on low or medium top cap only 	+\$37	Specify with wood top cap and select wood color number.
Customiz stain on wood top cap	No cost	► See Surface Materials Reference Manual.
Height		
	Vertical application Vertical application Top cap Wood group 1 on low or medium top cap only Customiz stain on wood top cap	Fabric direction • Vertical application No cost Top cap • Wood group 1 on low or medium top cap only • Customiz stain on wood top cap No cost

Specifica	ation Informa	ation	
·Lowest	·Highest	·Style	·U.S.
Panel	Panel	Number	Base
Height	Height	:	Price
•			:

X-Configuration Top Cap Only


All	N.A.	PJXM	\$ 62
		-	

X-Configuration Fillers

41"	53"	PJAXM4153	\$293
41"	65"	PJAXM4165	\$293
41"	80"	PJAXM4180	\$293
53"	65"	PJAXM5365	\$293
53"	80"	PJAXM5380	\$293
65"	80"	PJAXM6580	\$293
:	:	:	•

X-Configuration Fillers with Back Filler

41"	53"	PJBXM4153	\$293
41"	65"	PJBXM4165	\$293
41"	80"	PJBXM4180	\$293
53"	65"	PJBXM5365	\$293
53"	80"	PJBXM5380	\$293
65"	80"	PJBXM6580	\$293



*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

► See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Standard Includes

- 41"H-65"H end-of-run fillers, fabric direction with horizontal application*: all fabric price groups
- · 80"H end-of-run filler, fabric direction with vertical application: all fabric price groups

 • Top cap and base cover: all paint price groups

Required to Specify

- 1 Style number
- 2 Fabric color number for end-of-run filler
- 3 Paint color number for top cap and base cover
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Fabric direction on 65" • Vertical application	H and shorter fillers No cost	Specify with vertical application.
	Top cap • Wood group 1	+\$37	Specify with wood top cap and select wood color number.
	 Customiz stain on wood top cap 	No cost	See Surface Materials Reference Manual.

Specification Information

► Need help?

page 34

Product details,

·Height	·Style	·U.S.
	Number	Base
-		Price
:	:	

For Use with Medium Top Caps


41"	ERFM41	\$391
53"	ERFM53	\$391
65"	ERFM65	\$391
80"	ERFM80	\$391

For Canadian Pricing Multiply U.S. Price by the

Canadian price factor. ► See page 1 for details.

Panel Brackets

Panel-to-Wall Bracket Package (PAB6)



	Standard Includes	Required to Specify
Need help? Product details, page 36	Bracket package: black paint only	Style number
Specificat	ion Information	
Style	·U.S.	
_		

Panel-to-Furniture Bracket Package (PAB7)



	Standard Includes	Required to Specify
Need help? Product details, page 36		Style number
Specificat	ion Information	
· Style	·U.S.	
Number	Price	
:		
PAB7	\$31	

Anchor Brackets (OSHPD)



Tip: Four anchor bracket packages are required for each cabinet.

	Standard Includes	Required to Specify
Need help? Product details, page 37	Two-piece anchor bracket: black paint only	Style number

Specification Information	
·U.S.	
Price	
φου	
t	



Panel Accessories

Panel Stabilizer Foot



	Standard Includes	Required to Specify
► Need help? Product details, page 38	Panel foot: all paint price groups	1 Style number 2 Paint color number for panel foot ▶ See <i>Surface Materials</i> , page 354.

Specification Information			
Style Number	· U.S. Price		
PFF16	\$217		

Gripper Glide Caps



	Standard includes	Required to Specify
	Carton of 12 gripper glide caps: soft black plastic only	Style number
_	tion Information	
•Style Number	·U.S. Price	
CGGC12	\$68	

Panel Coat Hooks



Tip: For use with painted top caps only.


	Standard Includes	Required to Specify	
Need help? Product details, page 38	Two coat hooks: all paint price groups	1 Style number2 Paint color number for coat hook▶ See Surface Materials, page 354.	

Specification Information		
•Style Number	· U.S. Price	
PCH	\$53 :	



► See page 1 for details.

Markerboards



Standard Includes	Required to Specify

► Need help? Product details, page 38

Surface

Materials

- · Markerboard surface: white laminate only
- · Frame: black only

Options

· Black only

Markerboard tray

1 Style number

Required to Specify	

Specify with markerboard tray.

2 Options, if selected (see below)

Dim W	ensions H	• Style Number	· U.S. Base Price	
30"	33"	PMB3330	\$762	
36"	33"	PMB3336	\$808	

U.S. Price

+\$76

Tackboards



	Standard Includes	Required to Specify	
Need help?	Tackboard, fabric direction with horizontal	1 Style number	
Product details,	application: fabric price group 1	2 Fabric color number for tackboard	

veea neip?	 Lackboard, fabric direction with norizontal
Product details,	application: fabric price group 1
page 39	 Hardware: black paint only

- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Tackboard		
Materials	 Fabric price group 1 	No cost	Specify fabric color number.
	 Fabric price group 2 	+\$ 12	Specify fabric color number.
	 Fabric price group 3 	+\$ 58	Specify fabric color number.
	 Fabric price group 4 	+\$ 79	Specify fabric color number.
	 Fabric price group 5 	+\$126	Specify fabric color number.
	Fabric price group COM	+\$ 16	See Surface Materials Reference Manual to specify.
	Fabric direction on 30"	W-60"W tackboards	
	 Vertical application 	No cost	Specify with vertical application.
Related Products	Wall channels		▶ Page 331

· Dimer W	nsions H	• Style Number	·U.S. Base Price
30"	173/4"	TB3018	\$226
36"	17¾"	TB3618	\$237
42"	17¾"	TB4218	\$271
48"	17¾"	TB4818	\$297
60"	173⁄4"	TB6018	\$386
72"	173//"	TB7218	\$472



► Need help?

page 40

Wiring

Schematics

Product details,

Base Power-Ins



Tip: Three circuit with separate neutral, and all four circuit base power-ins, can only fit in larger-size receptacle openings.

Standard Includes

Options

Three-circuit

Separate neutral

openings only)

Four-circuit

(available for larger-size

• Right-angle base power-in assembly

- 6' long, ½" diameter conduit: black plastic only
- 3-circuit with shared neutral or 4-circuit 3+D

Required to Specify

- 1 Style number
- 2 Paint color number is required for base power-in for use in New York City
- 3 Options, if selected (see below)
- ► See Surface Materials, page 354.

Required to Specify

Specify with separate neutral.


• 3I+1 wiring • 2+2 wiring s		+\$56 +\$56	Specify with 3I+1 wiring. Specify with 2+2 wiring.
Specification Informati	on		
·Fits	•Style Number	· U.S. Base Price	
3-Circuit			
Standard- or larger-size openings	98669	\$364	
For Use in New York City			
Standard- or larger-size openings	986691	\$364	
4-Circuit (3+D)	•	·	
Larger-size openings only	986694	\$397	
For Use in New York City			
Larger-size openings only	987801	\$397	

U.S. Price

+\$48



Breakaway Base Power-Ins (OSHPD)



Tip: This product is not available in Canada.

Tip: Three-circuit with separate neutral, and all four-circuit base power-ins, can only fit in larger-size receptacle openings.

Standard Includes

Required to Specify

- ► Need help? Product details, page 40
- Breakaway base power-in assembly
- · 3-circuit with shared neutral or 4-circuit 3+D
- 1 Style number • 6' long, 1/2" diameter conduit: black plastic only 2 Options, if selected (see below)

	Options		U.S. Price	Required to Specify
Wiring Schematics	• Separate ne (available for openings or	eutral or larger-size	+\$48	Specify with separate neutral.
	Four-circu 3I+1 wiring 2+2 wiring s	schematic	+\$56 +\$56	Specify with 31+1 wiring. Specify with 2+2 wiring.
Specification	on Informati	on		
• Fits		• Style Number	· U.S. Base Price	
3-Circuit		•	•	
Standard- or large	er-size openings	98669C	\$441 :	
4-Circuit (3-	+D)			
Larger-size openi	ngs only	986694C	\$480	



End Power-Ins



	Standard Includes	Required to Specify
Need help? Product details, page 40	 End power-in assembly 6' long, ½" diameter conduit: black plastic only 3-circuit with shared neutral or 4 circuit 3+D 	1 Style number 2 Options, if selected (see below)

	Options	U.S. Price	Required to Specify
Wiring	Three-circuit		
Schematics	 Separate neutral 	+\$33	Specify with separate neutral.
	Four-circuit		
	 3I+1 wiring schematic 	+\$33	Specify with 3I+1 wiring.
	 2+2 wiring schematic 	+\$33	Specify with 2+2 wiring.
0			
Specificati	on Information		
Style	·U.S.		
Number	Base		
	Price		

3-Circuit	
MPSC372B	\$192

4-Circuit (3+D) MPSC472B \$214



► Need help?

page 41

Product details,

2" x 2" Power Poles



*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.
▶ See Specification Guidelines for Vertical Fabric Applications, page 370, for details on these exceptions. Warp vertical is available as an option.

Standard Includes

- Upper part of pole: all paint price groups
- 41"H–65"H lower part of pole, fabric direction with horizontal application*: all fabric price groups
- 80"H lower part of pole, fabric direction with vertical application: all fabric price groups
- · Base: all paint price groups
- · Ceiling trim plate: white paint only
- Harness with 3-circuit with shared neutral or 4-circuit 3+D
- Junction box
- · Mounting brackets

Required to Specify

- 1 Style number
- 2 Paint color number for upper part of pole and base
- 3 Fabric color number for lower part of pole
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Fabric direction on lo	wer part of 65"H and s	shorter poles
Materials	 Vertical application 	No cost	Specify with vertical application.
Wiring	Three-circuit		
Schematics	 Separate neutral 	+\$17	Specify with separate neutral.
	Four-circuit		
	 3I+1 wiring schematic 	+\$17	Specify with 3I+1 wiring.
	 2+2 wiring schematic 	+\$17	Specify with 2+2 wiring.

Panel Height	• Style Number	· U.S. Base Price	· Style Number	· U.S. Base Price
<u> </u>	3-Circuit	·	4-Circuit	(3+D)
41"	PP341A	\$770	PP441A	\$851
53"	PP353A	\$770	PP453A	\$851
65"	PP365A	\$770	PP465A	\$851
80"	PP380A	\$770	PP480A	\$851



2" x 6" Power and Cable Poles



Standard Includes

Required to Specify

► Need help? Product details, page 42

- · Pole: all paint price groups · Ceiling trim plate: white paint only
- Two harnesses with 3-circuit with shared neutral or 4-circuit 3+D
- Junction box
- · Mounting brackets

- 1 Style number
- 2 Paint color number for pole
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Wiring Schematics	Three-circuit • Separate neutral	+\$17	Specify with separate neutral.
	Four-circuit • 3I+1 wiring schematic • 2+2 wiring schematic	+\$17 +\$17	Specify with 3I+1 wiring. Specify with 2+2 wiring.

Panel Height	• Style Number	· U.S. Base Price	• Style Number	· U.S. Base Price
•	3-Circuit	·	4-Circuit ((3+D)
41"	PP6416S	\$1469	PP8416S	\$1529
53"	PP6536S	\$1469	PP8536S	\$1529
65"	PP6656S	\$1469	PP8656S	\$1529
80"	PP6806S	\$1469	PP8806S	\$1529



► Need help?

page 41

Product details,

2" x 2" Cable Poles



*Tip: For most fabrics, fabric application is standard in the warp horizontal direction.

See Specification
Guidelines for Vertical Fabric
Applications, page 370, for
details on these exceptions.
Warp vertical is available
as an option.

Standard Includes

- Upper part of pole: all paint price groups
- 41"H–65"H lower part of pole, fabric direction with horizontal application*: all fabric price groups
- 80"H lower part of pole, fabric direction with vertical application*: all fabric price groups
- · Base: all paint price groups
- · Ceiling trim plate: white paint only
- Mounting brackets

Required to Specify

- 1 Style number
- 2 Paint color number for upper part of pole and base
- 3 Fabric color number for lower part of pole
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Fabric direction on le	ower part of 65"H and	shorter poles
Materials	 Vertical application 	No cost	Specify with vertical application.

	• Style Number	U.S. Price
41"	MCP41A	\$708
53"	МСР53А	\$708
65"	МСР65А	\$708
80"	МСР80А	\$708



Powerways (field-installed)



Tip: For factory-installed powerways, refer to the panel pages.
▶ Pages 212–219

	Standard Includes	Required to Specify	
Need help?	 Powerway with 3-circuit with shared neutral or 	1 Style number	
Product details,	4-circuit 3+D	2 Options, if selected (see below)	
pages 44 and 46			

Specification Information

	Options	U.S. Price	Required to Specify
Wiring Schematics	Three-circuit • Separate neutral	+\$48	Specify with separate neutral.
	Four-circuit 3I+1 wiring schematic 2+2 wiring schematic	+\$55 +\$55	Specify with 3I+1 wiring. Specify with 2+2 wiring.

Opcomo	ation informa				
Panel Width	• Style Number	· U.S. Base Price	• Style Number	· U.S. Base Price	
<u>:</u>	3-Circuit		3-Circuit 4-Circuit (3+D)		
24"	FPW324	\$270	FPW424	\$321	
30"	FPW330	\$270	FPW430	\$321	
36"	FPW336	\$270	FPW436	\$321	
42"	FPW342	\$270	FPW442	\$321	
48"	FPW348	\$270	FPW448	\$321	
60"	FPW360	\$270	FPW460	\$321	
Pass-Thro	ugh Powerways				
18"	FPW318	\$270	FPW418	\$321	

Tip: 24" is double flag.



Panel-to-Panel Connector



	Standard Includes	Required to Specify
Need help? Product details,	Package of six panel-to-panel connectors	1 Style number 2 Options, if selected (see below)

	Options	U.S. Price	Required to Specify
Wiring Schematics	Three-circuit • Separate neutral	+\$173	Specify with separate neutral.
	Four-circuit • 2+2 wiring schematic • 3I+1 wiring schematic	+\$131 +\$131	Specify with 2+2 wiring. Specify with 3I+1 wiring.
Specificat	tion Information		
• Style Number	·U.S. Base Price	•Style •U.S. Number Base Price	
3-Circuit	•	4-Circuit	
мртрз	\$577	MPTP4 \$734	

Corner Wire Covers

Tip: Corner wire covers are required by UL to cover flexible power harnesses in L- and Tconfigurations.





	Standard Includes	Required to Specify
Need help? Product details, page 187	Corner wire cover: all paint price groups	1 Style number2 Paint color number for wire cover▶ See Surface Materials, page 354.
Specificat	ion Information	
• Style Number	·U.S. Price	
For 90° Pane	l Angle	
PBCC90	\$51	
For 180° Pan	el Angle (T-Configuration)	
PBCC180	\$51	

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.

See page 1 for details.

Cable Grommets for Base Cover



Tip: For use in standard-size receptacle opening in power base cover.

	Standard Includes	Required to Specify
Need help? Product details, page 49	Carton of five cable grommets: plastic	1 Style number 2 Plastic color number for cable grommet ▶ See <i>Surface Materials</i> , page 354.

Specification Information			
Style Number	· U.S. Price		
98863	\$33		

Panel-Base End Filler



Standard Includes	Required to Specify
 Carton of six end fillers: paint 	1 Style number
	2 Paint color number for end filler
	► See Surface Materials, page 354.

Specifica	Specification Information				
•Style Number	· U.S. Price				
PBEF	\$51				



Duplex Receptacles





Larger size Product details, page 48

Need help?

Standard Includes

- Package of six powerway receptacles: plastic
- **Required to Specify**
- 1 Style number
- 2 Plastic color number for receptacles
- See Surface Materials, page 354.

Tip: For designation of controlled receptacles, order permanent ink stamp with controlled icon; service part (1063909001SR). It includes a pair of stamps, one white and one black. Appropriate receptacles can be stamped at the job site during installation.

Tip: You can order additional filler plates from Service Parts. For transparent panels, order 9000118SR; for all other straight panels, order 9001398SR.

Tip: You must specify receptacle to match wiring schematic used in other components.

· Description	·Size	· Style	·U.S.	· Style	·U.S.
Ecomption	:	Number	Price	Number	Price
		15-amp Recept	tacles	20-amp Recep	tacles
3-Circuit with	Shared Neutr	al			
Line 1	Standard size	986831DA15S	\$298	986831DA20S	\$448
Line 2	Standard size	986832DA15S	\$298	986832DA20S	\$448
Line 3	Standard size	986833DA15S	\$298	986833DA20S	\$448
3-Circuit with	Separate Neu	ıtral			
Line A	Standard size	98683ADD15S	\$448	98683ADD20S	\$675
Line B	Standard size	98683BDD15S	\$448	98683BDD20S	\$675
Line C	Larger size	98683CDD15S	\$579	98683CDD20S	\$873
4-Circuit 3+D					
Line 1	Standard size	986831DA15S	\$298	986831DA20S	\$448
Line 2	Standard size	986832DA15S	\$298	986832DA20S	\$448
Line 3	Standard size	986833DA15S	\$298	986833DA20S	\$448
Line 4	Larger size	986834DA15S	\$388	986834DA20S	\$579
4-Circuit with	3I+1 Wiring				
Line 1	Standard size	986831DC15S	\$448	986831DC20S	\$675
Line 2	Standard size	986832DC15S	\$448	986832DC20S	\$675
Line 3	Standard size	986833DC15S	\$448	986833DC20S	\$675
Line 4	Larger size	986834DC15S	\$579	986834DC20S	\$873
4-Circuit with	2+2 Wiring				
Line 1	Standard size	986831DB15S	\$333	986831DB20S	\$504
Line 2	Standard size	986832DB15S	\$333	986832DB20S	\$504
Line 3	Larger size	986833DB15S	\$448	986833DB20S	\$675
Line 4	Larger size	986834DB15S	\$448	986834DB20S	\$675

Panel-Supported Receptacle



	Standard Includes	Required to Specify
Need help? Product details, page 188	Three receptacles, each with 9' cord and three-prong plug: black plastic only	Style number

Specification In	Specification Information			
Fits	· Style Number	·U.S. Price		
<u>:</u>	: Number	Frice		
Duplex-size opening	PMDR	\$291		

Avenir Universal Systems Worksurface Wire Managers



	Standard Includes	Required to Specify
Need help? Product details, page 71	Set of six field installed worksurface wire managers: plastic Attachment hardware	1 Style number 2 Plastic color number for worksurface wire manager: 6000 Black 6009 Arctic White 6052 Milk 6053 Seagull 6249 Platinum Solid 6654 Sand 6695 Midnight 6697 Fog

Specification Information				
Style Number	· U.S. Price			
Humber	FILE			
TS7WWM	\$154			



Specifying Worksurfaces and Related Products

Worksurfaces

Avenir Universal Systems Worksurfaces	25 1
Avenir Worksurfaces	275

Universal System: Worksurfaces

Specifying Avenir Universal Systems Worksurfaces

Worksurfaces	
Straight Worksurfaces	252
Transition Worksurfaces	254
Corner, Curved-Front Worksurfaces	256
Extended Corner, Curved-Front Worksurfaces	258
Spanner Worksurfaces	260
Bullet Peninsula Worksurfaces	261
Jetty Worksurfaces	262
Visitor Worksurfaces	264
Transaction Worksurfaces	266
Panel-Mounted Universal Systems Worksurface Supports	267
Legs and Supports for Avenir Universal	
Systems Worksurfaces	270

Straight Worksurfaces

Laminate



Tip: Supports for freestanding and panel-mounted applications must be specified separately.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Worksurface spans greater than 54" require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately. Page 269

Tip: Not all Avenir Universal Systems Worksurface installations can be panel wrapped.

▶See page 75 for application details.

Standard Includes

Required to Specify

- ► Need help? Product details, page 70
- · Worksurface: laminate price group 1
- · 3 mm edge profile on front edge: plastic
- · Plastic default flat profile on side and back edges
- · Cable scallop on back edge

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify	
Surface Materials	Laminate worksurfaces - Laminate price group 2 - Open Line laminate See information at left +\$74 plus cost of laminate		Specify laminate color number. See Surface Materials Reference Manual.	
Scallops	Omit scallop	No cost	Specify omit scallop.	
Related Products	Panel-mounted Universal S Reinforcing channel Legs and supports for Aven Worksurfaces	, , , , , , , , , , , , , , , , , , , ,	▶ Page 267▶ Page 269▶ Page 270	
	Worksurface power and cor	See Montage Solutions Specification Guide.		



Specification Information

U.S. Base Price Laminate



	_			
Dime	nsions B	· Style · Number	• Plastic • 3 mm	
			Edge	
183/8"	301/8"	MUS1830	\$198	
183/8"	361/8"	MUS1836	\$214	
183/8"	421/8"	MUS1842	\$232	
183/8"	481/8"	MUS1848	\$277	
183/8"	5411/32"	MUS1854	\$297	
183/8"	6011/32"	MUS1860	\$320	
231/2"	241/8"	MUS2424	\$204	
231/2"	301/8"	MUS2430	\$221	
231/2"	361/8"	MUS2436	\$232	
231/2"	421/8"	MUS2442	\$249	
231/2"	481/8"	MUS2448	\$296	
231/2"	5411/32"	MUS2454	\$316	
231/2"	6011/32"	MUS2460	\$335	
231/2"	6611/32"	MUS2466	\$378	
231/2"	7211/32"	MUS2472	\$422	
291/2"	241/8"	MUS3024	\$289	
291/2"	301/8"	MUS3030	\$299	
291/2"	361/8"	MUS3036	\$320	
291/2"	421/8"	MUS3042	\$335	
291/2"	481/8"	MUS3048	\$384	
291/2"	5411/32"	MUS3054	\$409	
291/2"	6011/32"	MUS3060	\$432	
291/2"	6611/32"	MUS3066	\$475	
291/2"	7211/32"	MUS3072	\$517	



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Transition Worksurfaces

► Need help? Product details,

page 70

Laminate



Tip: Illustration above shows a left-hand worksurface.

Tip: Supports for freestanding and panel-mounted applications must be specified separately.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Worksurface spans greater than 54" require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

Page 269

Tip: Not all Avenir Universal Systems Worksurface installations can be panel wrapped. See page 75 for application details.

Standard Includes

- · Worksurface: laminate price group 1
- 3 mm edge profile on front edge: plastic
- · Plastic default flat profile on side and back edges
- · Cable scallop on back edge

Required to Specify

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify	
Surface Materials	Laminate worksurfaces Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manu	
Scallops	Omit scallop	No cost	Specify omit scallop.	
Related Products	Panel-mounted Universal Systems worksurface supports Legs and supports for Avenir Universal Systems Worksurfaces Worksurface power and communication components		 ▶ Page 267 ▶ Page 270 ▶ See Montage Solutions Specification Guide. 	



Specification Information

U.S. Base Price Laminate



Din	nensior	ıs	· Style	·Plastic		
· A	В	C	Number	3 mm		
				Edge		

Left-Hand Worksurfaces

231/2"	18 ³ ⁄ ₈ "	36 ¹ / ₈ "	MUT2136L	\$384
231/2"	18 ³ ⁄8"	421/8"	MUT2142L	\$405
231/2"	18 ³ ⁄8"	481/8"	MUT2148L	\$471
231/2"	18 ³ ⁄8"	54 ¹ / ₃₂ "	MUT2154L	\$504
231/2"	18 ³ ⁄8"	6011/32"	MUT2160L	\$538
291/2"	231/2"	361/8"	MUT3236L	\$451
291/2"	231/2"	421/8"	MUT3242L	\$476
291/2"	231/2"	481/8"	MUT3248L	\$553
291/2"	231/2"	54 ¹ / ₃₂ "	MUT3254L	\$595
291/2"	231/2"	6011/32"	MUT3260L	\$631

MUT2348R

MUT2354R

MUT2360R

\$553

\$595

\$631

Right-Hand Worksurfaces

5411/32"


6011/32"

231/2"

231/2"

291/2"

291/2"



183/8"	231/2"	361/8"	MUT1236R	\$384			
183/8"	231/2"	421/8"	MUT1242R	\$405			
183/8"	231/2"	481/8"	MUT1248R	\$471			
183/8"	231/2"	54 ¹¹ / ₃₂ "	MUT1254R	\$504			
183/8"	231/2"	6011/32"	MUT1260R	\$538			
231/2"	291/2"	361/8"	MUT2336R	\$451			
231/2"	291/2"	421/8"	MUT2342R	\$476			

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.

See page 1 for details.

Corner, Curved-Front Worksurfaces

► Need help?

page 70

Product details,

Laminate



Tip: Supports must be specified separately, including side support brackets for rear corner support in panelmounted applications.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Single and stand alone Universal Systems worksurfaces cannot be panel wrapped.

See page 75 for application details.

Standard Includes

Worksurface: laminate price group 1

- 3 mm edge profile on front edge: plastic
- Plastic default flat profile on side and back edges
- · Cable scallops on back edges

Required to Specify

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify	
Surface Materials	Laminate worksurfaces Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual	
Scallops	Omit scallops	No cost	Specify omit scallops.	
Related Products	- and meaning of the contract of the contract of		 ▶ Page 267 ▶ Page 270 ▶ See Montage Solutions Specification Guide. 	

Specification Information U.S. Base Price Laminate Dimensions ·Style · Plastic D Number 3 mm В Edge MUCC1122 183/8" 183/8" 415/8" 415/8" \$499 183/8" 183/8" 475/8" 475/8" **MUCC1188** \$545 231/2" 231/2" 35%" 355/8" **MUCC2266** \$477 231/2" 231/2" 415/8" 415/8" **MUCC2222** \$517 475/8" 231/2" 231/2" 475/8" **MUCC2288** \$574 5927/32" 5927/32" **MUCC2200** MUCC3322 \$562 415/8" 415/8" 291/2" 291/2" 291/2" 291/2" 475/8" 475/8" **MUCC3388** \$624



Universal Systems Worksurfaces

Extended Corner, Curved-Front Worksurfaces

► Need help? Product details,

page 70

Laminate



Tip: Illustration above shows a left-hand worksurface.

Tip: Supports must be specified separately, including side support brackets for rear corner support in panelmounted applications.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Worksurface spans greater than 54" require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

> Page 269

Tip: Not all Avenir Universal Systems Worksurface installations can be panel wrapped.

▶ See page 75 for application details.

Standard Includes

- · Worksurface: laminate price group 1
- · 3 mm edge profile on front edge: plastic
- · Plastic default flat profile on side and back edges
- Cable scallops on back edges

Required to Specify

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Laminate worksurfaces Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual
Scallops	Omit scallops	No cost	Specify omit scallops.
Related Products	Panel-mounted Universal Sy. Reinforcing channel Legs and supports for Avenir Worksurfaces Worksurface power and com	Universal Systems	 ▶ Page 267 ▶ Page 269 ▶ Page 270 ▶ See Montage Solutions Specification Guide.




Specification Information

U.S. Base Price Laminate




·Din	nensi	ons		·Style	·Plasti
A	В	C	D	Number	3 mm
				:	Edge

tic



Left-Hand Worksurfaces

231/2"	231/2"	59 ²⁷ / ₃₂ "	415/8"	MUEC2202L	\$ 763
231/2"	231/2"	65 ²⁷ /32"	415/8"	MUEC2262L	\$ 835
231/2"	231/2"	71 ²⁷ /32"	415/8"	MUEC2222L	\$ 903
231/2"	231/2"	59 ²⁷ / ₃₂ "	475/8"	MUEC2208L	\$ 784
231/2"	231/2"	65 ²⁷ / ₃₂ "	475/8"	MUEC2268L	\$ 850
231/2"	231/2"	71 ²⁷ / ₃₂ "	475/8"	MUEC2228L	\$ 918
291/2"	291/2"	59 ²⁷ / ₃₂ "	415/8"	MUEC3302L	\$ 867
291/2"	291/2"	65 ²⁷ / ₃₂ "	415/8"	MUEC3362L	\$ 938
291/2"	291/2"	71 ²⁷ / ₃₂ "	415/8"	MUEC3322L	\$1014
291/2"	291/2"	59 ²⁷ / ₃₂ "	475/8"	MUEC3308L	\$ 898
291/2"	291/2"	65 ²⁷ / ₃₂ "	475/8"	MUEC3368L	\$ 969
291/2"	291/2"	71 ²⁷ /32"	475/8"	MUEC3328L	\$1038
					•



Right-Hand Worksurfaces

9					
231/2"	231/2"	415/8"	59 ²⁷ / ₃₂ "	MUEC2220R	\$ 763
231/2"	231/2"	415/8"	65 ²⁷ / ₃₂ "	MUEC2226R	\$ 835
231/2"	231/2"	415/8"	71 ²⁷ / ₃₂ "	MUEC2222R	\$ 903
231/2"	231/2"	475/8"	59 ²⁷ / ₃₂ "	MUEC2280R	\$ 784
231/2"	231/2"	475/8"	65 ²⁷ / ₃₂ "	MUEC2286R	\$ 850
231/2"	231/2"	475/8"	71 ²⁷ / ₃₂ "	MUEC2282R	\$ 918
291/2"	291/2"	415/8"	59 ²⁷ / ₃₂ "	MUEC3320R	\$ 867
291/2"	291/2"	415/8"	65 ²⁷ / ₃₂ "	MUEC3326R	\$ 938
291/2"	291/2"	415/8"	71 ²⁷ / ₃₂ "	MUEC3322R	\$1014
291/2"	291/2"	475/8"	59 ²⁷ / ₃₂ "	MUEC3380R	\$ 898
291/2"	291/2"	475/8"	65 ²⁷ / ₃₂ "	MUEC3386R	\$ 969
291/2"	291/2"	475/8"	71 ²⁷ / ₃₂ "	MUEC3382R	\$1038
				•	•

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ► See page 1 for details.

Spanner Worksurfaces

Laminate



Tip: Supports for freestanding and panel-mounted applications must be specified separately.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Not all Avenir Universal Systems Worksurfaces installations can be panel wrapped. ► See page 75 for application details.

Standard Includes

Required to Specify

► Need help? Product details, page 70

30"

501/8"

MUSPC50

\$454

- Worksurface: laminate price group 1 • 3 mm edge profile on front edge: plastic
- · Plastic default flat profile on side and back edges
- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Laminate worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Related Products	Panel-mounted Universal S Legs and supports for Aven Worksurfaces	▶ Page 267 ▶ Page 270	
	Columns Worksurface power and cor	Page 273See Montage Solutions Specification Guide.	

Specification Information U.S. Base Price Laminate · Dimensions Style Plastic Number 3 mm **E**dge With 2" Notch for Use with Avenir Panels

*
For Canadian Pricing Multiply U.S. Price by the Canadian price factor.
See page 1 for details.

Bullet Peninsula Worksurfaces

page 70

Laminate



Tip: Supports for freestanding and panel-mounted applications must be specified separately.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Worksurface spans greater than 54" require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

▶ Page 269

Tip: Not all Avenir Universal Systems Worksurface installations can be panel wrapped. See page 75 for application details.

Tip: Bullet peninsula worksurfaces are recommended for use with other curved-front shapes such as corner, curved-front worksurfaces.

▶ Page 256

Standard Includes

- Required to Specify
- · Worksurface: laminate price group 1 ► Need help? Product details, · 3 mm edge profile on front edge: plastic

 - · Plastic default flat profile on side and back edges
 - · Cable scallop on back edge

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Laminate worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Scallops	Omit scallop	No cost	Specify omit scallop.
Related Products	Panel-mounted Universal Sy Legs and supports for Aveni Worksurfaces Columns Worksurface power and con	r Universal Systems	 ▶ Page 267 ▶ Page 270 ▶ Page 273 ▶ See Montage Solutions Specification Guide.

Specification Information

Dimensions

U.S. Base Price Laminate



· Plastic

A	В	Number	3 mm Edge
30"	59½"	UPBC3060	\$624

·Style

For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

See page 1 for details.

Jetty Worksurfaces

► Need help?

Product details, page 70

Laminate

Tip: Supports for freestanding and panel-mounted applications must be specified separately.

Tip: Worksurface spans greater than 54" require additional support of a cantilever, pedestal, intermediate support, or leg. Exception; worksurfaces can span up to 60" in heavy load applications and up to 72" in light load applications if a reinforcing channel is used. Reinforcing channel must be specified separately.

▶ Page 269

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.


Tip: Not all Avenir Universal Systems Worksurface installations can be panel wrapped.

See page 75 for application

Tip: Jetty worksurfaces are recommended for use with other curved-front shapes such as corner, curved-front worksurfaces.

▶Page 256

Tip: To specify 3 mm edge profile, no suffix is required. For all other edge profiles, add a suffix to the style number. (For example, MUS1830 becomes MUS1830P for P-edge profile.)



Standard Includes

Worksurface: laminate price group 1

- 3 mm edge profile or P-edge profile on front edge: plastic
- Plastic default flat profile on side and back edges
- Cable scallop on back edge

Required to Specify

- 1 Style number with appropriate edge profile suffix
- P Laminate with plastic P-edge
- ► See edge profiles below.
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Laminate worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Scallops	Omit scallop	No cost	Specify omit scallop.
Related Products	 Panel-mounted Universal S Legs and supports for Aven Worksurfaces 	▶ Page 267 ▶ Page 270	
	ColumnsWorksurface power and cor	mmunication components	Page 273See Montage Solutions Specification Guide.

Specification Information

U.S. Base Prices
Laminate
Plastic Plastic

Din	nensi	ons		·Style	·Plastic	·Plastic
A	В	C	D	Number	3 mm Edge	P-Edge
					•	•
				•	No Suffix	Suffix P
:				:	NO SUIIIX	Sullix P

Left-Hand Worksurfaces

291/2"	231/2"	651/2"	48"	UJC3268L	\$888	\$1007
291/2"	231/2"	71½"	48"	UJC3228L	\$917	\$1036
291/2"	231/2"	771/2"	48"	UJC3288L	\$948	\$1067
291/2"	291/2"	65½"	48"	UJC3368L	\$916	\$1035
291/2"	291/2"	71½"	48"	UJC3328L	\$948	\$1067
291/2"	291/2"	771/2"	48"	UJC3388L	\$981	\$1100

▶ Specification Information, continued on next page




Multiply U.S. Price by the Canadian price factor.

See page 1 for details.

▶ Specification Information, continued from previous page

Sp	ecific	atio	on Info	ormation			
					U.S. Base Pr Laminate	ices	
·Dim	nensio	ns		Style	Plastic	Plastic	
; A	В	C	D	Number	3 mm Edge	P-Edge	
				:	No Suffix	Suffix P	



				•				
Righ	ıt-Ha	nd W	orksur/	faces				
231/2"	291/2"	48"	65 ¹ / ₂ "	UJC2386R	\$888	\$1007		
231/2"	291/2"	48"	71½"	UJC2382R	\$917	\$1036		
231/2"	291/2"	48"	771/2"	UJC2388R	\$948	\$1067		
291/2"	291/2"	48"	65 ¹ / ₂ "	UJC3386R	\$916	\$1035		
291/2"	291/2"	48"	71½"	UJC3382R	\$948	\$1067		
291/2"	291/2"	48"	771/2"	UJC3388R	\$981	\$1100		

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.

See page 1 for details.

Visitor Worksurfaces

Laminate



Tip: Supports for freestanding and panel-mounted applications must be specified separately.

Tip: Not all Avenir Universal Systems Worksurface installations can be panel wrapped.

See page 75 for application details.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Visitor worksurfaces are recommended for use with other curved-front shapes such as corner, curved-front worksurfaces.

▶Page 256

Tip: Scallops are available only on visitor worksurfaces 36"W and wider.

Standard Includes

Need help? Product details, page 70

- Worksurface: laminate price group 1
- 3 mm edge profile or P-edge profile on front edge: plastic
- Plastic default flat profile on side and back edges
- Cable scallop on back edge of visitor worksurfaces 36"W and wider


Required to Specify

- 1 Style number with appropriate edge profile suffix
- ▶ Laminate with plastic P-edge▶ See edge profiles at right.
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Laminate worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Scallops	Omit scallop	No cost	Specify omit scallop.
Related Products	 Panel-mounted Universal S Legs and supports for Aven Worksurfaces 	ystems worksurface supports ir Universal Systems	▶ Page 267 ▶ Page 270



Tip: To specify 3 mm edge profile, no suffix is required. For all other edge profiles, add a suffix to the style number. (For example, MUS1830 becomes MUS1830P for P-edge profile.)

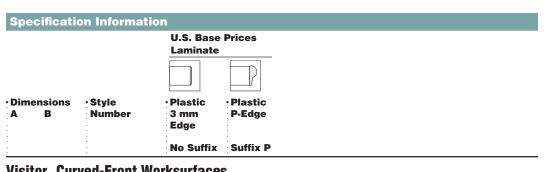





Visitor, Curved-Front Worksurfaces								
Left-Hand Worksurfaces								
231/2"	24"	UVC2424L	\$433	\$492				
231/2"	30"	UVC2430L	\$465	\$524				
231/2"	36"	UVC2436L	\$498	\$557				
231/2"	42"	UVC2442L	\$530	\$589				
231/2"	48"	UVC2448L	\$557	\$616				
291/2"	30"	UVC3030L	\$478	\$537				
291/2"	36"	UVC3036L	\$514	\$573				
291/2"	42"	UVC3042L	\$543	\$602				
291/2"	48"	UVC3048L	\$577	\$636				
Right-	Hand W	Vorksurfaces						
231/2"	24"	UVC2424R	\$433	\$492				
231/2"	30"	UVC2430R	\$465	\$524				
231/2"	36"	UVC2436R	\$498	\$557				
231/2"	42"	UVC2442R	\$530	\$589				
231/2"	48"	UVC2448R	\$557	\$616				
291/2"	30"	UVC3030R	\$478	\$537				
291/2"	36"	UVC3036R	\$514	\$573				
291/2"	42"	UVC3042R	\$543	\$602				
291/2"	48"	UVC3048R	\$577	\$636				

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Transaction Worksurfaces

► Need help?

Product details, page 76

Laminate



Tip: Transaction worksurfaces can be used with 41"H panels only.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Support brackets allow transaction worksurfaces to be attached to low or medium top caps. They cannot attach to panels with high top caps.

Standard Includes

- · Worksurface: laminate price group 1
- 3 mm edge profile on front edge: plastic
- · Plastic default flat profile on side and back edges
- Support brackets: paint

Required to Specify

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for front edge on laminate worksurface
- 4 Paint color number for support bracket
- 5 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Laminate worksurfaces Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Support Brackets	For use with low top cap	No cost	Specify for use with low top cap.

Specification Information

U.S. Base Price Laminate



Dir	nensions	·Style
A	В	Number
		•

·Plastic 3 mm Edge

With Brackets for Use with Avenir Panels

	15"	301/4"	MUTR1630	\$344
15" 42 ¹ / ₄ " MUTR1642 \$404 15" 48 ¹ / ₄ " MUTR1648 \$428	15"	36 ¹ / ₄ "	MUTR1636	\$375
15" 48 ¹ / ₄ " MUTR1648 \$428				

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Panel-Mounted Universal Systems Worksurface Supports

For Use with Avenir Panels

Panel-Mounted Universal Systems Worksurface Supports

On-Module Cantilever



Tip: 30"D straight and transition cantilevered worksurfaces require additional floor support along the front edge, such as a pedestal, end panel, post leg, side support bracket, or an adjacent return worksurface.

	Standard Includes	Required to Specify
Need help? Product details, page 78	Cantilever: paintTie plateAttachment hardware	1 Style number2 Paint color number for cantilever▶ See Surface Materials, page 354.

Specification Information		
· Style Number	· U.S. Price	
MUCANT	\$140	
:	:	

Rear Corner Brackets



Tip: Rear corner bracket includes a single bracket. To order a pair of handed brackets, specify the MSS side support bracket package.

Page 291

	Standard Includes	Required to Specify
Need help? Product details, page 78	Rear corner bracket: black paint only Attachment hardware	Style number

Specification Information		
•Style Number	· U.S. Price	
MUCSBR	\$35	



Panel-Mounted Universal Systems Worksurface Supports for Use with Avenir Panels, continued

Support Plates



Tip: Support plate can also be used in freestanding applications.

Standard Includes		Required to Specify	
Need help?	Support plate: black paint only Attachment bardware	Style number	

Product details, page 110

• Attachment hardware

Specification Information		
Dimensions	• Style Number	·U.S. Price
14"D	TS714WSP	\$76
20"D	TS720WSP	\$76
1	1	:

Flush-Mount Brackets



Standard Includes	Required to Specify
Flush-mount brackets: black paint only Attachment hardware	Style number

Specification Information		
Style Number	· U.S. Price	
UFB	: \$29	

Tie Plates



Standard Includes	Required to Specify
Package of six tie plates: black paint only Attachment hardware	Style number

Specification Information			
Dimensions	· Style · Number	· U.S. Price	
3 ³ / ₄ "L	TS7TIEPLATE	\$110	
:	•		



Reinforcing Channels



Standard Includes

Required to Specify

Reinforcing channel: black paint onlyAttachment hardware

Style number

Tip: Reinforcing channel can also be used in freestanding applications.

Specification Information		
Dimensions	• Style Number	· U.S. Price
39"W	TS7WKSPT39	\$54
48"W	TS7WKSPT48	\$54
51"W	TS7WKSPT51	\$54
54"W	TS7WKSPT54	\$54
57"W	TS7WKSPT	\$54
60"W	TS7WKSPT60	\$54
63"W	TS7WKSPT63	\$54
66"W	TS7WKSPT66	\$54
72"W	TS7WKSPT72	\$54



Legs and Supports for Avenir Universal Systems Worksurfaces

Without Alignment Tab

Post Legs and Double Post Legs

Tip: Height dimensions listed are nominal and include the thickness of a worksurface.

Tip: Standing height legs can be used as column support in panel-mounted applications only.

Tip: Corner worksurfaces require a leg in the back corner. Be sure to order fifth leg if specifying a package of four.

<	^	>





	Standard Includes	Required to Specify
Need help? Product details, page 80	Legs: paint Attachment hardware Non-locking caster, if selected: black plastic only	1 Style number 2 Paint color number for leg 3 Options, if selected (see below) ▶See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Paint price group 1	No cost	Specify paint color number.
Materials	 Paint price group 2 	+\$21 per leg	Specify paint color number.
	 Paint price group 3 	+\$37 per leg	Specify paint color number.
	Paint price group 3	+\$37 per leg	

Planning	·Style	·U.S.	 Planning 	· Style	·U.S.
Height	Number	Base	Height	Number	Base
		Price			Price
			:		

Post Leg with Glide			
26"	UNPL	\$136	
281/2"	UPL	\$136	
407/8"	UHPL	\$171	
<u>:</u>	:	:	

Post Leg	with Cast	er
26"	UNPLC	\$155
281/2"	UPLC	\$155

Package of Four Post Legs with Glides

26"	UNPL4	\$544	
281/2"	UPL4	\$544	
-			

Package of Four Post Legs with Casters

26"	UNPL4C	\$620
281/2"	UPL4C	\$620

Package of Four Post Legs with Two Glides and Two Casters

26"	UNPL4M	\$582
281/2"	UPL4M	\$582
	-	•

[▶] Specification Information, continued on next page

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

▶Specification Information, continued from previous page

Specification Information Planning Style U.S. Height Number Base Price

Double Post Leg with Glides

281/2"	UDPL	\$382
407/8"	UHDPL	\$448



Tip: Double post legs can be used as a shared or column support in applications with other post legs.

Double	Post	C-Leg	with	Glides
--------	-------------	-------	------	--------

		•
281/2"	UCL	\$434
: :		:

Adjustable-Height Legs

Tip: Corner worksurfaces require a leg in the back corner. Be sure to order fifth leg if specifying a package of four.


Tip: See Table and Leg Combinations page for number of legs required per worksurface.

► See Answer Solutions Specification Guide

Tip: Height dimensions listed include the thickness of a worksurface.

{	>





	Standard Includes
►Need help?	 Worksurface legs: paint

Product details,

page 80

- Worksurface legs: paint
- · Glides, if selected: paint to match legs
- Locking casters, if selected: paint to match legs
- Attachment hardware

Required to Specify

- 1 Style number
- 2 Paint color number for leg
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify	
Surface Materials	Paint price group 1Paint price group 2	No cost +\$21 per leg	Specify paint color number. Specify paint color number.	

Specific	ation Info	rmation			
·Planning	· Style	·U.S.	·Planning	·Style	·U.S.
Height	Number	Base	Height	Number	Base
:	:	Price	:	:	Price
		•			-

Adjustable-Height Leg with Glide

251/2"-311/2" **UADJ** \$223 251/2"-311/2" **UADJ**4

Legs with Glides

\$ 892

Adjustable-Height Leg with Caster

251/2"-311/2" **UADJC** \$251

Package of Four Adjustable-Height **Legs with Casters**

Package of Four Adjustable-Height

251/2"-311/2" **UADJ4C** \$1004

Package of Four Adjustable-**Height Legs with Two Glides** and Two Casters

251/2"-311/2"	UADJ4M	\$ 948

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Columns



Tip: Columns have a different aesthetic than post legs (round vs. elliptical). Columns can be used as column supports in applications without post legs.

Tip: Height dimensions include the thickness of a worksurface.

 Column: paint ►Need help? Product details,

page 80

Attachment hardware

1 Style number

2 Paint color number for column

3 Options, if selected (see below) ►See Surface Materials, page 354

D.	 	

	Options	U.S. Price	Required to Specify	
Surface Materials	Paint price group 1Paint price group 2Paint price group 3	No cost +\$21 per leg +\$37 per leg	Specify paint color number. Specify paint color number. Specify paint color number.	

Planning	·Style	·U.S.
Height	Number	Base
	:	Price
28½"	UCOL	\$301
	UADJCOL	*

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ► See page 1 for details.


Specifying Avenir Worksurfaces

276
278
279
280
282
284
286
287
288
289
290
291
298
299

Panel-Supported Radius-End Tables

 $1\frac{1}{2}$ "-Thick

Panel-Supported Radius-End Tables with Laminate Worksurface



Need help? Product details, page 90

Standard Includes

- Worksurface: laminate price group 1
- Worksurface edge: plastic T-mold on user sides and default square plastic edge on straight edge
- Height-adjustable column support: all paint price groups
- · Locking side support: black paint only

Required to Specify


- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for plastic worksurface edge
- 4 Paint color number for column support
- 5 Options, if selected (see below)
- See Surface Materials, page 354.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

	Options	U.S. Price	Required to Specify	
Surface Materials	Worksurface Laminate price group 2 Open Line laminate See information a +\$ 74 plus cost of laminate		See Surface Materials Reference Manu	
	Column support Polished Chrome	+\$122	Specify with 9201 Polished Chrome column.	
Grommets • Available on 30"D and 36"D +\$ worksurfaces		+\$ 45	Back left: CWBL and plastic color number Back right: CWBR and plastic color number	
Related Products	Worksurface supports and bra Worksurface accessories Worksurface wiring and cablin Mobile pedestals		▶ Page 291▶ Page 298▶ Page 299▶ Page 308	

·Dimer	nsions	· Style	·U.S.
D	W	Number	Base Price
30"	60"	MPT6030	\$1473
30"	66"	MPT6630	\$1493
30"	72"	MPT7230	\$1512
36"	60"	MPT6036	\$1631
36"	66"	MPT6636	\$1650
36"	72"	MPT7236	\$1670

Panel-Supported Radius-End Tables with Wood Worksurface



Need help? Product details, page 90

Standard Includes

Worksurface: wood group 1

- Worksurface edge: wood on exposed portion
- · Height-adjustable column support: all paint price groups
- · Locking side support: black paint only

Required to Specify

- 1 Style number
- 2 Wood color number for worksurface and worksurface edge
- 3 Paint color number for column support
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Worksurface		
Materials	 Customiz stain on wood 	No cost	Specify with Customiz stain.
	Full fill finish an area of arrays 4	. 04.00	See Surface Materials Reference Manual
	 Full-fill finish on wood group 1 	+\$103	Specify with full-fill finish and select wood color number
			See Surface Materials, page 354.
	Column support		
	Polished chrome	+\$122	Specify with 9201 Polished Chrome column.
Grommets	Grommets	+\$ 45	Back left: CWBL and plastic
			color number
			Back right: CWBR and plastic color number
Related	Worksurface supports and brace	ckets	▶ Page 291
Products	 Worksurface accessories 		▶ Page 298
	 Worksurface wiring and cabling 	3	▶ Page 299
	 Mobile pedestals 		▶ Page 308

Spe	cificatio	on Informatio	n
Dim	ensions	· Style	∙U.S.
D	W	Number	Base Price
:	2011	HUUDTOOO	
30"	60"	MWPT6030	\$2055
30"	66"	MWPT6630	\$2081
30"	72"	MWPT7230	\$2100
:		:	



Transaction Worksurfaces

► Need help?

page 92

Product details,

13/16"-Thick



Tip: Transaction worksurfaces can only be used with 41"H panels.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Support brackets allow transaction worksurfaces to be attached to low or medium top caps.

Standard Includes

- · Worksurface: laminate price group 1
- Front and back worksurface edge: plastic T-mold
- · Side edges: plastic default square edge
- · Support brackets for use with medium top cap: all paint price groups

Required to Specify

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for transaction
- worksurface edge 4 Paint color number for support brackets
- 5 Options, if selected (see below)
- See Surface Materials, page 354.

		Options		U.S. Price	Required to Specify
Surface Materials		Worksurface Laminate price group 2 Open Line laminate		See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Support Brackets		For use with low top cap		No cost	Replace suffix M in style number with L . Example: MTWS3017L
Spec	ification	Information			
Dimer D	nsions W	•Style Number	·U.S. Base Price		
Straig	jht Trans	action Worksu	rfaces		
165/8"	301/4"	MTWS3017M	\$511		
165/8"	361/4"	MTWS3617M	\$551		
165/8"	421/4"	MTWS4217M	\$594		
165/8"	481/4"	MTWS4817M	\$634		
165/8"	60 ¹⁵ / ₃₂ "	MTWS6017M	\$685		



Corner Curvilinear Worksurfaces

11/2"-Thick



For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Standard Includes

Required to Specify


Need help? Product details, page 96

- Worksurface: laminate price group 1
- · Radius-edge T-mold on user's side: plastic
- · Side and back edges: plastic square edge default
- · Rear corner bracket: black paint only
- Cable scallops centered on the width edges
- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. ▶ See Surface Materials Reference Manual.
Related	Worksurface supports and brackets		▶ Page 291
Products	 Worksurface accessories 		▶ Page 298
	 Worksurface wiring and call 	oling	▶ Page 299
	Storage accessories	-	▶ Page 311

Specification Information							
ensions W	Radius	•Style Number	· U.S. Base Price				
361/8"	18"	PCWRC3618	\$470				
361/8"	12"	PCWRC3624	\$648				
421/8"	18"	PCWRC4224	\$710				
481/8"	18"	PCWRC4824	\$792				
421/8"	12"	PCWRC4230	\$778				
481/8"	18"	PCWRC4830	\$869 ·				
	36½" 36½" 36½" 42½" 48½"	Radius 361/8" 18" 361/8" 12" 421/8" 18" 481/8" 18" 421/8" 12"	Style Number Style Style Number Style St				

Corner Curved-Edge Worksurfaces

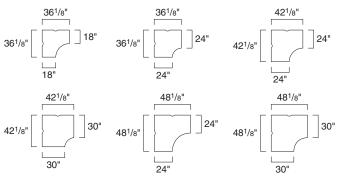



Corner Split-Top Curvilinear Worksurfaces

 $1\frac{1}{2}$ "-Thick



Standard Includes

Required to Specify

- ► Need help? Product details, page 98
- · Worksurface: laminate price group 1
- Monitor surface: plastic square edge default, all sides
- Keyboard surface front edge: radius edge T-mold, plastic square edge default sides and rear
- · Rear corner bracket: black paint only
- · Cable scallops centered on the width edges
- Two cantilevers: all paint price groups
- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Paint color number for cantilevers
- 5 Options, if selected (see below)
- ► See Surface Materials, page 354.

For laminate price						
group 2 pricing, please						
refer to the electronic cata						
log or SmartTools.						

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.


Dimensions D W		• Style Number	· U.S. Base Price	
24"	421/8"	PCWRC4224ST	\$1486	
24"	48 ¹ / ₈ "	PCWRC4824ST	\$1737	



Worksurfaces

Straight Worksurfaces for Use with Curvilinear Worksurfaces

1¹/₂"-Thick



For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Not all curvilinear worksurface installations can be panel wrapped.

► See page 94 for application details.

Standard Includes

Required to Specify

- ► Need help? Product details, page 100
- Worksurface: laminate price group 1
- · Radius-edge T-mold on user's side: plastic
- · Side and back edges: plastic square edge default · Center support on 66"W and 72"W worksurfaces:
- black paint only
- · Cable scallop(s) on worksurfaces that are 36"W or wider
- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

Options	U.S. Pric	e Required to Specify
Laminate price	group 2 See informa	See Surface Materials Reference Manual.
Worksurface acWorksurface wiPedestals	cessories ring and cabling	▶ Page 291▶ Page 298▶ Page 299▶ Pages 306–309▶ Page 311
on Information		
• Style Number	·U.S. Base Price	
	Worksurface Laminate price Open Line lamin Worksurface su Worksurface ac Worksurface wi Pedestals Storage access Information Style	Worksurface • Laminate price group 2 • Open Line laminate • Worksurface supports and brackets • Worksurface accessories • Worksurface wiring and cabling • Pedestals • Storage accessories on Information • Style Number Base


	••	Number	Price	
24"[) Worksur	faces		
24"	241/8"	PWRC2424	\$300	
24"	301/8"	PWRC3024	\$324	
24"	361/8"	PWRC3624	\$340	
24"	421/8"	PWRC4224	\$369	
24"	481/8"	PWRC4824	\$436	
24"	5411/32"	PWRC5424	\$467	
24"	6011/32"	PWRC6024	\$499	
24"	6611/32"	PWRC6624	\$555	
24"	7211/32"	PWRC7224	\$622	
:				

▶ Specification Information, continued on next page



▶ Specification Information, continued from previous page

Specification Information							
· Dimensions	·Style	·U.S.					
D W	Number	Base					
:	:	Price					
	:	:					



30"D	30"D Worksurfaces			
30"	241/8"	PWRC2430	\$416	
30"	301/8"	PWRC3030	\$442	
30"	361/8"	PWRC3630	\$470	
30"	42 ¹ /8"	PWRC4230	\$499	
30"	481/8"	PWRC4830	\$567	
30"	5411/32"	PWRC5430	\$605	
30"	6011/32"	PWRC6030	\$639	
30"	6611/32"	PWRC6630	\$700	
30"	7211/32"	PWRC7230	\$764	
:		:	:	

Straight Worksurfaces

241/8"	301/8"	361/8"	421/8"	481/8"	54 ¹¹ /32"
24" or 30"	24" or 30"	24" or 30"	24" or 30"	24" or 30"	24" or 30"

6011/32"	66 ¹¹ /32"	72 ¹¹ /32"
24"	24" 🗆	24"
or 30" L	or 30" L	or 30" L

Extended Corner Curvilinear Worksurfaces

Product details,

page 96

1¹/₂"-Thick

Tip: Not all curvilinear work- ▶ Need help? surface installations can be panel wrapped.

► See page 94 for application details.


Standard Includes

Required to Specify

- · Worksurface: laminate price group 1
- · Radius-edge T-mold on user's side: plastic
- · Side and back edges: plastic square edge default
- · Rear corner bracket: black paint only
- Cable scallops centered on the width edges
- Cable scallop(s) on the length edges
- · Center support on 72"W worksurfaces: black paint only
- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual
Related Products	 Worksurface supports and brackets Worksurface accessories Worksurface wiring and cabling Pedestals Storage accessories 		 ▶ Page 291 ▶ Page 298 ▶ Page 299 ▶ Pages 306–309 ▶ Page 311



Specification Information									
Dim A	ensions B	С	D	Radius	· Style Number	· U.S. Base Price			
Left	-Hand								
24"	24"	6011/32"	481/8"	18"	PCWRL226048	\$1147			
30"	30"	6011/32"	481/8"	18"	PCWRL336048	\$1264			
24"	30"	6011/32"	481/8"	18"	PCWRL236048	\$1264			
30"	24"	6011/32"	481/8"	18"	PCWRL326048	\$1264			
24"	24"	7211/32"	481/8"	18"	PCWRL227248	\$1356			
30"	30"	7211/32"	481/8"	18"	PCWRL337248	\$1475			
24"	30"	7211/32"	481/8"	18"	PCWRL237248	\$1475			
30"	24"	7211/32"	481/8"	18"	PCWRL327248	\$1475			
					:				

▶ Specification Information, continued on next page




▶ Specification Information, continued from previous page

Dime	ensions				· Style	∙U.S.
A	В	C	D	Radius	Number	Base
					:	Price
					•	



Righ	Right-Hand								
24"	24"	481/8"	6011/32"	18"	PCWRR224860	\$1147			
30"	30"	481/8"	6011/32"	18"	PCWRR334860	\$1264			
24"	30"	481/8"	6011/32"	18"	PCWRR234860	\$1264			
30"	24"	481/8"	6011/32"	18"	PCWRR324860	\$1264			
24"	24"	481/8"	7211/32"	18"	PCWRR224872	\$1356			
30"	30"	481/8"	7211/32"	18"	PCWRR334872	\$1475			
24"	30"	481/8"	7211/32"	18"	PCWRR234872	\$1475			
30"	24"	481/8"	7211/32"	18"	PCWRR324872	\$1475			
						•			

Extended Corner Worksurfaces

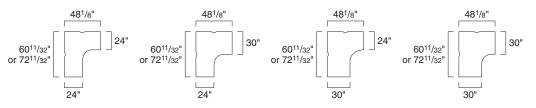

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.

See page 1 for details.

Transitional Curvilinear Worksurfaces

► Need help?

page 100

Product details,

11/2"-Thick

Tip: Not all curvilinear worksurface installations can be panel wrapped.

See page 94 for application details.

Standard Includes

Required to Specify

- Worksurface: laminate price group 1
 - · Radius-edge T-mold on user's side: plastic
 - Side and back edges: plastic square edge default
 - · Cable scallop centered on the straight edge
- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

For laminate price
group 2 pricing, please
refer to the electronic cata-
log or SmartTools.

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual
Related Products	Worksurface supports and I Worksurface accessories Worksurface wiring and cab Pedestals Storage accessories		▶ Page 291▶ Page 298▶ Page 299▶ Pages 306–309▶ Page 311





 Dimensions 			· Style	·U.S.	
A	В	C	Number	Base	
				Price	
			•	•	


Left-Hand

24"	18"	361/8"	PTRWL2136	\$567
30"	24"	421/8"	PTRWL3242	\$701
30"	24"	481/8"	PTRWL3248	\$818
:			:	:

Right-Hand

18"	24"	361/8"	PTRWR1236	\$567
24"	30"	42 ¹ / ₈ "	PTRWR2342	\$701
24"	30"	481/8"	PTRWR2348	\$818
:			•	•

Transitional Worksurfaces





Jetty Curvilinear Worksurfaces

11/2"-Thick

Tip: Not all curvilinear worksurface installations can be panel wrapped.

See page 94 for application details.

Standard Includes

Required to Specify

► Need help? Product details, page 102

· Worksurface: laminate price group 1

· Storage accessories

- Radius-edge T-mold on user's side: plastic
- · Side and back edges: plastic square edge default
- Column base: all paint price groups
- Locking side support: black paint only
- · Cable scallops centered on 48" side


1 Style number

▶ Page 311

- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Paint color number for column base and conference end panel
- 5 Options, if selected (see below)
- ► See Surface Materials, page 354.


For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. ▶See Surface Materials Reference Manual.
Related Products	Worksurface supports and brackets Worksurface accessories Worksurface wiring and cabling		▶ Page 291 ▶ Page 298 ▶ Page 299



Spe	Specification Information									
· Dim	ensions B	С	D	Radius	• Style Number	·U.S. Base Price				
Left	-Hand				·	·				
30"	24"	66"	48"	18"	PJWL326648	\$1927				
30"	24"	72"	48"	18"	PJWL327248	\$1973				
30"	30"	72"	48"	18"	PJWL337248	\$2019 ·				
Righ	nt-Hand									
24"	30"	48"	66"	18"	PJWR234866	\$1927				
24"	30"	48"	72"	18"	PJWR234872	\$1973				
30"	30"	48"	72"	18"	PJWR334872	\$2019 :				

Jetty Worksurfaces

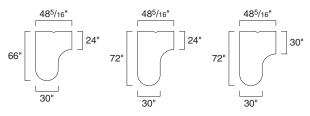



For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Visitor Curvilinear Worksurfaces

► Need help?

page 104

1¹/₂"-Thick

Tip: Not all curvilinear worksurface installations can be panel wrapped.

See page 94 for application details.

Standard Includes

Required to Specify

- · Worksurface: laminate price group 1 Product details,
 - Radius-edge T-mold on user's side: plastic
 - · Side and back edges: plastic square edge default · Conference end panel: all paint price groups
- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Paint color number for conference end panel
- 5 Options, if selected (see below)
- See Surface Materials, page 354.

For laminate price
group 2 pricing, please
refer to the electronic cata-
log or SmartTools.

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. ▶ See Surface Materials Reference Manual.
Related Products	Worksurface supports and to Worksurface accessories Worksurface wiring and cable Storage accessories		▶ Page 291 ▶ Page 298 ▶ Page 299 ▶ Page 311





· Dim	· Dimensions · Style		· Style	·U.S.	
D	W	Radius		Base Price	
Left	t-Hand				
24"	245/16"	12"	PVWRL2424	\$640	
24"	305/16"	12"	PVWRL2430	\$693	
24"	365/16"	12"	PVWRL2436	\$735	
30"	305/16"	12"	PVWRL3030	\$713	
<u>:</u>			:	<u>:</u>	
Rigl	ht-Hand				
24"	245/16"	12"	PVWRR2424	\$640	
24"	305/16"	12"	PVWRR2430	\$693	
24"	365/16"	12"	PVWRR2436	\$735	
30"	305/16"	12"	PVWRR3030	\$713	
:			:		

Visitor Worksurfaces

245/16"	305/16"	305/16"	365/16"
		30"	



Vorksuriac

Linking Curvilinear Worksurfaces

1¹/₂"-Thick



Tip: These worksurfaces are 2" deeper to allow for panel thickness.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Not all curvilinear worksurface installations can be panel wrapped.

See page 94 for application details.

Standard Includes

Required to Specify

- ► Need help? Product details, page 104
- Worksurface: laminate price group 1
 Padius adda T mold on user's side; pl
- Radius-edge T-mold on user's side: plastic
- · Side and back edges: plastic square edge default
- Column support: all paint price groups
- Cable scallop at back corner

- 1 Style number
- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge
- 4 Paint color number for column support
- 5 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Related Products	 Worksurface supports and Worksurface accessories Worksurface wiring and call Storage accessories 		▶ Page 291▶ Page 298▶ Page 299▶ Page 311

Specifi	Specification Information					
Dimensi D W		Radius	•Style Number	·U.S. Base Price		
25 ²⁷ / ₃₂ " 25	5 ²⁷ /32"	18"	PLWR2424	\$839		
31 ²⁷ / ₃₂ " 3	1 ²⁷ / ₃₂ "	18"	PLWR3030	\$839 :		

Linking Worksurface

25 ²⁷ /32"	31 ²⁷ /32	,"
25 ²⁷ / ₃₂ "	31 ²⁷ / ₃₂ "	

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Spanner Curvilinear Worksurfaces

 $1^{1/2}$ "-Thick

Tip: Not all curvilinear worksurface installations can be panel wrapped.

See page 94 for application details.

Tip: Shared cantilevers must be used on both sides of the worksurface.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

► Need help?
Product details,
page 104

Standard Includes

- Worksurface: laminate price group 1
- · Radius-edge T-mold on user's side: plastic
- Side and back edges: plastic square edge default
- Column support for panel-mounted applications: all paint price groups


1 Style number

- 2 Laminate color number for worksurface
- 3 Plastic color number for T-mold edge

Required to Specify

- 4 Paint color number for column support
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Worksurface Laminate price group 2 Open Line laminate	See information at left +\$74 plus cost of laminate	Specify laminate color number. See Surface Materials Reference Manual.
Related Products	Worksurface supports and brackets Worksurface accessories Worksurface wiring and cabling Storage accessories		▶ Page 291▶ Page 298▶ Page 299▶ Page 311




Dimensions	∙Style	∙U.S.
D W	Number	Base
•	:	Price
	•	

Panel-Supported

30"	50½"	PSPWR3050	\$1216
36"	501/8"	PSPWR3650	\$1399
36"	621/8"	PSPWR3662	\$1399
:		:	:


Spanner Worksurfaces





Worksurface Supports and Brackets

Side Supports



Tip: Side support bracket package includes a pair of handed brackets. Only one bracket is required for rear corner support of Avenir Universal Systems corner worksurface. Specify one package for every two corner worksurfaces.

	Standard Includes	Required to Specify
Need help? Product details, page 106	Pair of side supports: black paint only	Style number

Specifica	tion Information		
Style Number	·U.S. Price		
MSS	\$59 :		

Locking Side Supports



	Standard Includes	Required to Specify
Need help? Product details, page 106	Pair of locking side supports: black paint only	Style number

Style · U.S. Number Price	Specification Information					
DWCMP2 ¢69	Style Number	·U.S. Price				
FW3WB2 \$00	PWSMB2	\$68				



L-Shaped Cantilevers



Tip: Use a cantilever to support only one end of a 30"D worksurface. Use a side support, end panel, clear-access end panel, or a pedestal to support the opposite end.

	Standar	d Includes	Required to Specify
Need help? Product details, page 107	Cantilever: a	all paint price groups	1 Style number 2 Paint color number for cantilever ▶ See <i>Surface Materials</i> , page 354.
Specification	on Informatio	on	
· Fits Worksurface Depth	• Style Number	·U.S. Price	
Left-Hand C	antilevers		
18"	PCWS18CL	\$359	
24"	PCWS24CL	\$378	
30"	PCWS30CL	\$440 :	
Right-Hand	Cantilevers		
18"	PCWS18CR	\$359	
24"	PCWS24CR	\$378	
30"	PCWS30CR	\$440	
:	:	:	

Triangular-Shaped Cantilever




Tip: Use cantilever to support only one end of a 30"D worksurface. Use side support, end panel, or a pedestal to support the opposite end.

	Standard Includes	Required to Specify
► Need help? Product details, page 108	Cantilever: all paint price groups	1 Style number 2 Paint color number for cantilever ► See <i>Surface Materials</i> , page 354.

Spe	cification	on Informa	ition
·Dime	ensions	·Style	·U.S.
D	н	Number	Price
:		:	:
16"	12"	ВС	\$165



L-Shaped Shared Cantilevers



	Standard Includes	Required to Specify
► Need help?	Shared cantilever: all paint price groups	1 Style number
Product details,	 Support plate: black paint only 	2 Paint color number for shared cantilever

page 109

► See Surface Materials, page 354.

· Fits · Worksurface	Style Number	·U.S. Price
Depth		
24"	PCSB18S	\$378
30"	PCSB24S	\$563
	:	

Triangular-Shaped Shared Cantilevers




	Standard Includes	Required to Specify
► Need help?	Shared cantilever: all paint price groups	1 Style number
Droduct dotails	Alignment plate: grette paint only	2 Paint color number for chared cantilover

page 109

See Surface Materials, page 354.

Fits	·Style	·U.S.
Worksurface	Number	Price
Depth	:	
	:	
18", 24", or 30"	BSC	\$165

Support Plates



	Standard Includes	Required to Specify
Need help? Product details, page 110	Support plate: black paint only	Style number

· Dimens		nformation • Fits	· Style	·U.S.	
D	н	Worksurface Depth	Number	Price	
14"	311/16"	18"	PWSCL18	\$107	
20"	311/16"	24"	PWSCL24	\$107	
25 ¹⁵ / ₁₆ "	311/16"	30"	PWSCL30	\$107	

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ► See page 1 for details.

End Panels with Base



	Standard Includes	Required to Specify
Need help? Product details, page 110	End panel: paint price group 1	 1 Style number 2 Paint color number for end panel 3 Options, if selected (see below) See Surface Materials, page 354.

	Optior	ıs	U.S. Price	Required to Specify
Surface Materials	Paint pridPaint pridPaint prid	ce group 2	No cost +\$21 +\$37	Specify paint color number. Specify paint color number. Specify paint color number.
Specification	on Informa	tion		
Dimensions	Style	·U.S.		

Spe	Cilication	on informa	tion
·Dime	ensions	·Style	∙U.S.
D	н	Number	Base
			Price
:		:	:
18"	27"	MFES18	\$765
24"	27"	MFES24	\$786
30"	27"	MFES30	\$825

End Panels without Base



	Standard Includes	Required to Specify
Need help? Product details, page 111	End panel: paint price group 1	1 Style number2 Paint color number for end panel3 Options, if selected (see below)See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Paint price group 1Paint price group 2Paint price group 3	No cost +\$21 +\$37	Specify paint color number. Specify paint color number. Specify paint color number.

Spec	cificati	on Informa	ation
·Dime	nsions	· Style	·U.S.
D	н	Number	Base
:		:	Price
:		:	:
24"	27"	BEP24	\$595
30"	27"	BEP30	\$677
:		:	:



Floor-Support End Panel



	Standard Includes	Required to Specify
Need help? Product details, page 111	End panel: paint price group 1Adjustable base	1 Style number2 Paint color number for end panel3 Options, if selected (see below)See Surface Materials, page 354.


	Options	U.S. Price	Required to Specify
Surface Materials	Paint price group 1Paint price group 2Paint price group 3	No cost +\$21 +\$37	Specify paint color number. Specify paint color number. Specify paint color number.

Tip: Minimum and maximum height refers to the worksurface height.

Spe	cification	Informatio	n		
Dime	ensions Minimum Height	Maximum Height	• Style Number	· U.S. Base Price	
Left-	-Hand Floo	r-Support	End Pane		
24"	25"	28¾"	PWF24L	\$595	
30"	25"	28¾"	PWF30L	\$677 :	
Righ	t-Hand Flo	or-Suppor	t End Pan	ls	
24"	25"	283/4"	PWF24R	\$595	
30"	25"	283/4"	PWF30R	\$677	



Clear-Access End Panels



	Standard Includes	Required to Specify
Need help? Product details, page 112	Clear-access end panel: paint price group 1	1 Style number2 Paint color number for end panel3 Options, if selected (see below)See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Paint price group 1Paint price group 2Paint price group 3	No cost +\$21 +\$37	Specify paint color number. Specify paint color number. Specify paint color number.

	Paint price group 3		+\$37	Specify paint color number.
Specif	ication Info	rmation		
Depth	• Style Number	·U.S. Base Price		
Left-Ha	and Clear-Ad	cess End Pane	els	
24"	MCAS24L	\$609		
30"	MCAS30L	\$684 :		
Right-l	land Clear- <i>A</i>	Access End Par	nel	
24"	MCAS24R	\$609		
30"	MCAS30R	\$684		
:	:	:		

Cantilever-to-Cantilever Clamp

PWSCL1

\$107



Need help? Product details, page 107	Clamp: black paint only ,	Style number
Specificat	tion Information	
• Style Number	· U.S. Price	

Required to Specify



296 Avenir Specification Guide

Standard Includes

Change-of-Height Cantilever-to-Cantilever Clamp



	Standard Includes	Required to Specify
Need help? Product details,	Clamp: black	Style number

Specifica	ation Information	
Style Number	· U.S. Price	
PW60L0	÷	
PWSCL2	\$107 :	

Worksurface Fillers for Use with 1½"-Thick Worksurfaces



	Standa	rd Includes	Required to Specify
Need help? Product details, page 115	• Worksurfa	ce filler: plastic	1 Style number 2 Plastic color number ▶ See <i>Surface Materials</i> , page 354.
Specificatio	n Informat	ion	
· Fits Worksurface	· Style Number	·U.S. Price	

Fits	·Style	·U.S.	
Worksurface	Number	Price	
Depth			
•			

ror use	Retween a Rat	ilus Eage and a Seit Eage
24"	PWRF24	\$71
30"	PWRF30	\$71
:	:	

For Use E	setween Iwo S	elf Eages
24"	PWSF24	\$71
30"	PWSF30	\$71



Worksurface Accessories

Metal Center Drawers



	Standard Includes	Required to Specify
Need help? Product details, page 114	Center drawer: all paint price groupsMounting frame: Grey V2 paint only	1 Style number 2 Paint color number for center drawer ► See Surface Materials, page 354.

Spec	cificati	on Info	rmation	
· Dime	nsions W	н	•Style Number	·U.S. Price
<u></u>			:	<u>:</u>
23"	21½"	23/8"	FCD20	\$253
181/8"	21½"	23/8"	FSCD20	\$258

Plastic Center Drawer



	Standard Includes	Required to Specify
Need help? Product details, page 114	 Drawer: black textured plastic only Slides: black plastic only Attachment hardware and installation template 	Style number

Spe	cificat	ion Inf	ormation		
· Dim	ensions W	н	· Style Number	·U.S. Price	
19"	21"	11/2"	ASHC1921X1	\$97	



Worksurface Wiring and Cabling

Cable and Fiber Reels



	Standard Includes	Required to Specify
Need help? Product details, page 123	Package of four reels: black plastic only	Style number

Spe	cifica	tion Info	rmation	
	ensions		·Style	·U.S.
D	W	н	Number	Price
11/4"	8"	85/16"	98766	\$175
:				:

Termination Plate



	Standard Includes	Required to Specify
Need help? Product details, page 124	Termination plate: black paint only	Style number

Spe	ecificati	on Info	ormation	
	ensions		·Style	·U.S.
D	W	Н	Number	Price
3/4"	71/8"	71/8"	98765	\$26
:			:	:

Cord Reels



	Standard Includes	Required to Specify
► Need help? Product details, page 189	Carton of six cord reels: grey paint only	Style number

Specifica	ation Information
•Style Number	· U.S. Price
98767	\$74



Cable Storage Tray



	Standard Includes	Required to Specify
► Need help? Product details, page 189	Cable storage tray: black paint only	Style number

Spe	ecificat	ion Info	ormation	
	ensions		·Style	·U.S.
D	W	н	Number	Price
2"	24"	21/2"	98768	\$57

Wire Guide Clips



Tip: Recommended for painted metal surfaces only.

Standard Includes

Required to Specify

Need help?
Product details,
page 189

• Carton of 20 adhesive-backed wire guide clips: black plastic only

Style number

Specification Information

Number	· U.S. Price
32WCP	\$41
-	-

Grommet Convenience Receptacles




	Standard Includes	Required to Specify
Need help? Product details, page 189	Carton of three receptacles each with 9' cord, three-prong plug: black plastic only	Style number

Specification Information Style U.S. Number Price 98683WS \$245



Power Spheres



Tip: Sphere is field installed. Use 3"-diameter drill to cut mounting hole at desired location.

Standard Includes

Required to Specify

► Need help? Product details, page 121

- · Sphere with four simplex electrical outlets: black plastic
- Two 6' power cords (each rated at 15 amps), if selected: black plastic
- Two 6' Greenfield conduits (each rated at 15 amps), if selected: metal

Style number

SING	acitic	ation	rmation
	-1711115	I - L'I L'' I I	

· Dimensions			· Style	·U.S.
D	W	н	Number	Price

Four Electrical Outlets with Two 6' Power Cords

Four Electrical Outlets with Two 6' Greenfield Conduits for Hardwiring

33/8"	33/8"	3"	PTDMGB2	\$46

Power and Communication Spheres



Tip: Sphere is field installed. Use 3"-diameter drill to cut mounting hole at desired location

Tip: Faceplates in sphere accommodate standard voice/data jacks. Order jacks by calling any of the manufacturers listed below:

- · AMP Corporation 1.800.522.6752
- Leviton 1.800.722.2082
- Lucent 1.800.344.0223
- Krone 1.800.775.5766
- Punduit 1.800.777.3300

Standard Includes

Required to Specify

► Need help? Product details, page 121

- · Sphere with two simplex electrical outlets: black plastic · Faceplates to accommodate two customer-supplied voice/
- data jacks: black plastic
- 6' power cord with plug rated at 15 amps, if selected: black plastic
- · 6' Greenfield conduit for hardwiring, if selected: metal

Style number

Sp	ecificat	ion In	formation		
Di	mensions		· Style	·U.S.	
D	w	н	Number	Price	

Sphere with One 6' Power Cord

33/8"	33/8"	3"	PTDMGB3	\$266

Sphere with One 6' Greenfield Conduit for Hardwiring

33/8"	33/8"	3"	PTDMGB4	\$382



For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

See page 1 for details.

Communication Sphere



Tip: Sphere is field installed. Use 3"-diameter drill to cut mounting hole at desired location.

Tip: Order jacks by calling any of the manufacturers listed below:

- · AMP Corporation
- 1.800.522.6752 · Leviton
- 1.800.722.2082 · Lucent
- 1.800.344.0223
- Krone
- 1.800.775.5766
- · Punduit 1.800.777.3300

page 121

► Need help?

Standard Includes · Sphere with face plates to accommodate four Product details, customer-supplied voice/data jacks: black plastic **Required to Specify** Style number

Spe	cificat	ion In	formation	
Dime	ensions W	н	Style Number	·U.S. Price
			<u>:</u>	:
33/8"	33/8"	3"	PTDMGB5	\$266
			-	

Round Power and Communication Port



Tip: Port is field installed.
Use a 3½"-diameter drill to cut mounting hole at desired

Tip: Order jacks by calling any of the manufacturers listed below:

- · AMP Corporation 1.800.522.6752
- Leviton 1.800.722.2082
- · Lucent 1.800.344.0223
- Krone 1.800.775.5766
- · Punduit 1.800.777.3300

- **Standard Includes Required to Specify**
- ► Need help? Product details, page 122
- · Round unit with two electrical outlets: black plastic • 6' power cord with plug rated at 15 amps: black plastic
 - · Adapters for two customer-supplied data couplers/jacks

Style number

Spe	cificat	ion Info	rmation		
Dime D	ensions W	н	· Style · Number	· U.S. Price	
<u>:</u> 4½"	41/4"	45/16"	PTRSGB1	\$394	
			:	:	

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Answer Universal Systems Worksurface Wire Managers



Standard Includes

Required to Specify

Need help? Product details, page 71

- Set of six field installed worksurface wire managers: plastic
- Attachment hardware

1 Style number 2 Plastic color number for worksurface

wire manager: 6000 Black 6009 Arctic White 6052 Milk 6053 Seagull


6249 Platinum Solid 6654 Sand 6695 Midnight 6697 Fog

Specification Information

Style Number	·U.S. Price
:	:
TS7WWM	\$154



Specifying Storage



Steelcase 800 Series

lateral files are available with an Avenir-style pull to make these products compatible with Avenir. The Avenir-style pull complements the Avenir pull, but it is not identical. The Avenir-style pull is flush so it will allow the lateral file receding door to go back into the file.

Storage with Avenir Pulls	
Fixed Pedestals	306
Worksurface-Supported Pedestals	307
Mobile Pedestals	308
Mobile Pedestal Cushion Tops	310
Accessories for Pedestals	311
Overhead Bins and Shelves	
Universal Sliding Door Bins with Steel Fronts	313
Universal Sliding Door Bins with Laminate Fronts	314
Universal Sliding Door Bins with Wood Fronts	315
Universal Over the Case Bins with Flat Fronts	316
Universal Over the Case Bins with Radius Fronts	318
Universal In the Case Bins with Steel Flat Fronts	320
Universal In the Case Bins with Laminate Flat Fronts	322
Universal In the Case Bins with Wood Flat Fronts	324
Hutch Kits	326
Universal Shelves	329
Universal Personal Shelves	330
Accessories	331
Slim Shelves	334
800 Series Products	
800 Series Lateral Files	336
Counterweight Packages	338

Fixed Pedestals

With Avenir Pulls

	Standard Includes	Required to Specify
Need help? Product details, page 130	 Pedestal: paint price group 1 Drawer pulls: all paint price groups Pedestal filler: paint to match pedestal Lock keyed random: 9201 Polished Chrome Drawer interiors: black only —One pencil tray and two box drawer dividers per box/box/file pedestal Four adjustable leveling glides: black only 	1 Style number 2 Paint color number for pedestal 3 Paint color number for drawer pulls 4 Options, if selected (see below) ▶ See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Pedestal		
Materials	 Paint price group 1 	No cost	Specify paint color number.
	Paint price group 2	+\$ 47	Specify paint color number.
	Paint price group 3	+\$ 80	Specify paint color number.
Drawer	Rails		
Accessories	 Two side-to-side hanging file rails per file drawer 	No cost	Specify with rails.
Filler	Omit filler	- \$ 39	Specify with no filler.
Lock and	Lock		
Keying	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.
	Individual locking draw	rers	
	 File/file pedestals only 	+\$139	Specify with individual drawer lock.
	Keying		
	 Factory- and field-installed k 	eying	▶ Page 374
Related Products	Accessories		▶ Pages 311-312

Tip: Filler ships separate from pedestal for field installation. Filler can be omitted if not needed for structural or aesthetic reasons.

Tip: Counterweights are not required on fixed pedestals.

Speci	ficat	tion In	formation	
Dimens	sions	3	· Style	·U.S.
D 1	w	н	Number	Base
				Price
			-	



15"W Pedestal with Two File Drawers and Lock

231/2"	15"	27"	MU2824FFL	\$ 919
291/2"	15"	27"	MU2830FFL	\$1107
			•	•

15"W Pedestal with Two Box Drawers, One File Drawer, and Lock

231/2"	15"	27"	MU2824BBFL	\$ 940
291/2"	15"	27"	MU2830BBFL	\$1126
				•



Worksurface-Supported Pedestals

With Avenir Pulls



Tip: Counterweights are not required on worksurfacesupported pedestals.

Standard Includes

Required to Specify

- ► Need help? Product details, page 130
- Pedestal: paint price group 1 • Drawer pulls: all paint price groups
- · Lock, keyed random: 9201 Polished Chrome
- · Drawer interiors: black only
- —One pencil tray and one box drawer divider
- · Attachment hardware

- 1 Style number
- 2 Paint color number for pedestal
- 3 Paint color number for drawer pulls
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Pedestal		
Materials	 Paint price group 1 	No cost	Specify paint color number.
	 Paint price group 2 	+\$47	Specify paint color number.
	 Paint price group 3 	+\$80	Specify paint color number.
Drawer	Rails		
Accessories	 Two side-to-side hanging file rails per file drawer 	No cost	Specify with rails.
Lock and	Lock		
Keying	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.
	Keying		
	 Factory- and field-installed k 	eying	► Page 374
Related Products	Accessories		▶ Pages 311-312

Spe	ecifica	tion Inf	ormation	
·Dim	ensions	5	· Style	·U.S.
D	W	н	Number	Base
			:	Price

Pedestal with One Box Drawer, One File Drawer, and Lock

231/2"	15"	181/2"	MUPC24BFL	\$745
281/2"	15"	18½"	MUPC30BFL	\$924



Mobile Pedestals

With Avenir Pulls



► Need help? Product details,

page 130

Standard Includes

• Pedestal: paint price group 1

- 1/8"H steel top: paint to match pedestal
- Drawer pulls: all paint price groups
- · Lock, keyed random: 9201 Polished Chrome
- Non-locking, hard-composition casters: black only
 Counterweight package
- · Drawer interiors: black only
- -One pencil tray and one box drawer divider
- Factory-installed cushion top, if selected:
 –Cushion upholstery: price group 1
- -Retractable handle: black only

Required to Specify

- 1 Style number
- 2 Paint color number for pedestal
- 3 Paint color number for drawer pulls
- 4 Fabric color number for cushion upholstery (MUP2224BFSC only) 5 Options, if selected (see below)
- See Surface Materials, page 354.

Tip: Optional tops will
increase the overall
pedestal height.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

	Options	U.S. Price	Required to Specify
Surface	Pedestal		
Materials	 Paint price group 1 	No cost	Specify paint color number.
	Paint price group 2	+\$ 47	Specify paint color number.
	Paint price group 3	+\$ 80	Specify paint color number.
Tops	1"H square edge steel top	+\$ 74	Specify with steel square top.
	Laminate top		
	• 1 ³ / ₁₆ "H square edge	+\$314	Specify with laminate top and indicate
	laminate price group 1 top	• -	laminate color number.
	 1⁷/₁₆"H bullnose laminate 	+\$358	Specify with bullnose laminate top and
	price group 1 top	****	indicate laminate color number.
	• 13/16"H square edge laminate	See information at left	Specify with laminate top and indicate
	price group 2 top		color number.
	• 17/16"H bullnose laminate	See information at left	Specify with bullnose laminate top and
	price group 2 top		indicate laminate color number.
	Open Line laminate on	+\$ 74	See Surface Materials Reference Manua
	laminate top	plus cost of laminate	
	Wood veneer top		
	 1³/₁₆"H wood group 1 veneer 	+\$425	Specify with wood veneer top and
	top		indicate wood color number.
	 Customiz stain on wood top 	No cost	Specify with Customiz stain.
			See Surface Materials Reference Manua
	Upholstery on cushion to	op .	
	 Fabric price group 1 	No cost	Specify fabric color number.
	 Fabric price group 2 	+\$ 10	Specify fabric color number.
	 Fabric price group 3 	+\$ 42	Specify fabric color number.
	 Fabric price group 4 	+\$ 51	Specify fabric color number.
	 Fabric price group 5 	+\$ 65	Specify fabric color number.
	 Fabric price group 6 	+\$ 92	Specify fabric color number.
	 Fabric price group 7 	+\$111	Specify fabric color number.
	 Fabric price group 8 	+\$161	Specify fabric color number.
	 Fabric price group 9 	+\$206	Specify fabric color number.
	 Fabric price group 10 	+\$250	Specify fabric color number.
	 Leather price group 	+\$641	Specify leather color number.
			► See Surface Materials, page 354.
	 Customer's own material 	+\$ 16	See Surface Materials Reference Manua
	(COM) or Customer's own		to specify.
	leather (COL)		
Drawer	Rails		
Accessories	 Two side-to-side hanging 	No cost	Specify with rails.
	file rails per file drawer		. ,
Lock and	Lock		
Keying	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.
	Keying		
	 Factory- and field-installed key 	ving	▶ Page 374
Related	Accessories		▶ Pages 311-312



Products

Specification Information					
·Dim	ensions		Style	·U.S.	
D	W	W H Number		Base	
· ·			:	Price	



231/2"	15"	21"	MUP2224BFS	\$1289
			•	

One Box and One File Drawer with Factory-Installed Pedestal Cushion Top with Handle

231/2"	15"	231/4"	MUP2224BFSC	\$1779





For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Mobile Pedestal Cushion Tops

Field-Installed Kit



Standard Includes

Required to Specify

- ► Need help? Product details, page 130
- Cushion upholstery: price group 1Retractable handle, if selected: black only
- · Template for installation

- 1 Style number
- 2 Fabric color number for cushion upholstery
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Upholstery		
Materials	 Fabric price group 1 	No cost	Specify fabric color number.
	 Fabric price group 2 	+\$ 10	Specify fabric color number.
	 Fabric price group 3 	+\$ 42	Specify fabric color number.
	 Fabric price group 4 	+\$ 51	Specify fabric color number.
	Fabric price group 5	+\$ 65	Specify fabric color number.
	 Fabric price group 6 	+\$ 92	Specify fabric color number.
	Fabric price group 7	+\$111	Specify fabric color number.
	Fabric price group 8	+\$161	Specify fabric color number.
	Fabric price group 9	+\$206	Specify fabric color number.
	 Fabric price group 10 	+\$250	Specify fabric color number.
	 Leather price group 	+\$641	Specify leather color number.
	 Select Surfaces leather price group 1 	+\$641	See Surface Materials Reference Manual.
	Elmosoft leather price group	+\$741	Specify Elmosoft leather color number.
			See Surface Materials, page 354.
	 Select Surfaces leather price group 2 	+\$741	► See Surface Materials Reference Manual.
	Customer's own material (COM) or Customer's own leather (COL)	+\$ 16	See Surface Materials Reference Manual.

Tip: Mobile pedestal cushion top can be used with Avenir mobile pedestal MUP2224BFS and 200 Series BUMPF24BFL pedestals only.

Specif	Specification Information			
Dimens	ions W	· Style Number	·U.S.	
; D \	W	Number	Base Price	
		:		

For Use with Avenir and 200 Series Box File Mobile Pedestals

Cushion Top with Black Handle					
231/2"	15"	RPXTCH24P	\$459		
Cushion Top without Handle					
Cushic	n Top	without Handle			
Cushic 23 ¹ /2"	on Top 15"	without Handle RPXTC24P	\$341		



Accessories for Pedestals

Rails

For Use in Pedestals Manufactured after February 22, 2004 For Use in Universal Towers and Universal Workstation Verticals



Tip: Two rails per drawer accommodate side-to-side filing of letter, A4-, and legalsize hanging folders.

Tip: For pedestals manufactured on or before February 22, 2004, see Service Parts catalog.

	Standard Includes	Required to Specify
Need help? Product details, page 133	Package of two rails: black only	Style number

Dividers

For Use in Pedestals Manufactured after February 22, 2004 For Use in Universal Towers and Universal Workstation Verticals

Tip: For pedestals manufactured on or before February 22, 2004, see Service Parts catalog.

•	Need help?
	Product details,
	page 133

Package of two dividers: black only

Standard Includes

Style number


Required to Specify

Speci	fication In	formation			
Width	·Quantity	• Style Number	·U.S. Price		
For Us	e in 6"H D	rawers	•		
12"	2	RDV1506	\$ 42		
:	:		:		
For Us	e in 12"H	Drawers			
12"	2	RDV1512	\$ 45		
12"	10	RDV151210	\$210		
:	:	:	:		



Pencil Tray

For Use in Pedestals, Universal Towers, and Universal Workstation Verticals




Tip: Pedestals with box drawers include one pencil tray per pedestal.

	Standard Includes	Required to Specify
► Need help? Product details, page 132	Pencil tray: black only	Style number

Specifica	Specification Information							
Style Number	· U.S. Price							
RPXDPT	\$36 :							

Reference Shelf



	Standard Includes	Required to Specify
Need help? Product details, page 132	Reference shelf: black only Insert: clear plastic only	Style number

Specification Information							
Style Number	· U.S. Price						
RPXDRS	\$51						



Universal Sliding Door Bins with Steel Fronts

For Use with Avenir



Standard Includes

Required to Specify

Need help? Product details, page 134

Lock and

Keying

Related

Products

- Overhead bin: paint price group 1
- Sliding door: paint price group 1
- · Recess beneath unit to accommodate shelf light
- Shelf backstop

Lock

· No lock

Keying

Accessories

· Shelf lights

• Ember Chrome

· Factory- and field-installed keying

- On-module attachment brackets with safety catch: black paint only
- Vertical off-module attachment brackets, if selected: black paint only
- · Lock, keyed random: 9201 Polished Chrome
- 1 Style number

Specify with no lock.

▶ Page 374

► Pages 331–333 ► Pages 340–344

Specify with 9250 Ember Chrome lock.

- 2 Paint color number for overhead bin and steel door
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Overhead bin with one		
Materials	 Paint price group 1 	No cost	Specify paint color number.
	 Paint price group 2 	+\$ 47	Specify paint color number.
	Paint price group 3	+\$ 80	Specify paint color number.
			See Surface Materials Reference Manual.
Brackets	Off-module attachment	brackets	
	 One vertical off-module 	+\$ 70	Specify with one vertical off-module
	bracket		bracket.
	 Two vertical off-module 	+\$140	Specify with two vertical off-module
	brackets		brackets.
	Upmount brackets		
	Upmount kit	+\$206	Specify with upmount kit.
	No brackets		
	 Omit brackets 	-\$ 22	Specify omit brackets.
Shelf	Four dividers: white plastic	+\$ 53	Specify with dividers.
Accessories	·		

-\$ 73

No cost

Tip: Upmount brackets include steel back to enclose storage bin.

Dime D	nsions W	н	•Style Number	·U.S. Base
:			:	Price
153/4"	36"	161/4"	RSB36AVR	\$ 737
15 ³ ⁄4"	42"	161/4"	RSB42AVR	\$ 764
15 ³ ⁄4"	48"	161/4"	RSB48AVR	\$ 787
15 ³ ⁄4"	60"	161/4"	RSB60AVR	\$1189
15 ³ ⁄4"	66"	161/4"	RSB66AVR	\$1253
15¾"	72"	161/4"	RSB72AVR	\$1300
				•



Universal Sliding Door Bins with Laminate Fronts

For Use with Avenir



► Need help?

page 134

Product details,

Standard Includes

- · Overhead bin: paint price group 1
- · Sliding door: laminate price group 1
- · Recess beneath unit to accommodate shelf light
- · Shelf backstop
- On-module attachment brackets with safety catch: black paint only
- · Vertical off-module attachment brackets, if selected: black paint only
- · Lock, keyed random: 9201 Polished Chrome

Required to Specify

- 1 Style number
- 2 Paint color number for overhead bin
- 3 Laminate color number for door
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: Upmount brackets include steel back to enclose storage bin.

	Options	U.S. Price	Required to Specify				
Surface	Overhead bin with one de	oor					
Materials	 Paint price group 1 on bin 	No cost	Specify paint color number.				
	 Paint price group 2 on bin 	+\$ 47	Specify paint color number.				
	 Paint price group 3 on bin 	+\$ 72	Specify paint color number.				
			See Surface Materials Reference Manual.				
	 Laminate price group 2 on door 	See information at left	Specify laminate color number.				
	 Open Line laminate on door 	+\$ 74					
		plus cost of laminate	See Surface Materials Reference Manual.				
Brackets	Off-module attachment brackets						
	 One vertical off-module 	+\$ 70	Specify with one vertical off-module				
	bracket		bracket.				
	 Two vertical off-module 	+\$140	Specify with two vertical off-module				
	brackets		brackets.				
	Upmount brackets						
	 Upmount kit 	+\$206	Specify with upmount kit.				
	No brackets						
	Omit brackets	- \$ 22	Specify omit brackets.				
Shelf	Four dividers: white plastic	+\$ 53	Specify with dividers.				
Accessories							
Lock and	Lock						
Keying	 No lock 	- \$ 73	Specify with no lock.				
	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.				
	Keying						
	 Factory- and field-installed key 	ing	►Page 374				
Related	Accessories		▶ Pages 331–333				
Products	 Shelf lights 		▶ Pages 340–344				

Spe	Specification information							
• Dime	ensions W	н	• Style Number	·U.S. Base Price				
15¾"	36"	161/4"	RSB36LAVR	\$1131				
153/4"	42"	161/4"	RSB42LAVR	\$1158				
15¾"	48"	161/4"	RSB48LAVR	\$1181				
153/4"	60"	161/4"	RSB60LAVR	\$1902				
153/4"	66"	161/4"	RSB66LAVR	\$1966				
15¾"	72"	161/4"	RSB72LAVR	\$2013				
:								



Universal Sliding Door Bins with Wood Fronts

For Use with Avenir



Standard Includes

Required to Specify

► Need help? Product details, page 134

- · Overhead bin: paint price group 1
- Sliding door: wood group 1
- · Recess beneath unit to accommodate shelf light
- Shelf backstop
- On-module attachment brackets with safety catch: black paint only
- · Vertical off-module attachment brackets, if selected: black paint only
- · Lock, keyed random: 9201 Polished Chrome

- 1 Style number
- 2 Paint color number for overhead bin
- 3 Wood color number for door 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify			
Surface	Overhead bin with one de	oor				
Materials	 Paint price group 1 	No cost	Specify paint color number.			
	 Paint price group 2 	+\$ 47	Specify paint color number.			
	 Paint price group 3 	+\$ 72	Specify paint color number.			
	 Customiz stain on wood door 	No cost	Specify with Customiz stain.			
			See Surface Materials Reference Manual			
Brackets	Off-module attachment brackets					
	 One vertical off-module bracket 	+\$ 70	Specify with one vertical off-module bracket.			
	 Two vertical off-module 	+\$140	Specify with two vertical off-module			
	brackets		brackets.			
	Upmount brackets					
	Upmount kit	+\$206	Specify with upmount kit.			
	No brackets					
	Omit brackets	-\$ 22	Specify omit brackets			

Tip: Upmount brackets include steel back to enclose storage bin.

	bracketTwo vertical off-module brackets	+\$140	bracket. Specify with two vertical off-module brackets.
	Upmount brackets Upmount kit	+\$206	Specify with upmount kit.
	No brackets Omit brackets	-\$ 22	Specify omit brackets.
Shelf Accessories	Four dividers: white plastic	+\$ 53	Specify with dividers.
Lock and	Lock		
Keying	 No lock 	-\$ 73	Specify with no lock.
	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.
	Keying		
	 Factory- and field-installed ke 	eying	▶ Page 374
Related	Accessories		▶ Pages 331–333
Products	 Shelf lights 		▶ Pages 340–344

Spe	Specification Information							
Dime	ensions W	Н	Style Number	· U.S. Base Price				
153/4"	36"	16 ¹ / ₄ "	RSB36WAVR	\$1161				
153/4"	42"	161/4"	RSB42WAVR	\$1188				
153/4"	48"	161/4"	RSB48WAVR	\$1211				
153/4"	60"	161/4"	RSB60WAVR	\$1932				
153/4"	66"	161/4"	RSB66WAVR	\$1996				
153/4"	72"	161/4"	RSB72WAVR	\$2043				
				•				



Universal Over the Case Bins with Flat Fronts

For Use with Avenir



Standard Includes

Required to Specify

- Need help? Product details, page 138
- Overhead bin with lift-up door: paint price group 1
- · Recess beneath unit to accommodate shelf light
- Shelf backstop
- On-module attachment brackets with safety catch: black paint only
- Off-module attachment brackets, if selected: black paint only
- Picture frame door acrylic insert, if selected: 6538 Satin only
- Picture frame door glass insert, if selected: 6580 Ice White only
- · Lock, keyed random: 9201 Polished Chrome

- 1 Style number
- 2 Paint color number for overhead bin
- 3 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify			
Surface	Overhead bin with one do	or				
Materials	 Paint price group 1 	No cost	Specify paint color number.			
	Paint price group 2	+\$ 47	Specify paint color number.			
	• Paint price group 3 +\$ 80		Specify paint color number.			
	Overhead bin with two do	ors				
	 Paint price group 1 	No cost	Specify paint color number.			
	 Paint price group 2 	+\$ 65	Specify paint color number.			
	 Paint price group 3 	+\$112	Specify paint color number.			
Brackets	Off-module attachment br	ackets				
	One vertical off-module bracket	+\$ 70	Specify with one vertical off-module bracket.			
	 Two vertical off-module brackets 	+\$140	Specify with two vertical off-module brackets.			
	Upmount brackets					
	• Upmount kit +\$206		Specify with upmount kit.			
	No brackets					
	Omit brackets	-\$ 22	Specify omit brackets.			
Picture Frame	Omit insert	Prices at right	Specify omit insert.			
Door	 Acrylic insert 	Prices at right	Specify with acrylic insert.			
	 Glass insert (assist 	Prices at right	Specify with glass insert.			
	mechanism recommended)					
Door Mechanism	Assist mechanism for standard door, glass insert, or omit insert	+\$206 per door	Specify with assist mechanism.			
Shelf Accessories	Four dividers: white plastic	+\$ 53	Specify with dividers.			
Lock and	Lock					
Keying	No lock	-\$ 73 per door	Specify with no lock.			
	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.			
	Keying • Factory- and field-installed keyir	ng	▶ Page 374			
Related	Accessories		▶ Pages 331–333			

Tip: Upmount brackets include steel back to enclose storage bin.

Tip: When ordering the omit insert option, remember that custom material cannot be factory installed. Custom material must be ordered from a material vendor.

Tip: A door assist mechanism cannot be used with an acrylic door insert.





Dime D	nsion W	s H	· Number of Doors	· Style · Number	·U.S. Base	• Option (Add \$			
			:	Price		Base Price)			
				•	:	Pictur	e Frame I	Door Inserts	
				:	:	Omit Insert	: Acrylic : Insert	Glass Insert	
			:	:	:	:	•	:	
53/4"	24"	16 ¹ / ₄ "	1	RBB24QAVR	\$ 721	+\$288	+\$409	+\$ 490	
5 ³ /4"	30"	16 ¹ / ₄ "	1	RBB30QAVR	\$ 749	+\$303	+\$433	+\$ 523	
5 ³ /4"	36"	16 ¹ / ₄ "	1	RBB36QAVR	\$ 763	+\$318	+\$453	+\$ 556	
53/4"	42"	16 ¹ / ₄ "	1	RBB42QAVR	\$ 791	+\$331	+\$475	+\$ 614	
5 ³ /4"	48"	16 ¹ / ₄ "	1	RBB48QAVR	\$ 816	+\$345	+\$499	+\$ 669	
5 ³ /4"	60"	16 ¹ / ₄ "	2	RBB60QAVR	\$1306	+\$566	+\$790	+\$ 997	
53/4"	66"	16 ¹ / ₄ "	2	RBB66QAVR	\$1358	+\$579	+\$814	+\$1056	
53/4"	72"	16 ¹ / ₄ "	2	RBB72QAVR	\$1423	+\$592	+\$836	+\$1113	



Universal Over the Case Bins with Radius Fronts

For Use with Avenir



Need help? Product details,

page 138

Surface

Standard Includes

Required to Specify

- Overhead bin with lift-up door: paint price group 1
 Recess beneath unit to accommodate shelf light
- · Shelf backstop

Options

- On-module attachment brackets with safety catch: black paint only
- Off-module attachment brackets, if selected: black paint only
- · Lock, keyed random: 9201 Polished Chrome

Overhead bin with one door

- 1 Style number
- 2 Paint color number for overhead bin
- 3 Options, if selected (see below)

Required to Specify

► See Surface Materials, page 354.

Juliace	Overnead bill with one	uooi	
Materials	 Paint price group 1 	No cost	Specify paint color number.
	 Paint price group 2 	+\$ 47	Specify paint color number.
	Paint price group 3	+\$ 80	Specify paint color number.
	Overhead bin with two	doors	
	 Paint price group 1 	No cost	Specify paint color number.
	 Paint price group 2 	+\$ 65	Specify paint color number.
	 Paint price group 3 	+\$112	Specify paint color number.
Brackets	Off-module attachmen	t brackets	
	 One vertical off-module bracket 	+\$ 70	Specify with one vertical off-module bracket.
	 Two vertical off-module brackets 	+\$140	Specify with two vertical off-module brackets.
	Upmount brackets		
	Upmount kit	+\$206	Specify with upmount kit.
	No brackets		
	 Omit brackets 	-\$ 22	Specify omit brackets.

U.S. Price

Tip: Upmount brackets include steel back to enclose storage bin.

	No brackets Omit brackets	- \$ 22	Specify omit brackets.		
Door Mechanism	Assist mechanism for standard door, glass insert, or omit insert	+\$206 per door	Specify with assist mechanism.		
Shelf Accessories	Four dividers: white plastic	+\$ 53	Specify with dividers.		
Lock and	Lock				
Keying	 No lock 	-\$ 73 per door	Specify with no lock.		
	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock		
	Keying				
	 Factory- and field-installed ke 	eying	▶Page 374		
Related	Accessories		▶ Pages 331–333		
Products	 Shelf lights 		▶ Pages 340–344		





		н	of Doors	• Style Number	· U.S. Base Price
:			:		:
15¾"	24"	16 ¹ / ₄ "	1	RBB24QCAVR	\$ 880
15¾"	30"	16 ¹ / ₄ "	1	RBB30QCAVR	\$ 908
15¾"	36"	16 ¹ / ₄ "	1	RBB36QCAVR	\$ 922
15¾"	42"	16 ¹ / ₄ "	1	RBB42QCAVR	\$ 950
153/4"	48"	16 ¹ / ₄ "	1	RBB48QCAVR	\$ 975
153/4"	60"	16 ¹ / ₄ "	2	RBB60QCAVR	\$1624
15 ³ ⁄ ₄ "	66"	16 ¹ / ₄ "	2	RBB66QCAVR	\$1676
15¾"	72"	16 ¹ / ₄ "	2	RBB72QCAVR	\$1741

Universal In the Case Bins with Steel Flat Fronts

For Use with Avenir



Standard Includes

Required to Specify

- Need help? Product details, page 142
- Overhead bin with lift-up door: paint price group 1

 Page 2 hangeth unit to geometric about light.
- · Recess beneath unit to accommodate shelf light
- Shelf backstop
- On-module attachment brackets with safety catch: black paint only
- Off-module attachment brackets, if selected: black paint only
- Picture frame door acrylic insert, if selected: 6538 Satin only
- Picture frame door glass insert, if selected: 6580 Ice White only
- Lock, keyed random: 9201 Polished Chrome

- 1 Style number
- 2 Paint color number for overhead bin
- 3 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify				
Surface	Overhead bin with one o	loor					
Materials	Paint price group 1	No cost	Specify paint color number.				
	Paint price group 2	+\$ 47	Specify paint color number.				
	Paint price group 3	+\$ 80	Specify paint color number.				
	Overhead bin with two doors						
	 Paint price group 1 	No cost	Specify paint color number.				
	 Paint price group 2 	+\$ 65	Specify paint color number.				
	 Paint price group 3 	+\$112	Specify paint color number.				
Brackets	Off-module attachment	brackets					
	 One vertical off-module bracket 	+\$ 70	Specify with one vertical off-module bracket.				
	Two vertical off-module	+\$140	Specify with two vertical off-module				
	brackets		brackets.				
	Upmount brackets						
	Upmount kit	+\$206	Specify with upmount kit.				
	No brackets						
	Omit brackets	- \$ 22	Specify omit brackets.				
Picture Frame	Omit insert	Prices at right	Specify omit insert.				
Door	 Acrylic insert 	Prices at right	Specify with acrylic insert.				
	 Glass insert (assist 	Prices at right	Specify with glass insert.				
	mechanism recommended)						
Door	Assist mechanism for	+\$206 per door	Specify with assist mechanism.				
Mechanism	standard door, glass insert,						
	or omit insert						
Shelf	Four dividers: white plastic	+\$ 53	Specify with dividers.				
Accessories							
Lock and	Lock						
Keying	 No lock 	-\$ 73 per door	Specify with no lock.				
	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.				
	Keying						
	Factory- and field-installed ke	ying	▶Page 374				
Related	Accessories		▶ Pages 331–333				
Products	 Shelf lights 		▶ Pages 340–344				

Tip: Upmount brackets include steel back to enclose storage bin.

Tip: When ordering the omit insert option, remember that custom material cannot be factory installed. Custom material must be ordered from a material yendor.

Tip: A door assist mechanism cannot be used with an acrylic door insert.





Dimensions D W		н	· Number of Doors		·U.S. Base Price	• Options (Add \$ to Base Price)		
			:	:	:			oor Inserts
			•	:	:	: Omit : Insert	: Acrylic : Insert	Glass
			:	:	:	:	:	
53/4"	24"	16 ¹ / ₄ "	1	RBB24AVR	\$ 721	+\$288	+\$409	+\$ 490
53/4"	30"	16 ¹ / ₄ "	1	RBB30AVR	\$ 749	+\$303	+\$433	+\$ 523
53/4"	36"	16 ¹ / ₄ "	1	RBB36AVR	\$ 763	+\$318	+\$453	+\$ 556
53/4"	42"	16 ¹ / ₄ "	1	RBB42AVR	\$ 791	+\$331	+\$475	+\$ 614
53/4"	48"	16 ¹ / ₄ "	1	RBB48AVR	\$ 816	+\$345	+\$499	+\$ 669
53/4"	60"	16 ¹ / ₄ "	2	RBB60AVR	\$1263	+\$566	+\$790	+\$ 997
53/4"	66"	16 ¹ / ₄ "	2	RBB66AVR	\$1313	+\$579	+\$814	+\$1056
53/4"	72"	16 ¹ / ₄ "	2	RBB72AVR	\$1423	+\$592	+\$836	+\$1113
			:	:	:	:	:	:



Universal In the Case Bins with Laminate Flat Fronts

For Use with Avenir



Need help? Product details,

page 142

Standard Includes

- Overhead bin: paint price group 1
- · Lift-up door: laminate price group 1
- · Recess beneath unit to accommodate shelf light
- Shelf backstop
- On-module attachment brackets with safety catch: black paint only
- Off-module attachment brackets, if selected: black paint only
- · Lock, keyed random: 9201 Polished Chrome

Required to Specify

- 1 Style number
- 2 Paint color number for overhead bin
- 3 Laminate color number for door
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

For laminate price					
group 2 pricing, please					
refer to the electronic cata-					
log or SmartTools.					

	Options	U.S. Price	Required to Specify		
Surface	Overhead bin with one do	or			
Materials	 Paint price group 1 on bin 	No cost	Specify paint color number.		
	 Paint price group 2 on bin 	+\$ 47	Specify paint color number.		
	 Paint price group 3 on bin 	+\$ 72	Specify paint color number.		
			► See Surface Materials Reference Manual.		
	 Laminate price group 2 on door 	See information at left	Specify laminate color number.		
	 Open Line laminate on door 	+\$ 74			
		plus cost of laminate	See Surface Materials Reference Manual.		
	Overhead bin with two do	ors			
	 Paint price group 1 on bin 	No cost	Specify paint color number.		
	 Paint price group 2 on bin 	+\$ 65	Specify paint color number.		
	 Paint price group 3 on bin 	+\$ 98	Specify paint color number.		
	 Laminate price group 2 on doors 	See information at left	Specify laminate color number.		
	 Open Line laminate on doors 	+\$ 74			
		plus cost of laminate	See Surface Materials Reference Manual.		
Brackets	Off-module attachment br	ackets			
	 One vertical off-module 	+\$ 70	Specify with one vertical off-module		
	bracket		bracket.		
	 Two vertical off-module 	+\$140	Specify with two vertical off-module		
	brackets		brackets.		
	Upmount brackets				
	Upmount kit	+\$206	Specify with upmount kit.		
	No brackets				
	Omit brackets	-\$ 22	Specify omit brackets.		
Door	Assist mechanism	+\$206 per door	Specify with assist mechanism.		
Mechanism					
Shelf	Four dividers: white plastic	+\$ 53	Specify with dividers.		
Accessories					
Lock and	Lock				
Keying	No lock	-\$ 73 per door	Specify with no lock.		
	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.		
	Keying				
	 Factory- and field-installed keying 	ng	▶Page 374		
Related	Accessories		▶ Pages 331–333		
Products	 Shelf lights 		▶ Pages 340–344		

Tip: Upmount brackets include steel back to enclose storage bin.

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.



Dime D	nsions W	н	· Number of Doors		·U.S. Base Price
			:	•	:
153/4"	24"	16 ¹ / ₄ "	1	RBB24LAVR	\$1115
153/4"	30"	16 ¹ / ₄ "	1	RBB30LAVR	\$1143
15 ³ ⁄ ₄ "	36"	16 ¹ / ₄ "	1	RBB36LAVR	\$1157
153/4"	42"	16 ¹ / ₄ "	1	RBB42LAVR	\$1185
153/4"	48"	16 ¹ / ₄ "	1	RBB48LAVR	\$1210
15 ³ ⁄ ₄ "	60"	16 ¹ / ₄ "	2	RBB60LAVR	\$1976
15 ³ ⁄ ₄ "	66"	16 ¹ / ₄ "	2	RBB66LAVR	\$2026
15 ³ ⁄ ₄ "	72"	16 ¹ / ₄ "	2	RBB72LAVR	\$2136
					•



Universal In the Case Bins with Wood Flat Fronts

For Use with Avenir



Standard Includes

Required to Specify

- Need help?
 Product details,
 page 142
- Overhead bin: paint price group 1
- · Lift-up door: wood group 1
- · Recess beneath unit to accommodate shelf light
- · Shelf backstop

Options

· Shelf lights

Products

- On-module attachment brackets with safety catch: black paint only
- Off-module attachment brackets, if selected: black paint only
- · Lock, keyed random: 9201 Polished Chrome
- 1 Style number

▶ Pages 340–344

- 2 Paint color number for overhead bin
- 3 Wood color number for door
- 4 Options, if selected (see below)
- ► See Surface Materials, page 354.

Required to Specify

For wood group 2 and
3 pricing, please refer
to the electronic catalog or
SmartTools.

	Options		incquired to opening		
Surface	Overhead bin with one d	oor			
Materials	Paint price group 1	No cost	Specify paint color number.		
	Paint price group 2	+\$ 47	Specify paint color number.		
	Paint price group 3	+\$ 80	Specify paint color number.		
	Wood group 2 on wood door	See information at left	Specify wood color number.		
	Wood group 3 on wood door	See information at left	Specify wood color number.		
	Customiz stain on wood door	No cost	Specify with Customiz stain.		
	Oustonia Stain on wood door	140 0031	See Surface Materials Reference Manua		
			, coo canaco maionaio nererence manac		
	Overhead bin with two d	oors			
	 Paint price group 1 	No cost	Specify paint color number.		
	 Paint price group 2 	+\$ 65	Specify paint color number.		
	 Paint price group 3 	+\$ 98	Specify paint color number.		
	 Wood group 2 	See information at left	Specify wood color number.		
	 Wood group 3 	See information at left	Specify wood color number.		
	 Customiz stain on wood door 	No cost	Specify with Customiz stain.		
			See Surface Materials Reference Manua		
Brackets	Off-module attachment b				
	 One vertical off-module 	+\$ 70	Specify with one vertical off-module		
	bracket	•	bracket.		
	Two vertical off-module	+\$140	Specify with two vertical off-module		
	brackets		brackets.		
	Upmount brackets				
	 Upmount kit 	+\$206	Specify with upmount kit.		
	No brackets				
	Omit brackets	- \$ 22	Specify omit brackets.		
Door Mechanism	Assist mechanism	+\$206 per door	Specify with assist mechanism.		
wechanism					
Shelf	Four dividers: white plastic	+\$ 53	Specify with dividers.		
Accessories					
Lock and	Lock				
Keying	• No lock	-\$ 73 per door	Specify with no lock.		
	Ember Chrome	No cost	Specify with 9250 Ember Chrome lock.		
	Keying				
	 Factory- and field-installed key 	ring	▶Page 374		
Related	Accessories		▶ Pages 331–333		
	01 141: 1 :		D 040 044		

U.S. Price

Tip: Upmount brackets include steel back to enclose storage bin.






Dime D	ensions W	н	· Number of Doors		·U.S. ·Base ·Price	
			:		:	
15 ³ ⁄ ₄ "	24"	16 ¹ / ₄ "	1	RBB24WAVR	\$1145	
15¾"	30"	16 ¹ / ₄ "	1	RBB30WAVR	\$1173	
15¾"	36"	16 ¹ / ₄ "	1	RBB36WAVR	\$1187	
15¾"	42"	16 ¹ / ₄ "	1	RBB42WAVR	\$1215	
15¾"	48"	16 ¹ / ₄ "	1	RBB48WAVR	\$1240	
15 ³ ⁄4"	60"	16 ¹ / ₄ "	2	RBB60WAVR	\$2006	
15 ³ ⁄4"	66"	16 ¹ / ₄ "	2	RBB66WAVR	\$2056	
15¾"	72"	16 ¹ / ₄ "	2	RBB72WAVR	\$2166	
			-			

Hutch Kits

Hutch Kits

For Use with Universal Sliding Door, Universal Over the Case, and Universal In the Case Bins



Tip: A hutch kit cannot support more than one bin.

► Need help? Product details, page 146

Standard Includes

- Steel back to enclose storage bin, end supports, accessory rail, and one non-handed cable manager: paint price group 1
- Double-sided tackboard, fabric direction with horizontal application: fabric price group 1
- Attachment hardware

Required to Specify

- 1 Style number
- 2 Paint color number for end supports, back, accessory rail, and cord manager
- 3 Fabric color number for tackboard surface 1 (front)
- 4 Fabric color number for tackboard surface 2 (back)
- 5 Options, if selected (see below)
- See Surface Materials, page 354.

Tip: Be sure to order the storage bin in the same paint finish as the hutch kit. Storage bin is ordered separately.

Tip: To price a tackboard with fabrics in two different price groups on opposite sides, add the two prices together and divide by two.

Tip: 66"W and 72"W tackboards accommodate fabric in the horizontal direction only.

	Options	U.S. Price	Required to Specify
Surface	Paint price group 1	No cost	Specify paint color number.
Materials	 Paint price group 2 	+\$ 43	Specify paint color number.
	 Paint price group 3 	+\$ 72	Specify paint color number.
	Tackboard		
	 Fabric price group 1 	No cost	Specify fabric color number.
	Fabric price group 2	+\$ 24	Specify fabric color number.
	 Fabric price group 3 	+\$116	Specify fabric color number.
	 Fabric price group 4 	+\$158	Specify fabric color number.
	Fabric price group 5	+\$252	Specify fabric color number.
	Fabric price group COM	+\$ 32	See Surface Materials Reference Manual to specify.
	Fabric direction on 48"		
	 Vertical application 	No cost	Specify with vertical application.
Related	Universal sliding door bins		▶Pages 313–315
Products	 Universal over the case bins and Universal in the case bi 		▶ Pages 316–325

Specif	Specification Information					
·Width	•Style Number	·U.S. Base Price				
48"	RHK48	\$510				
60"	RHK60	\$549				
66"	RHK66	\$572				
72"	RHK72	\$590				
:						



Hutch Kit Receptacle

For Use with Hutch Kit Accessory Rail



	Standard Includes	Required to Specify
No sel le ele O	One built is a control with Olegan and there are a live.	Ohula mumahan

► Need help? Product details, page 147 One hutch kit receptacle with 9' cord and three-prong plug: Style number black only

· Rail attachment hardware

Specification	on Information
Style Number	· U.S. Price
RHKRECPT	\$130 :

Hutch Kit Cable Manager



Standard Includes

Required to Specify

Need help?
Product details,
page 147

Package of two hutch kit cable managers: paint
Product details,
page 354.

Required to Specify

1 Style number
2 Paint color number for cable managers
> See Surface Materials, page 354.

Specification Information				
	•Style Number	· U.S. Price		
93/8"	RHKCM	\$56 :		

Power and Data Strip with Cord and Slatwall Attachment Bracket



	Standard Includes	Required to Specify
► Need help? Product details, page 147	 Power and data strip with cord: 8043 Clear Anodized Aluminum cover with black faceplate Slatwall attachment bracket: 4799 Platinum paint only 	Style number

Spe	cificati	on Info	ormation		
Dime D	ensions W	н	• Style Number	· U.S. Price	
			:	:	
21/4"	101/4"	3"	BPDSSWPL	\$276	
				•	



Hutch Connector Bracket

211/8"

RHKESB

\$83



	Sta	ndard Includes	Required to Specify
Need help? Product deta page 147	ails,	ket: paint	1 Style number 2 Paint color number for bracket ▶ See <i>Surface Materials</i> , page 354.
Specific	ation Infor	mation	
·Height	Style Number	·U.S. Price	



Universal Shelves

For Use with Avenir



Standard Includes

Required to Specify

► Need help? Product details, page 148

- Shelf: paint price group 1
 Recess beneath unit to accommodate shelf light
- Shelf backstop

Specification Information

- · On-module attachment hooks with safety catch
- 1 Style number 2 Paint color number for shelf
- 3 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	Paint price group 1 Daint price group 2	No cost	Specify paint color number.
Materials	Paint price group 2Paint price group 3	+\$15 +\$27	Specify paint color number. Specify paint color number.
Related Products	AccessoriesShelf lights		➤ Pages 331–333 ➤ Pages 340–344

Dime	nsions		∶Style	·U.S.	
D	W	н	Number	Base Price	
For L	Jse wi	th Aven	ir		
143⁄4"	24"	71/2"	RSH24AVR	\$235	
143/4"	30"	71/2"	RSH30AVR	\$245	
143/4"	36"	71/2"	RSH36AVR	\$259	
143/4"	42"	71/2"	RSH42AVR	\$276	
143/4"	48"	71/2"	RSH48AVR	\$300	
143/4"	60"	71/2"	RSH60AVR	\$333	
143/4"	72"	71/2"	RSH72AVR	\$370	



Universal Personal Shelves

For Use with Avenir



Standard Includes Required to Specify Need help? • Personal shelf: paint price group 1 1 Style number Product details, page 148 • Recess beneath unit to accommodate shelf light 2 Paint color number for personal shelf • On-module attachment hooks 3 Options, if selected (see below) • See Surface Materials, page 354.

	Options		U.S. Price	Required to Specify
Surface Materials Specificati	Paint price group 1 Paint price group 2 Paint price group 3 Information		No cost +\$15 +\$27	Specify paint color number. Specify paint color number. Specify paint color number.
D :	· Style	·U.S.		
 Dimensions 				

For Use with Avenir				
1311/16"	24"	RDS24AVR	\$240	
1311/16"	30"	RDS30AVR	\$247	
1311/16"	36"	RDS36AVR	\$261	
1311/16"	42"	RDS42AVR	\$280	
1311/16"	48"	RDS48AVR	\$303	
:		:	:	



Accessories

For Overhead Bins and Shelves

Horizontal Wall Attachment Brackets

For Use with Universal Sliding Door, Universal Over the Case, and Universal In the Case Bins



Standard Includes

Required to Specify

- Need help?
 Product details,
 page 152
- Brackets: paint price group 1 Steel back to enclose storage bin: paint price group 1
- 1 Style number
- 2 Paint color number for brackets and back
- 3 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface	 Paint price group 1 	No cost	Specify paint color number.
Materials	Paint price group 2Paint price group 3	+\$15 +\$27	Specify paint color number. Specify paint color number.

Width	• Style Number	·U.S. Base Price
24"	RBKHWM24	\$234
30"	RBKHWM30	\$234
36"	RBKHWM36	\$234
42"	RBKHWM42	\$234
48"	RBKHWM48	\$234
60"	RBKHWM60	\$234
72"	RBKHWM72	\$234

Wall Channels

For Use with Overhead Storage Products



Need help? Product details, page 153	Two wall channels: all paint price groups	1 Style number 2 Paint color number for channels
		▶ See Surface Materials, page 354.
	Related Products	
	Tackboards	▶Page 236
Specification	Information	
· Height · Style Numb	· U.S. er Price	
: :	:	
39 ³ / ₄ " PWC53	\$149	
49 ³ / ₄ " PWC65	\$149	
64 ³ / ₄ " PWC80	\$149	
: :	:	

Wall Channel Horizontal Brace

For Use with Overhead Storage Products



	Standard Includes	Required to Specify
Need help? Product details, page 153	Horizontal brace: all paint price groups	1 Style number2 Paint color number for brace▶ See Surface Materials, page 354.

Specification Information					
·Width	Style Number	·U.S. Price			
42"	PWCHB42	\$110			
48"	PWCHB48	\$110			
60"	PWCHB60	\$110			
72"	PWCHB72	\$110			
:	:	•			

Dividers

For Use with Universal Sliding Door, Universal Over the Case, and Universal In the Case Bins, and Universal Shelves Introduced in March 2007 For Use with Hutch Kit



	Standard Includes	Required to Specify
Need help? Product details, page 154	Package of four dividers: white plastic only	Style number

Specification Information					
•Style Number	· U.S. Price				
RDIV	\$52				



Universal Vertical Off-Module Bracket

For Use with Universal Sliding Door, Universal Over the Case, and Universal In the Case Bins



Tip: For two-sided, off-module application, order two vertical off-module brackets.

Tip: Vertical off-module brackets are used with panels which have vertical slot patterns including Answer, Kick, Avenir, and Montage.

Tip: For Montage, vertical off-module brackets can be used with 30"W to 60"W bins only.

	Standard Includes	Required to Specify
Need help? Product details, page 135	Vertical off-module bracket with safety catch: black paint only	Style number

Style · U.S. Number Price	Specification Information					
.						
RBKVOFM \$67	·					

Standard Overhead Upmount Packages

For Use on Avenir Panels

For Use with Universal Sliding Door, Universal Over the Case, and Universal In the Case Bins

Specification Information



	Standard Includes	Required to Specify
► Need help? Product details, page 135	 Pair of steel upmount brackets: paint price group 1 Steel back to enclose storage bin 	 1 Style number 2 Paint color number for brackets and back 3 Options, if selected (see below) See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Paint price group 1Paint price group 2Paint price group 3	No cost +\$15 +\$27	Specify paint color number. Specify paint color number. Specify paint color number.

·Width	• Style Number	· U.S. Base Price	
For Use	with Avenir		
24"	RUK24AVR	\$201	
30"	RUK30AVR	\$201	
36"	RUK36AVR	\$201	
42"	RUK42AVR	\$201	
48"	RUK48AVR	\$201	
60"	RUK60AVR	\$201	
72"	RUK72AVR	\$201	
	•		



Slim Shelves



Standard Includes Required to Specify

- Need help?
 Product details,
 page 155
- Shelf: paint price group 1Attachment brackets: paint to match shelf

- 1 Style number 2 Paint color number for shelf 3 Options, if selected (see below)
- ► See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	Paint price group 1Paint price group 2Paint price group 3	No cost +\$15 +\$27	Specify paint color number. Specify paint color number. Specify paint color number.

Spe	Specification Information						
Dim D	ensions W	• Style Number	·U.S. Base Price				
6"	24"	RSS24AVR	\$224				
6"	30"	RSS30AVR	\$239				
6"	36"	RSS36AVR	\$255				
6"	42"	RSS42AVR	\$275				
6"	48"	RSS48AVR	\$292				
6"	60"	RSS60AVR	\$366				
6"	72"	RSS72AVR	\$401				
6"	96"	RSS96AVR	\$472				
:		:	:				

Storage

800 Series Lateral Files

► Need help? Product details,

page 156

with Flush Steel Fronts



Tip: Security top reduces overall height by approximately 1".

Tip: Laminate and wood veneer tops are 3/16" taller than other tops and will add 3/16" to overall case height.

For laminate price group 2 pricing, please refer to the electronic catalog or SmartTools.

Tip: One hanging folder bar and three dividers are included with each lift-up door with roll-out shelf. Tip: Counterweight packages are recommended based on case size and

interior options.

See Specification

Information at right.

Standard Includes

· Flush-front lateral file with 12"H drawers:

- paint price group 1 · 1"H top: paint to match file
- 800 Series or Avenir-style pulls
- Lift-up door with fixed shelf, if selected: paint to match file
- · Central lock, keyed random: 9201 Polished Chrome
- · One label holder per drawer: clear plastic
- · Drawer body: black only
- Drawer suspensions: black only
- · One hanging folder bar per drawer
- Four adjustable leveling glides

Required to Specify

- 1 Style number
- 2 Paint color number for file

Specify with roll-out shelf.

Specify with counterweight.

Specify with counterweight.

Specify with counterweight.

- 3 Pull style and color number (see below)
- 4 Options, if selected (see below)
- See Surface Materials, page 354.

	Counterweight package, if selected				
	Options	U.S. Price	Required to Specify		
Surface Materials	Paint price group 1Paint price group 2Paint price group 3	No cost +\$ 80 +\$138	Specify paint color number. Specify paint color number. Specify paint color number.		
Pulls	800 Series pulls:9201 Polished Chrome800 Series pulls: paint	No cost	Specify with 9201 Polished Chrome 800 Series pulls. Specify with painted 800 Series pulls		
	Avenir-style pulls: paint	No cost	and select paint color number. Specify with Avenir-style pulls and select paint color number.		
Tops	Security top • For use on 28"H lateral files only	No cost	Specify with security top.		
	No top on 28"H, 40"H, or For use under a worksurface or beneath a common top	· 52"H -\$104	Specify with no top.		
	Laminate top • Square edge laminate price group 1 top	+\$145	Specify with laminate top and indicate laminate color number for top and plastic color number for edges.		
	Square edge laminate price group 2 top	See information at left	Specify with laminate top and indicate laminate color number for top and plastic color number for edges.		
	Open Line laminate on laminate top	+\$ 74 plus cost of laminate	See Surface Materials Reference Manual		
	Wood veneer top • Wood group 1 veneer top	+\$437	Specify with wood veneer top and indicate wood color number.		
	Customiz stain on wood veneer top	No cost	Specify with Customiz stain. See Surface Materials Reference Manual		
Drawer Interiors	Divider packageRails	+\$ 29 +\$ 36	Specify with divider package. Specify with rails.		

+\$ 48

+\$128

+\$128

+\$167

weights · Package 4

Counter-

Lift-Up Door

With Roll-Out Shelf

· On 651/2"H files

· Package 2

· Package 3

▶ Options, continued on next page

should be specified if the cabinet is not ganged to adjacent cabinets or bolted to the floor or wall.

Tip: Counterweight option

Tip: Counterweight packages ship separately from case and must be installed on site.

▶ Options, continued from previous page

	Options	U.S. Price	Required to Specify	
Lock and	Lock			
Keying	 Ember Chrome 	No cost	Specify with 9250 Ember Chrome lock.	
	Individual lock			
	 With two drawers 	+\$140	Specify with individual lock.	
	 With three drawers 	+\$281	Specify with individual lock.	
	 With four drawers 	+\$421	Specify with individual lock.	
	 Factory- and field-installe 	d keying	▶Page 374	
Related	Field-installed tops		▶See Storage Specification Guide.	
Products	Storage accessories		▶ Pages 311–312	
	 Counterweight packages 		▶ Page 338	

Tip: 65½"H files with individual lock option do not have a lock in the lift-up door. Lift-up door is locked by the drawer below.

Spe	Specification Information							
· Dimensions		s	·Counterweight ·Style		·U.S.			
D	W	н	Package	Number	Base			
			:		Price			
			:	:	:			


Tip: Height dimension listed is for units with 1" top. Overall height will vary if another top is selected.

Lateral Files with Drawers










Two	12"H D	rawers			
18"	30"	28"	Package 3	8LF18302F	\$1061
18"	36"	28"	Package 4	8LF18362F	\$1240
18"	42"	28"	Package 4	8LF18422F	\$1402
Thre	e 12"H	Drawers	3		
18"	30"	40"	Package 3	8LF18303F	\$1443
18"	36"	40"	Package 3	8LF18363F	\$1682
18"	42"	40"	Package 3	8LF18423F	\$1908
Four	12"H D	rawers			
18"	30"	52"	Package 3	8LF18304F	\$1890
18"	36"	52"	Package 3	8LF18364F	\$2205
18"	42"	52"	Package 4	8LF18424F	\$2492

Four	Four 12"H Drawers and One 13 $^{1}\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!$					
18"	30"	65½"	Package 2	8LF18305F	\$2272	
18"	36"	65½"	Package 2	8LF18365F	\$2640	
18"	42"	651/2"	Package 3	8LF18425F	\$2988	
:			:	:	:	

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Counterweight Packages



	Standard Includes	Required to Specify
Need help? Product details, page 157	Counterweight: black only Attachment hardware	Style number

	Price
:	<u> </u>
Package 1 RAACW1	\$128
Package 2 RAACW2	\$128
Package 3 RAACW3	\$128
Package 4 RAACW4	\$167
Package 5 RAACW5	\$233
Package 6 RAACW6	\$233



Specifying Lighting

ighting	
Standard Shelf Lights	340
Utility2 Shelf Lights	342
LED Shelf Lights	344
LED Linear Shelf Lights	346
LED Personal Task Lights	348
elated Products	
Vertical Wire Managers	349

Standard Shelf Lights

► Need help?

page 168

Product details,

Tip: Daisy chaining shelf lights together extends power from one fixture to another within workstations to help keep receptacles clear for other uses.

►See page 170 for more information

Standard Includes

- · Light housing with centered on-off switch: black paint
- · End cap cord managers: black plastic only
- · Cords:
 - Standard and Chicago (including circuit breaker), 9' cord with three-prong plug at 45° angle: black plastic only
 - Daisy chain, one 78" cord with modular connectors for daisy chaining: black plastic only
- · Contrast sleeve around lamp
- · Faceted reflector: white only
- T8 3500K lamp
- Ballast
- · Universal mounting hardware package
- · Daisy chain starter cord, if selected: black plastic only (order separately)

Required to Specify

- 1 Style number
- 2 Paint color number, if other than black (see options below)
- 3 Options, if selected (see below)
- ► See Surface Materials, page 354.

Tip: Because shelf lights are usually recessed, black is the standard paint color. Paint colors other than black have an upcharge.


Tip: If an optional paint color is selected for the housing, the electrical switches and end caps will remain black plastic.

	Options	U.S. Price	Required to Specify
Surface Materials	Painted light housing other than black	+\$28	Specify paint color number for housing.
Bracket Option	Competitive mounting package	No cost	Specify with competitive mounting package.
-	Flush mounting package	No cost	Specify with flush mounting package and paint color number for end cap covers.

Spo	Specification Information							
·Dim	·Dimensions		·Lamp	Style	·U.S.			
D	W	н	Wattage	Number	Base			
:				:	Price			

Electronic High-Power-Factor Ballast


With	Stand	ard Pow	er Cord		
91/4"	25"	13/4"	17 watts	LSM24K	\$464
91/4"	37"	13/4"	25 watts	LSM36K	\$492
91/4"	49"	13/4"	32 watts	LSM48K	\$533
With	Chica	go Cord	Including C	ircuit Breaker	r
91/4"	25"	13/4"	17 watts	LSM24KC	\$536
91/4"	37"	13/4"	25 watts	LSM36KC	\$564
91/4"	49"	13/4"	32 watts	LSM48KC	\$605
With	Daisy	Chain C	ords		
91/4"	25"	13/4"	17 watts	LSM24KD	\$505
91/4"	37"	13/4"	25 watts	LSM36KD	\$533
91/4"	49"	13/4"	32 watts	LSM48KD	\$574
:			:	:	•



▶ Specification Information, continued on next page



Tip: When ordering with standard power cord or Chicago cord, daisy chaining is not possible.



Tip: Remember to order a daisy chain starter cord separately.

►See page 178.



For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

See page 1 for details.

▶ Specification Information, continued from previous page

Related Products					
· Quantity in Package	Length	· Style Number	·U.S. Price		
:	:	:	:		

Daisy Chain Starter Cord

1	78"	LS1FSC	\$ 64	
6	78"	LS6FSC	\$384	



Tip: Use with standard shelf light with daisy chain cord only. Do not order with Utility2.



Utility2 Shelf Lights

► Need help?

page 168

Product details,

Tip: Daisy chaining is not allowed in Chicago. Local electrical codes vary, so you should consult a qualified electrical contractor or engineer for proper installation of all electrical equipment.

Tip: Specification guidelines can be found on the next page.


Tip: Cord on stand alone light has right-hand exit. Cord on daisy chain light has off center exit.

Tip: Because shelf lights are usually recessed, black is the standard paint color. Paint colors other than black have an upcharge.

Tip: If an optional paint color is selected for the housing, the electrical switches and end caps will remain black plastic.



Tip: When ordering with standard power cord or Chicago cord, daisy chaining is not possible.





Tip: Minimum of two fixtures for daisy chaining and maximum of 10.

For more information on daisy chaining, see page 170.

Tip: When ordering starter light do not order a daisy chain starter cord.

Standard Includes

- · Light housing with right-hand on-off switch: black paint
- End cap cord managers: black plastic only
- Cords
- Standard and Chicago (including circuit breaker),
 9' cord with three-prong plug at 45° angle:
 black plastic only
- Daisy chain, one 78" cord with modular connectors for daisy chaining: black plastic only
- Prismatic lens
- · Angled reflector: silver only
- T8 3500K lamp

·Lamp

Wattage

Ballast

Specification Information

Dimensions

W

D

· Universal and flush mounting hardware package

·Style

Number

Required to Specify

- 1 Style number
- 2 Paint color number, if other than black (see options below)
- 3 Options, if selected (see below)
- See Surface Materials, page 354.

	Options	U.S. Price	Required to Specify
Surface Materials	 Painted light housing other than black 	+\$28	Specify paint color number for housing.
Lens	Batwing lens	+\$37	Specify with batwing lens.

·U.S.

Base


:					Price
Elec	tronic	High-	Power-Fac	tor Ballast	
With	Standa	rd Pow	er Cord		
67/8"	25"	15/8"	17 watts	LSB24K2	\$308
67/8"	37"	15/8"	25 watts	LSB36K2	\$363
67/8"	49"	15/8"	32 watts	LSB48K2	\$404
With	Chicag	o Cord	Including Cir	cuit Breaker	
67/8"	25"	15/8"	17 watts	LSB24KC2	\$380
67/8"	37"	15/8"	25 watts	LSB36KC2	\$435
67/8"	49"	1 ⁵ /8"	32 watts	LSB48KC2	\$476
Daisy	/ Chain	Light w	ith 78" Jum	per Cord	
67/8"	25"	15/8"	17 watts	LSB24KD2	\$349
67/8"	37"	15/8"	25 watts	LSB36KD2	\$404
67/8"	49"	15/8"	32 watts	LSB48KD2	\$445
Daisy	/ Chain	Starter	Light with 9	' Starter Cord	
67/8"	25"	15/8"	17 watts	LSB24KS2	\$349
67/8"	37"	15/8"	25 watts	LSB36KS2	\$404
67/8"	49"	15/8"	32 watts	LSB48KS2	\$445
:			:	:	•

▶ Specification Information, continued on next page

▶ Specification Information, continued from previous page


Specification Information							
·Dimensions		·Lamp	·Style	∙U.S.			
D	W	н	Wattage	Number	Base		
:			:	:	Price		

Electronic Normal-Power-Factor Ballast



Tip: When ordering with standard power cord or Chicago cord, daisy chaining is not possible.

With	Stand	ard Pow	er Cord		
67/8"	25"	15/8"	17 watts	LSB24M2	\$219
67/8"	37"	15/8"	25 watts	LSB36M2	\$274
67/8"	49"	15/8"	32 watts	LSB48M2	\$315
With	Chica	go Cord	Including Cir	cuit Breaker	
67/8"	25"	15/8"	17 watts	LSB24MC2	\$291
67/8"	37"	15/8"	25 watts	LSB36MC2	\$346
67/8"	49"	15/8"	32 watts	LSB48MC2	\$387
Dais	y Chai	n Light w	ith 78" Jum	per Cord	
67/8"	25"	15/8"	17 watts	LSB24MD2	\$260
67/8"	37"	15/8"	25 watts	LSB36MD2	\$315
67/8"	49"	1 ⁵ /8"	32 watts	LSB48MD2	\$356



Tip: When ordering daisy chain with jumper cord there is no power supply.

_	

Tip: Minimum of two fixtures for daisy chaining and maximum of 10.

For more information on daisy chaining, see page 170.

Tip: When ordering starter light do not order a daisy chain starter cord.

Daisy Chain Starter Light with 9' Starter Cord							
67/8"	25"	15/8"	17 watts	LSB24MS2	\$260		
67/8"	37"	1 ⁵ ⁄8"	25 watts	LSB36MS2	\$315		
67/8"	49"	1 ⁵ /8"	32 watts	LSB48MS2	\$356		

Specification Guidelines

Application	Requirement
2 lights	1 starter light fixture and 1 daisy chain light with jumper cord fixtures
3 lights	1 starter light fixture and 2 daisy chain light with jumper cord fixtures
4 lights	1 starter light fixture and 3 daisy chain light with jumper cord fixtures
5 lights	1 starter light fixture and 4 daisy chain light with jumper cord fixtures
6 lights	1 starter light fixture and 5 daisy chain light with jumper cord fixtures
7 lights	1 starter light fixture and 6 daisy chain light with jumper cord fixtures
8 lights	1 starter light fixture and 7 daisy chain light with jumper cord fixtures
9 lights	1 starter light fixture and 8 daisy chain light with jumper cord fixtures
10 lights	1 starter light fixture and 9 daisy chain light with jumper cord fixtures



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ► See page 1 for details.

LED Shelf Lights

Tip: Maximum number of lights that can be daisy chained is three lights.

Standard Includes

Required to Specify

Need help? Product details, page 170

21/2"

18"

1/2"

- · Aluminum extrusion with plastic cover
- · Power supply with cord
- Soft touch switch
- Thin profile accommodates recessed and low profile flush mounting
- Ultra energy efficient LED light source

LSL18

- Universal magnetic mounting
- Polycarbonate matte film diffuser
- · Continuous dimming

9.6 watts


1	Style	number
---	-------	--------

- 2 Plastic color number for cover: 6000 Black
- 6009 Arctic White
- 3 Options, if selected (see below)

	Options	U.S. Price	Required to Specify
Mounting	 Fastener kit for use with 	+\$8	Specify with fastener kit.
	wood shelf		

Dimensions	·Lamp	Style	·U.S.
O W H	Wattage	Number	Base Price
	:	:	•

\$377



Tip: LED standard light comes with a 9' 18 watt power supply.

LED Daisy Chain Starter Light



Tip: Daisy chain starter light comes with a 60 watt power supply that will support up to three lights in series (11' cord; 6' from power supply to power outlet, 5' from power supply to fixture). Does not include daisy chain jumper cords.

LED Daisy Chain Secondary Light

21/2"	18"	1/2"	9.6 watts	LSL18YB	\$370
				•	



Tip: Daisy chain secondary light does not come with a power supply. Daisy chain cord package (8" and 30") comes standard with each secondary light.

Lighting

LED Linear Shelf Lights

Tip: The power supply for the 17" stand alone only uses a straight plug with a 9' 18 watt 24 volt wall transformer. The power supply for the 31", 44", 58", or 17" starter light uses a 11'60 watt compact in-line brick with straight plug.

Standard Includes	Required to Specify
Task light and mounting bracket: 4231 Arctic White Power supply with cord: black	1 Style number 2 Options, if selected (see below)

► Need help? Product details, page 172

- · Power supply with cord: black
- · Soft touch switch
- · Magnetic and wood mounting brackets
- Continuous range dimmer
- Automatic turn off program
- Color temperature 3500K

	Options	U.S. Price	Required to Specify
Surface Materials	 Painted light housing in 0835 Black 	+\$ 13	Specify with 0835 Black.
Occupancy Sensor	17"W, 31"W, 44"W, and 58"W with stand alone or daisy chain starter	+\$139	Specify with occupancy sensor.
High Output	17"W with stand alone, starter, or secondary	+\$ 87	Specify with high output.
-	31"W, 44"W, and 58"W with stand alone or daisy chain starter, or secondary	+\$149	Specify with high output.

Din D	nensions W H	Style Number	· U.S. Base Price	
17"	Stand Alon	e Light		









Multiply U.S. Price by the Canadian price factor. See page 1 for details.

17" Daisy Chain Starter Light

LLL17YA \$332

17" Daisy Chain Secondary Light

LLL17YB \$249

31" Stand Alone or Daisy Chain Starter Light

2" LLL31

31" Daisy Chain Secondary Light

LLL31YB \$383

▶ Specification Information, continued on next page

▶ Specification Information, continued from previous page

Dimensions	∙Style	·U.S.
D W H	Number	Base Price
44" Ctond Alo	ne or Daisy Chain S	lortor Liabt







44"	Daisy	Chain	Secondary	Liaht
	,	•	oooonaa,	3

⁷/10"

2"	44"	7/10"	LLL44YB	\$514

LLL44

58" Stand Alone or Daisy Chain Starter Light

2"	58"	⁷ / ₁₀ "	LLL58	\$786

58" Daisy Chain Secondary Light

2"	58"	⁷ / ₁₀ "	LLL58YB	\$555
			and the second s	

LED Personal Task Lights

Required to Specify Standard Includes ► Need help? · Housing: 6009 Arctic White plastic only 1 Style number Product details, Fixture and stanchions: paint 2 Paint color number for fixture and page 176 · Power supply with 9' cordage stanchions: Soft touch switch 4231 Arctic White Ultra energy efficient LED light source 4710 Low Gloss Black 4799 Platinum Metallic · Polycarbonate matte film diffuser · Continuous dimming **Related Products** · c:scape desk ► See c:scape Specification Guide. · FrameOne bench ► See Benching Specification Guide. · SOTO rail See Steelcase Worktools Specification Guide. · Technology zone integral rail ▶ See Elective Elements Specification Guide. Worksurfaces ▶ See Answer Solutions Specification Guide. · Campfire Big Table See turnstone Specification Guide. **Specification Information** · U.S. Dimensions ·Lamp ·Style D Wattage Number Price



Rail-Mounted LED Personal Task Light

6" 30" 17" 12.6 watts **LPTL30** \$676



Tip: Non rail-mounted LED personal task lights will not work on worksurfaces with knife edge that is longer than 11/4", or with modesty panels or modesty screens closer than 6" from the back edge.

Non Rail-Mounted LED Personal Task Light

6" 30" 17" 12.6 watts **LPTL30NR** \$676

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

ighting

Vertical Wire Managers

S

Standard Includes

Required to Specify

Need help?
Product details,
page 179

- Vertical wire manager cover: vertical surface fabric or plastic
- Top cap, on applicable models:
- paint on fabric-covered vertical wire manager
- plastic on plastic vertical wire manager
- Reveal between top cap and vertical wire manager cover, on applicable models: black plastic only
- 1 Style number
- 2 Fabric or plastic color number for vertical wire manager cover: all Avenir vertical surface fabrics or plastics
- 3 Paint color number for top cap on fabric-covered vertical wire manager
- See Surface Materials, page 354.

Height	·With Top Cap	• Style Number	· U.S. Price
Fabric (Covered	for Use Betw	veen Panel Top Cap and Worksurface
107/16"	Yes	VWM41M	\$112
21%16"	Yes	VWM53M	\$121
337/8"	Yes	VWM65M	\$138
4911/16"	Yes	VWM80M	\$152
Echric (Covered:	for Iloo Potu	upon Starona Pina Shalyaa and Warkaurfaaa
rabric	Jovereu	IUI USE DELM	veen Storage Bins, Shelves, and Worksurface
17½"	No	VWM18	\$112
			•
BIACIL.			



Surface Materials

Surface Materials Overview	352
Surface Materials	354
Paint, Textured Paint, and Coating Color Availability Matrix	
Laminate Color Availability Matrix	359
Wood Color Availability Matrix	360
Plastic Color Availability Matrix	36 1
Vertical Surface Fabric Color Availability Matrix	362
Color Coordination Matrices	363
Trim Color Defaults for Mobile Pedestal Laminate Tops	368
Directional Laminate Grain Directions	369
Specification Guidelines for Vertical Fabric Applications	370

Surface Materials Overview

	Applications Panels	Worksurfaces	Storono	Limbing
	Paneis		Storage	Lighting
Paint	Top cap End trim Base cover Transparent panel frame surface Non-tackable panel surface Panel stackers Panel door frame Connector packages Change-of-height panel connector Panel stabilizer foot Power pole Cable pole Corner wire cover	Cantilever Shared cantilever End panel Clear-access end panel Table column supports Back panels Pedestal Drawer pulls Center drawer Adjustable-height legs	Pedestal Lateral file Drawer pulls Shelves Storage bins	Shelf lights
Laminate	• Panel door	Worksurface Panel-supported table Adjustable-height monitor and keyboard surfaces	Mobile pedestal Universal storage bin fronts	
Wood	• Top cap (low or medium only)	Worksurface (except 1 ½"-thick curvilinear worksurfaces) Panel-supported table	Mobile pedestal Universal storage bin fronts	
Plastic	Base cover cable grommets Receptacles	Grommets Panel-supported table edge Worksurface filler		Cord Vertical wire manager
Plated Metal		Panel-supported table column support Lock	•Lock	
Glass	Straight transparent panel insert Half glass, half fabric transparent panels Panel stackers			
Vertical Surface Fabric	Panel surface End trim Change-of-height panel connector Tackboard Power pole Cable pole Filler			Vertical wire manager

Applications Accessories Paint • Wall channels • Metal center drawer • Horizontal brace

Surface Materials

This listing includes all the surface material choices that are available for the products in this specification guide.

Resources

For more information about surface materials, refer to the following resources:

Additional surface materials specification tools are available to

assist you in the specification process—the Surface Materials Binders.

The global surface materials palette is a

core collection of finishes that is available across multiple geographies (Americas/ EMEA - Europe, Middle East, and Africa/ APAC -Asia Pacific) and on global product lines, where applicable. For a list of finishes included in the offering, see the Surface Materials Reference Manual. Additional details, like product approvals by geography and finish number conversions, can also be found in the Surface Materials Reference Manual or see steelcase.com/ surface-materials

Surface Materials

- Binders include:Surface Materials
- Reference Manual

 A complete set of swatch cards for hard surfaces, vertical surface fabrics, and seating upholstery

Paint

Not every paint color is available on every painted component.

▶ Refer to the Paint, Textured Paint, and Coating Color Availability Matrix on page 358 before specifying.

Established

Steelcase Surfaces

Price Group 1 Smooth Paint

4242 Milk

Textured Paint

7207	Black
7225	Sand
7236	Fog G
7237	Slate G
7238	Fieldstone
7239	Midnight
7241	Arctic White
7243	Seagull
7250	Sterling Dark Solid

Price Group 2

Smooth Metallic Paint

Dark Bronze

4728	Nickel Metallic
4743	Mineral Metallic
4744	Pearl Metallic
4750	Champagne Metallic
4752	Steel Metallic 😉
4788	Gold Dust Metallic 6
4798	Sterling Metallic
4799	Platinum Metallic
4803	Near Black Metallic

Textured Metallic Paint

7245	Carbon Metallic
7246	Midnight Metallic

Select Surfaces

Price Group 3

Accent paint

Accent paints allow you to choose from a pre-matched color palette of trend driven colors. Refer to the *Surface Materials Reference Manual* for more information.

Custom Surfaces

Price Group 3

PerfectMatch

PerfectMatch is a service that allows you to create your own paint color. Refer to the *Surface Materials Reference Manual* for more information about this program.

Tip: A one-time \$500 U.S. per color, per customer, registration fee will be invoiced. There is no additional upcharge for PerfectMatch paint on Avenir products.

See PerfectMatch Paint or Coating in the Steelcase Surface Materials Reference Manual for more details.

Accessory Paint

Steelcase Surfaces

4140 Arctic White Gloss 4144 Black Gloss

Laminate

Steelcase Surfaces

High-Pressure Laminate

Price Group 1

Not every laminate is available on all worksurfaces.

Refer to the *Laminate Color Availability Matrix* on page 359 before specifying.

Fiber Laminate

2850	Vanadium Fiber
2851	Rhyme Fiber G
2852	Tungsten Fiber
2854	Vellum Fiber
2859	Novell Fiber
2860	Granite Fiber
2861	Coconut Fiber
2862	Stucco Fiber

Micro Laminate

2920	Marl Micro
2921	Gypsum Micro
2922	Clay Micro
2923	Shadow Micro @

Patina Laminate

2870	Blonde Bronze
	Patina
2871	Blackened Bronze
	Patina
2873	Instant Iron Patina

Solid Laminate

OUIIG	Lammac
2722	Cream 🖪
2730	Arctic White
2746	Black
2759	Warm White G
2811	Mist 3
2883	Seagull
2884	Milk
2885	Dune
2HMG	Merle

Speckle Laminate

Speci	kie Laminate
2820	Coffee Speckle 6
2822	Woodrose Speckle @
2823	Driftwood Speckle
2824	Smoke Speckle
2825	Vanadium Speckle

Tip: Some wood veneer finishes and woodgrain laminates share the same name. Because of the difference in materials, veneers and laminates of the same name are not an exact match but do coordinate with each other.

Woodgrain Laminate

2406	Clear Cherry
2409	Clear Maple
2410	Graphite Walnut
2412	Natural Cherry
2422	Medium Cherry
2511	Winter on Maple
2535	Virginia Walnut
2536	Blackwood
2538	Clear Walnut
2539	Warm Oak G
2592	Blonde on Maple
2714	Natural Walnut
2772	Medium Mahogany
	on Walnut 😉
2HAK	Clear Oak
2HAN	Ash Noce
2HAT	Acacia
2HAW	Ash Wenge
2HBN	Bisque Noce
2HBW	Bisque Wenge
2HCN	Clay Noce
2HCW	Clay Wenge
2HSN	Storm Noce

turnstone Laminate

Storm Wenge

A selection of laminates and edge bands in this collection are available on Steelcase brand products. This collection is available with standard leadtimes and supported like standard laminates to help make ordering easy. Please see the turnstone section of village.steelcase.com for swatching information.

2535	Virginia Walnut
2536	Blackwood
2612	Marbled Maple
2614	Chocolate Walnut
2615	Marbled Cherry

Select Surfaces

High-Pressure Laminate

Price Group 2

Textured Woodgrain Laminate

2TH2	Fawn Cypress
2TH3	Weathered Char
2TH4	Saddle Oak
2TH5	Veranda Teak
2TH6	Persian Cherry
2TH7	Walnut Heights

Custom Surfaces

Open Line Laminate (OLL)

This service allows you to order non-standard laminate at an additional processing fee of \$74 U.S. per unit, plus the cost of the laminate.

Edge color for custom laminate orders must be determined by the dealer and customer before orders can be entered.

Tip: Standard laminates being used in the Open Line Laminate program to obtain a different edge detail will be charged the Open Line laminate upcharge; however, no additional charges for the laminate will be applied.

Laminate Approval and Material Requirements

To confirm whether a particular laminate has already been tested for use on a specific Steelcase product or to determine material square foot requirements:

Visit www.steelcase.com

For additional information, refer to the Steelcase Surface Materials Reference Manual.

Wood

Steelcase carefully selects veneer and solid wood for consistent color and grain structure. Wood is a natural material and variations will occur in color, grain and texture. These variations are part of the inherent natural beauty of wood and are not considered defects.

All wood products will darken with age and exposure to ultraviolet light. This is especially apparent with cherry and maple veneer. We recommend that desk accessories be rearranged periodically to ensure even aging of wood surfaces.

When storing your wood furniture, please follow the following guidelines:

- · Do not store products in trailers
- · Store products in areas that simulate office temperatures (60°F to 90°F)
- Store products in areas that maintain constant. office-like humidity levels
- Keep product away from light. Cover products to make sure they are not exposed to light.

Steelcase Surfaces

Veneer

Veneers are matched for proper balance and consistency. Veneers are available flat cut or quarter cut, except for Oak, which is rift cut. Refer to the Surface Materials Reference Manual for descriptions of each cut

Open-pore finish is a medium gloss finish that leaves the wood grain texture visible to the eye and distinguishable to the touch.

Flat-cut open-pore finish choices

Wood Group 1

3062	FC/OP Graphite Walnut
3402	FC/OP Clear Cherry (Aged)
3412	FC/OP Natural Cherry (
3422	FC/OP Medium Cherry

3522 FC/OP Clear Maple*

3572 FC/OP Amber on Maple 6 3592 FC/OP Blonde on Maple

3702 FC/OP Clear Walnut 3712 FC/OP Natural Walnut

3722 FC/OP Dark Mahogany on Walnut

3752 FC/OP Medium Walnut

FC/OP Dark Walnut 3762

3772 FC/OP Medium Mahogany on Walnut

Quarter-cut open-pore finish choices

Wood Group 1

3222 QC/OP Clear Maple* 3272 QC/OP Amber on Maple 6 3292 QC/OP Blonde on Maple 3302 QC/OP Clear Walnut

3312 QC/OP Natural Walnut

3322 QC/OP Dark Mahogany on Walnut 3352 QC/OP Medium Walnut

3362

QC/OP Dark Walnut

QC/OP Medium Mahogany on Walnut 3372

3382 QC/OP Graphite Walnut

Rift-cut open-pore finish choices

Wood Group 1

3602 RC/OP Desert Oak 3612 RC/OP Warm Oak 3 3692 RC/OP Espresso Oak

Full-fill finish is a medium-gloss finish that completely fills the grain texture, yet allows the grain pattern to be seen. The wood has a lustrous, satiny look, and it is smooth to the touch. This finish is available on the wood worksurface or top only.

Flat-cut full-fill finish choices

Wood Group 1

3064 FC/FF Graphite Walnut 3404 FC/FF Clear Cherry (Aged)

FC/FF Natural Cherry 6 3414 FC/FF Medium Cherry 3424

3524 FC/FF Clear Maple*

FC/FF Blonde on Maple 3544

FC/FF Amber on Maple 3 3574 FC/FF Clear Walnut 3704

FC/FF Natural Walnut 3714

3724 FC/FF Dark Mahogany on Walnut

FC/FF Medium Walnut 3754 3764 FC/FF Dark Walnut

FC/FF Medium Mahogany on Walnut 3774

Quarter-cut full-fill finish choices

Wood Group 1

3224 QC/FF Clear Maple* QC/FF Amber on Maple 6 QC/FF Blonde on Maple 3294

3304 QC/FF Clear Walnut 3314 QC/FF Natural Walnut

3324 QC/FF Dark Mahogany on Walnut

QC/FF Medium Walnut 3354

3364 QC/FF Dark Walnut

QC/FF Medium Mahogany on Walnut 3374

3384 QC/FF Graphite Walnut

Rift-cut full-fill finish choices

Wood Group 1

3604 RC/FF Desert Oak RC/FF Warm Oak **G** 3614 RC/FF Espresso Oak

*To ensure an understanding of the color ranges and characteristic variations of natural veneer, a sign-off sheet is required prior to orders being accepted for this clear-coat finish. The sign-off sheet is available through Steelcase advertising stock. Form number 05-0001370.

Select Surfaces

For information on products within Select Surfaces, including accent paints and fabrics from Designtex, Gabriel, Kvadrat, and Pollack, please refer to the Surface Materials Reference Manual or visit steelcase.com/surface-materials under the Select Surfaces section.

Composite Veneer

Composite veneers are an engineered wood intended to create specific grain patterns and characteristics. They are pre-stained and finished with Steelcase's Clarity water-borne UV topcoat, which protects the environment while providing durability and clarity. Only open-pore finishes are available on composite wood. Composite veneer and matching edge bands are available on most Steelcase brand products. Composites, for use as a solid nosing substitute, are not available. Steelcase does not recommend mixing composite veneers with natural solid nosings because composite and natural wood grain and color matching are rarely compatible. Composite veneers are Graded-In as Wood Group 1 pricing.

Flat-cut open-pore finish choices

Wood Group 1

3JDX FC/OP Oak Composite 3JFX FC/OP Maple Composite 3JHX FC/OP Cherry Composite 3JJX FC/OP Walnut Composite

Quarter-cut open-pore finish choices

Wood Group 1

3F8X QC/OP European Walnut Composite

3GAX QC/OP Gold Teak Composite 3GFX QC/OP Rosewood Composite

3GGX QC/OP Zebrano Composite

3HGX QC/OP Oak Composite

3HVX QC/OP Walnut Composite

3JEX QC/OP Maple Composite 3JGX QC/OP Cherry Composite

3ZNX QC/OP Night Cerused Oak Composite

Natural Veneer

Natural veneer is available in the Select Surfaces offering. Natural veneer may have extended leadtimes. Place your order as you normally would for any other finish, calling out the appropriate finish

The following finishes are available through the natural veneer offering:

Flat-cut open-pore finish choices

Wood Group 1

3342 FC/OP Black Walnut FC/OP Blanch Maple 35A2 37A2 FC/OP Thunder Walnut

Wood Group 3

3082 FC/OP Washed Walnut

Flat-cut full-fill finish choices

Wood Group 1

3734 FC/FF Black Walnut

Wood Group 3

3084 FC/FF Washed Walnut

Quarter-cut open-pore finish choices

Wood Group 1

32A2 QC/OP Blanch Maple QC/OP Thunder Walnut 3392 QC/OP Black Walnut

Quarter-cut full-fill finish choices

Wood Group 1

3394 QC/FF Black Walnut

Rift-cut open-pore finish choices

Wood Group 1

36A2 RC/OP Volcanic Oak

Planked Veneer

Planked veneer is available in the Select Surfaces offering. Planked veneer may have extended leadtimes. Place your order as you normally would for any other finish, calling out the appropriate finish code.

The following finishes are available through the planked veneer offering:

Wood Group 1

3P41 OP Planked Cherry 3P51 OP Planked Maple 3P61 OP Planked Oak 3P71 OP Planked Walnut Tip: Known for its uniqueness, planked veneer has intentional and natural variations that include, but are not limited to: character marks, grain pattern, color, and natural color aging.

Custom Surfaces

Customiz stain is a

service that allows you to create your own stain colors and finishes on standard veneer. Customiz stain color is available on all product lines that offer wood veneer.

A \$500 stain-matching fee applies on CUSTOMIZ requests (Exception: The \$500 fee does not apply on matches to Coalesse standard finishes or for a low-gloss finish request on a standard color). The \$500 fee covers the cost of formulating the Customiz color finish and applies regardless of whether or not an order for product is placed.

In addition, an approval form must be signed to indicate customer acceptance of Customiz match, A \$1,500 initiation fee will be charged prior to first order entry. This initiation fee activates the finish for unlimited use on any Steelcase product for an 18 month time period. After the 18 month time period has lapsed, the Customiz finish may be reactivated for another 18 months for a \$1,000 fee at any point within five years after the \$1,500 initiation fee was paid. If the finish is not reactivated within five years after the \$1,500 initiation fee was paid, the finish will be culled and the customer will need to pay the \$1,500 initiation fee again. All style number related Customiz charges products are no cost as of April 2014. The matching and initiation fees are not discountable

Established

Customiz stain takes 10 days to formulate. Consult the *Surface Materials Reference Manual* for more information. Custom veneers are also available and must be quoted by Steelcase specials group. Customiz stain on custom veneers takes 2 to 4 weeks to formulate.

Requirements and information on ordering a Customiz stain color are found in the Surface Materials Reference Manual.

Plastic

Steelcase Surfaces

Plastic products may not be available in all colors listed below.

▶ Refer to page 361 for an overview of the plastic colors that are available for each component.

6000 Black 6001 Coffee 6009 Arctic White 6052 Milk 6053 Seagull Platinum Solid 6249 6612 Grev V2 G Grey V5 6615 6631 Cream Dawn **G** 6635 6636 Mist

6654 Sand 6655 Warm White 6681 Grotto **6** 6695 Midnight

6697 Fog
Tip: Light color plastic edges
are susceptible to degradation due to normal wear and
tear. Staining (e.g., ball point
pen or clothing dyes such as
blue jeans) and dirt effects
are more pronounced in light
colors and are not considered defects

Applies to:

 3 mm and 1 mm edge profile on Avenir Universal Systems Worksurfaces

6000 Black 6001 Coffee Arctic White 6009 6034 Natural Cherry 6036 Medium Cherry 6037 Winter on Maple 6038 Blonde on Maple 6041 Natural Walnut 6045 Medium Mahogany on Walnut **G** 6052 Milk

6053 Seagull 6213 Acacia 6219 Clear Oak 6231 Graphite Walnut

6234 Clear Cherry 6237 Clear Maple 6242 Virginia Walnut 6243 Blackwood

6243 Blackwood 6245 Clear Walnut 6246 Warm Oak **9** 6249 Platinum Solid 6271 Plywood

6527 Merle 6607 Woodrose 6608 Driftwood 6609 Smoke

6615 Grey V5 6617 Warm Brown V2 **9** 6619 Ice **9** 6631 Cream

6635 Dawn **9**6636 Mist
6654 Sand
6655 Warm White

6676 Marbled Maple 6677 Chocolate Walnut 6678 Marbled Cherry 6694 Slate 6695 Midnight

6697 Fog 6698 Fieldstone 6703 Ash Wenge 6704 Storm Wenge 6705 Bisque Wenge

6706 Clay Wenge 6707 Ash Noce 6708 Bisque Noce

6709 Clay Noce 6710 Storm Noce

Select Surfaces

6T02 Fawn Cypress 6T03 Weathered Char 6T04 Saddle Oak 6T05 Veranda Teak 6T06 Persian Cherry 6T07 Walnut Heights

Metal

Steelcase Surfaces

8043 Clear Anodized
Aluminum

9201 Polished Chrome

9250 Ember Chrome (available for locks only)

Plated Metal

Steelcase Surfaces

Applies to:
• 800 Series pulls
9201 Polished Chrome

Glass

Steelcase Surfaces

6500 Clear 6530 Frosted

Applies to:

 Universal over the case or Universal in the case bin picture frame door glass insert

6580 Ice White

Acrylic Steelcase Surfaces

Applies to:

 Universal over the case or Universal in the case bin picture frame door acrylic insert
 6538. Satin

Accessory Paint

Steelcase Surfaces

4140 Arctic White Gloss 4144 Black Gloss

Vertical Surface Fabric

► See page 362 for specific vertical surface availability.

Steelcase Surfaces

Price Group 1

Abacus **G**

P122 Entasis P123 Portico

P124 Opus

P125 Cusp

P126 Artifact

P126 Artifac P129 Atlas

Alloy

P525 Polar P526 Skim

P527 Bubbly P528 Tern

P529 Shore

P530 Asti P531 Silver

P532 Oxide P533 Element

P534 Construct P535 Currency

P536 Iron

Boccie P200 New Rice P201 New Almond

P202 New Nutmeg P203 New Camel P204 New Opal

P204 New Opai P205 New Mist

P206 New Plum P207 New Lichen

P207 New Lichen
P208 New Spearmint
P209 New Sky

Buzz2

5F03 Tomato 5F04 Red **3** 5F05 Burgund

5F05 Burgundy 5F06 Sky **©**

5F07 Blue 5F08 Navy

5F10 Grape **G** 5F11 Eggplant **G**

5F15 Stone 5F16 Grey

5F17 Black 5G50 Dunegrass

5G51 Sable 5G52 Barley

5G53 Sunrise 5G54 Carrot

5G55 Pumpkin

5G56 Timber 5G57 Rouge

5G58 Chocolate 5G59 Meadow

5G60 lvy

5G61 Cyan

5G62 Atlantic 5G63 Crocus

5G64 Alpine 5G65 Tornado

Charm P505 Shell P506 Mimosa P507 Birch P508 Sparkle

P509 Ginkao P510 Debut P511 Clover

P513 Twilight

Lapel

P409 Cement P410 Pebble P411 Beech P412 Dune P413 Grain P414 Sprout P415 Misty Blue P416 Maple P417 Slate

Optic

P540 Hazel P541 Twinkle P542 Orion P543 Seaglass P544 Shine P545 Halo P546 Whiskey P547 Bath P548 Whisper P549 Breezy P550 Wry

Pianista

P551 Glimmer

P420 Sand P421 Mist P422 Rain P423 Natural P424 Café P425 Denim P426 Carbon P427 Stone P428 Flax P429 Oat P430 Wheat

Rhythm

P431 Maize

P555 Allegro P556 Tempo P557 Refrain P558 Pitch P559 Harmony P560 Melody P561 Stanza P562 Opus

Tinsel P516 Lit

P517 Ego P518 Fizz P519 Muse P520 Depth P521 Bliss P522 Grow P523 Dolce

3 = Established

Price Group 2

Bariolage

G200 New Etude G201 New Andante G202 New Cantata G203 New Adagio G204 New Melody G205 New Ballata G206 New Sonata

Bouquet (3)

P165 Hosta P166 Dundee P169 Argenta P170 Hoya P173 Camomile

Code

5FA1 Fossil 5FA2 Gabbro 5FA3 Reed 5FA4 Bluff 5FA5 Sea Salt 5FA6 Cannon 5FA7 Tussah 5FA8 Mica 5FA9 Ecru 5FB1 Bamboo

Flip: Orbit

5F85 Mud Pie 5F86 Hummus 5F87 Petoskey Pluto 5F88 Papyrus 5F89 5F91 Blizzard

Flip: TexHex

5F92

Briquette

5F75 Mud Pie 5F76 Hummus 5F77 Petoskey 5F78 Pluto Papyrus 5F79 5F97 Blizzard 5F98 Briquette

Fresco

G001 Sandrift G002 Mistiblu G003 Faon G006 Chamoline G007 Grapenut G017 Flint

Latch

P600 Seashell P601 Clam P602 Eggshell P603 Zen P604 Cool Gray P605 Armor P606 Sentinel P607 Rye P608 Billow P609 Nimbus

Milano (3

N002 Delft N003 Woodland N004 Sunshadow N005 Olivine N012 Teakwood

Price Group 3

Billiard Multi-Use by **Designtex**

5H10 Bone 5H11 Poppy 5H12 Tangelo 5H13 Citron 5H14 Avocado 5H15 Hunter 5H16 Indiao 5H17 Mallard 5H18 Teak 5H19 Cumulus 5H20 Pewter 5H21 Gunmetal

5H22 Ink

Select Surfaces

For information on products within Select Surfaces, including accent paints and fabrics from Designtex, Gabriel, Kvadrat, and Pollack, please refer to the Surface Materials Reference Manual or visit steelcase.com/ surface-materials under the Select Surfaces section.

Custom Surfaces

Price Group COM (Customer's Own Material)

Fabric Approval and Yardage

To confirm whether a particular COM material has already been tested for use on a specific Steelcase product or to determine actual yardage requirements: Visit www.steelcase.com

For additional information regarding Customer's

Own Material, call 1 888 STEEL CASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com.

Seating

► See Surface Materials Reference Manual for a listing of available seating upholstery colors.

Available on mobile pedestal cushion top only

Steelcase Surfaces

Price Group 1

Buzz2

Era

Jacks (3) Link New Black Playground (3) Tip: New Black upholstery has color numbers in both price group 1 and price aroup 2.

Price Group 2

Chainmail Cogent: Connect Cogent: Trails New Black Nitelights Seating Vinyl (1) Spyder 6 Stand In

Tip: New Black upholstery has color numbers in both price group 1 and price group 2.

Price Group 3

Billiard Multi-Use by Designtex Gaja - Cradle to Cradle Certified[™] Silver Imperma Redeem Retrieve Texel

Price Group 5

Bo Peep Remix

Price Group 6

Brisa

Price Group 7

Steelcut Trio

Leather

Steelcase Leather

Elmosoft Leather

Flmosoft Leather

Select Surfaces

For information on products within Select Surfaces, including accent paints and fabrics from Designtex, Gabriel, Kvadrat, and Pollack, please refer to the Surface Materials Reference Manual or visit steelcase.com/ surface-materials under the Select Surfaces section.

Custom Surfaces

Price Group COM (Customer's Own Material)

Fabric Approval and Yardage

To confirm whether a particular COM material has already been tested for use on a specific Steelcase product or to determine actual yardage requirements: Visit www.steelcase.com

For additional information regarding **Customer's Own** Material, call 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com

Paint, Textured Paint, and Coating Color Availability Matrix

Paint, Textured Paint, and (Coa	ting	g C	olo	r A	vail	labi	ility	/ M	atri	ix																
Legend • = Not available ■ = Available □ = Available with exceptions ③ = Established ▶ See specification pages for details.	Paint Price Group 1 (smooth)	4242 Milk	Paint Price Group 1 (textured)	7207 Black	7225 Sand	7236 Fog (B	7237 Slate (B	7238 Fieldstone	7239 Midnight	7241 Arctic White	7243 Seagull	7250 Sterling Dark Solid	7278 Dark Bronze	Paint Price Group 2 (metallic)	4728 Nickel Metallic	4743 Mineral Metallic	4744 Pearl Metallic	4750 Champagne Metallic	4752 Steel Metallic @	4788 Gold Dust Metallic (9)	4798 Sterling Metallic	4799 Platinum Metallic	4803 Near Black Metallic	7245 Carbon Metallic	7246 Midnight Metallic	Paint Price Group 3	Perfect Match
Panels		\Box												Ì													
Transparent panel frame surface																											
Panel stacker frame																											
Panel door frame		П																									
Connector packages																											
Change-of-height panel connector																											
Corner wire cover																											
Тор сар																											
End trim																											
Base cover																											
Panel coat hooks																											
Panel stabilizer foot																											
Power/cable poles																											
Fillers																											
Worksurfaces														ĺ													П
Cantilevers																											
Clear access end panels																											
End panels																											
Back panels																											
Post legs and columns																											
Brackets																											
Metal center drawer																											
Adjustable-height legs		·				•	•	•		•	•				•	•	•		•	•				•	•		·
Storage																											
Pedestals																											
Storage bins, shelves, and hutch kits					•																				•		
800 Series products																											
Lighting																											
Shelf lights		•																					•	•			
Accessory Products																											
Metal center drawer																											
Wall channels																											
Horizontal brace																											

Laminate Color Availability Matrix

		Universal Worksurfaces	Avenir Worksurfaces	Mobile Pedestal Tops	Universal Storage Bin Fronts
High-	Pressure Laminates				
Price	Group 1				
Fiber			1	1	
2850	Vanadium Fiber				
2851	Rhyme Fiber (3				
2852	Tungsten Fiber				
2854	Vellum Fiber	-			
2859	Novell Fiber				
2860	Granite Fiber				
2861	Coconut Fiber				
2862	Stucco Fiber				
Micro					
2920	Marl Micro				Ш
2921	Gypsum Micro				H
2922	Clay Micro			H	
2923	Shadow Micro Shadow Micro				
Patin		1_			_
2870	Blonde Bronze Patina				딘
2871	Blackened Bronze Patina				H
2873	Instant Iron Patina				Ц
Solid	0	1_			_
2722 2730	Cream Arctic White				
2746	Black			H	Ħ
	Warm White (3)				
2811	Mist 3				H
2883	Seagull				
2884	Milk				H
2885	Dune				Ħ
2HMG	Merle				
Spec					_
2820	Coffee Speckle				
2822	Woodrose Speckle (3				
2823	Driftwood Speckle				
2824	Smoke Speckle				
2825	Vanadium Speckle				П
	•				

		Universal Worksurfaces	Avenir Worksurfaces	Mobile Pedestal Tops	Universal Storage Bin Fronts
Wood	-				
2406	Clear Cherry				
2409	Clear Maple		_	_	_
2410	Graphite Walnut				
2412	Natural Cherry				_
2422	Medium Cherry				
2511	Winter on Maple				
2538	Clear Walnut				
2539	Warm Oak (5				
2592	Blonde on Maple				
2714	Natural Walnut				
2772	Medium Mahogany on Walnut Olass Oals			H	
2HAK	Clear Oak				
2HAN 2HAT	Ash Noce Acacia		H	H	
2HAW		H	H	Ħ	Ė
2HBN	Ash Wenge Bisque Noce		H	Ħ	Ħ
2HBW	Bisque Wenge	H		ä	
2HCN	Clay Noce				
2HCW	Clay Wenge	H		ā	
2HSN	Storm Noce				
2HSW	Storm Wenge				
	one Laminate Collection				
2535	Virginia Walnut		•	•	
2536	Blackwood		•		
2612	Marbled Maple		•	•	
2614	Chocolate Walnut		•	•	
2615		_			
Teytu	Marbled Cherry		•	•	
ICALU	Marbled Cherry red Woodgrain—Select Surfaces		•	•	
			•	•	
	red Woodgrain—Select Surfaces		•	•	-
Price	red Woodgrain—Select Surfaces Group 2	•			
Price 2TH2	red Woodgrain—Select Surfaces Group 2 Fawn Cypress Weathered Char		•	•	•
Price 2TH2 2TH3 2TH4	red Woodgrain—Select Surfaces Group 2 Fawn Cypress Weathered Char	=	-	-	
Price 2TH2 2TH3 2TH4 2TH5	red Woodgrain—Select Surfaces Group 2 Fawn Cypress Weathered Char Saddle Oak	=	•		

Legend

- = Not available
- = Available
- **G** = Established
- See specification pages for details.

Wood Color Availability Matrix

		Panel top caps (low or medium only)	Worksurfaces (except curvilinear worksurfaces)	Mobile pedestal tops
	er Cut			
Maple				
	QC/OP Clear Maple*			
	QC/FF Clear Maple*			•
3272	QC/OP Amber on Maple (3)			
3274	QC/FF Amber on Maple 3			•
3292	QC/OP Blonde on Maple			
3294	QC/FF Blonde on Maple			•
Waln	ut			
3302	QC/OP Clear Walnut			
3304	QC/FF Clear Walnut			•
3312	QC/OP Natural Walnut			
3314	QC/FF Natural Walnut			•
3322	QC/OP Dark Mahogany on Walnut		•	-
3324	QC/FF Dark Mahogany on Walnut		•	
3352	QC/OP Medium Walnut			
3354	QC/FF Medium Walnut			•
3362	QC/OP Dark Walnut			
	QC/FF Dark Walnut			•
3372	QC/OP Medium Mahogany on Walnut			
3374	QC/FF Medium Mahogany on Walnut		-	•
3382	QC/OP Graphite Walnut			
3384	QC/FF Graphite Walnut			•

^{*}Due to the nature of clear coat on the maple species, a sign-off will be required prior to orders being accepted for this finish. The sign-off sheet is available through Steelcase advertising stock. Form number 05-0001370

Legend

- = Not available
- = Available
- Established
- ▶ See specification pages for details.

		Panel top caps (low or medium only)	Worksurfaces (except curvilinear worksurfaces)	Mobile pedestal tops
Flat C	Cut			
Cherr	у			
3402	FC/OP Clear Cherry (Aged)			
	FC/FF Clear Cherry (Aged)			•
3412	FC/OP Natural Cherry 6			
	FC/FF Natural Cherry 3			•
	FC/OP Medium Cherry			
	FC/FF Medium Cherry			•
Maple				
	FC/OP Clear Maple*			
	FC/FF Clear Maple*	_		•
	FC/FF Blonde on Maple			•
	FC/OP Amber on Maple FC/FF Amber on Maple 1	_	-	
	FC/OP Blonde on Maple	H		•
Walnu		_	_	_
	FC/OP Graphite Walnut			
	FC/FF Graphite Walnut		_	-
	FC/OP Clear Walnut		_	
	FC/FF Clear Walnut			•
3712	FC/OP Natural Walnut			
3714	FC/FF Natural Walnut			•
3722	FC/OP Dark Mahogany on Walnut		•	
3724	FC/FF Dark Mahogany on Walnut	_	•	
3752	FC/OP Medium Walnut			
3754	FC/FF Medium Walnut			•
3762	FC/OP Dark Walnut			
	FC/FF Dark Walnut	-		•
	FC/OP Medium Mahogany on Walnut	•	•	•
3774	FC/FF Medium Mahogany on Walnut	_	_	
Rift C				•
	RC/OP Desert Oak			
	RC/FF Desert Oak		_	
	RC/OP Warm Oak (3)			
	RC/FF Warm Oak 3			-
	RC/OP Espresso Oak			
	RC/FF Espresso Oak			•

Surface Material:

Plastic Color Availability Matrix

Avenir Plastic Color Availa	abili	ity	Ma	trix																	
Not every plastic component is available in every plastic color. This matrix gives you an overview of which plastic colors can be specified for each Avenir plastic component. See page 366 for Avenir Universal worksurface edge profile color availability.	6000 Black	6001 Coffee	6009 Arctic White	6052 Milk	6053 Seagull	6249 Platinum Solid	6527 Merle	6607 Woodrose (9	6608 Driftwood (9)	6609 Smoke 9	6612 Grey V2 G	6615 Grey V5	6631 Cream	6635 Dawn (3	6636 Mist	6654 Sand	6655 Warm White	6681 Grotto	6694 Slate	6695 Midnight	6697 Fog
Panels																					
Panel base cable grommet				•	•		•	•	•	•			•	•	•	•		•	•	•	
Receptacles		•		•	•		•				•	•	•	•	•			•	•	•	•
Avenir Worksurfaces																					
Worksurface grommet							•	•	•	•		•	•	•	•			•	•		
Panel-supported radius-end table edge: 1½"T	-	•		•	•	-	•	•	•	•	•		•	-	•	-	•		•	•	-
Transaction worksurface edge								•	•	•								•	•		
Curvilinear worksurface edge			•					•	•	•								•	•		
Worksurface fillers: 11/2"T								•	•	•								•	•		
Lighting																					
Vertical wire manager							•	•	•	•	•	•	•	•	•				•	•	•

Products that are missing from the matrix are not available with these surface materials.

Legend

• = Not available

■ = Available

G = Established

▶ See specification pages for details.

Vertical Surface Fabric Color Availability Matrix

	Panels	Panel	Panel Stackers	Filler packages	Tackboards
Fabric Price Group 1					
Abacus					
Alloy					
Billiard Multi-Use by Designtex					
Boccie					
Buzz2					
Charm					
Lapel		-			
Optic					
Pianista					
Rhythm			•		
Tinsel		•			
Fabric Price Group 2					
Bariolage					
Bouquet 9		•			
Code					
Flip: Orbit					
Flip: TexHex					
Fresco					
Latch					
Milano G					
Fabric Price Group COM					
COM					

Legend

- = Not available
- = Available
- ☐ = Available with exceptions **③** = Established
- See specification guide for details.

Color Coordination Matrices

Avenir Worksurfaces (Excluding Curvilinear and Universal)

Plastic edge trim color for all Avenir worksurfaces is determined by the worksurface color you select. The edge color is a default and cannot be specified.

All laminates, except woodgrain laminates, will have solid color plastic edging.

Woodgrain laminates

will have woodgrain plastic edges and the grain of the edges will be horizontal. The woodgrain edge color will match the laminate color.

► For information regarding location of plastic edge on applicable Avenir worksurfaces, see "Standard Includes" information.

Lami	nate Color		ılt Plastic Color
Fiber			
2850	Vanadium Fiber	6654	Sand
2851	Rhyme Fiber G	6631	Cream
2852	Tungsten Fiber	6636	Mist
2854	Vellum Fiber	6655	Warm White
2859	Novell Fiber	6001	Coffee
2860	Granite Fiber	6000	Black
2861	Coconut Fiber	6654	Sand
2862	Stucco Fiber	6053	Seagull
Micro)		
2920	Marl Micro	6053	Seagull
2921	Gypsum Micro	6654	Sand
2922	Clay Micro	6654	Sand
2923	Shadow Micro 6	6249	Platinum Solid
Patin	a		
2870	Blonde Bronze Patina	6654	Sand
2871	Blackened Bronze Patina	6615	Grey V5
2873	Instant Iron Patina	6615	Grey V5
Solid			
2722	Cream 3	6631	Cream
2730	Arctic White	6697	Fog
2746	Black	6000	Black
2759	Warm White 6	6655	Warm White
2811	Mist 3	6636	Mist
2883	Seagull	6053	Seagull
2884	Milk	6052	Milk
2885	Dune	6654	Sand
2HMG	Merle	6527	Merle
Spec	kle		
2820	Coffee Speckle 6	6631	Cream
2822	Woodrose Speckle 6	6635	Dawn 3
2823	Driftwood Speckle	6631	Cream
2824	Smoke Speckle	6636	Mist
2825	Vanadium Speckle	6619	Ice 3

Lami	nate Color		ılt Plastic Color
Textu	red Woodgrain—Sele	ect Su	rfaces
2TH2	Fawn Cypress	6T02	Fawn Cypress
2TH3	Weathered Char	6 T 03	Weathered Char
2TH4	Saddle Oak	6T04	Saddle Oak
2TH5	Veranda Teak	6 T 05	Veranda Teak
2TH6	Persian Cherry	6 T 06	Persian Cherry
2TH7	Walnut Heights	6 T 07	Walnut Heights
Wood	lgrain		
2406	Clear Cherry	6234	Clear Cherry
2409	Clear Maple	6237	Clear Maple
2410	Graphite Walnut	6231	Graphite Walnut
2412	Natural Cherry	6034	Natural Cherry
2422	Medium Cherry	6036	Medium Cherry
2511	Winter on Maple	6037	Winter on Maple
2538	Clear Walnut	6245	Clear Walnut
2539	Warm Oak 6	6246	Warm Oak 6
2592	Blonde on Maple	6038	Blonde on Maple
2714	Natural Walnut	6041	Natural Walnut
2772	Medium Mahogany on Walnut	6045	Medium Mahogany on Walnut 🖲
2HAK	Clear Oak	6219	Clear Oak
2HAN	Ash Noce	6707	Ash Noce
2HAT	Acacia	6213	Acacia
2HAW	Ash Wenge	6703	Ash Wenge
2HBN	Bisque Noce	6708	Bisque Noce
2HBW	Bisque Wenge	6705	Bisque Wenge
2HCN	Clay Noce	6709	Clay Noce
2HCW	Clay Wenge	6706	Clay Wenge
2HSN	Storm Noce	6710	Storm Noce
2HSW	Storm Wenge	6704	Storm Wenge

Avenir Curvilinear Worksurfaces

Plastic square edge trim color for all Avenir worksurfaces is determined by the worksurface color you select. The square edge color is a default and cannot be specified. Some worksurfaces have plastic T-mold edges that you can specify to coordinate or contrast with the laminate color that you select for the worksurface. The column at the far right lists recommended colors for use with each laminate color.

All laminates, except woodgrain laminates, will have solid color plastic edging.

Woodgrain laminates will have woodgrain plastic edges and the grain of the edges will be horizontal. The woodgrain edge color will match the laminate color.

Lamin Color	nate		lt Plastic e Edge Color		ested Color stic T-Mold Edge
Fiber	· · · · · · · · · · · · · · · · · · ·				
2850	Vanadium Fiber	6654	Sand	6654	Sand
2851	Rhyme Fiber G	6631	Cream	6631	Cream
2852	Tungsten Fiber	6636	Mist	6636	Mist
2854	Vellum Fiber	6655	Warm White	6655	Warm White
2859	Novell Fiber	6001	Coffee	6001	Coffee
2860	Granite Fiber	6000	Black	6000	Black
2861	Coconut Fiber	6654	Sand	6654	Sand
2862	Stucco Fiber	6053	Seagull	6053	Seagull
Micro			0 "		<u> </u>
2920	Marl Micro	6053	Seagull	6053	Seagull
2921	Gypsum Micro	6654	Sand	6654	Sand
2922	Clay Micro	6654	Sand	6654	Sand
2923	Shadow Micro G	6249	Platinum Solid	6249	Platinum Solid
Patina			0 1		
2870	Blonde Bronze Patina	6654	Sand	6654	Sand
2871	Blackened Bronze Patina	6615	Grey V5	6615	Grey V5
2873	Instant Iron Patina	6615	Grey V5	6615	Grey V5
Solid					
	Cream G	6631	Cream	6631	Cream
2730	Arctic White	6697	Fog	6697	Fog
2746	Black	6000	Black	6000	Black
2759	Warm White (3)	6655	Warm White	6655	Warm White
2730	Arctic White	6697	Fog	6697	Fog
2811	Mist 3	6636	Mist	6636	Mist
2883	Seagull	6053	Seagull	6053	Seagull
2884	Milk	6052	Milk	6052	Milk
2885	Dune	6654	Sand	6654	Sand
2HMG	Merle	6527	Merle	6615	Grey V5
Speck		0004	0	2004	0-"-
	Coffee Speckle Wasdrage Speckle	6631	Cream	6001	Coffee
	Woodrose Speckle	6635	Dawn G	6635	Dawn G
	Driftwood Speckle	6631	Cream	6631	Cream
2824	Smoke Speckle	6636	Mist	6636	Mist
	Vanadium Speckle	6619	Ice 😉	6631	Cream
	red Woodgrain—Select				<u> </u>
	Fawn Cypress	6T02	Fawn Cypress	6654	Sand
2TH3	Weathered Char	6 T 03	Weathered Char	6615	Grey V5
2TH4	Saddle Oak	6 T 04	Saddle Oak	6001	Coffee
2TH5	Veranda Teak	6 T 05	Veranda Teak	6612	Grey V2 G
2TH6	Persian Cherry	6 T 06	Persian Cherry	6001	Coffee
2 TH 7	Walnut Heights	6 T 07	Walnut Heights	6001	Coffee

▶ Continued on next page

6 = Established

Avenir Curvilinear Worksurfaces, continued

Woodgrain 2406 Clear Cherry 6234 Clear Cherry 6001 Coffee 2409 Clear Maple 6237 Clear Maple 6655 Warm 1 2410 Graphite Walnut 6231 Graphite Walnut 6000 Black 2412 Natural Cherry 6034 Natural Cherry 6001 Coffee 2422 Medium Cherry 6036 Medium Cherry 6001 Coffee 2511 Winter on Maple 6037 Winter on Maple 6655 Warm 2538 Clear Walnut 6245 Clear Walnut 6000 Black 2539 Warm Oak	olor Mold
2409 Clear Maple 6237 Clear Maple 6655 Warm 2410 Graphite Walnut 6231 Graphite Walnut 6000 Black 2412 Natural Cherry 6034 Natural Cherry 6001 Coffee 2422 Medium Cherry 6036 Medium Cherry 6001 Coffee 2511 Winter on Maple 6037 Winter on Maple 6655 Warm 2538 Clear Walnut 6245 Clear Walnut 6000 Black 2539 Warm Oak	
2410 Graphite Walnut 6231 Graphite Walnut 6000 Black 2412 Natural Cherry 6034 Natural Cherry 6001 Coffee 2422 Medium Cherry 6036 Medium Cherry 6001 Coffee 2511 Winter on Maple 6037 Winter on Maple 6655 Warm 2538 Clear Walnut 6245 Clear Walnut 6000 Black 2539 Warm Oak	
2412 Natural Cherry 6034 Natural Cherry 6001 Coffee 2422 Medium Cherry 6036 Medium Cherry 6001 Coffee 2511 Winter on Maple 6037 Winter on Maple 6655 Warm 2538 Clear Walnut 6000 Black 2539 Warm Oak 6246 Warm Oak 6655 Warm 2592 Blonde on Maple 6038 Blonde on Maple 6655 Warm 2714 Natural Walnut 6041 Natural Walnut 6001 Coffee 2772 Medium Mahogany on Walnut 6045 Medium Mahogany on Walnut 6001 Coffee 2HAN Ash Noce 6707 Ash Noce 6654 Sand 2HAW Ash Wenge 6703 Ash Wenge 6654 Sand 2HBW Bisque Medium Medium Medium Medium Medium Medium Geoffee 2HAW Ash Noce 6654 Sand 2HAW <td>White</td>	White
2422 Medium Cherry 6036 Medium Cherry 6001 Coffee 2511 Winter on Maple 6037 Winter on Maple 6655 Warm 2538 Clear Walnut 6245 Clear Walnut 6000 Black 2539 Warm Oak 9 6246 Warm Oak 9 6655 Warm 2592 Blonde on Maple 6038 Blonde on Maple 6655 Warm 2714 Natural Walnut 6041 Natural Walnut 6001 Coffee 2772 Medium Mahogany 9 6045 Medium Mahogany on Walnut 9 6051 Coffee 2774 Natural Walnut 6045 Medium Mahogany 6001 Coffee 2775 Medium M	
2511 Winter on Maple 6037 Winter on Maple 6655 Warm 2538 Clear Walnut 6245 Clear Walnut 6000 Black 2539 Warm Oak ● 6246 Warm Oak ● 6655 Warm 2592 Blonde on Maple 6038 Blonde on Maple 6655 Warm 2714 Natural Walnut 6041 Natural Walnut 6001 Coffee 2772 Medium Mahogany ● 6045 Medium Mahogany on Walnut ● 6051 Coffee 2772 Medium Mahogany ● 6045 Medium Mahogany on Walnut ● 6051 Coffee 2774 Ash Noce 6707 Ash Noce 6654 Sand 2775 Sand Sand Sand Sand Sand Sand Sand Sand	
2538 Clear Walnut 6245 Clear Walnut 6000 Black 2539 Warm Oak 6 6246 Warm Oak 6 6655 Warm 2592 Blonde on Maple 6038 Blonde on Maple 6655 Warm 2714 Natural Walnut 6041 Natural Walnut 6001 Coffee 2772 Medium Mahogany 6 6045 Medium Mahogany 6001 Coffee 2772 on Walnut 7 6045 Medium Mahogany 6001 Coffee 2784 Noce 6707 Ash Noce 6654 Sand 2484 Ash Wenge 6703 Ash Wenge 6654 Sand 2485 Sand 6708 Bisque Noce 6631 Cream 2485 Clear Walnut 6000 Black 246 Warm Oak 6 6655 Warm 2592 Blonde on Maple 6655 Warm 2656 Sand 2665 Marm 2665 Sand 2665 Marm 2665 Marm 2665 Marm 2665 Marm 2665 Marm 2665 Marm 2665 Medium Mahogany 6001 Coffee 2772 Medium Mahogany 6001 Coffee 2783 Medium Mahogany 6001 Coffee 2794 Medium Mahogany 6001 Coffee 2795 Medium Mahogany 6001 Coffee 2795 Medium Mahogany 6001 Coffee	
2539 Warm Oak 6246 Warm Oak 6655 Warm 2592 Blonde on Maple 6038 Blonde on Maple 6655 Warm 2714 Natural Walnut 6041 Natural Walnut 6001 Coffee 2772 Medium Mahogany on Walnut 6001 Coffee 2HAN Ash Noce 6707 Ash Noce 6654 Sand 2HAW Ash Wenge 6703 Ash Wenge 6654 Sand 2HBN Bisque Noce 6631 Cream 2HBW Bisque Wenge 6631 Cream	White
2592 Blonde on Maple 6038 Blonde on Maple 6655 Warm 2714 Natural Walnut 6041 Natural Walnut 6001 Coffee 2772 Medium Mahogany on Walnut 9 2HAN Ash Noce 6707 Ash Noce 6654 Sand 2HAW Ash Wenge 6703 Ash Wenge 6654 Sand 2HBW Bisque Noce 6708 Bisque Noce 6631 Cream 2HBW Bisque Wenge 6705 Bisque Wenge 6631 Cream	
2714Natural Walnut6041Natural Walnut6001Coffee2772Medium Mahogany on Walnut6045Medium Mahogany on Walnut6001Coffee2HAN Ash Noce6707Ash Noce6654Sand2HAW Ash Wenge6703Ash Wenge6654Sand2HBN Bisque Noce6708Bisque Noce6631Cream2HBW Bisque Wenge6705Bisque Wenge6631Cream	White
2772Medium Mahogany on Walnut6045Medium Mahogany on Walnut6001Coffee on Walnut2HAN Ash Noce6707Ash Noce6654Sand2HAW Ash Wenge6703Ash Wenge6654Sand2HBN Bisque Noce6708Bisque Noce6631Cream2HBW Bisque Wenge6705Bisque Wenge6631Cream	White
on Walnut On Walnut © 2HAN Ash Noce 6707 Ash Noce 6654 Sand 2HAW Ash Wenge 6703 Ash Wenge 6654 Sand 2HBN Bisque Noce 6708 Bisque Noce 6631 Cream 2HBW Bisque Wenge 6705 Bisque Wenge 6631 Cream	
2HAW Ash Wenge 6703 Ash Wenge 6654 Sand 2HBN Bisque Noce 6708 Bisque Noce 6631 Cream 2HBW Bisque Wenge 6705 Bisque Wenge 6631 Cream	
2HBN Bisque Noce6708Bisque Noce6631Cream2HBW Bisque Wenge6705Bisque Wenge6631Cream	
2HBW Bisque Wenge 6705 Bisque Wenge 6631 Cream	
2HCN Clay None 6709 Clay None 6612 Gray V	
211011 Clay Noce 012 Grey V	′2 ()
2HCW Clay Wenge 6706 Clay Wenge 6612 Grey V	′2 9
2HSN Storm Noce 6710 Storm Noce 6615 Grey V	/5
2HSW Storm Wenge 6704 Storm Wenge 6615 Grey V	

Recommended Edge Colors for Avenir Universal Worksurfaces—Laminate

Edges

The recommended edge color will complement the laminate color you specify. Edge color is specified separately.

Lamin	nate Color		mmended Edge Color		mmended je Color
Fiber					
2850	Vanadium Fiber	6654	Sand	6697	Fog
2851	Rhyme Fiber G	6631	Cream	6654	Sand
2852	Tungsten Fiber	6636	Mist	6654	Sand
2854	Vellum Fiber	6655	Warm White	6697	Fog
2859	Novell Fiber	6001	Coffee	6697	Fog
2860	Granite Fiber	6000	Black	6000	Black
2861	Coconut Fiber	6654	Sand	6654	Sand
2862	Stucco Fiber	6053	Seagull	6053	Seagull
Micro					
2920	Marl Micro	6053	Seagull	6053	Seagull
2921	Gypsum Micro	6654	Sand	6654	Sand
2922	Clay Micro	6654	Sand	6654	Sand
2923	Shadow Micro 3	6249	Platinum Solid	6249	Platinum Solid
Patina	<u> </u>				
2870	Blonde Bronze Patina	6654	Sand	6654	Sand
2871	Blackened Bronze Patina	6615	Grey V5	6000	Black
2873	Instant Iron Patina	6615	Grey V5	6000	Black
Solid					
2722	Cream G	6631	Cream	6631	Cream
2730	Arctic White	6009	Arctic White	6009	Arctic White
2746	Black	6000	Black	6000	Black
2759	Warm White G	6655	Warm White	6654	Sand
2811	Mist 3	6636	Mist	6636	Mist
2883	Seagull	6053	Seagull	6053	Seagull
2884	Milk	6052	Milk	6052	Milk
2885	Dune	6654	Sand	6654	Sand
2HMG	Merle	6527	Merle	6527	Merle
Speck	rle				
2820	Coffee Speckle 6	6631	Cream	6001	Coffee
2822	Woodrose Speckle 6	6635	Dawn G	6635	Dawn G
2823	Driftwood Speckle	6631	Cream	6631	Cream
2824	Smoke Speckle	6636	Mist	6636	Mist
2825	Vanadium Speckle	6619	Ice (3	6631	Cream
Textu	red Woodgrain—Select S	urfaces	3		
2TH2	Fawn Cypress	6T02	Fawn Cypress	6654	Sand
2TH3	Weathered Char	6T03	Weathered Char	6615	Grey V5
2TH4	Saddle Oak	6T04	Saddle Oak	_	_
2TH5	Veranda Teak	6T05	Veranda Teak	6612	Grey V2 G
2TH6	Persian Cherry	6T06	Persian Cherry	_	
2TH7	Walnut Heights	6T07	Walnut Heights	_	_
		0.07	aa loigillo		

▶ Continued on next page

G = Established

Recommended Edge Colors for Avenir Universal Worksurfaces—Laminate, continued

Edges

The recommended edge color will complement the laminate color you specify. Edge color is specified separately.

Lamin	nate Color		mmended Edge Color		mmended e Color
turnst	one Laminate Collect	ion*			
2535	Virginia Walnut	6242	Virginia Walnut	6000	Black
2536	Blackwood	6243	Blackwood	6000	Black
2612	Marbled Maple	6676	Marbled Maple	6000	Black
2614	Chocolate Walnut	6677	Chocolate Walnut	6000	Black
2615	Marbled Cherry	6678	Marbled Cherry	6000	Black
Wood	grain				
2406	Clear Cherry	6234	Clear Cherry	6000	Black
2409	Clear Maple	6237	Clear Maple	6654	Sand
2410	Graphite Walnut	6231	Graphite Walnut	6000	Black
2412	Natural Cherry	6034	Natural Cherry	6000	Black
2422	Medium Cherry	6036	Medium Cherry	6000	Black
2511	Winter on Maple	6037	Winter on Maple	6654	Sand
2538	Clear Walnut	6245	Clear Walnut	6000	Black
2539	Warm Oak G	6246	Warm Oak G	6654	Sand
2592	Blonde on Maple	6038	Blonde on Maple	6654	Sand
2714	Natural Walnut	6041	Natural Walnut	6000	Black
2772	Medium Mahogany on Walnut	6045	Medium Mahogany on Walnut 😉	6000	Black
2HAK	Clear Oak	6219	Clear Oak	6654	Sand
2HAN	Ash Noce	6707	Ash Noce	6654	Sand
2HAT	Acacia	6213	Acacia	6559	Warm White Solid
2HAW	Ash Wenge	6703	Ash Wenge	6654	Sand
2HBN	Bisque Noce	6708	Bisque Noce	6631	Cream
2HBW	Bisque Wenge	6705	Bisque Wenge	6631	Cream
2HCN	Clay Noce	6709	Clay Noce	6612	Grey V2 G
2HCW	Clay Wenge	6706	Clay Wenge	6612	Grey V2 6
2HSN	Storm Noce	6710	Storm Noce	6615	Grey V5
2HSW	Storm Wenge	6704	Storm Wenge	6615	Grey V5

^{*}A selection of laminates and edge bands in this collection are available on Steelcase brand products. This collection is available with standard leadtimes and supported like standard laminates to help make ordering easy.

G = Established

Trim Color Defaults

for Mobile Pedestal Laminate Tops

Plastic square edge trim color of tops that are added to files is determined by the laminate color you select for the top. The edge color is a default and cannot be specified.

All laminates, except woodgrain laminates, will have solid color plastic edging.

Woodgrain laminates will have woodgrain plastic edges and the grain of the edges will be horizontal.

Plastic square edge trim is applied to all four sides of laminate tops.

Plastic edge trim is applied only to the sides (left and right) and back of bullnose laminate tops.


Lamin	ate Color	Defau	It Plastic Color
Fiber			
2850	Vanadium Fiber	6654	Sand
2851	Rhyme Fiber G	6631	Cream
2852	Tungsten Fiber	6636	Mist
2854	Vellum Fiber	6655	Warm White
2859	Novell Fiber	6001	Coffee
2860	Granite Fiber	6000	Black
2861	Coconut Fiber	6654	Sand
2862	Stucco Fiber	6053	Seagull
Micro			
2920	Marl Micro	6053	Seagull
2921	Gypsum Micro	6654	Sand
2922	Clay Micro	6654	Sand
2923	Shadow Micro 3	6249	Platinum Solid
Patina	1		
2870	Blonde Bronze Patina	6654	Sand
2871	Blackened Bronze Patina	6615	Grey V5
2873	Instant Iron Patina	6615	Grey V5
Solid			
2722	Cream G	6631	Cream
2730	Arctic White	6697	Fog
2746	Black	6000	Black
2759	Warm White 6	6655	Warm White
2811	Mist G	6636	Mist
2883	Seagull	6053	Seagull
2884	Milk	6052	Milk
2885	Dune	6654	Sand
2HMG	Merle	6527	Merle
Speck	de		
2820	Coffee Speckle G	6631	Cream
2822	Woodrose Speckle 6	6635	Dawn (3
2823	Driftwood Speckle	6631	Cream
2824	Smoke Speckle	6636	Mist
2825	Vanadium Speckle	6619	Ice G
Textu	red Woodgrain—Select	Surface	es
2TH2	Fawn Cypress	6T02	Fawn Cypress
2TH3	Weathered Char	6T03	Weathered Char
2TH4	Saddle Oak	6 T 04	Saddle Oak
2TH5	Veranda Teak	6 T 05	Veranda Teak
2TH6	Persian Cherry	6 T 06	Persian Cherry
2TH7	Walnut Heights	6 T 07	Walnut Heights

Lamir	nate Color	Defau	It Plastic Color
Wood	grain		
2406	Clear Cherry	6234	Clear Cherry
2409	Clear Maple	6237	Clear Maple
2410	Graphite Walnut	6231	Graphite Walnut
2412	Natural Cherry	6034	Natural Cherry
2422	Medium Cherry	6036	Medium Cherry
2511	Winter on Maple	6037	Winter on Maple
2538	Clear Walnut	6245	Clear Walnut
2539	Warm Oak 6	6246	Warm Oak 3
2592	Blonde on Maple	6038	Blonde on Maple
2714	Natural Walnut	6041	Natural Walnut
2772	Medium Mahogany on Walnut 3	6045	Medium Mahogany on Walnut 9
2HAK	Clear Oak	6219	Clear Oak
2HAT	Acacia	6213	Acacia
2HAW	Ash Wenge	6703	Ash Wenge
2HBW	Bisque Wenge	6705	Bisque Wenge
2HCW	Clay Wenge	6706	Clay Wenge
2HSW	Storm Wenge	6704	Storm Wenge

G = Established

Directional Laminate Grain Directions

Directional laminates are standard with the grain directions shown.

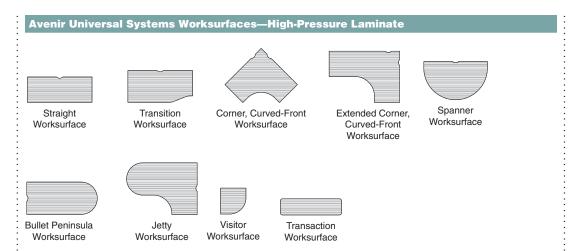

Specification Guidelines for Vertical Fabric Applications


What is the issue?

Some textiles are simple and look the same regardless of how you apply them to a product. Many other fabrics are patterned, textured, or have luster that will have a distinctly different appearance if applied in different directions on chairs or panels. Because of these differences, and the fact that there are limits to how some fabrics can be applied to Steelcase products, it is important to understand fabric application direction standards at Steelcase in order to avoid being disappointed.

Talking about direction

Fabrics come on rolls. The long varns that run down the length of the roll are called the "warp" yarns. These yarns are used to define the direction you are viewing the fabric as it is applied to a panel or chair. Fabric directionality is determined by how the fabric comes off the roll. It is NOT determined by the way the pattern looks on the product (i.e., horizontal stripes do not mean the fabric was applied warp horizontal-it could have been applied warp vertical).

Warp Horizontal



Warp horizontal


application is the standard application direction for most Steelcase fabrics on Steelcase panel and seating products.

See page 371 for details on these exceptions.

Horizontal application

means that as you view the panel or chair in its upright position, the warp yarns of the fabric are running in the horizontal direction.


Warp Vertical



Warp vertical application is the standard application direction for any panels taller than 68"H and a few other exceptions. Vertical application means that as you view the panel or chair in its upright position, the warp yarns are running in the vertical direction.


See page 371 for details on these exceptions.

Warp Horizontal



Fabric on panels taller than 68"H cannot be applied warp horizontal because the height of the product is greater than the width of the fabric.

Steelcase is not responle for charges associated with replacement or re-upholstery of products due to incorrect specifications.



The combination of tall panels (75"H with warp vertical) with short panels (65"H or less with warp horizontal) will result in the fabric patterns running in opposite directions.

To remedy this situation, the following options are available:

- Use non-directional fabric. Only a small selection of fabrics are non-directional.
- Use fabrics that have standard warp vertical application direction.
- Specify warp vertical application on fabrics that are standard warp horizontal

Tip: If you require warp vertical and it is not the standard, you must specify the warp vertical option on every line in the order.

Application Topics

Surface Materials Representatives are available to answer your questions and to provide clarification. They can also help with situations where you are using fabrics under 66"W. Call 616.246.9822 or fax 616.698.4700.

Price

No additional cost to specify warp direction.

How to Specify

You must specify warp direction when you need to depart from the standard. Avenir panels allow this option to be selected electronically. On non-electronic orders, add a written specification to each panel to indicate non-standard warp directions.

For example: MPTAM5348 523/6"H x 485/16"W tackable acoustical panels side 1: fabric 5F07 (Buzz2 Blue) with vertical application. side 2: fabric 5F08 (Buzz2 Navy) with vertical application.

Standard Warp Directions for Avenir							
Fabric	Fabric Panel Panel Height					Tackboards	
	Direction	Stacker	41"H	53"H	65"H	80"H	
Abacus 3	D	Н	Н	Н	Н	V	Н
Alloy	D	Н	Н	Н	Н	V	Н
Bariolage	D	Н	Н	Н	Н	V	Н
Billiard Multi-Use by Designtex	D	Н	Н	Н	V	V	Н
Boccie	D	Н	Н	Н	Н	V	Н
Bouquet 3	D	Н	Н	Н	Н	V	Н
Buzz2	D	Н	Н	Н	V	V	Н
Charm	D	Н	Н	Н	Н	V	Н
Code	D	Н	Н	Н	Н	V	Н
Flip: Orbit	D	НО	НО	НО	НО	•	НО
Flip: TexHex	D	НО	НО	НО	НО	•	НО
Fresco	D	Н	Н	Н	Н	V	Н
Lapel	D	Н	Н	Н	Н	V	Н
Latch	D	Н	Н	Н	Н	V	Н
Milano 😉	D	Н	Н	Н	Н	V	Н
Optic	D	Н	Н	Н	Н	V	Н
Pianista	D	НО	НО	НО	НО	•	НО
Rhythm	D	Н	Н	Н	Н	V	Н
Tinsel	D	Н	Н	Н	Н	V	Н

Customer's Own Material Yardage Requirements

Pre-approved fabrics are available. To determine if the fabric you want is on the pre-approved list, call a COM Consultant at 616.246.9822.

For information regarding COM fabrics, refer to the Steelcase Surface Materials Reference Manual.

Additional fabric is required to accommodate flaws, wrinkles, and other imperfections.

Legend

D = Directional

ND = Non-directional

H = Warp horizontal

HO = Horizontal only

V = Warp vertical• = Not available

3 = Established

Resource

Resources

Resources


Lock and Keying 374
Style Number Index 376

Lock and Keying

All locking products

are standard with factoryinstalled, keyed-random locks. Consecutive, specific, and random keying are available as field-installed options.

Exceptions: Individual locking drawers are available only with field-installed locks.



Locks consist of a factoryor field-installed lock cylinder and a factory-installed lock face ring. Two types of locks are available — the standard keying system (FR series) and the master keying system (XF series). All the locks in the XF series can be opened with a single master key.

Factory-Installed Keying

Factory-installed locks are always key random (standard) or master key random (option). Key random means that the locks will be assigned arbitrarily at the factory with key numbers ranging from FR305 to FR454 (Master keying numbers: XF1001 to XF1150) All locks within a unit will be keyed alike.

Tip: Random keying can mean that different furniture units will have the same key number. If you must have all locks keyed differently, you should specify field-installed, key specific or key consecutive lock cylinders.

See below.

Key Random

FR305
FR421
FR305
or
XF1011
XF
Master
Key
XF1011

Required to Specify

Master key random

+\$27

Specify with master key random.

Field-Installed Keying

Field-installed locks are only available on products that include factory-installed lock mechanisms.

Specify "plug" when specifying furniture, and the product will ship with a plastic plug in place of the lock cylinder.

Tip: For products with optional lock colors, make sure to specify the color for both the lock and lock face ring.

Front-removable lock cylinders must be spec-

cylinders must be specified separately. You must also order a special lock tool to install or remove lock cylinders in the field.

Tip: Lock tools are reusable. You do not need to order additional lock tools with every furniture order. **Lock cylinders** will be shipped separately so that you can install the locks when you are ready.

Three keying choices are available for field installation—random (standard), specific, and consecutive. All three are also available with master keying, which means that all locks can be opened with a single master key.

Key random means that the locks will be assigned arbitrarily at the factory with key numbers ranging from FR305 to FR454 (Master keying numbers: XF1001 to XF1150).

Tip: Random keying can mean that different furniture units will have the same key number. If you must have all locks keyed differently, you should specify key specific or key consecutive lock cylinders.

Kev Random

FR305
FR421
FR305
or
XF1011
XF
Master
Key

Key specific means that you can specify any key number from FR305 to FR454 (Master keying numbers: XF1001 to XF1150). This option can be used to key all the furniture units in a workstation or department the same.

Tip: Designate the quantity per key number in your specification.

See example at right.

Key consecutive means that you can specify lock numbers in a consecutive order to ensure that no two locks have the same key number until the key sequence repeats. You must select a beginning key number from FR305 to FR454 (Master keying numbers: XF1001 to XF1150).

Example of a typical lock cylinder specification is shown below:

- 10 LOCK9201FR FR320
- 5 LOCK9201FR FR350
- 15 LOCK9201XF XF1100
- 30 Total
- 1 877102003SR standard lock tool
- 1 877102002SR master lock tool

Key Specific

FR350
FR350
FR350
or

XF1020
XF1020
XF1020
XF1020
XF1020

Key Consecutive

FR350
FR351
FR352
or
XF1020
XF1021
XF
Master
Key

iesources

Field-Installed Lock Cylinders



Tip: Lock price is included in price of furniture with locks.

Tip: For replacement lock cylinders, refer to Service Parts.

Tip: You can change lock

cylinders in the field by using the appropriate lock tool.

Standard Includes

Required to Specify

- Lock cylinder, keyed random: 9201 Polished Chrome or 9250 Ember Chrome
- 1 Style number
- Chrome or 9250 Ember Chrome 2 Options, if selected (see below)
 Two keys

Options	U.S. Price	Required to Specify
Key specific	No cost	Select key number from FR305–FR454.
Key consecutive	No cost	Specify <i>key consecutive</i> and select beginning key number from FR305–FR454.
Master key random	+\$27 each	Specify master key random.
Master key specific	+\$27 each	Specify key number from XF1001–XF1150.
Master key consecutive	+\$27 each	Specify master key consecutive and select beginning key number from XF1001–XF1150.

Specificat	tion Informatio	n
·Color	· Style	·U.S.
•	Number	Base
:	:	Price

FR Series (Standard Keying System) – Lock Cylinder Polished Chrome LOCK9201FR No cost Ember Chrome LOCK9250FR No cost

Standard Lock Tool

877102003SR \$2

XF Series (Master Keying System) – Lock Cylinder

Polished Chrome	LOCK9201XF	No additional cost. Price included in price of furniture with master-keyed locks.
Ember Chrome	LOCK9250XF	No additional cost. Price included in price of furniture with master-keyed locks.
:		<u>:</u>

Master Lock Tool

	877102002SR	\$27
•		



Style Number Index

Style Number	Page	Description	: Style : Number 	Page	Description
32WCP	300	Wire Guide Clip	98769	234	Anchor Brkt
77102002SR	375	Master Lock Tool	987801	237	Base Pwr-In
77102003SR	375	Standard Lock Tool	98863	245	S9000 Dx Cable Grom
LF18302F	337	800 Lateral File w/Flush Front	ASHC1921X1	298	Plastic Dwr
.F18303F	337	800 Lateral File w/Flush Front	BC	292	AV Tri-Shaped Cantilever
.F18304F	337	800 Lateral File w/Flush Front	BEP24	294	AV End Panel
.F18305F	337	800 Lateral File w/Flush Front	: BEP30	294	AV End Panel
LF18362F	337	800 Lateral File w/Flush Front	BPDSSWPL	327	Pwr & Data Stp w/Crd
LF18363F	337	800 Lateral File w/Flush Front	BSC	293	AV Tri-Shaped Shared Cantilever
LF18364F	337	800 Lateral File w/Flush Front	CGGC12	235	Gripper Glide Caps
LF18365F	337	800 Lateral File w/Flush Front	ERFM41	233	AV End-of-Run Filler
LF18422F	337	800 Lateral File w/Flush Front	ERFM53	233	AV End-of-Run Filler
LF18423F	337	800 Lateral File w/Flush Front	ERFM65	233	AV End-of-Run Filler
LF18424F	337	800 Lateral File w/Flush Front	ERFM80	233	AV End-of-Run Filler
LF18425F	337	800 Lateral File w/Flush Front	FCD20	298	AV Center Drawer
8669	237	Base Pwr-In	FPW318	243	AV Powerway
86691	237	Base Pwr-In	FPW324	243	AV Powerway
86694	237	Base Pwr-In	FPW330	243	AV Powerway
86694C	238	Brkwy Base Pwr-In	: FPW336	243	AV Powerway
8669C	238	Brkwy Base Pwr-In	FPW342	243	AV Powerway
86831DA15S	246	Dplex Receptacle	: FPW348	243	AV Powerway
86831DA20S	246	Dplex Receptacle	FPW360	243	AV Powerway
86831DB15S	246	Dplex Receptacle	FPW418	243	AV Powerway
86831DB20S		·	FPW418		•
	246	Dplex Receptacle	•	243	AV Powerway
86831DC15S	246	Dplex Receptacle	: FPW430	243	AV Powerway
86831DC20S	246	Dplex Receptacle	: FPW436	243	AV Powerway
86832DA15S	246	Dplex Receptacle	FPW442	243	AV Powerway
86832DA20S	246	Dplex Receptacle	: FPW448	243	AV Powerway
86832DB15S	246	Dplex Receptacle	FPW460	243	AV Powerway
86832DB20S	246	Dplex Receptacle	FSCD20	298	AV Center Drawer
86832DC15S	246	Dplex Receptacle	LLL17	346	LED Linear Shelf Light
86832DC20S	246	Dplex Receptacle	; LLL17YA	346	LED Linear Shelf Light
86833DA15S	246	Dplex Receptacle	LLL17YB	346	LED Linear Shelf Light
86833DA20S	246	Dplex Receptacle	LLL31	346	LED Linear Shelf Light
86833DB15S	246	Dplex Receptacle	: LLL31YB	346	LED Linear Shelf Light
86833DB20S	246	Dplex Receptacle	LLL44	347	LED Linear Shelf Light
86833DC15S	246	Dplex Receptacle	: LLL44YB	347	LED Linear Shelf Light
86833DC20S	246	Dplex Receptacle	LLL58	347	LED Linear Shelf Light
86834DA15S	246	Dplex Receptacle	: LLL58YB	347	LED Linear Shelf Light
86834DA20S	246	Dplex Receptacle	LOCK9201FR	375	Lock Cylinder
86834DB15S	246	Dplex Receptacle	LOCK9201XF	375	Lock Cylinder
86834DB20S	246	Dplex Receptacle	LOCK9250FR	375	Lock Cylinder
86834DC15S	246	Dplex Receptacle	LOCK9250XF	375	Lock Cylinder
86834DC20S	246	Dplex Receptacle	LPTL30	348	LED Personal Task Light
8683ADD15S	246	Dplex Receptacle	: LPTL30NR	348	LED Personal Task Light
8683ADD20S	246	Dplex Receptacle	LS1FSC	341	Daisy Chain Cord
8683BDD15S	246	Dplex Receptacle	LS6FSC	341	Daisy Chain Cord
8683BDD20S	246	Dplex Receptacle	LSB24K2	342	Utility2 Shelf Light
8683CDD15S	246	Dplex Receptacle	LSB24KC2	342	Utility2 Shelf Light
8683CDD20S	246	Dplex Receptacle	LSB24KD2	342	Utility2 Shelf Light
8683WS	300	Grommet Receptacle	LSB24KS2	342	Utility2 Shelf Light
8765	299	Termination Plate	LSB24M2	343	Utility2 Shelf Light
)8766	299	Cable/Fiber Reel	LSB24MC2	343	Utility2 Shelf Light
8767	299	Cord Reels	LSB24MC2	343	Utility2 Shelf Light
9101	299	Outu Neels	LJD24WD2	343	Ounty 2 Otton Light

Style Number	Page	Description	∶ Style ∶ Number ·	Page	Description	
LSB36K2	342	Utility2 Shelf Light	: MPSGM6536	217	AV Transp Panel	
.SB36KC2	342	Utility2 Shelf Light	MPSGM6542	217	AV Transp Panel	
SB36KD2	342	Utility2 Shelf Light	: MPSGM6548	217	AV Transp Panel	
SB36KS2	342	Utility2 Shelf Light	MPSGM8024	217	AV Transp Panel	
SB36M2	343	Utility2 Shelf Light	MPSGM8030	217	AV Transp Panel	
SB36MC2	343	Utility2 Shelf Light	MPSGM8036	217	AV Transp Panel	
SB36MD2	343	Utility2 Shelf Light	MPSGM8042	217	AV Transp Panel	
B36MS2	343	Utility2 Shelf Light	MPSGM8048	217	AV Transp Panel	
SB48K2	342	Utility2 Shelf Light	: MPSGS1118	222	Glass Panel Stacker	
SB48KC2	342	Utility2 Shelf Light	MPSGS1124	222	AV Glass Panel Stacker	
SB48KD2	342	Utility2 Shelf Light	: MPSGS1130	222	AV Glass Panel Stacker	
SB48KS2	342	Utility2 Shelf Light	MPSGS1136	222	AV Glass Panel Stacker	
SB48M2	343	Utility2 Shelf Light	: MPSGS1142	222	AV Glass Panel Stacker	
SB48MC2	343	Utility2 Shelf Light	MPSGS1148	222	AV Glass Panel Stacker	
SB48MD2	343	Utility2 Shelf Light	: MPSGS1160	222	Glass Panel Stacker	
SB48MS2	343	Utility2 Shelf Light	MPSGS1218	222	Glass Panel Stacker	
SL18	344	LED Lgt.	: MPSGS1224	222	AV Glass Panel Stacker	
SL18YA	344	LED Lgt.	MPSGS1224	222	AV Glass Panel Stacker	
SL18YB	344	LED Lgt.	MPSGS1236	222	AV Glass Panel Stacker	
SM24K		•	MPSGS1242	222	AV Glass Panel Stacker	
	340	Standard Light	•			
SM24KC	340	Standard Light	MPSGS1248	222	AV Glass Panel Stacker	
SM24KD	340	Standard Light	MPSGS1260	222	Glass Panel Stacker	
SM36K	340	Standard Light	: MPSGS1518	222	Glass Panel Stacker	
SM36KC	340	Standard Light	MPSGS1524	222	Glass Panel Stacker	
SM36KD	340	Standard Light	: MPSGS1530	222	Glass Panel Stacker	
SM48K	340	Standard Light	MPSGS1536	222	Glass Panel Stacker	
SM48KC	340	Standard Light	MPSGS1542	222	Glass Panel Stacker	
SM48KD	340	Standard Light	MPSGS1548	222	Glass Panel Stacker	
ICAS24L	296	AV Clear-Access End Pnl	MPSGS1560	222	Glass Panel Stacker	
ICAS24R	296	AV Clear-Access End Pnl	MPSGS2418	223	Glass Panel Stacker	
ICAS30L	296	AV Clear-Access End Pnl	MPSGS2424	223	AV Glass Panel Stacker	
ICAS30R	296	AV Clear-Access End Pnl	MPSGS2430	223	AV Glass Panel Stacker	
ICP41A	242	AV Cable Pole	MPSGS2436	223	AV Glass Panel Stacker	
ICP53A	242	AV Cable Pole	MPSGS2442	223	AV Glass Panel Stacker	
ICP65A	242	AV Cable Pole	MPSGS2448	223	AV Glass Panel Stacker	
ICP80A	242	AV Cable Pole	MPSGS2460	223	Glass Panel Stacker	
MFES18	294	AV End Panel	: MPT6030	276	AV Pnl-Supported Table	
NFES24	294	AV End Panel	MPT6036	276	AV Pnl-Supported Table	
IFES30	294	AV End Panel	: MPT6630	276	AV Pnl-Supported Table	
IPDFM8042	224	AV Frame	MPT6636	276	AV Pnl-Supported Table	
IPDFWDM8042	224	AV Pnl Door	: MPT7230	276	AV Pnl-Supported Table	
/PHGM6524	219	AV Gls/Fab Panel	MPT7236	276	AV Pnl-Supported Table	
IPHGM6530	219	AV Gls/Fab Panel	: MPTAM3318	213	AV Tackable Panel	
IPHGM6536	219	AV Gls/Fab Panel	MPTAM3324	213	AV Tackable Panel	
IPHGM6542	219	AV Gls/Fab Panel	: MPTAM3330	213	AV Tackable Panel	
IPHGM6548	219	AV Gls/Fab Panel	MPTAM3336	213	AV Tackable Panel	
IPHGM8024	219	AV Gls/Fab Panel	. MPTAM3342	213	AV Tackable Panel	
IPHGM8030	219	AV Gls/Fab Panel	: MPTAM3348	213	AV Tackable Panel	
IPHGM8036	219	AV Gls/Fab Panel	: MPTAM3360	213	AV Tackable Panel	
MPHGM8042	219	AV Gls/Fab Panel	: MPTAM4118	213	AV Tackable Panel	
MPHGM8048	219	AV Gls/Fab Panel	: MPTAM4124	213	AV Tackable Panel	
MPSC372B	239	AV End Power-In	MPTAM4130	213	AV Tackable Panel	
MPSC472B	239	AV End Power-In	: MPTAM4136	213	AV Tackable Panel	
MPSC472B MPSGM6524			MPTAM4142	213	AV Tackable Panel	
IF JUNI0324	217	AV Transp Panel	: WIF I AWI 4 1 4 2	213	AV INCRADIO FAITOI	

Style Number	Page	Description	: Style : Number	Page	Description
MPTAM4160	213	AV Tackable Panel	. MTW\$4817M	278	AV Transaction Wksf
MPTAM5318	213	AV Tackable Panel	MTWS6017M	278	AV Transaction Wksf
MPTAM5324	213	AV Tackable Panel	: MU2824BBFL	306	AV Fixed Ped
MPTAM5330	213	AV Tackable Panel	MU2824FFL	306	AV Fixed Ped
MPTAM5336	213	AV Tackable Panel	MU2830BBFL	306	AV Fixed Ped
MPTAM5342	213	AV Tackable Panel	MU2830FFL	306	AV Fixed Ped
MPTAM5348	213	AV Tackable Panel	MUCANT	267	AV Cantilever
MPTAM5360	213	AV Tackable Panel	MUCC1122	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM6518	214	AV Tackable Panel	MUCC1188	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM6524	214	AV Tackable Panel	MUCC2200	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM6530	214	AV Tackable Panel	MUCC2222	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM6536	214	AV Tackable Panel	MUCC2266	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM6542	214	AV Tackable Panel	MUCC2288	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM6548	214	AV Tackable Panel	MUCC3322	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM6560	214	AV Tackable Panel	: MUCC3388	256	AV Univ Sys Cor Wksf, Curved Front
MPTAM8018	214	AV Tackable Panel	MUCSBR	267	AV Side Support Brackets
MPTAM8024	214	AV Tackable Panel	MUEC2202L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAM8030	214	AV Tackable Panel	MUEC2208L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAM8036	214	AV Tackable Panel	MUEC2220R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAM8042	214	AV Tackable Panel	MUEC2222L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAM8048	214	AV Tackable Panel	MUEC2222R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1118	220	Tack Fabric-Cvrd Pnl Stcker	MUEC2226R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1124	220	AV Fab Panel Stacker	MUEC2228L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1130	220	AV Fab Panel Stacker	MUEC2262L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1136	220	AV Fab Panel Stacker	MUEC2268L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1142	220	AV Fab Panel Stacker	MUEC2280R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1148	220	AV Fab Panel Stacker	MUEC2282R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1160	220	Tack Fabric-Cvrd Pnl Stcker	MUEC2286R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1218	220	Tack Fabric-Cvrd Pnl Stcker	MUEC3302L	259	AV Univ Sys Ext Cor Wksf, Str Front
MPTAS1224	220	AV Fab Panel Stacker	MUEC3308L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1230	220	AV Fab Panel Stacker	MUEC3320R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1236	220	AV Fab Panel Stacker	MUEC3322L	259	AV Univ Sys Ext Cor Wksf, Str Front
MPTAS1242	220	AV Fals Panel Stacker	MUEC3322R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1248	220	AV Fab Panel Stacker	MUEC3326R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1260	220	Tack Fabric-Cvrd Pnl Stcker	MUEC3328L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1518	221	Tack Fabric-Cvrd Pnl Stcker	MUEC3362L	259	AV Univ Sys Ext Cor Wksf, Str Front
MPTAS1524	221	Tack Fabric-Cvrd Pnl Stcker	MUEC3368L	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1530	221	Tack Fabric-Cvrd Pnl Stcker	MUEC3380R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1536	221	Tack Fabric-Cvrd Pnl Stcker	MUEC3382R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1542	221	Tack Fabric-Cvrd Pnl Stoker	MUEC3386R	259	AV Univ Sys Ext Cor Wksf, Crvd Front
MPTAS1548	221	Tack Fabric-Cvrd Pnl Stcker	MUP2224BFS MUP2224BFSC	309	AV Mobile Pedestal
MPTAS1560	221	Glass Panel Stacker Tack Fabric-Cvrd Pnl Stcker	•	309	AV Wksf Supported Red
MPTAS2418 MPTAS2424	221 221	AV Fab Panel Stacker	MUPC24BFL MUPC30BFL	307 307	AV Wksf-Supported Ped AV Wksf-Supported Ped
		AV Fab Panel Stacker	•		• •
MPTAS2430 MPTAS2436	221 221	AV Fab Panel Stacker AV Fab Panel Stacker	: MUS1830 : MUS1836	253 253	AV Univ Sys Straight Wksf
MPTAS2436 MPTAS2442	221	AV Fab Panel Stacker	: MUS1842	253 253	AV Univ Sys Straight Wksf AV Univ Sys Straight Wksf
MPTAS2442	221	AV Fab Panel Stacker	MUS1848	253 253	AV Univ Sys Straight Wksf
MPTAS2448	221	Tack Fabric-Cvrd Pnl Stcker	: MUS1854	253	AV Univ Sys Straight Wksf
MPTAS2460	244	AV Pnl-to-Pnl Conn	. MUS1860	253 253	AV Univ Sys Straight Wksf
MPTP4	244	AV Pnl-to-Pnl Conn	: MUS2424	253	AV Univ Sys Straight Wksf
MSS	291	AV Side Support	MUS2430	253	AV Univ Sys Straight Wksf
MTWS3017M	278	AV Side Support AV Transaction Wksf	•	253	
MTWS3617M	278 278	AV Transaction Wksf	MUS2436 MUS2442	253	AV Univ Sys Straight Wksf AV Univ Sys Straight Wksf
MTWS4217M	278	AV Transaction Wksf	: MUS2442	253	
, IVI I VI 342 I / IVI	210	AV Halisaciioli WKSI	. 141032440	203	AV Univ Sys Straight Wksf

Style Number	Page	Description	∶ Style ∶ Number	Page	Description	
MUS2454	253	AV Univ Sys Straight Wksf	PAB5E	227	AV Panel Conn Pkg	
MUS2460	253	AV Univ Sys Straight Wksf	PAB5F	227	AV Panel Conn Pkg	
MUS2466	253	AV Univ Sys Straight Wksf	PAB5G	227	AV Panel Conn Pkg	
MUS2472	253	AV Univ Sys Straight Wksf	PAB6	234	Attachment Bracket	
MUS3024	253	AV Univ Sys Straight Wksf	: PAB7	234	Attachment Bracket	
MUS3030	253	AV Univ Sys Straight Wksf	PAB9	228	AV Panel Conn Pkg	
MUS3036	253	AV Univ Sys Straight Wksf	PBCC180	244	AV Corner Wire Cvr	
MUS3042	253	AV Univ Sys Straight Wksf	PBCC90	244	AV Corner Wire Cvr	
MUS3048	253	AV Univ Sys Straight Wksf	PBEF	245	AV Pnl-Base End Flr	
MUS3054	253	AV Univ Sys Straight Wksf	PC4133	229	AV COH Panel Conn	
MUS3060	253	AV Univ Sys Straight Wksf	PC5333	229	AV COH Panel Conn	
MUS3066	253	AV Univ Sys Straight Wksf	PC5341	229	AV COH Panel Conn	
MUS3072	253	AV Univ Sys Straight Wksf	PC6533	229	AV COH Panel Conn	
MUSPC50	260	AV Univ Sys Spanner Wksf	PC6541	229	AV COH Panel Conn	
MUT1236R	255	AV Univ Sys Transition Wksf	PC6553	229	AV COH Panel Conn	
MUT1242R	255	AV Univ Sys Transition Wksf	PC8033	229	AV COH Panel Conn	
MUT1248R	255	AV Univ Sys Transition Wksf	PC8041	229	AV COH Panel Conn	
MUT1254R	255	AV Univ Sys Transition Wksf	PC8053	229	AV COH Panel Conn	
MUT1260R	255	AV Univ Sys Transition Wksf	PC8065	229	AV COH Panel Conn	
MUT2136L	255	AV Univ Sys Transition Wksf	PCH	235	AV Panel Coat Hook	
MUT2142L	255	AV Univ Sys Transition Wksf	PCSB18S	293	AV Shared Cantilever	
MUT2148L	255	AV Univ Sys Transition Wksf	PCSB24S	293	AV Shared Cantilever	
MUT2154L	255	AV Univ Sys Transition Wksf	PCWRC3618	279	AV Cor Crvlnr Wksf	
MUT2160L	255	AV Univ Sys Transition Wksf	PCWRC3624	279	AV Cor Crvlnr Wksf	
MUT2336R	255	AV Univ Sys Transition Wksf	PCWRC4224	279	AV Cor Crvlnr Wksf	
MUT2342R	255	AV Univ Sys Transition Wksf	PCWRC4224ST	280	AV Cor Crvlnr Wksf	
MUT2348R	255	AV Univ Sys Transition Wksf	PCWRC4230	279	AV Cor Crvlnr Wksf	
MUT2354R	255	AV Univ Sys Transition Wksf	PCWRC4824	279	AV Cor CrvInr Wksf	
MUT2360R	255	AV Univ Sys Transition Wksf	PCWRC4824ST	280	AV Cor CrvInr Wksf	
MUT3236L	255	AV Univ Sys Transition Wksf	PCWRC4830	279	AV Cor CrvInr Wksf	
MUT3242L	255	AV Univ Sys Transition Wksf	PCWRL226048	284	AV Ext Cor Crv Wksf	
MUT3248L	255	AV Univ Sys Transition Wksf	PCWRL227248	284	AV Ext Cor Crv Wksf	
MUT3254L	255	AV Univ Sys Transition Wksf	PCWRL236048	284	AV Ext Cor Crv Wksf	
MUT3260L	255	AV Univ Sys Transition Wksf	PCWRL237248	284	AV Ext Cor Crv Wksf	
MUTR1630	266	AV Univ Sys Transaction Wksf	PCWRL326048	284	AV Ext Cor Crv Wksf	
MUTR1636	266	AV Univ Sys Transaction Wksf	PCWRL327248	284	AV Ext Cor Crv Wksf	
MUTR1642	266	AV Univ Sys Transaction Wksf	PCWRL336048	284	AV Ext Cor Crv Wksf	
MUTR1648	266	AV Univ Sys Transaction Wksf	PCWRL337248	284	AV Ext Cor Crv Wksf	
MUTR1660	266	AV Univ Sys Transaction Wksf	PCWRR224860	285	AV Ext Cor Crv Wksf	
MWPT6030	277	AV Pnl-Supported Table	PCWRR224872	285	AV Ext Cor Crv Wksf	
MWPT6630	277	AV Pal Supported Table	PCWRR234860	285	AV Ext Cor Cry Wksf	
MWPT7230	277	AV Parad Care Plan	PCWRR234872	285	AV Ext Cor Crv Wksf	
PAB233	226	AV Panel Conn Pkg	PCWRR324860	285	AV Ext Cor Cry Wksf	
PAB241	226	AV Panel Conn Pkg	PCWRR324872	285	AV Ext Cor Cry Wksf	
PAB253	226	AV Panel Conn Pkg	PCWRR334860	285	AV Ext Cor Cry Wksf	
PAB265	226	AV Panel Conn Pkg	PCWRR334872	285	AV Ext Cor Crv Wksf	
PAB333	226	AV Panel Conn Pkg	PCWS18CL	292	AV Cantilever	
PAB341	226	AV Panel Conn Pkg	PCWS18CR	292	AV Cantilever	
PAB353	226	AV Panel Conn Pkg	PCWS24CL	292	AV Cantilever	
PAB365	226	AV Panel Conn Pkg	PCWS24CR	292	AV Cantilever	
PAB4	228	AV Panel Conn Pkg	PCWS30CL	292	AV Cantilever	
PAB5A	227	AV Panel Conn Pkg	PCWS30CR	292	AV Cantilever	
PAB5B	227	AV Panel Conn Pkg	: PFF16	235	AV Y Carfin Filler	
PAB5C	227	AV Panel Conn Pkg	PJAXM4153	232	AV X-Config Filler	
PAB5D	227	AV Panel Conn Pkg	: PJAXM4165	232	AV X-Config Filler	

∷ Style ∷ Number	Page	Description	∶ Style ∶ Number	Page	Description	:
: PJAXM4180	232	AV X-Config Filler	PTDMGB1	301	Power Sphere	<u> </u>
PJAXM5365	232	AV X-Config Filler	PTDMGB2	301	Power Sphere	:
PJAXM5380	232	AV X-Config Filler	: PTDMGB3	301	Pwr Comm Sphere	:
PJAXM6580	232	AV X-Config Filler	PTDMGB4	301	Pwr Comm Sphere	:
PJBXM4153	232	AV X-Config Filler	: PTDMGB5	302	Comm Sphere	:
PJBXM4165	232	AV X-Config Filler	PTRSGB1	302	Power Comm Port	:
PJBXM4180	232	AV X-Config Filler	PTRWL2136	286	AV Trnstn Crv Wksf	:
PJBXM5365	232	AV X-Config Filler	PTRWL3242	286	AV Trnstn Crv Wksf	:
PJBXM5380	232	AV X-Config Filler	PTRWL3248	286	AV Trnstn Crv Wksf	:
PJBXM6580	232	AV X-Config Filler	PTRWR1236		AV Trnstn Crv Wksf	:
PJLM41	230	AV L-Config Filler	: PTRWR2342		AV Trnstn Crv Wksf	:
PJLM53	230	AV L-Config Filler	PTRWR2348		AV Trnstn Crv Wksf	:
PJLM65	230	AV L-Config Filler	PVWMM	349	AV Vertical Wire Manager	:
PJLM80	230	AV L-Config Filler	PVWRL2424	288	AV Visitor Crv Wksf	:
: PJTM41 : PJTM4153	231	AV T Config Filler	∴ PVWRL2430 - PVWRL2436	288 288	AV Visitor Crv Wksf AV Visitor Crv Wksf	:
: PJTM4153 : PJTM4165	231 231	AV T Config Filler	PVWRL2430	288	AV Visitor Crv Wksf	:
PJTM4180	231	AV T-Config Filler AV T-Config Filler	PVWRR2424		AV Visitor Crv Wksf	:
PJTM53	231	AV T-Config Filler	PVWRR2430		AV Visitor Crv Wksf	:
PJTM5365	231	AV T-Config Filler	PVWRR2436		AV Visitor Crv Wksf	:
: PJTM5380	231	AV T-Config Filler	PVWRR3030		AV Visitor Crv Wksf	:
PJTM65	231	AV T-Config Filler	PWC53	331	AV Wall Channels	:
. PJTM6580	231	AV T-Config Filler	PWC65	331	AV Wall Channels	:
PJTM80	231	AV T-Config Filler	PWC80	331	AV Wall Channels	:
: PJWL326648	287	AV Jetty Crv Wksf	PWCHB42	332	AV Horizontal Brace	:
PJWL327248	287	AV Jetty Crv Wksf	PWCHB48	332	AV Horizontal Brace	:
: PJWL337248	287	AV Jetty Crv Wksf	: PWCHB60	332	AV Horizontal Brace	:
PJWR234866	287	AV Jetty Crv Wksf	PWCHB72	332	AV Horizontal Brace	:
PJWR234872	287	AV Jetty Crv Wksf	: PWF24L	295	AV Floor-Support End PnI	:
PJWR334872	287	AV Jetty Crv Wksf	PWF24R	295	AV Floor-Support End PnI	:
PJXM	232	AV X-Config Top Cap	: PWF30L	295	AV Floor-Support End Pnl	:
PLWR2424	289	AV Link CrvInr Wksf	PWF30R	295	AV Floor-Support End Pnl	:
PLWR3030	289	AV Link CrvInr Wksf	: PWRC2424	282	AV Straight Wksf	:
PMB3330	236	AV Markerboard	PWRC2430	283	AV Straight Wksf	:
: PMB3336	236	AV Markerboard	PWRC3024	282	AV Straight Wksf	:
PMDR	247	AV Pal-Supported Recept	PWRC3030	283	AV Straight Wksf	:
: PP341A : PP353A	240 240	AV Power Pole AV Power Pole	PWRC3624 PWRC3630	282	AV Straight Wksf	:
: PP353A : PP365A	240		PWRC4224	283 282	AV Straight Wksf	:
. PP303A . PP380A	240	AV Power Pole AV Power Pole	PWRC4230	283	AV Straight Wksf AV Straight Wksf	:
: PP441A	240	AV Power Pole	PWRC4824	282	AV Straight Wksf	:
PP453A	240	AV Power Pole	PWRC4830	283	AV Straight Wksf	:
: PP465A	240	AV Power Pole	: PWRC5424	282	AV Straight Wksf	:
PP480A	240	AV Power Pole	PWRC5430	283	AV Straight Wksf	:
: PP6416S	241	AV Power Pole	: PWRC6024	282	AV Straight Wksf	:
PP6536S	241	AV Power Pole	PWRC6030	283	AV Straight Wksf	:
: PP6656S	241	AV Power Pole	: PWRC6624	282	AV Straight Wksf	:
PP6806S	241	AV Power Pole	PWRC6630	283	AV Straight Wksf	:
PP8416S	241	AV Power Pole	PWRC7224	282	AV Straight Wksf	:
PP8536S	241	AV Power Pole	PWRC7230	283	AV Straight Wksf	:
PP8656S	241	AV Power Pole	PWRF24	297	AV Wksf Filler	:
PP8806S	241	AV Power Pole	PWRF30	297	AV Wksf Filler	:
PSPWR3050	290	AV Span CrvInr Wksf	: PWSCL1	296	AV Cantilever Clamp	:
PSPWR3650	290	AV Span CrvInr Wksf	PWSCL18	293	AV Support Plate	:
PSPWR3662	290	AV Span CrvInr Wksf	PWSCL2	297	AV COH Cantilever Clamp	:

· Chula			: Chulo		
∶Style ∶Number	Page	Description	∶ Style ∶ Number	Page	Description
: PWSCL24	293	AV Support Plate	:	331	Wall Bracket
PWSCL30	293	AV Support Plate	RBKHWM60	331	Wall Bracket
PWSF24	297	AV Wksf Filler	RBKHWM72	331	Wall Bracket
PWSF30	297	AV Wksf Filler	RBKVOFM	333	Vert Off-Module Brkt
PWSMB2	291	AV Locking Side Support	RDIV	332	Dividers
RAACW1	338	Counterweight Pkg	RDS24AVR	330	Univ Personal Shelf
RAACW2	338	Counterweight Pkg	RDS30AVR	330	Univ Personal Shelf
RAACW3	338	Counterweight Pkg	RDS36AVR	330	Univ Personal Shelf
RAACW4	338	Counterweight Pkg	: RDS42AVR	330	Univ Personal Shelf
RAACW5	338	Counterweight Pkg	RDS48AVR	330	Univ Personal Shelf
: RAACW6	338	Counterweight Pkg	: RDV1506	311	Dividers
RBB24AVR	321	Univ In the Case Bin	RDV1512	311	Dividers
RBB24LAVR	323	Univ In the Case Bin	: RDV151210	311	Dividers
RBB24QAVR	317	Univ Over the Case Bin	: RHK48	326	Hutch Kit
RBB24QCAVR	319	Univ Over the Case Bin	RHK60	326	Hutch Kit
RBB24WAVR	325	Univ In the Case Bin	RHK66	326	Hutch Kit
RBB30AVR	321	Univ In the Case Bin	RHK72	326	Hutch Kit
· RBB30LAVR	323	Univ In the Case Bin	RHKCM	327	Hutch Kit Cable Manager
RBB30QAVR	317	Univ Over the Case Bin	RHKESB	328	Hutch Connector Bracket
RBB30QCAVR	317	Univ Over the Case Bin	RHKRECPT	327	
RBB30WAVR			•		Hutch Kit Receptacle
	325	Univ In the Case Bin	RPXDPT	312	Pencil Tray
RBB36AVR	321	Univ In the Case Bin	RPXDRS	312	Reference Shelf
RBB36LAVR	323	Univ In the Case Bin	RPXTC24P	310	U Ped Cushion Top
RBB36QAVR	317	Univ Over the Case Bin	RPXTCH24P	310	U Ped Cushion Top
RBB36QCAVR	319	Univ Over the Case Bin	RSB36AVR	313	Univ Sliding Door Bin w/Steel Frnt
RBB36WAVR	325	Univ In the Case Bin	RSB36LAVR	314	Univ Sliding Door Bin W/Lam Frnt
RBB42AVR	321	Univ In the Case Bin	RSB36WAVR	315	Univ Sliding Door Bin w/Wood Frnt
RBB42LAVR	323	Univ In the Case Bin	RSB42AVR	313	Univ Sliding Door Bin w/Steel Frnt
RBB42QAVR	317	Univ Over the Case Bin	RSB42LAVR	314	Univ Sliding Door Bin W/Lam Frnt
RBB42QCAVR	319	Univ Over the Case Bin	RSB42WAVR	315	Univ Sliding Door Bin w/Wood Frnt
RBB42WAVR	325	Univ In the Case Bin	RSB48AVR	313	Univ Sliding Door Bin W/Steel Frnt
RBB48AVR	321	Univ In the Case Bin	RSB48LAVR	314	Univ Sliding Door Bin W/Lam Frnt
RBB48LAVR	323	Univ In the Case Bin Univ Over the Case Bin	RSB48WAVR	315	Univ Sliding Door Bin w/Wood Frnt
RBB48QAVR	317		RSB60AVR	313	Univ Sliding Door Bin W/Steel Frnt
RBB48QCAVR	319	Univ Over the Case Bin	RSB60LAVR	314	Univ Sliding Door Bin W/Lam Frnt
RBB48WAVR	325	Univ In the Case Bin	RSB60WAVR	315	Univ Sliding Door Bin w/Wood Frnt
RBB60AVR	321	Univ In the Case Bin	RSB66AVR	313	Univ Sliding Door Bin W/Steel Frnt
RBB60LAVR	323	Univ In the Case Bin	RSB66LAVR	314	Univ Sliding Door Bin W/Lam Frnt
RBB60QAVR	317	Univ Over the Case Bin	RSB66WAVR	315	Univ Sliding Door Bin w/Wood Frnt
RBB60QCAVR	319	Univ Over the Case Bin	RSB72AVR	313	Univ Sliding Door Bin w/Steel Frnt
RBB60WAVR	325	Univ In the Case Bin	RSB72LAVR	314	Univ Sliding Door Bin W/Lam Frnt
RBB66AVR	321	Univ In the Case Bin	RSB72WAVR	315	Univ Sliding Door Bin w/Wood Frnt
RBB66LAVR	323	Univ In the Case Bin	RSH24AVR	329	Univ Shelf
RBB66QAVR	317	Univ Over the Case Bin	RSH30AVR	329	Univ Shelf
RBB66QCAVR	319	Univ Over the Case Bin	RSH36AVR	329	Univ Shelf
RBB66WAVR	325	Univ In the Case Bin	RSH42AVR	329	Univ Shelf
RBB72AVR	321	Univ In the Case Bin	RSH48AVR	329	Univ Shelf
RBB72LAVR	323	Univ In the Case Bin	RSH60AVR	329	Univ Shelf
RBB72QAVR	317	Univ Over the Case Bin	RSH72AVR	329	Univ Shelf
RBB72QCAVR	319	Univ Over the Case Bin	RSS24AVR	334	Slim Shelf
RBB72WAVR	325	Univ In the Case Bin	RSS30AVR	334	Slim Shelf
RBKHWM24	331	Wall Bracket	RSS36AVR	334	Slim Shelf
RBKHWM30	331	Wall Bracket	RSS42AVR	334	Slim Shelf
RBKHWM36	331	Wall Bracket	RSS48AVR	334	Slim Shelf
RBKHWM42	331	Wall Bracket	RSS60AVR	334	Slim Shelf

Style Number	Page	Description		Style Number	Page	Description	: :
RSS72AVR	334	Slim Shelf	: .	TS7WKSPT48	269	Reinforcing Chan	:
RSS96AVR	334	Slim Shelf	: •	TS7WKSPT51	269	Reinforcing Chan	:
RSTA3318	225	Tack Acst Skin	: '	TS7WKSPT54	269	Reinforcing Chan	:
RSTA3324	225	Tack Acst Skin	· ·	TS7WKSPT60	269	Reinforcing Chan	
RSTA3330	225	Tack Acst Skin	:	TS7WKSPT63	269	Reinforcing Chan	:
RSTA3336	225	Tack Acst Skin	: '	TS7WKSPT66	269	Reinforcing Chan	:
RSTA3342	225	Tack Acst Skin		TS7WKSPT72	269	Reinforcing Chan	:
RSTA3348	225	Tack Acst Skin	•	TS7WWM	247, 303	U WS Wire Mgr	:
RSTA3360	225	Tack Acst Skin		UADJ	272	U Adj-Hgt Leg	
RSTA4118	225	Tack Acst Skin	•	UADJ4	272	U Adj-Hgt Leg	•
RSTA4124	225	Tack Acst Skin		UADJ4C	272	U Adj-Hgt Leg	
RSTA4130	225	Tack Acst Skin	•	UADJ4M	272	U Adj-Hgt Leg	:
RSTA4136	225	Tack Acst Skin		UADJC	272	U Adj-Hgt Leg	:
RSTA4142	225	Tack Acst Skin	•	UADJCOL	273	Adjustable Column	
RSTA4148	225	Tack Acst Skin		UCL	271	U Dbl Post C-Leg	:
RSTA4160	225	Tack Acst Skin	•	UCOL	273	Column	
RSTA5318 RSTA5324	225	Tack Acst Skin		UDPL	271	U Dbl Post Leg	:
RSTA5324	225 225	Tack Acst Skin Tack Acst Skin	•	UFB UHDPL	268 271	Flush-Mount Bracket	
RSTA5336	225	Tack Acst Skin		UHPL	271	U Dbl Post Leg U Post Leg	:
RSTA5342	225	Tack Acst Skin	•	UJC2382R	262	U Jetty WS, Fr CD	:
RSTA5348	225	Tack Acst Skin		UJC2382R UJC2386R	262	U Jetty WS, Fr CD	
RSTA5360	225	Tack Acst Skin	•	UJC2388R	262	U Jetty WS, Fr CD	
RSTA6518	225	Tack Acst Skin		UJC3228L	262	U Jetty WS, Fr CD	:
RSTA6524	225	Tack Acst Skin	•	UJC3268L	262	U Jetty WS, Fr CD	
RSTA6530	225	Tack Acst Skin		UJC3288L	262	U Jetty WS, Fr CD	:
RSTA6536	225	Tack Acst Skin	•	UJC3328L	262	U Jetty WS, Fr CD	
RSTA6542	225	Tack Acst Skin		UJC3368L	262	U Jetty WS, Fr CD	:
RSTA6548	225	Tack Acst Skin	•	UJC3382R	262	U Jetty WS, Fr CD	:
RSTA6560	225	Tack Acst Skin		UJC3386R	262	U Jetty WS, Fr CD	
: RSTA8018	225	Tack Acst Skin	•	UJC3388L	262	U Jetty WS, Fr CD	
RSTA8024	225	Tack Acst Skin	: (UJC3388R	262	U Jetty WS, Fr CD	:
RSTA8030	225	Tack Acst Skin		UNPL	270	U Post Leg	
RSTA8036	225	Tack Acst Skin	: (UNPL4	270	U Post Leg	:
RSTA8042	225	Tack Acst Skin		UNPL4C	270	U Post Leg	
RSTA8048	225	Tack Acst Skin	<u> </u>	UNPL4M	270	U Post Leg	:
RUK24AVR	333	Stnd OH Upmount Pkg	: (UNPLC	270	U Post Leg	
RUK30AVR	333	Stnd OH Upmount Pkg	<u>:</u> (UPBC3060	261	U Bullet Penn WS, CD	:
RUK36AVR	333	Stnd OH Upmount Pkg	: (UPL	270	U Post Leg	:
RUK42AVR	333	Stnd OH Upmount Pkg	<u> </u>	UPL4	270	U Post Leg	
RUK48AVR	333	Stnd OH Upmount Pkg	: '	UPL4C	270	U Post Leg	:
RUK60AVR	333	Stnd OH Upmount Pkg	: 1	UPL4M	270	U Post Leg	:
RUK72AVR	333	Stnd OH Upmount Pkg		UPLC	270	U Post Leg	:
RXADRL15	311	Rails	•	UVC2424L	265	U Visitor Wksf	:
TB3018	236	AV Tackboard		UVC2424R	265	U Visitor Wksf	
TB3618	236	AV Tackboard	•	UVC2430L	265	U Visitor Wksf	:
TB4218	236	AV Tackboard		UVC2430R	265	U Visitor Wksf	:
TB4818	236	AV Tackboard	•	UVC2436L	265	U Visitor Wksf	
TB6018	236	AV Tackboard		UVC2436R	265 265	U Visitor Wksf	:
: TB7218	236	AV Tackboard	•	UVC2442L	265 265	U Visitor Wksf	:
TS714WSP	268	U Support Plate		UVC2442R	265 265	U Visitor Wksf	:
TS720WSP TS7TIEPLATE	268 268	U Support Plate U Tie Plates	•	UVC2448L UVC2448R	265	U Visitor Wksf	:
TS7WKSPT	269	Reinforcing Chan		UVC2448K UVC3030L	265	U Visitor Wksf U Visitor Wksf	:
TS7WKSPT39	269	Reinforcing Chan	•	UVC3030E UVC3030R	265	U Visitor Wksf	
. 13/WK3F139	209	Helliotoling Ottall	: '	- 103030h	203	O MISHOL MANSI	:

Style Number	Page	Description
UVC3036L	265	U Visitor Wksf
UVC3036R	265	U Visitor Wksf
UVC3042L	265	U Visitor Wksf
UVC3042R	265	U Visitor Wksf
UVC3048L	265	U Visitor Wksf
UVC3048R	265	U Visitor Wksf
VWM18	349	AV Vertical Wire Manager
VWM41M	349	AV Vertical Wire Manager
VWM53M	349	AV Vertical Wire Manager
VWM65M	349	AV Vertical Wire Manager
W08MWV	349	AV Vertical Wire Manager

Trademark List

- The following are registered trademarks for products of Steelcase Inc. or one of its related corporate entities: 4 o'clock, 900 Series, à la carte, Airtouch, Ally, Amia, Answer, Archipelago, Avenir, Ballet, Bix, Brayton International, Cachet, Canopy, Canto, Chancellor, Coalesse, Confidante, Context, Convene, CopyCam, Criterion, Crushed Can, Currency, dash, Designtex, Details, Detour, Drive, Elective Elements, Ellipse, Ember Chrome, Emerge, E-Table 2, FYI, Garland, Gentry, Ginkgo Biloba, Groupwork, Ideo, Jacket, Jenny, Jersey, Kart, Kick, LaCosta, Leap, Let's B, LiveBack, Max-Stacker, media:scape, Metro, Migrations, Mitra, Montage, Nurture, Oriana, Parade, Pathways, PCT, Permiso, Player, Portal, Power Pincher, Progeny, Protégé, R2, Rally, Relevant, Reply, Rizzi Arc, Sensor, Series 9000, Siento, Sieste, Sine, Softcare, Springboard, Steelcase, Steelcase Design Partnership, Stella, Stow Davis, Swathmore, TeamWork, Technique, Texpress, Think, Thunder, Topo, Train, turnstone, Underline, Unison, Vecta, Viridian, Walden, Werndl, and X-Stack.
- The following registered trademarks are under license from AWI Licensing Company, Dover, DE: SoundScapes, DuraBrite, BioBlock, and Armstrong
- The following registered trademarks are under license from Byrne Electrical, Rockford, MI: Interport, Mini-Port, Axil Z, and Ellora
- The following is a registered trademark of DuPont, Wilmington, DE: Corian.
- The following is a registered trademark of Genlyte Thomas Company, Louisville, KY: Liahtolier.
- The following is a registered trademark of Hilti Corporation, FL-9494 Schaan, Principality of Liechtenstein: Hilti.
- The following is a registered trademark of Leviton Manufacturing Company, Little Neck, NY: Decora.
- The following is a registered trademark of Mechanical Plastics Corp, Elmsford, NY: Toggler.
- The following is a registered trademark of Microsoft Corporation, Redmond, WA:
- The following is a registered trademark of Panduit Corporation, Lockport, IL: Panduit.
- The following is a registered trademark of Trav (Press), Cuneo, Italy: Assisa.
- The following is a registered trademark of Virtual Ink, Boston, MA: mimioActive.
- The following registered trademarks are under license from Wilkhahn Furniture Products: Avera, Senzo, Versal, and Wilkhahn FS.

- The following is a registered trademark of Wilsonart International, Temple, TX: Chemsurf.
- The following is a registered trademark of Wiremold, West Hartford, CT: Wiremold.
- The following is a registered trademark of EMU Group S.P.A., Perugia, Italy: Emu.
- The following is a registered trademark of Security People, Inc.: Digilock.
- ™ The following are trademarks for products of Steelcase Inc. or one of its related corporate entities: Access, Active/Passive Shelf, Ainsley, Akira, Alcove, Alerion, Alight, Amaris, American Elect, American Tradition, ap40, Arbor, Arriva, Asana, Ascot, Aspekt, Astor, Await, Bassline, B-Free, Bira, Bivi, Bixby, Bottomline, Brody, Brook, Buoy, Burton, c:scape Calla, Calm, Camber, Campfire, Capa, Cappuccino, Cesar, Chester, Chord, Circa, Clarendon, Classic Rectangular, Clipper, cobi, Collaboration, Community, Company, Convey, Cortex, Coupe, Crea, Crew, Cura, Cypress, Davenport, Dearborn, Deck, Déjà, Denizen, Denska, Derby, Divisio, Donovan, Dune, Duo, Echo, Edge, Elsna, Empath, Empress, Enea, ēno, EnSync, Enviro, Escapade, Exchange, Exponents, Field, Flat Top, FlexFrame, Flip Top, Flute, Folio, FrameOne, FreeFlow, Frontier, Galilei, Gesture, Ginger, Ginkgo, Go Wall, Grip, Groove, Hatchback, Hawthorne, Hitch, Host Collection, Hosu, Huddleboard, i2i, Impact, Indy, InfoLink, IOS, I-Solve, Jack, Jarrah, Jetty, Juice, Kami, Kast, Kathryn, Lagunitas, Lark, L'Attitude, LearnLab, Leela, LessThanFive, Lincoln, Linden, LiveSeat, Loria, Lyric, Malibu, Malibu Too, Mansfield, Marathon, Martini, Mason, Masque, Migration, Millbrae, Mineral, Mingle, Mistic, Mistic Metal, Mistic Wood, Montara650, Montreal, Move, Nadia, Neighbor, nesso, Nickel, Nikko, Nod, Node, Norfolk, Ology, Ontrak, Oom, Opus, Orchid, Outlook Collection, Ovation, Paloma, Paperflo, Parliament, Pasio, Passerelle, Patriarch, Payback, Peek, Pile File, Pisa, Pool, Potrero415, PUCK, QiVi, Quba, Rave, Reed, Regard, Relay, Reunion, Ripple, Riser, Rocco, Rocky, RoomWizard, Runner, Satellite, Sawyer, ScapeSeries, Senti, Sentinel, Senza, Sequoia, Session, ShareLink, Shield, Shortcut, Sidewalk, SILQ, Skylar, Slumber, Smoke, Snug, Soft Leaf, Sonata, Sorrel, SOTO, Southside, Stationkits, Steelcase Series, Stiletto, Surprise!, Surround, Switch, Symphony, Sync, TagWizard, Tava, TeamStudio, TeamTheater, Tenaro, Terrazzo, Theorem, Thread, Topaz, Touchdown, Tour, Tower Too, Trees, Trillium, Trolly, tX2, U-Free, Umami, Underscore, Uno, V.I.A., Verb, Verge, Verlay, Victor2, Visalia, Waldorf, Woodruff, Workspring, and X-tenz.
- ™ The following is a trademark of Microsoft Corporation, Redmond, WA: Windows.
- ™ The following is a trademark of Rodman Industries, Inc., Oconomowoc, WI: ResinCore1.
- ™ The following is a trademark of Ultrafabrics, LLC, Elmsford, NY: Ultraleather.

- ™ The following trademarks are under license from Wilkhahn Furniture products: Cana, Linus, Logon, Picto, Range, Stitz, Thema, Timetable, and Tubis.
- ™ The following trademark is used under license from Cradle to Cradle Products Innovation Institute, Oakland, CA: Cradle to Cradle Certified.
- ™ The following trademarks are under license from Walter Knoll: Andoo, Bob, Lazlo, Lox, Ribbon, and Together.
- The following trademarks are under license from PP Møbler: Bar and Flag Halyard.
- ™ The following trademarks are under license from Viccarbe: Davos, Holy Day, Last Minute, RS, Sistema, and Wrapp.
- ™ The following trademarks are under license from Carl Hansen: Elbow, Paddle, Shell, Wing, and Wishbone.
- ™ The following trademarks are under license from Cambridge Sound Management, LLC, Cambridge, MA: QtPro Soundmasking, Qt Quiet Technology, and Sonet Qt.
- ™ The following is a trademark of Electri-Cable Assemblies, Shelton, CT: Interact.
- ™ The following is a trademark of Clestra Hauserman: IRYS.
- ™ The following is a trademark of Wiesner-Hager Möbel GmbH: Nooi.
- [™] The following are trademarks of PolyVision: a³, e3, Motif, and PolyVision.

Trademarks used here in are the property of Steelcase, Inc. or of their respective owners.