




## All in one free standing package.


Acoustics / Fire Safety / Ventilation / Lighting / Electrics




AIR-23 - 9'2" x 5'6"




AIR-25 - 9'2" x 9'9"



AIR-27 - 9'2" x 14'5"



AIR-29 - 13'4" x 14'4"



**AIR³ & Fan Height:**  
8ft 3 13/16 inch

**Open Roof Blades Height:**  
7ft 9 inch



**Tax Benefit**  
Classed as furniture



**US Manufactured**  
Lead Time: 6-8 Weeks



**ADA Compliant**



**Acoustic Excellence**



**IT Integration**  
Convenience Power and Data



**UL 1286**  
ETL - Intertek listed




## Patented Louvered Roof

AIR³ offers a unique opening/closing roof, providing an effective solution for sprinklered buildings. During any life safety event, the roof will automatically fail-safe open, providing access for the building sprinklers.



## Flexibility

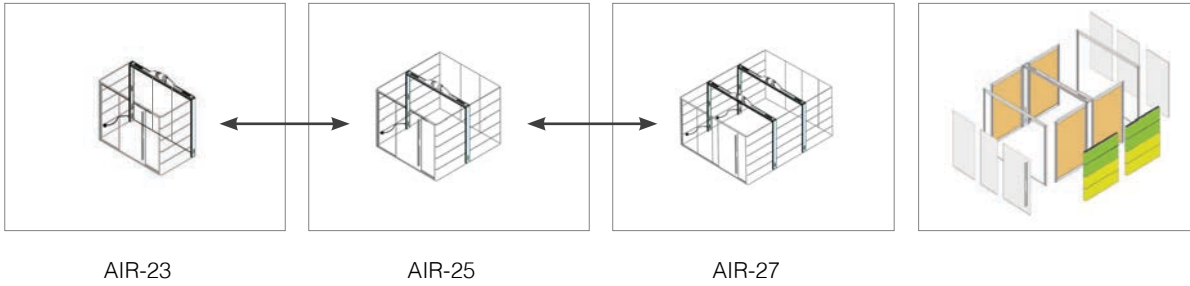

AIR<sup>3</sup> is a free-standing modular pod system that can easily be moved or reconfigured to different sizes.


## Accessories

AIR<sup>3</sup> can be customized with a range of fabric choices on upholstered panels.


Whiteboards, monitor brackets, and integrated tables can also be directly integrated into the AIR<sup>3</sup> structure. AIR<sup>3</sup> can also come equipped with a seismic bolt down kit for use in seismic regions.




Glass Magnetic Whiteboards



Monitor Brackets

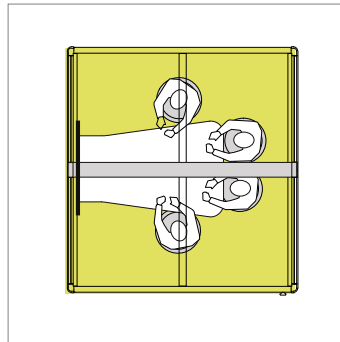



Integrated Tables

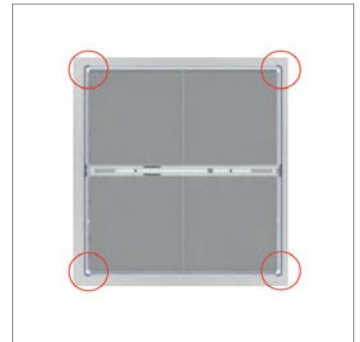

Seismic Kit

## Control Panel

The control panel allows you to manage lights, air and roof settings. AIR<sup>3</sup> requires the power of a standard wall outlet - 120 volts, 12 amps.

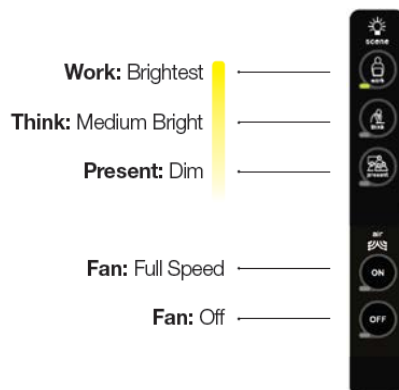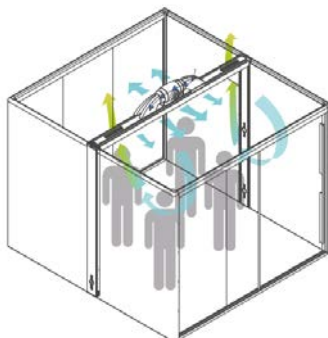

When you walk into the Air<sup>3</sup> Pod, you activate the motion sensor; the lights and fan turn on, and the roof closes. 5 minutes after leaving the Air<sup>3</sup> Pod, with no movement detected, everything shuts off.