



Architectural Solutions Specification Guide

Availability

Electronic price list updated with release 200.L (U.S.) and 156.L (Canada), dated April 15, 2024.

All specifications subject to change without notice. Reference the electronic catalog/Hedberg for current pricing.

Transitional products in this specification guide are **maintained for existing customers only** and are likely to be phased out over time. These products are indicated with a . Products that are scheduled to be culled are indicated with an , followed by the last order entry date.

Surface Materials

The surface materials team has announced the launch of the Finish Library, found at www.steelcase.com/finishlibrary/.

► For a list of all trademarks, refer to the last page of this specification guide. © 2024 Steelcase Inc.

Working With This Specification Guide

Ten Tips: How to Get the Most Out of This Book	2
Additional Resources	4

Understanding

Privacy Wall	5
Thread	267
Underscore Floor	287
Modular Power	305
QtPro Soundmasking	329

Specifying

Privacy Wall	109
Thread	275
Underscore Floor	297
Modular Power	313
QtPro Soundmasking	343

Surface Materials

Resources

Wiring Schematics	374
Locations with Special Requirements	375
How to Calculate Power Needs	376
Style Number Index	378




For Canadian Pricing

Canadian factor can be found at www.steelcase.com/CADpricing/. Calculate in the following order to avoid rounding errors:

- Multiply the base price and each option by the Canadian factor.
- Round each to the nearest dollar.
- Add base and options for total list price.


Ten Tips: How to Get the Most Out of This Book

Tip 1



Watch the tabs on the right-hand edges of the pages. They'll always indicate which chapter you are in.

Tip 2



Use the Statement of Line pages for an overview of the available components, their sizes, and page references for additional information. Each *Understanding* chapter includes a statement of line after the table of contents.

Tip 3



Find cross references by looking for page numbers flagged with an arrow.

Tip 4

Study the product detail pages in the *Understanding* section to learn everything an expert knows about specific products. Each product detail page in this section contains the following features, where applicable:

- Product Drawing
- Actual Dimensions
- Product Details
- Connections
- Wiring and Cabling
- Surface Materials
- Application Topics

Product Drawing


shows you what the product looks like and points out important features.

Product Details

gives specific information on the product and how it is used.

Connections

describes how the product is assembled or how it attaches to another product.

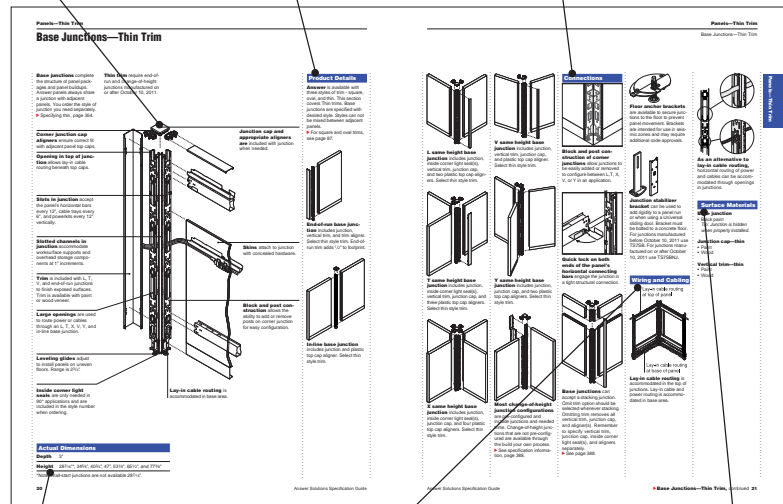

Actual Dimensions

table lists the dimensions of the product.

Wiring and Cabling

details the power and cable-management and cable routing capabilities of the product.

Surface Materials

lists what material is used for each part of the product.

Tip 5

Refer to the specifying pages for all the information needed to order a product.

Each product specifying page contains a variety of elements to help you complete a specification:

- Product Drawing
- Standard Includes
- Required to Specify
- Options
- Related Products
- Specification Information
 - Dimensions
 - Style Number
 - Price

Standard Includes

(under the red or dark grey band) provides a list of what comes standard with the product.


Required to Specify

(under the red or dark grey band) itemizes the information that you must provide to order the standard product and the preferred sequence for specification.

Specification Information

(under the teal or light grey band) provides product dimensions, style numbers, and prices for the standard product and any surface material choices that are available.

Product Drawing shows you what the product looks like.

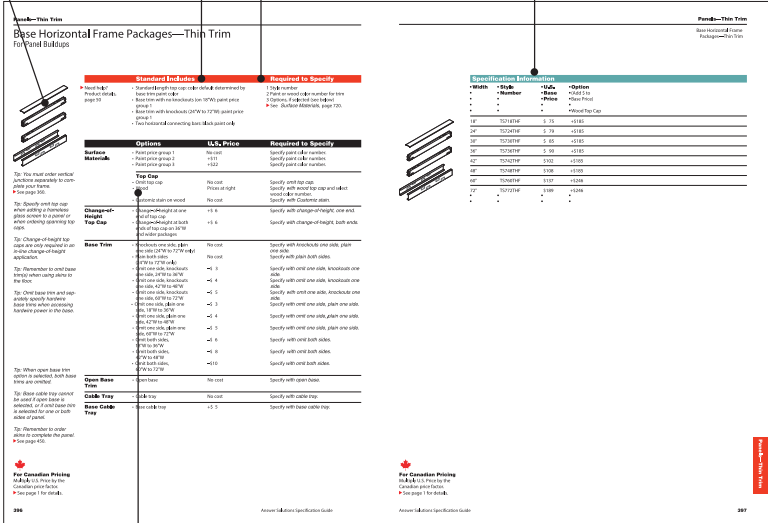

Options

(under the black band) lists all the options that apply to the product, their price, and what is required to specify.

Related Products

provide specification information for products that are directly related.

Tip 6

Required to Specify

Specify with Customiz Stain


Tip 7

• **To determine** how many skins are needed to complete a panel, consult the table at the right.

• *Tip: Remember to order skins for both sides of the panel buildup.*

Watch for tips throughout the text that give you explanations and helpful instructions.

Tip 8



Learn what you cannot do by looking for drawings crossed out with an “X.”

Tip 9

Use the surface materials listings in the Surface Materials section of this book to find surface material color numbers.

Tip 10

Style Number	Page
TS7042BL	131
TS7042S	130
TS7048BL	131
TS7048S	130
TS7060BL	131
TS7060S	130
TS7072BL	131

Refer to the style number index when you know a style number and you need to find the page that has more details about the product.

Additional Resources

Architectural Solutions

are supported with informational materials, tools, and software to help you plan, specify, and order an installation efficiently.

Product brochures and planning tools

can be ordered through your Steelcase area office by calling 1.800.784.0358 or through the Marketing Resources web site at village.steelcase.com.

Printed Materials

Surface Materials Reference Manual

This publication provides:

- An explanation of the surface materials
- "Available on" matrices
- Vertical surface fabric and seating upholstery selection listing
- Technical data for surface materials
- Surface material care and cleaning instructions

Computer Tools

Electronic Catalog

Accurate sales quotations and purchase orders for Steelcase products are created with specification software that uses Steelcase Electronic Catalog data. Use the data to specify and price style numbers and options for every Steelcase product. The data is updated bimonthly by Steelcase and provided to software programs including: the Hedberg Business System, SmartTools—Steelcase's design and specification software (for more information on SmartTools, please email SmartTools@steelcase.com), the ProjectMatrix ProjectSymbols libraries, as well as 20-20 CAP Studio.

Furniture Symbol Graphic Data

Steelcase creates 2D and 3D furniture symbols (with attributes) for planning and initially specifying Steelcase products. This data is incorporated into several add-on software packages that work in either a Microstation or an AutoCAD drafting environment.

For more information about these and other software tools to help you plan effective work environments, please email fsl@steelcase.com.

Digital Publications

You can access these digital publications at www.steelcase.com or village.steelcase.com.

Architectural Solutions Product Training

Basic training for the products included in the Architectural Solutions product portfolio is available as part of the Building Product Muscle (BPM) curriculum on the Steelcase University Web site at village.steelcase.com.

The four BPM modules are Web-based, interactive courses filled with pictures, detailed positioning, statement of line, and feature benefit information, as well as practice exercises designed to build salespeople's knowledge of the products. The BPMs also provide printable job aids of all content covered in the courses to serve as ongoing performance support. The available courses are:

- Privacy Wall—SAL271
- Architectural Solutions Low-Profile Floor—SAL243
- Architectural Solutions Modular Power—SAL245

Additionally, there are two courses available to help improve your understanding of how to position the advantages of an Architectural Solution with potential clients: Architectural Solutions—SAL242 and The AS Value Proposition—SAL258.

Support

Steelcase Capabilities

Steelcase products are distributed, installed, and serviced through a network of more than 600 dealers worldwide. Steelcase is also represented with offices and corporate showrooms in 26 U.S. cities, 4 Canadian cities, and in France, Germany, Great Britain, and Japan. Every Steelcase product meets our exceptionally high standards of quality and durability and comes with the Steelcase assurance of excellence in service.

For ordering or product assistance,

please call your local dealer, the Steelcase Solutions Resource Team, or the Steelcase Solutions Fulfillment Team at 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com.

Call the Steelcase Solutions Resource Team prior to placing an order, when working on a bid, or when you need information about product applications and specifications.

Call the Steelcase Solutions Fulfillment Team if you have submitted an order to Steelcase and you need to speak to your Solutions Fulfillment Team Representative about the order. Also call if you have any post-shipment quality concerns or service parts questions.

For warranty information, please go to <http://www.steelcase.com/warranty/>.

Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call 1.616.247.2500.

For information about Steelcase, the name of your nearest Steelcase dealer, or for product literature, call 1.800.333.9939, or visit our Web site: www.steelcase.com.

Sustainability

At Steelcase, we believe business can be a force for good. We create long-lasting products that are better for people and better for the planet. Our products and operations use life cycle thinking to meet our commitment to reducing climate change. This commitment is reinforced by practices such as designing to minimize global warming and other life cycle impacts, ensuring material health, and enabling end-of-use strategies. To learn more at a corporate level, visit: <https://www.steelcase.com/discover/steelcase/esg-overview/environmental/ProductEnvironmentalProfiles>, which provide key environmental attributes such as recycled content, embodied carbon and recyclability, as well as product certifications can be found by searching for Steelcase at *Origin.build*.

Understanding Privacy Wall


Statement of Line
6

Product Details	
Solid Wall Panels	18
Glass Wall Panels	24
Butt-Hinged Frames and Door Leaves	32
Pivot-Hinged Frames and Door Leaves	42
Door Swing Orientation Choices	48
Privacy Wall Slider Doors	50
Glass Selections Polished Edge Slider Doors	56
Ceiling Tracks	62
Cornice Track	66
Ceiling Clip Application	68
Mini Ends	70
Wall Channels	74
Wall Channel Flexibility	77
Cut Panels	78
Adapters	80
Posts	84
Feature Strip Application	88
Application Topics	
Centerline Versus Interior Dimension Planning	90
Base Trim Details	92
How to Connect Privacy Wall to I-Line Moveable Walls	96
Etched and Pattern Glass Planning	98
Wiring and Cabling	
How to Power a Panel	100
Overview of Powered Panels	104
Wiring Schematics	106
How to Calculate Power Needs	107
Field-Installed Modular Harness Length Guidelines	108

Statement of Line

Privacy Wall



Solid Wall Panels

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M



- ▶ Understanding, page 18
- ▶ Specifying, page 110

All-Glass Wall Panels

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

- ▶ Understanding, page 24
- ▶ Specifying, page 116

M = Available in modular widths



Glass Wall Panels with Three Equal Divided Lites

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

► Understanding, page 24
► Specifying, page 120



Glass Wall Panels with Four Equal Divided Lites

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

► Understanding, page 24
► Specifying, page 124

M = Available in modular widths

Statement of Line Privacy Wall, continued



Glass Wall Panels with Four Divided Lites*

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M


*Transom-aligned top lite
► Understanding, page 24
► Specifying, page 128

Glass Wall Panels with Two Divided Lites*

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
► Understanding, page 24
► Specifying, page 132


M = Available in modular widths



Clerestory Wall Panels*

Heights 8'0" to 10'0" in one-inch increments	
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
 ▶ Understanding, page 24
 ▶ Specifying, page 136



Glass Selections All-Glass Frame Kits

Heights 8'0" to 10'0" in one-inch increments	
72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M

▶ Understanding, page 24
 ▶ Specifying, page 194


M = Available in modular widths



Glass Selections All-Glass Wall Panels

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

▶ Understanding, page 24
 ▶ Specifying, page 192





Glass Selections All-Glass Glass Kits

Heights 8'0" to 10'0" in one-inch increments	
72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M

▶ Understanding, page 24
 ▶ Specifying, page 196


Statement of Line Privacy Wall, continued



Glass Selections Wall Panels with Two Divided Lites*

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
► Understanding, page 24
► Specifying, page 198



Glass Selections Two Divided Lite Glass Kits*

Heights 8'0" to 10'0" in one-inch increments	
72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M

*Transom-aligned top lite
► Understanding, page 24
► Specifying, page 204

M = Available in modular widths

Glass Selections Two Divided Lite Frame Kits*

Heights 8'0" to 10'0" in one-inch increments	
72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M


*Transom-aligned top lite
► Understanding, page 24
► Specifying, page 202



Glass Selections Clerestory Wall Panels*

Heights 8'0" to 10'0" in one-inch increments	
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
► Understanding, page 24
► Specifying, page 206

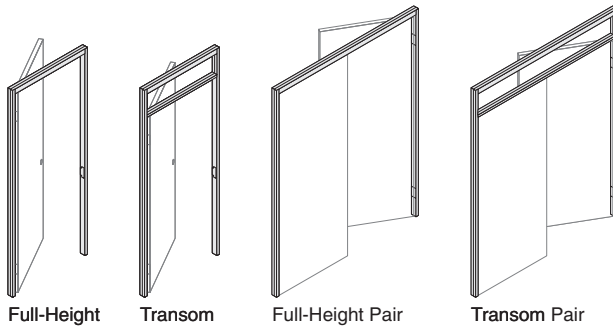

Full-Height

Transom

Full-Height Pair

Transom Pair

Butt-Hinged Door Frames

Heights 8'0" to 10'0"
in one-inch increments

40"W single



76"W pair



► Understanding, page 32

► Specifying, page 142

Glass Selections Full-Height Butt-Hinged Door Frames

Glass Selections

Heights 7'5" to 10'0"
in 1" increments
42" wide unit is 9'0"
maximum

40"W single




42"W single



► Understanding, page 38

► Specifying, page 212

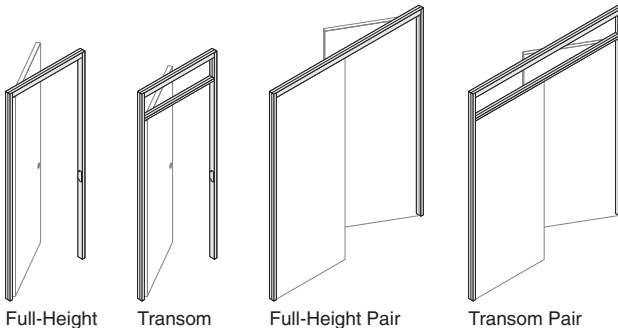

Full-Height

Transom

Full-Height Pair

Transom Pair

Pivot-Hinged Door Frames

Heights 8'0" to 10'0"
in one-inch increments

40"W without
switch cutout



42"W with
switch cutout




80"W without
switch cutout



► Understanding, page 42

► Specifying, page 144

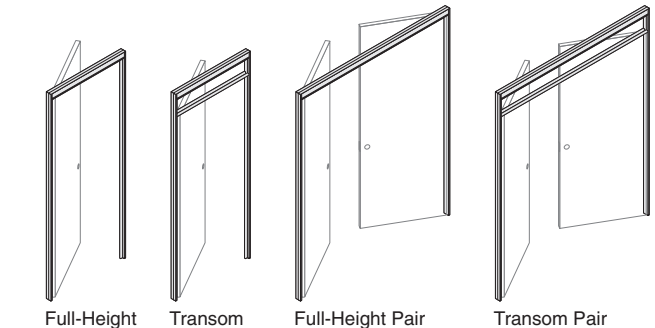

Full-Height

Transom

Full-Height Pair

Transom Pair

Glass Selections Pivot-Hinged Door Frames

Glass Selections

Heights 8'0" to 10'0"
in 1" increments

40"W without
switch cutout



42"W with
switch cutout



80"W without
switch cutout




► Understanding, page 42

► Specifying, page 210

Tip: Glass Selections door leaves must be used in conjunction with Glass Selections door frames.

Statement of Line Privacy Wall, continued

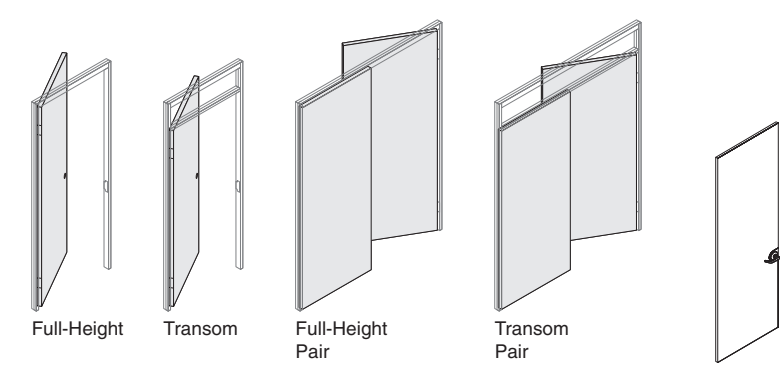

Butt-Hinged Door Leaves


	Height
40"W (35 ¹³ / ₁₆ " actual) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
40"W (35 ¹³ / ₁₆ " actual) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
76"W (71 ⁵ / ₈ " actual) solid pair	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame

► Understanding, page 32
► Specifying, page 148
Tip: Butt-hinged door leaves are not available in anodized aluminum and are not recommended for use with Glass Selections panels.

Glass Selections Butt-Hinged Door Leaves

	Height
40"W (35 ¹³ / ₁₆ " actual) glass single	7'0" to 10'0" in one-inch increments for full-height door frame
42"W (37 ¹³ / ₁₆ " actual) glass single	7'0" to 10'0" in one-inch increments for full-height door frame

► Understanding, page 38
► Specifying, page 222
Tip: Butt-hinged door leaves are not recommended for use with Glass Selections panels.

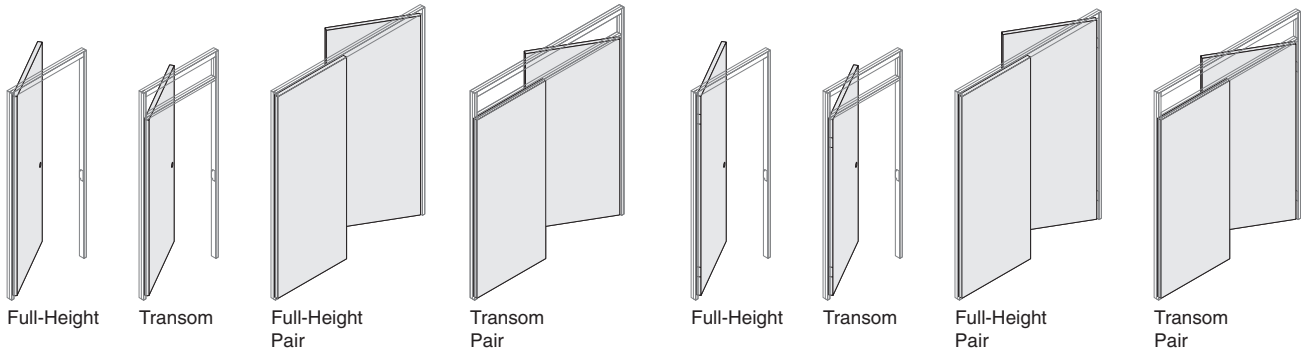

Pivot-Hinged Door Leaves

	Height
40"W (37 ³ / ₁₆ " actual*) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
40"W (37 ³ / ₁₆ " actual*) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
80"W (77 ¹ / ₂ " actual) solid pair	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame

Tip: For pivot-hinged pair of doors, the active leaf will always be 37³/₁₆"W. Width of inactive door leaf will be 39¹³/₁₆".

*36³/₈" with switch in frame

► Understanding, page 42

► Specifying, page 152

Glass Selections Pivot-Hinged Door Leaves

	Height
40"W (37 ³ / ₁₆ " actual*) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
40"W (37 ³ / ₁₆ " actual*) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
80"W (77 ¹ / ₂ " actual) solid pair	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame

Tip: For pivot-hinged pair of doors, the active leaf will always be 37³/₁₆"W. Width of inactive door leaf will be 39¹³/₁₆".


Tip: Glass Selections door leaves must be used in conjunction with Glass Selections door frames.

*36³/₈" with switch in frame

► Understanding, page 42

► Specifying, page 214


Statement of Line Privacy Wall, continued

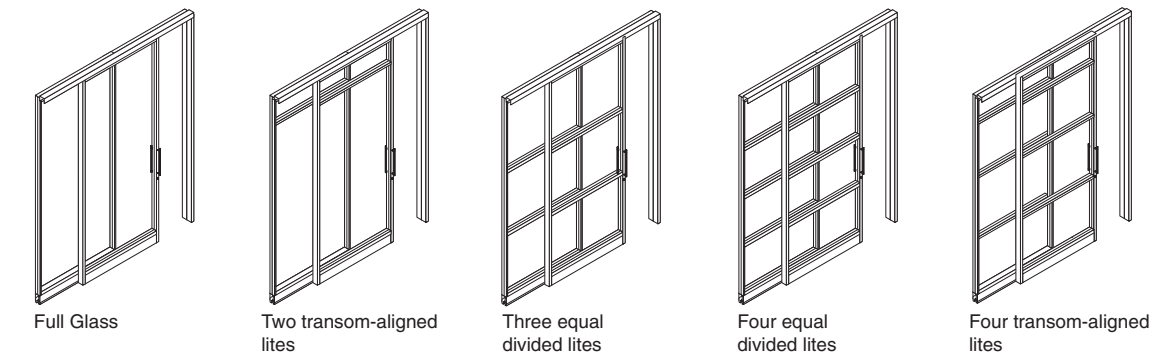

Slider Doors

	Heights 8'0" to 10'0" in one-inch increments				
	Full Glass	Two Transom-Aligned Lites	Three Equal Divided Lites	Four Equal Divided Lites	Four Transom-Aligned Lites
80"W	●	●	●	●	●
96"W	●	●	●	●	●


- ▶ Understanding, page 50
- ▶ Specifying, page 168

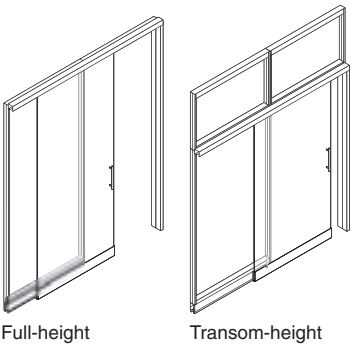

Glass Selections Polished Edge Slider Doors

	Heights 8'0" to 10'0" in one-inch increments	
	Full-Height	Transom-Height
80"W single	●	●
84"W single	●	●
96"W single	●	●


- ▶ Understanding, page 56
- ▶ Specifying, page 224

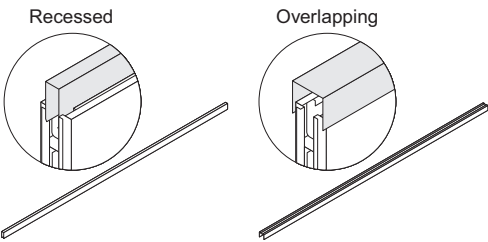

Ceiling Tracks*

Length
120" to cut on site

- *Finished end, L, and V ceiling tracks are also available.
- ▶ Understanding, page 62
 - ▶ Specifying, page 240



Continuous Base Trim

Length	5"H
120" to cut on site	●
► Understanding, page 18	
► Specifying, page 246	



90° corner




120° corner




135° corner

Corner Base Trim


	5"H
90°	●
120°	●
135°	●
► Understanding, page 84	
► Specifying, page 247	



Power-only
receptacles



Power and
communication
receptacles



Communication-
only receptacles

Power and Communication Base Trim

	24"W
Power only	●
Power and communication	●
Communication only	●

Tip: Chicago base trim is also available.
► Understanding, page 18
► Specifying, page 248



Feature Strips

	Heights 8'0" to 10'0" in one-inch increments
In-line	●
Half	●
► Understanding, page 18	
► Specifying, page 250	

Statement of Line Privacy Wall, continued




Furniture Reveal Strips

Length
34" to cut on site
► Understanding, page 18
► Specifying, page 253

Mini Ends

	Heights 8'0" to 10'0" in one-inch increments
1½"W to 2½"W	●
2½"W to 3½"W	●
3½"W to 6"W	●
► Understanding, page 70	
► Specifying, pages 180 and 232	

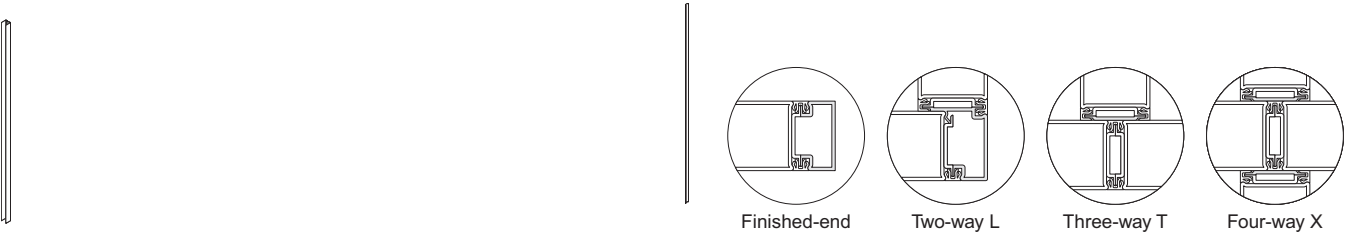


Wall Channels

	120"
1"	●
2¼"	●
4"	●

► Understanding, page 74
► Specifying, page 182
Tip: Wall channels are not available in anodized aluminum and are not recommended for use with Glass Selections panels.

Adapters

	Heights 8'0" to 10'0" in one-inch increments
L	●
T	●
X	●
Finished-end	120"
► Understanding, page 80	
► Specifying, page 186	

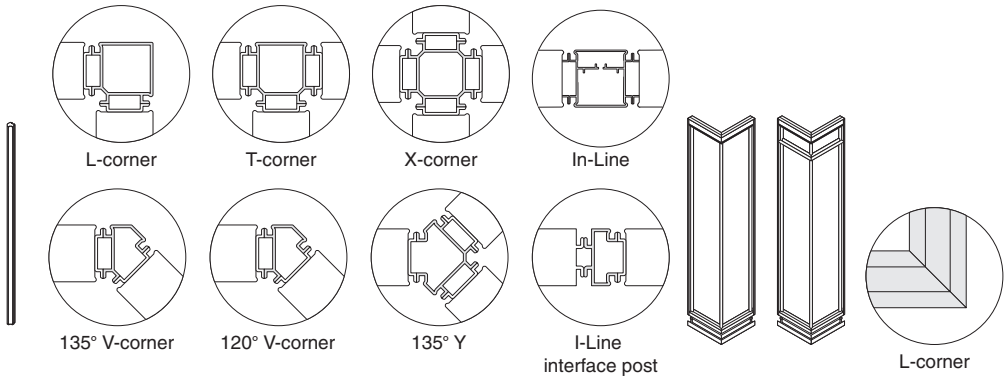


Posts

Privacy Wall
Glass Selections
Heights 8'0" to 10'0"
in 1" increments

L	●
T	●
X	●
In-line	●
120° V	●
135° V	●
135° Y	●
I-Line interface post	120"

Tip: I-Line Interface post is cut to length in the field.

- Understanding, page 84
- Specifying, page 188



Glass Selections T-Corner Unit All-Glass Frame Kits

Heights 8'0" to 10'0"
in one-inch increments

18"W x 18"W x 18"W ● M


- Understanding, page 26
- Specifying, page 236

Glass Selections L-Corner Units

Heights 8'0" to 10'0"
in one-inch increments

18"W x 18"W ● M

- Understanding, page 26
- Specifying, page 234



Glass Selections T-Corner Unit All-Glass Kits

Heights 8'0" to 10'0"
in one-inch increments

18"W x 18"W x 18"W ● M

- Understanding, page 26
- Specifying, page 237

M = Available in modular widths

Solid Wall Panels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall solid wall panels create floor-to-ceiling walls, prefabricated to the height and width dimensions you specify. These panels, which offer power and communication capability, can be relocated to respond to changing needs.

► Specifying, page 110

Hollow core panel enables wiring and cabling to be routed within the panel.

Enhanced core panel has an insulated core to afford greatest acoustical performance. Use with overlapping ceiling track to realize maximum results.

Integral slotted verticals allow for panel-supported furniture. Integral slotted verticals start above the base and run to a height of 84". Slotting will support components that are designed to hang on Answer and Kick, including Universal Storage and Worksurfaces.

Adjustable levelers allow panels to be installed on uneven floors.

Recessed or overlapping ceiling track is available.

Post extensions are available in two versions to accommodate both types of ceiling tracks.

Feature strip joins panels to posts, adapters, and other adjacent components.

Surface is steel, available in paint, fabric, or vertical surface vinyl.

Tip: Vertical surface vinyl is available only on panels 48"W or smaller.

Tip: Vertical surface is not Greenguard and Indoor Advantage certified.

Power and communication outlets can be located in the panel face at desk and/or ADA height and/or in the panel base. Receptacles and cover plates are ordered separately.


Continuous base trim, ordered separately, is added in the field.

Floor track is unitized to the panel to receive base trim and provide visual and acoustic separation at the floor.

Tip: When installing on low-profile floor, specify universal floor grippers.


► Page 256

Product Details

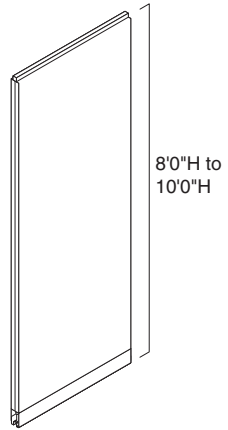


Panel height can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Ceiling track allows $1/2"$ of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows $3/4"$ of vertical adjustment to accommodate variations at base.

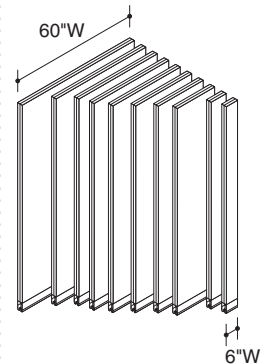


Panel widths range from 6"W to 60"W.




Width of panel is measured to center of joint between two panels.

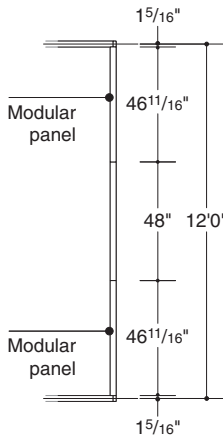


Modular panels used with adapters allow centerline planning. In the example above, two modular panels allow the distance between the centerline of the two parallel walls to remain at 12'0".



Modular panel widths are slightly smaller ($1\frac{1}{16}$ " less) than regular panel widths so that when a corner condition is created, the overall dimension remains unchanged. All other features of modular panels are the same as standard panels.



Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.



Finished-end adapter is available to finish the exposed end of a run of panels. Adapter adds approximately $1\frac{3}{16}$ " to the length of the wall.

Solid panels, as tested per ASTM E90, achieve STC ratings as follows:

- STC 41 for hollow core panels with recessed ceiling track
- STC 42 for hollow core panels with overlapping ceiling track
- STC 45 for enhanced core panels with overlapping ceiling track


Tip: Use of hang-on components or receptacles in panels may reduce acoustic effectiveness.



Panel end cut kit connects a cut panel to another panel in line. It restores leveler and housing that is removed when panel is cut on site. Kit includes trim piece to finish the cut side of the panel and to enable feature strip connection to an adjacent panel.


Tip: Hang-on components are not allowed on cut panels.

► Page 78

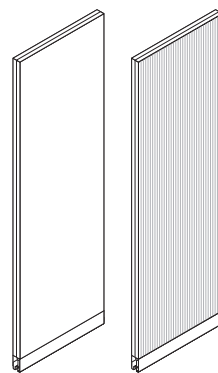

Different surface materials can be applied to opposite sides of the panel. For example, you can have vinyl applied to side 1 and fabric applied to side 2.

Vinyl is available on panels that are 48"W or smaller.




Ceiling track bypass cover is available to conceal cable or conduit routed next to a recessed ceiling track as the conduit travels from the ceiling into a wall panel.

► Page 63


Acoustic packing is available to improve the acoustical performance at mini ends and wall channels. Each 120" length of acoustic packing provides enough material for three mini ends at 10' ceiling height.

Connections





Feature strips, ordered separately, join panels together. Strip prevents light and sound leaks and can be cut to allow access to the integral slotted verticals. To rearrange panels, painted and anodized feature strips can be removed and reused. Fabric covered feature strips cannot be reused, and will need to be replaced as part of rearrangement process.

► Page 88



Furniture reveal strips, ordered separately, are positioned between two sections of in-line feature strip to allow access to one set of panel slots when a single component is mounted on a Privacy Wall panel. When components are mounted side-by-side, both sets of slots are left exposed, and there is no need for a furniture reveal strip. Furniture reveal strips are painted to match the adjacent wall panel or to match the component bracket.

Tip: Use of hang-on components with enhanced core panels may reduce acoustic effectiveness.




Ceiling track, ordered separately, joins the top of wall panels to the ceiling. Ceiling track is available recessed or overlapping.


Tip: Use overlapping ceiling track with enhanced core panels to maximize acoustical performance.

► Page 62

Solid Wall Panels, continued




Base trim fits into position at the bottom of panel surface above the floor track.




Integral slotted verticals accommodate any hang-on component that will hang on Answer or Kick panels, at any height in 1" increments up to 85".

► See *Storage Specification Guide*.




In some cases it may be desirable to hang components from the face of a solid panel, rather than connecting to the slots in the vertical edges of the panels. The solid panel construction is not adequate for fastening directly to the face of the panel. In the cases where a surface mounting solution is desired, load bars can be specified to provide additional support at the panel face. Mounting hardware can be screwed to the load bar without any damage to the panel surface.




Load bars engage with panel slots and can be mounted at 1" increments. They are specifiable in widths from 18" to 60", in 1/16" increments. Load bars should be specified in widths to match the panel(s) from which they are hanging. Load bars can be specified in standard or modular sizes to match their corresponding panels. Load bars can be used with solid or clerestory panels.

Tip: Use of hang-on components with solid panels may reduce acoustic effectiveness.

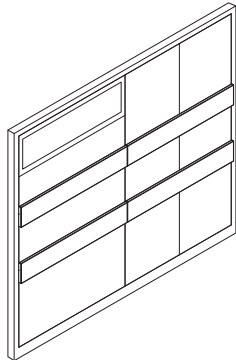


A single load bar can span multiple panels and can also be mounted side by side.




It is recommended that load bars and panels be planned in a narrow enough width to keep them concealed once the components are mounted.

Tip: Load bars are equal or less than the width of the mounted component.




Load bars are used in sets of two and can be spaced apart as needed to accommodate the equipment to be mounted to them. For smaller monitor mounting brackets, load bars can be spaced 1" apart.

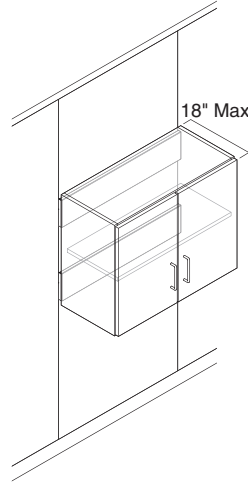


When hanging a larger conventional casework cabinet

that is designed to mount with cleats, load bars can be used. In these applications, the load bars would be positioned to align with the cleat hardware that is included as part of the cabinet design. Load bars are not designed to support cabinets that are deeper than 18".




Load bars can be mounted at a maximum height of 85" AFF (Above Finished Floor) and a minimum height of 12" AFF (Above Finished Floor). Two load bars can support a maximum of 650 pounds. When a single load bar is installed at a feature strip, a furniture reveal strip should be installed adjacent to the load bar.



Posts join panels in in-line, L-, T-, X-, V-, and Y-configurations without blocking access to integral slotted verticals.


► Page 84



Adapters connect panels in L-, T-, and X-configurations without adding extra creep to panel dimension.

Tip: Adapter blocks slotted verticals in panel edge of some panels.


► Page 80



Mini end connects a panel or panel run to a perpendicular building wall. Elements of the mini end telescope allow a limited range of dimensional adjustability.


► Page 70

Edge Premium Markerboard products can be surface mounted to Privacy Wall by clipping into panel slots. All mounting brackets and hardware are included with each board. In addition to bracket mounted boards, Senti markerboards can be magnetically mounted to painted panel surfaces. The maximum size markerboard for magnetic mounting is 48" x 48". Application rules, magnetic mounting guidelines, and specification information can be found in the *Collaborative Surfaces Specification Guide*.

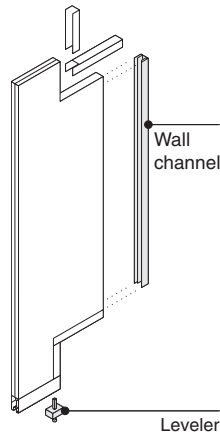


Cut edges of cut panel can be finished with field-cut wall channel.

End filler cut kit combines a wall channel and spreader into one assembly. Kit is used when cutting a panel at a perpendicular building wall.




Wall channel connects an uncut panel to a perpendicular building wall.

► Page 74




Solid panels can be cut on site to conform to building walls and ceiling details including sills and bulkheads.

Specify an end filler cut kit when cutting a panel into a wall channel. The end filler cut kit includes a wall channel and a spreader.

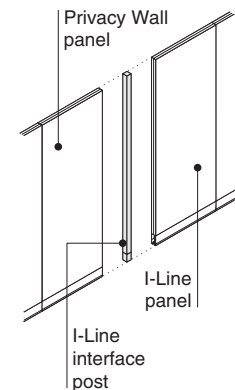

I-Line interface post allows a Privacy Wall panel to connect to an existing I-Line panel in line.

Tip: Two I-Line feature strips are needed for the I-Line side of the connection. Two Privacy Wall feature strips are needed for the Privacy Wall side of the connection.
► See *How to Connect Privacy Wall to I-Line Moveable Walls*, page 96.



Universal floor grippers are designed for use with Privacy Wall panels that are placed on top of Low-Profile Floor. The universal floor gripper fits underneath the panel floor channel and glides to evenly distribute weight on the floor. When used with double-sided adhesive tape, the universal floor gripper will also prevent movement on hard surface floors like tile, wood, or terrazzo.


Tip: Universal floor grippers must be specified when installing in accordance with ICC Compliance Report.

Panels which are configured for low profile base trim are not compatible with the universal floor gripper. Panels that are required to be secured to the floor must be directly anchored to the floor with conventional fasteners.

Edge and Senti Premium Markerboard products can be surface mounted to Privacy Wall by clipping into panel slots. All mounting brackets and hardware are included with each board. In addition to bracket mounted boards, Senti markerboards can be magnetically mounted to painted panel surfaces. The maximum size markerboard for magnetic mounting is 48"x48". Application rules, magnetic mounting guidelines, and specification information can be found in the *Collaborative Surfaces Specification Guide*.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity.


Wiring & Cabling



Hollow core in panel enables both vertical and horizontal cable routing within panel.


Panels with enhanced core do not allow for vertical cable routing. Cable can be routed laterally at the base.

Solid hollow core Privacy Wall panels can be specified with factory-installed powerkits. Powerkits include a power block and an installation cage. Field-installed powerkits are also available.




Desk- and ADA-height power blocks will be factory installed in center of panel to accommodate either power receptacles only or power and communication receptacles. A single power block can be specified to allow receptacles on one side or both sides of the panel.

Power receptacles




Power and communication receptacles


Cover plates, ordered separately, accommodate power receptacles and communication faceplates. Cover plates are used in panel face only.




Base-height power block will be factory installed in center of panel. A single power block can be specified to allow receptacles in one side or both sides of panel. Base-height power is available in both hollow core and enhanced core panels.



59"
Power only



Power and communication



Communication only


Base trim, ordered separately, is 59"W and available in three versions— power only, power and communication, and communication only.

Solid Wall Panels, continued

Width of panel must be adequate to accommodate cutouts. See table below for minimum widths.


Power and Communication

- 30"W–60"W Standard panel
- 30"W–60"W Modular panel




Power receptacles are ordered separately and installed on site. They are coded to indicate which circuit and type of ground they engage.

► Page 100





Controlled receptacle must be indicated when tying into the building management system. Duplex receptacles have an option for a factory permanent, pad stamp power icon symbol with the word controlled per compliance with the Energy Code.




USB receptacles are ordered separately and installed on site. They are available in three wiring schematics with multiple line options. USB receptacles offer easy access to two charging ports. Each port provides 1 ampere of output. USB receptacles conveniently charge a wide range of electronic devices. Some devices may not be compatible.

Communication receptacles are provided by others and installed on site. They can accommodate single-gang NEMA-style faceplate, snap-in modular furniture-style faceplate, or Decora mounting strap style.




Receptacles in hollow core panels can be specified in any combination of base height, desk height, or ADA height, or on Clerestory panels.

Utilities can be specified on either side of the panel or on both sides. Receptacles can be installed on either side of the panel or on both sides. Fillers can be installed in any unused cutouts.



Infeeds can connect power blocks to building power in the ceiling or floor. Factory-installed infeeds extend a minimum of 12' from the panel.



Modular harnesses and harness-to-harness connectors can be used to extend power to a power block from another power block in an adjacent panel.

Wiring schematics are available to accommodate a wide range of building types and power needs. 15-amp and 20-amp systems are available in 4-circuit, 3+1; 4-circuit, 2+2; and 3-circuit with separate neutrals. All of these choices are supported with a system ground and isolated ground.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical components.

Chicago and New York City require that all power be hardwired in the field. Modular power systems are not permitted. All Privacy Wall panels can be hardwired on site using conventional electrical components.

New York City/Chicago power prep option can be selected to provide panel cutouts and internal hardware to receive hardwired components.

New York City/Chicago power prep option requires use of Privacy Wall cover plate, ordered separately.
► Page 100

Surface Materials

Panels

- Paint
- Fabric

Tip: Different surface materials can be applied to opposite sides of the panel.

Tip: Remember to designate side 1 and side 2 as appropriate to correspond to power and communication locations.

Ceiling track

- Paint

Base trim

- Paint

Feature strip

- Paint
- Fabric
- Vinyl

Cover plate

- Plastic

Receptacle

- Plastic

Application Topics

Feature Strip Application

► Page 88

Centerline Versus Interior Dimension Planning

► Page 90

How to Power a Panel

► Page 100

Overview of Powered Panels

► Page 104

Power Options


► Page 140

Solid Wall Panels — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options


SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

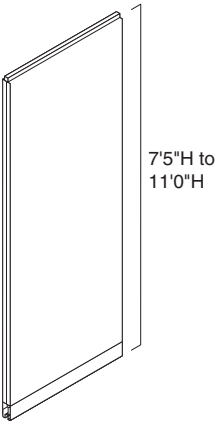

Panel height can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

Tip: Panels that are greater than 10'0"H cannot exceed 48" in width.

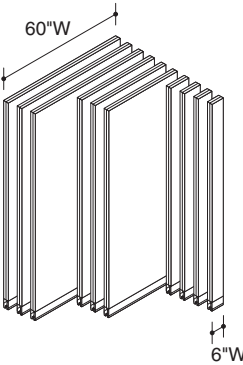


Solid panel widths range from 6"W to 60"W in even 1" increments.

Tip: Panels with enhanced core do not exceed 48" in width.

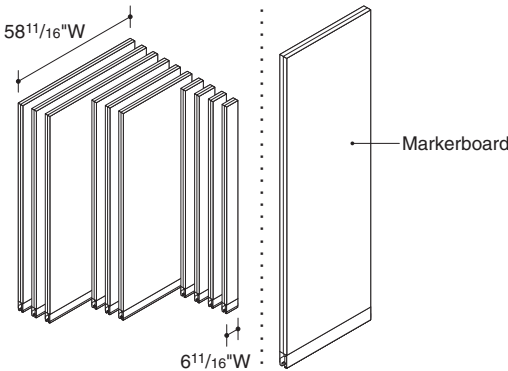

Modular solid panel widths range from 6 11/16"W to 58 11/16"W in 1" increments. *Tip: Panels with enhanced core do not exceed 46 11/16" in width.*



4" high continuous base trim, ordered separately, can also be specified and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using 4"H base, panels and other vertical components must be specified with a modified height to accept 4"H base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Other modified components that must be specified to accept 4"H base:
Panels
Posts and adapters
Feature strips
Door frames
Slider doors
Mini ends
Wall channels and cut kits

Tip: 4" high base cannot be used with base-located power.

Panel surfaces can be specified with a markerboard surface for use with dry erase markers.

Tip: When using adjacent markerboard panels, specify the shared feature strip in a black painted or anodized finish. Black painted strips will conceal marks on surface. Anodized surface will allow markers to be cleaned from surface.

Tip: Markerboard surface is available in a maximum ceiling height of 120" and a maximum width of 48".

Glass Wall Panels

Including Glass Selections Wall Panels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall glass wall panels and Glass Selections wall panels create floor-to-ceiling walls, prefabricated to the height and width dimensions you specify. These panels, which offer power and communication capability, can be relocated to respond to changing needs.
 ▶ Specifying, pages 116–136, 192–206, 234–238

Feature strip joins panels.

Factory-installed lites can be specified in a variety of glass types.
Tip: For information regarding Etched and Pattern Glass Planning.
 ▶ Page 98.

Muntins divide glass into separate lites.

Adjustable levelers allow panels to be installed on uneven floors.

Recessed or overlapping ceiling track is available.

Post extensions are available in two versions to accommodate both types of ceiling tracks.


Integral slotted verticals above the base run to a height of 84".
Tip: Integral slotted verticals are available only on Clerestory and solid panels.

Surface of Clerestory panels is steel, available in paint, fabric, or vertical surface vinyl.
Tip: Vertical surface vinyl is available only on panels 48"W or smaller.


Tip: Vertical surface vinyl is not Greenguard and Indoor Advantage certified.

Power and communication outlets can be located in the panel face at desk and/or ADA height and/or in the base of a Clerestory panel. Outlets can be located in the base of full-glass panel or divided lite panel. Receptacles and cover plates are ordered separately.


Continuous base trim, ordered separately, is added in the field.

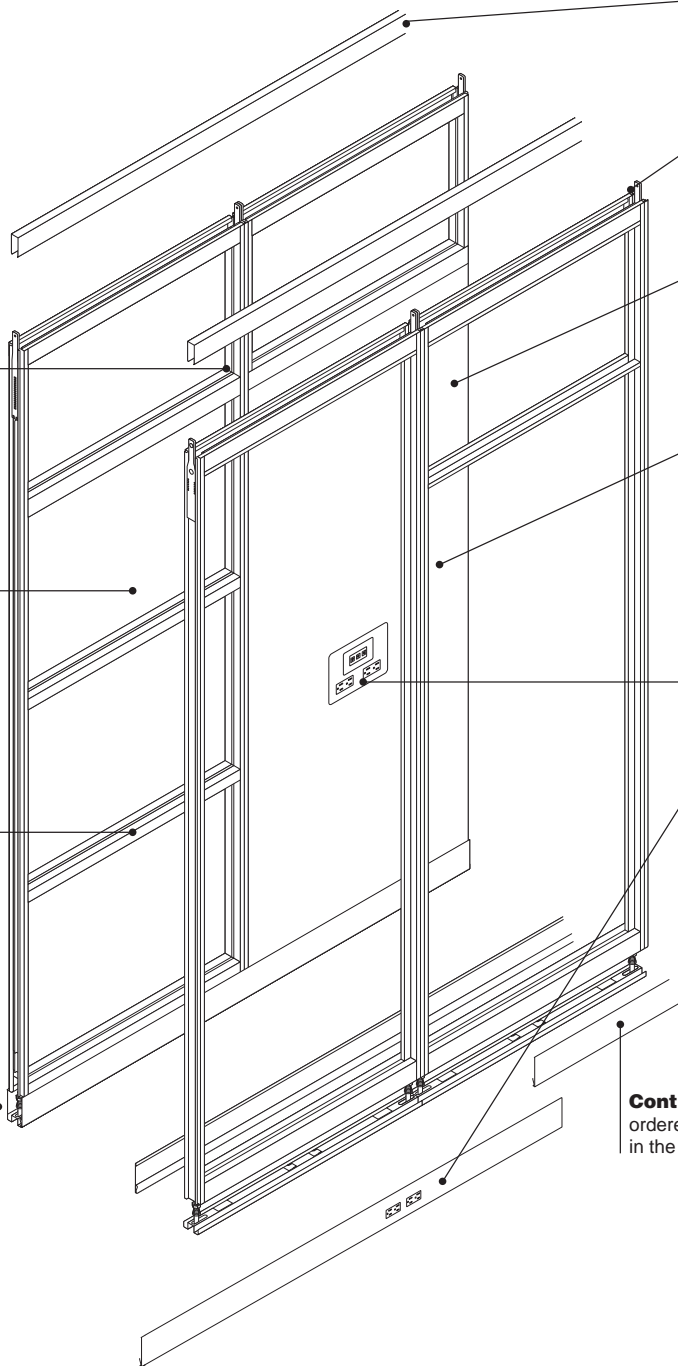


Product Details




Glass wall panel




Three equal divided lites




Some pattern glass types have a linear pattern. These linear patterns are oriented vertically as shown. ▶ See page 98 to identify vertical pattern glass.




Four equal divided lites



Two divided lites, transom-aligned top lite




Four divided lites, transom-aligned top lite




Clerestory

Glass wall panels are available in the following types: one lite, three equal divided lites, four equal divided lites, two divided lites with transom-aligned top lite, four divided lites with transom-aligned top lite, and solid with glass Clerestory.




Glass Selections frame and glass kits are assembled in the field. Butt joints must be sealed glazed with glazing tape or silicone sealant to be codecompliant. *Tip: COM glass for frame and glass kits must be $\frac{3}{8}$ " thick for structural integrity.*

Tip: Standard glass thickness must be between 0.312" and 0.417" thick.




Ceiling track allows $\frac{1}{2}$ " of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows $\frac{3}{4}$ " of vertical adjustment to accommodate variations at base.

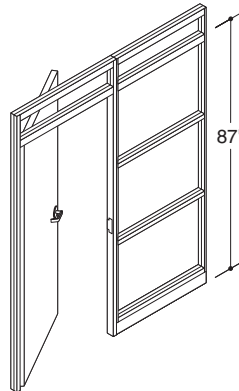


Glass wall panels with transom-aligned top lite correspond to transom-height doors.

Tip: Top muntin is $2\frac{1}{4}$ "H; other muntins are $\frac{1}{2}$ "H. Glass Selections muntins are $2\frac{1}{2}$ "H.

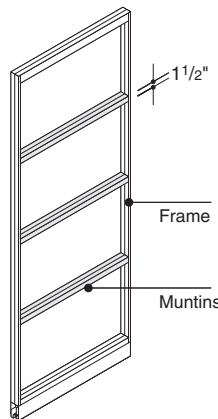


Muntins are factory installed horizontal framing elements that physically divide glass lites. Muntins match frame color specified. Glass Selections is available in clear anodized aluminum only.

Tip: All muntins in glass wall panels with four equal divided lites are $\frac{1}{2}$ "H. Glass Selections muntins are $2\frac{1}{2}$ "H.

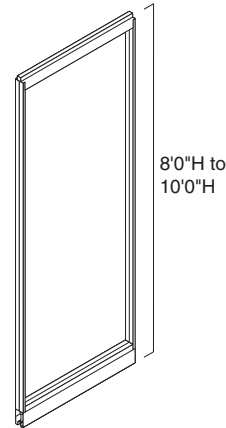


Panel height can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

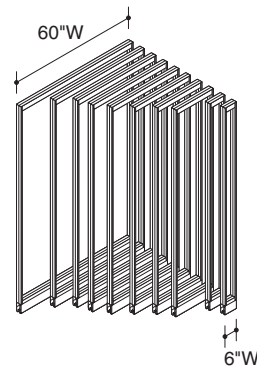


Panel widths range from 6"W to 60"W.



Exception: Clerestory and Glass Selections Clerestory wall panels range from 18"W to 60".




Width of panel is measured to center of joint between two panels.

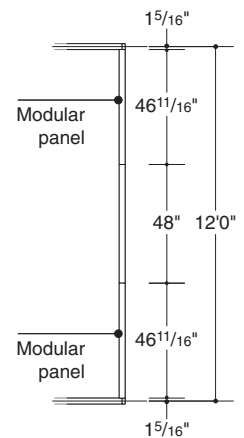

Modular panels used with adapters allow centerline planning. In the example above, two modular panels allow the distance between the centerline of the two parallel walls to remain at 12'0".




Modular panel widths are slightly smaller ($\frac{1}{16}$ " less) than regular panel widths so that when a corner condition is created, the overall dimension remains unchanged.




Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.

Glass Wall Panels, Including Glass Selections Wall Panels, continued




Finished-end adapter is available to finish the exposed end of a run of panels. Adapter adds approximately 13¹¹/₁₆" to the length of the wall.

Vinyl is available on Clerestory panels that are 48"W or smaller.





Glass Selections L-corner units, ordered separately, join Glass Selections panels in L-configuration. Butt joints are field-glazed (glazing tape or silicone sealant) on site during installation. ▶ Page 234

Full-size panel for interior dimension planning






Glass Selections L-corner units plan dimensionally in the same manner as individual panels that are joined by a post.

Full-size panel for interior dimension planning




Modular-size panel for centerline planning



Glass Selections T-corner frame kits join Glass Selection panels in a T-configuration. Frame kits are assembled in the field. Glass kits include three pieces of glass. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Mini end




No less than 20"


Mini end

Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini end or wall channel.


Connections




Feature strips, ordered separately, join panels together. Strip prevents light and sound leaks and can be cut to allow access to the integral slotted verticals in the Clerestory panels. To rearrange panels, painted and anodized feature strips can be removed and reused. Fabric covered feature strips cannot be reused, and will need to be replaced as part of rearrangement process. ▶ Page 88





For Clerestory panels, you can specify two different feature strips when the solid-panel finish is different from the upper-glass frame finish.




Half feature strips are used in combination with inline feature strips for inside corner applications.




Furniture reveal strips, ordered separately, are positioned between two sections of in-line feature strip to allow access to one set of panel slots when a single component is mounted on a Privacy Wall panel. When components are mounted side-by-side, both sets of slots are left exposed, and there is no need for a furniture reveal strip. Furniture reveal strips are painted to match the adjacent wall panel or to match the component bracket.




Ceiling track, ordered separately, joins the top of wall panels to the ceiling. Ceiling track is available recessed or overlapping. ▶ Page 62



Base trim fits into position at the bottom of panel surface above the floor track.




Panel-supported storage and work surface components cannot be attached to glass wall panels. Use solid wall or Clerestory panels instead. ▶ See page 89 for more information about hanging components.




Posts join panels in in-line, L-, T-, X-, V-, and Y-configurations without blocking access to integral slotted verticals.

► Page 84




Adapters connect panels in L-, T-, and X-configurations without adding extra creep to panel dimension.

► Page 80



Mini end connects a panel or panel run to a perpendicular building wall.

► Page 70.

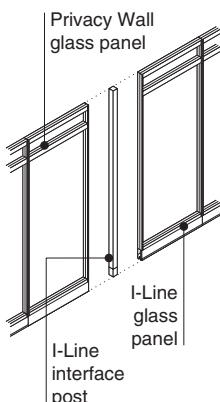


I-Line interface post allows a Privacy Wall panel to connect to an existing I-Line panel in line.

► Page 190

Tip: Two I-Line feature strips are needed for the I-Line side of the connection. Two Privacy Wall feature strips are needed for the Privacy Wall side of the connection.

► See *How to Connect Privacy Wall to I-Line Moveable Walls*, page 96.




Universal floor grippers are designed for use with Privacy Wall panels that are placed on top of Low-Profile Floor. The universal floor gripper fits underneath the panel floor channel and glides to evenly distribute weight on the floor. When used with double-sided adhesive tape, the universal floor gripper will also prevent movement on hard surface floors like tile, wood, or terrazzo.

Panels which are configured for low profile base trim are not compatible with the universal floor gripper. Panels that are required to be secured to the floor must be directly anchored to the floor with conventional fasteners.


Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity.

Wiring & Cabling




Hollow core in Clerestory panel enables both vertical and horizontal cable routing within panel

Glass Privacy Wall panels can be specified with factory-installed powerkits. Power kits include a power block. Field-installed powerkits are also available.





Desk- and ADA-height power blocks or Clerestory panel will be factory installed in center of panel to accommodate either power receptacles only or power and communication receptacles. A single power block can be specified to allow receptacles on one side or both sides of the panel. Both sides must be specified with the same configuration (power receptacles only or power and communications receptacles). Both sides must be specified with the same configuration (power receptacles only or power and communication receptacles).



Power is located in the center of a panel except in Glass Selections frame kits, where the center of the power is located 12" from the panel edge.


Power receptacles




Power and communication receptacles

Cover plates, ordered separately, accommodate power receptacles and communication faceplates. Cover plates are used in panel face only.

► Page 100



Base-height power block will be factory installed in center of panel. A single power block can accommodate receptacles in one side or both sides

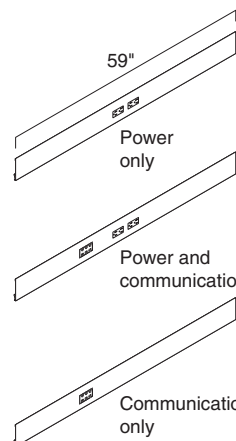


of panel. **Base trim**, ordered separately, is 59"W and available in three versions—power only, power and communication, and communication only.

Width of panel must be adequate to accommodate cutouts. See table below for minimum widths.

Power and Communication


- 30"W standard panel
- 30"W (nominal) modular panel




Power receptacles are ordered separately and installed on site. They are coded to indicate which circuit and type of ground they engage.

► Page 100

Glass Wall Panels, Including Glass Selections Wall Panels, continued





Controlled receptacle must be indicated when tying into the building management system. Duplex receptacles have an option for a factory permanent, pad stamp power icon symbol with the word controlled per compliance with the Energy Code.




USB receptacles are ordered separately and installed on site. They are available in three wiring schematics with multiple line options. USB receptacles offer easy access to two charging ports. Each port provides 1 ampere of output. USB receptacles conveniently charge a wide range of electronic devices. Some devices may not be compatible.

Communication receptacles are provided by others and installed on site. They can accommodate single-gang NEMA-style faceplate, snap-in modular furniture-style faceplate, or Decora mounting strap style.




Receptacles can be specified in any combination of base height, desk height, or ADA height, on Clerestory panels.

Utilities can be specified on either side of the panel or on both sides. Receptacles can be installed on either side of the panel or on both sides. Fillers can be installed in any unused cutouts.



Infeeds can connect power blocks to building power in the ceiling or floor. Because glass panels cannot accommodate vertical routing of harnesses through the glass portion of the panel, use adjacent solid panels, mini ends, or door frames to bring power from the ceiling to a power block in a glass panel. Clerestory can route in panel from bottom.



Modular harnesses and harness-to-harness connectors can be used to extend power to a power block from another power block in an adjacent panel.

Wiring schematics are available to accommodate a wide range of building types and power needs. 15-amp and 20-amp systems are available in 4-circuit, 3+1; 4-circuit, 2+2; and 3-circuit with separate neutrals. All of these choices are supported with a system ground and isolated ground.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical components.

Chicago and New York City require that all power be hardwired in the field. Modular power systems are not permitted. All Privacy Wall panels can be hardwired on site using conventional electrical components.

New York City/Chicago power prep option can be selected to provide panel cutouts and internal hardware to receive hardwired components.

New York City/Chicago power prep option requires use of Privacy Wall cover plate, ordered separately.
▶ Page 100

Surface Materials

Panel frame and muntins

- Paint

Glass Selections panel frame and muntins

- Paint
- Clear anodized aluminum

Clerestory panel

- Paint
- Fabric
- Vertical surface vinyl

Lite

- Glass
- Customer-specified glass also available

Ceiling track

- Paint

Base trim

- Paint

Feature strip

- Paint
- Fabric
- Vinyl
- Anodized aluminum

Cover plate

- Plastic

Receptacle

- Plastic

Application Topics

Feature Strip Application

▶ Page 88

Centerline Versus Interior Dimension Planning

▶ Page 90

How to Power a Panel

▶ Page 100

Overview of Powered Panels

▶ Page 104

Power Options


▶ Page 140

Glass Wall Panels — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

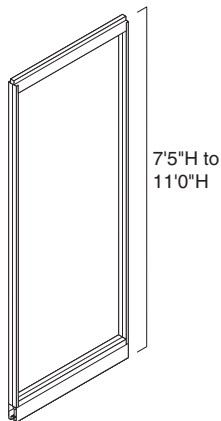


Panel height can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.


Tip: Panels that are greater than 10'0"H cannot exceed 48" in width.
Exception: Clerestory panels can be specified with a minimum ceiling height of 7'11".

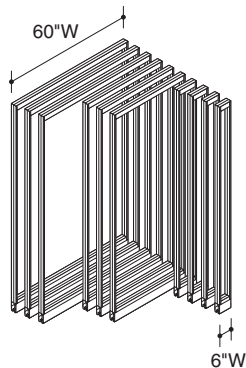

Glass panel widths range from 6"W to 60"W in even 1" increments.
Exception: Clerestory wall panels have a minimum width of 18"W, and maximum width of 60"W.

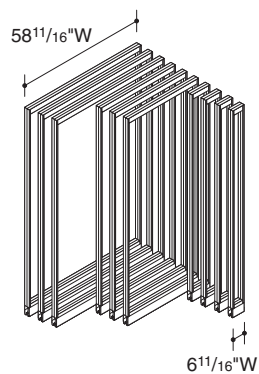

Modular glass panel widths range from 6 11/16"W to 58 11/16"W in 1" increments.
Exception: Clerestory wall panels have a minimum width of 16 11/16"W, and maximum of 58 11/16"W.




4" high continuous base trim, ordered separately, can also be specified and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using 4" high base, panels and other vertical components must be specified with modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Other special components that must be specified to accept 4"H base:


*Panels
Posts and adapters
Feature strips
Door frames
Slider doors
Mini ends
Wall channels and cut kits*

Tip: 4" high base cannot be used with base-located power.





Clerestory panel surfaces can be specified with a markerboard surface for use with dry erase markers.
Tip: When using adjacent markerboard panels, specify the shared feature strip in a black painted or anodized finish. Black painted strips will conceal marks on surface. Anodized surface will allow markers to be cleaned from surface.


Tip: Markerboard surface is available in a minimum of 18"W and a maximum of 48"W.




For Clerestory panels, you can specify two different feature strips when the solid panel finish is markerboard.

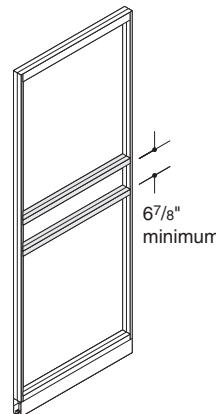


Any or all of the standard muntin positions can be moved. Muntins and glass horizontals can be no closer than 6 7/8".



Muntin size can be specified as 1 1/2" or 2 1/4".

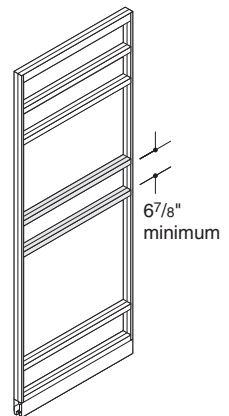

Additional muntins can be added to a four divided lite panel to make up to six lites. Muntins and glass horizontals can be no closer than 6 7/8".




A single muntin can be added to a Clerestory panel to create two lites. Muntins and glass horizontals can be no closer than 6 7/8".

Glass Selections — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

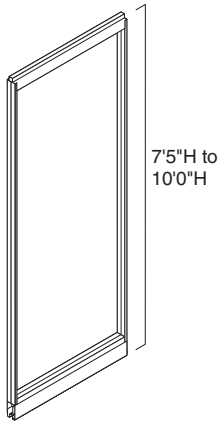


The height for wall panels, frame kits, glass kits, L- and T-corners

can be specified from 7'5"H to 10'0"H in one-inch increments to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

Exception: Clerestory panels can be specified with a minimum ceiling height of 7'11".

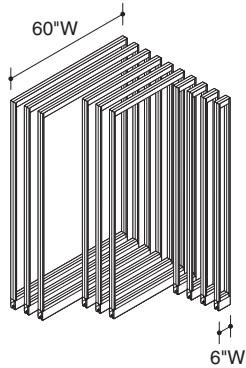


Panel widths range from 6"W to 60"W in even 1" increments.

Exception: Clerestory wall panels have a minimum width of 18"W and maximum of 60"W.

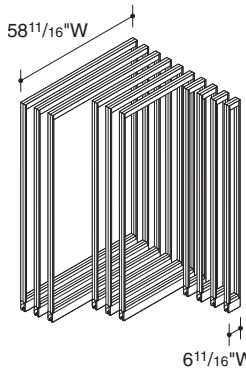


Modular glass panel widths range from 6 11/16"W to 58 11/16"W in 1" increments.

Exception: Clerestory wall panels have a minimum width of 16 11/16"W, and maximum of 58 11/16"W.




Frame kits and glass kits can range in widths from 61"W to 144"W in even 1" increments.



For modular frame kits and glass kits, sizes can range from 59 11/16"W to 142 11/16"W.

Door pull locations for Glass Selections polished edge butt-hinged and slider doors can be changed through the Alternate Pull Manager in SmartTools as part of the design/planning process.




Glass Selections

Clerestory panel surfaces

can be specified with a markerboard surface for use with dry erase markers.

Tip: When using adjacent markerboard panels, specify the shared feature strip in a black painted or anodized finish. Black painted strips will conceal marks on surface. Anodized surface will allow markers to be cleaned from surface.

Tip: Markerboard surface is available in a minimum width of 18"W and a maximum of 48"W.




4" high continuous base trim

, ordered separately, can also be specified and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using 4" high base, panels and other vertical components must be specified with modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Other components that must be specified with 4" base:

- Panels
- Frame kits and glass kits
- Posts and adapters
- Feature strips
- Door frames
- Slider doors
- Mini ends
- Wall channels and cut kits

Tip: 4" high base cannot be used with base-located power.

**Low profile base trim,**

ordered separately, can be specified on Glass Selections panels (including Clerestory) and frame kits. The base height is 2½"H and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using low profile base, specify panels with base trim height to match. Components must be specified with a modified height to ensure that correct overall ceiling height is achieved. Other components must also be specified with a modified height to ensure that correct overall ceiling height is achieved.

Tip: Other special components that must be specified with low profile base:

Panels

Frame kits and glass kits

L- and T-corner units

Feature strips

Posts

Door frames

Slider doors

Mini ends

Panels with low profile

base have reduced vertical adjustment at the floor (plus/minus ¾").

Base trim for low profile

base is provided with a clear anodized finish.

Panels which are configured for low profile

base trim are not compatible with the universal floor gripper. Panels that are required to be secured to the floor must be directly anchored to the floor with conventional fasteners.

Butt-Hinged Frames and Door Leaves

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall doors can be used with Privacy Wall panels. Door frames and leaves must be ordered separately.

► Specifying, pages 142 and 148

Tip: Glass Selections panels are compatible with pivot-hinged frames and leaves only.

Recessed or overlapping ceiling track is available.

Pair leaves can be painted or specified with wood veneer.

Inactive door leaf is secured with flush bolts that are included with hinge kit for pair doors (ordered separately).

Door frame is factory prepped for butt hinges. Door hardware is ordered separately.

Tip: Butt-hinged door frames are not available for Glass Selections panels.


Active door leaf accommodates latch.

Post extensions are available in two versions to accommodate both types of ceiling track.


Feature strip joins door frames to panels, posts, or adapters.

Single door leaves are solid or glass. Solid leaves can be painted or specified with wood veneer.


Product Details




Single and pair versions of doors and door frames are available.




Glass doors can be ordered with a bottom rail height dimension of 5"H or 12"H. The 5" rail height will align closely with the bottom horizontal of a glass panel. In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.




Door frames can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights. *Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.*




Ceiling track allows 1/2" of vertical adjustment to accommodate variations in field conditions. Floor track allows 3/4" of vertical adjustment.




Plinths are included to finish the bottom of both sides of a door frame.




Full-height doors increase in height as the door frame increases. *Tip: Maximum ceiling height of glass doors is 9'0"H.*




Transom-height door leaves are 7'0"H. Transom increases in height as the door frame increases.

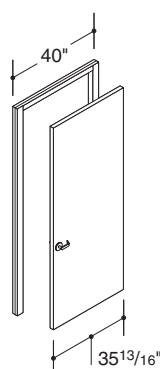


Width of single door frame is 40"W and accommodates a 35 13/16"W door.

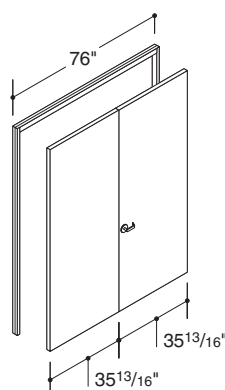


Width of pair frame is 76"W and accommodates two 35 13/16"W door leaves.




Transom-height doors correspond to Clerestory or glass wall panels with transom-aligned top lite. *Tip: For information regarding Etched and Pattern Glass Planning.* ▶ Page 98.




Transom-height frames for pair of doors with vertical directional, patterned glass will have a vertical muntin installed in the center of the transom. ▶ See *Glass Availability Matrix* for directional glass options, page 370.



Left- and right-hand versions of butt-hinged doors and door frames are available. Swing orientation cannot be altered.




To determine whether a door is left or right hand, imagine yourself standing in the door's frame with your back against the side of the frame where the door's hinges will be attached. If the door will swing to your left, it is a left-hand door (and frame). If it will swing to your right, it is a right-hand door (and frame).



Ceiling track bypass cover is available to conceal switch conduit routed next to a recessed ceiling track as the conduit travels from the ceiling into a door frame. ▶ Page 63

Butt-Hinged Frames and Door Leaves, continued



Cutout for cylindrical passage set or lockset is standard in butt-hinged door leaves. Cutout for mortise passage set or lockset is available as an option. Order passage sets and locksets separately.

Tip: Cutout and hardware must be the same for door and door frames.

Tip: Locksets and passage sets ordered from another manufacturer must have a 1 3/8" curved strike plate.

Tip: Doors that are specified with hardware prep for mortise locks will not have faces drilled for levers, cylinders, etc. All necessary holes in the face of the door must be drilled by the installer.



Magnetic wall stop



Dome-style floor stop




Screw-in base stop

Door stops can be ordered for use with doors. Magnetic wall stop, dome-style floor stop, and screw-in base stop are available. Magnetic wall stop is for use with painted solid or Clerestory panels only.

Tip: Dome stops and base stops are not recommended when using polished glass doors with drop seals.



All door openings meet ADA requirements.

Connections



Feature strips, ordered separately, join door frames to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.


► Page 88



Ceiling track, ordered separately, joins the top of door frames to the ceiling. Ceiling track is available recessed or overlapping.


► Page 62

Panel-supported storage and worksurface components cannot be attached to door frames. Use solid wall or Clerestory panels instead.




Posts join a door frame to a panel in an L-, T-, X-, V-, or Y-configuration. A T-, X-, or in-line post can also be used between two in-line door frames.

► Page 84




Adapters connect a door frame to a panel in an L-, T-, or X-configuration. A T-adapter can also be used between two in-line door frames.

► Page 80




Mini end connects a door frame to a perpendicular building wall.

► Page 70



When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.





Do not use a wall channel to connect a door frame to a perpendicular wall.


► See *Wall Channel Flexibility*, page 77.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity.


Wiring & Cabling

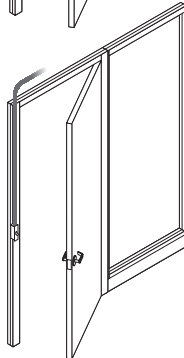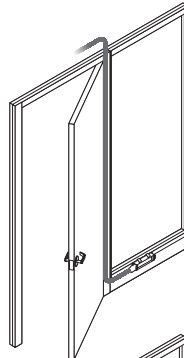

Installation of a switch in a door frame will limit the ability to route a power infeed through the frame. If the door frame has no switch, you can route power to the base of an adjacent glass panel.




Left-hand door

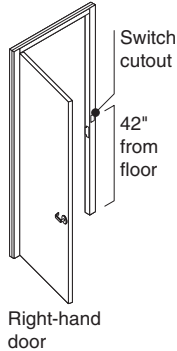


Right-hand door

Switch cutout, available as an option on single door frames, will be factory-cut in the strike jamb of the frame, on the side that matches the direction in which the door swings. Switch cutout is located 42" from floor.

Wiring is routed from the ceiling or floor through the door jamb.



Low-voltage switches are available on all door frame types except pairs of doors.



Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.

Low-voltage switch kits include:

- Switch device
- Cover trim
- Transformer
- Low-voltage (18-gauge) wire x 30'



High-voltage switches are rated for 120V and 277V applications, and are available on all door frame types except Privacy Wall slider doors, Glass Selections slider doors, and pairs of doors. You must specify door frame for use with switch cutout.


High-voltage switch kits include:

- Electrical box and strap
 - Switch device
 - Cover plate
- Wiring and conduit are not included.

Surface Materials

Door frame

- Paint



Aluminum rails and stiles on glass door leaf

- Paint

Solid door leaf

- Paint
- Wood veneer

Transom, glass door leaf

- Glass

Door stops and butt hinges

- 4710 Low Gloss Black
- 9200 Satin Chrome
- 9201 Polished Chrome

Strike plate, door stops, and butt hinges

- 9200 Satin Chrome
 - 9201 Polished Chrome
- Tip: When the black finish is specified on latchsets, the strike plate will default to the satin chrome finish.*

Switch plate

- Paint

Feature strip

- Paint
- Fabric
- Vinyl

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.

Application Topics

Door Swing Orientation Choices

► Page 48

Feature Strip Application


► Page 88

Butt-Hinged Frames and Door Leaves — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options


SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.




8'0"H to 11'0"H

Door frames with transom can be specified from 8'H to 11'H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



When planning with 4" high base, specify door frames to accept 4"H base and to receive special height plinths to match base trim.



A single muntin can be added to a transom height door frame to create two lites. Muntins and glass horizontals can be no closer than 6⁷/₈".




Muntin size can be specified as 1¹/₂" or 2¹/₄".

Glass Selections Butt-Hinged Frames and Door Leaves


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Glass Selections doors and frames can be used with Privacy Wall and Glass Selections panels. Door frames and leaves must be ordered separately.
 ▶ Specifying, pages 212 and 222

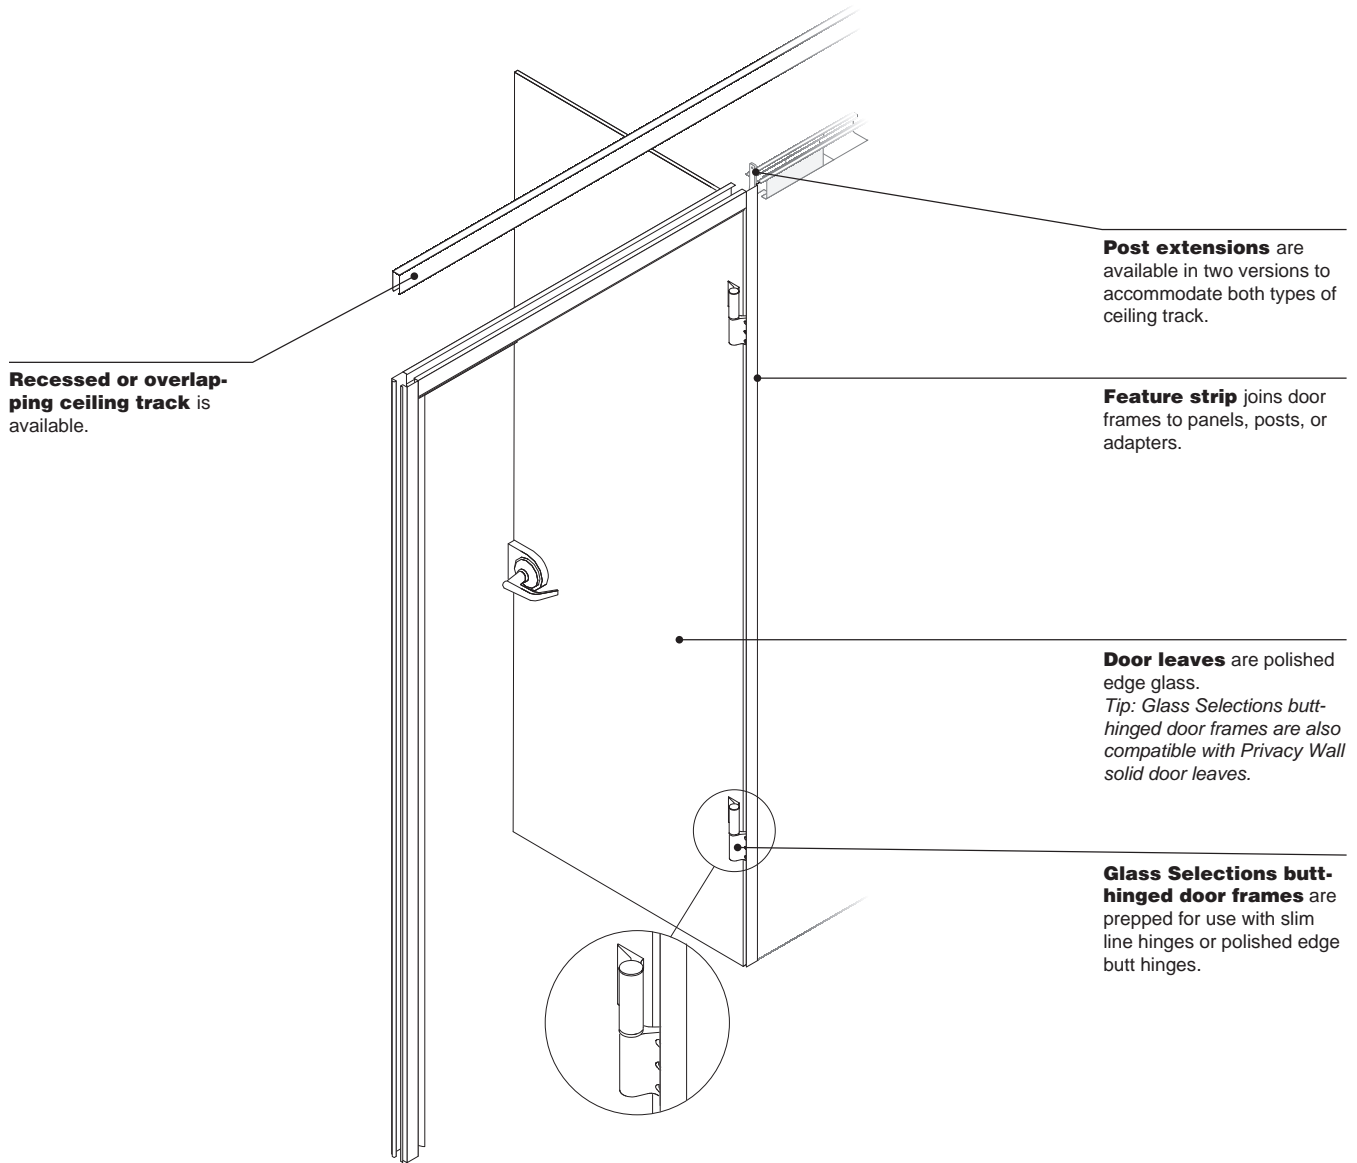




Glass selections butt-hinged doors are available with polished edge door leaves with 1/2" thick tempered glass.




7'5"H to 10'0"H

40"W Glass Selections butt hinge frames can be specified from 7'5"H to 10'0"H in 1" increments. Doors and frames that are 42"W can be specified at a maximum height of 9'0"H.

Polished edge butt-hinged doors are available as single doors in full height configuration only.




Butt Hinge




Slim Line Hinge

Polished edge butt-hinged doors can be equipped with polished edge butt hinges or slim line hinges.




When specified with the self-close feature, one of the slim line hinges includes a hold-open feature that engages the door at approximately 75° (when 90° hinge is specified) or 165° (when 180° hinge is specified). The hinge includes an adjustable control for regulating the force of the closure and fine-tuning the braking control.


The slim line hinge can also be configured as a free-swinging hinge.



When specified with polished edge slim line hinges, doors and frames will be configured for two hinges.




When specified with polished edge butt hinges, doors and frames will be configured for four hinges.

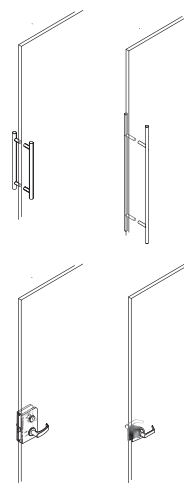


Glass Selections butt-hinged doors can be specified with mortise and cylindrical latch sets, push/pull handles, and ladder pulls.


► Refer to *V.I.A. Specification Guide* for ladder pulls and push/pull handles.

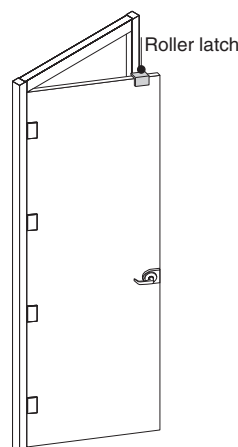


When equipped with push/pull handles or ladder pulls, self-closing hinges or a roller latch should be specified to keep the door in the closed position.

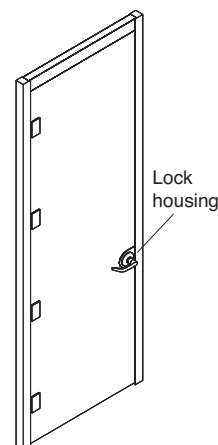

Glass Selections polished edge butt-hinged door leaves include housing for latch sets and roller latches as specified.




Glass Selections butt-hinged door frames can be specified with plinths for 2 1/2"H and 5"H base.




Ceiling track allows 1/2" of vertical adjustment to accommodate variations in field conditions. Floor track allows 3/4" of vertical adjustment.

Glass Selections Butt-Hinged Frames and Door Leaves, continued



To enhance acoustical performance, an optional drop seal can be specified at the bottom of the door. The drop seal automatically deploys to block the gap under the door when the door is closed and retracts when the door is open.

In order to ensure proper engagement at the drop seal, the door frame cannot accommodate any fluctuation in floor height.

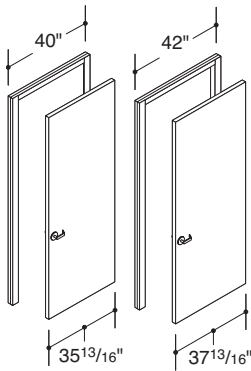

Width of a single door frame is 40"W or 42"W and accommodates door leaf widths of 35¹³/₁₆" or 37¹³/₁₆". The 90° clear opening dimensions are as follows:

Butt-Hinged Solid Door


- 40" door: 33¹/₁₆"
- 42" door: 35¹/₁₆"

Butt-Hinged Polished Edge Door


- 40" door: 32⁵/₈"
- 42" door: 34⁵/₈"

Slim Line Polished Edge Door


- 40" door: 33⁵/₃₂"
- 42" door: 35⁵/₃₂"




Left- and right-hand versions of butt-hinged doors and door frames are available. Swing orientation cannot be altered.



To determine whether a door is left or right hand, imagine yourself standing in the door's frame with your back against the side of the frame where the door's hinges will be attached. If the door will swing to your left, it is a left-hand door (and frame). If it will swing to your right, it is a right-hand door (and frame).



When specifying a door leaf with a satin finish, the etched side of the glass can be oriented to either surface of the wall. For this purpose, the outside surface is defined as shown above.



40"W Privacy Wall butt-hinged solid and glass doors can be used with Glass Selections butt-hinged door frames by specifying the same ceiling height. Door frames must be configured for polished edge butt hinges (not slim line).



When using Privacy Wall butt-hinged doors with Glass Selections butt-hinged door frames, Privacy Wall butt hinges must be specified.

► See **GPDBH4**, page 162.

Surface Materials

Frame

- Paint
- 8043 Anodized Aluminum

Door leaf

- 6500 Clear Tempered
- 6501 Low Iron Clear Tempered
- 6542 Satin

Hinges

- 4710 Black
- 9200 Satin Chrome
- 9201 Polished Chrome (slim line only)

Latchset housing

- 4710 Black
- 9200 Satin Chrome
- 9201 Polished Chrome

Roller latch housing

- 4710 Black
- 9200 Satin Chrome

Drop seal

- Paint
- 8043 Anodized Aluminum

Pivot-Hinged Frames and Door Leaves

Including Glass Selections Pivot-Hinged Frames and Door Leaves

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall doors can be used with Privacy Wall panels. Door frames and leaves must be ordered separately.

► Specifying, pages 144–146, 152–159, and 210–221

Tip: Glass Selections panels are compatible with pivot-hinged frames and leaves only.

Recessed or overlapping ceiling track is available.

Pair leaves can be painted or specified with wood veneer.

Frame has a narrow (1¼"W) profile. Expanded frame to accommodate switch has a 2½"W profile.

Inactive door leaf

Door frame is factory prepped for pivot hinges. Door hardware is ordered separately.

► Page 34

Tip: Hardware is mostly hidden.

Post extensions are available in two versions to accommodate both types of ceiling track.


Feature strip joins door frames to panels, posts, or adapters.

Active door leaf accommodates latch.


Glass Selections door frames are available in anodized aluminum to match Glass Selections panels.
Tip: Glass Selections transom profile is slightly smaller than Privacy Wall. Therefore, only Glass Selections door leaves must be used with Glass Selections door frames.

Single door leaves are solid or glass. Solid leaves can be painted or specified with wood veneer.


Product Details




Single and pair versions of doors and door frames are available.




Glass doors can be ordered with a bottom rail height dimension of 5"H or 12"H. The 5" rail height will align closely with the bottom horizontal of a glass panel. In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.




Door frames can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Ceiling track allows $\frac{1}{2}$ " of vertical adjustment to accommodate variations in field conditions. Floor track allows $\frac{3}{4}$ " of vertical adjustment.




Plinths are included to finish the bottom of both sides of a door frame.




Full-height doors increase in height as the door frame increases.
Tip: Maximum ceiling height of glass doors is 9'0"H.




Transom-height door leaves are 7'0"H. Transom increases in height as the door frame increases.
Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.

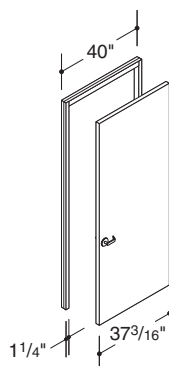


Width of single door frame without switch cutout is 40"W and accommodates a $37\frac{3}{16}$ "W door.

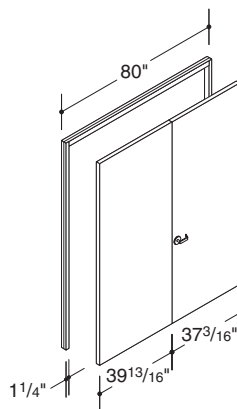


Width of pair frame is 80"W.

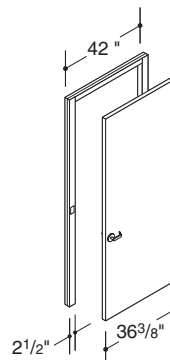


Width of single door frame with switch cutout is 42"W and accommodates a $36\frac{3}{8}$ "W door.




Maximum swing of door is 115°.




Transom-height frames for pair of doors with vertical directional, patterned glass will have a vertical muntin installed in the center of the transom.
► See *Glass Availability Matrix* for directional glass options, page 370.



Transom-height doors correspond to Clerestory or glass wall panels with transom-aligned top lite.
Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.




Left-hand pivot door



Right-hand pivot door

Solid pivot-hinged doors and door frames are non-handed. By removing and reinstalling the strike plate, you can convert a left-hand pivot door into a right-hand pivot door.
Tip: Glass pivot doors are handed to ensure that glass is properly oriented.
► Page 42


Pivot-Hinged Frames and Door Leaves, Including Glass Selections Pivot-Hinged Frames and Door Leaves, continued




Left-hand swing

Right-hand swing

Pivot-hinged door frames with switch cutout are handed. The switch cutout is on the side of the frame opposite the pivots. You cannot change the swing orientation of the door frame in the field, although you can change the swing of the door.




To determine whether a door is left or right hand, imagine yourself standing in the door's frame with your back against the side of the frame where the door's hinges will be attached. If the door will swing to your left, it is a left-hand door (and frame). If it will swing to your right, it is a right-hand door (and frame).



Ceiling track bypass cover is available to conceal switch conduit routed next to a recessed ceiling track as the conduit travels from the ceiling into a door frame.

► Page 244



Cutout for cylindrical passage set or lockset is standard in pivot-hinged door leaves. Cutout and strike plate for mortise passage set or lockset is available as an option. Order passage sets and locksets separately.

Tip: Cutout and hardware must be the same for door and door frames.

Tip: Mortise locksets and passage sets ordered from another manufacturer must have a 1½" flat strike plate.


Tip: Doors that are specified with hardware prep for mortise locks will not have faces drilled for levers, cylinders, etc. All necessary holes in the face of the door must be drilled by the installer.



Magnetic wall stop



Dome-style floor stop




Screw-in base stop

Door stops can be ordered for use with doors. Magnetic wall stop, dome-style floor stop, and screw-in base stop are available. Magnetic wall stop is for use with painted solid or Clerestory panels only.

Tip: Dome stops and base stops are not recommended when using polished glass doors with drop seals.


All door openings meet ADA requirements.

Connections




Feature strips, ordered separately, join door frames to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.

► Page 88



Recessed




Overlapping

Ceiling track, ordered separately, joins the top of door frames to the ceiling. Ceiling track is available recessed or overlapping.


► Page 62

Panel-supported storage and worksurface components cannot be attached to door frames. Use solid wall or Clerestory panels instead.




Posts join a door frame to a panel in an L-, T-, X-, V-, or Y-configuration. A T-, X-, or in-line post can also be used between two in-line door frames.

► Page 84




Adapters connect a door frame to a panel in an L-, T- or X-configuration. A T-adapter can also be used between two in-line door frames.

► Page 80




Mini end connects a door frame to a perpendicular building wall.

► Page 70



When positioned next to a door frame, the mini end should be specified "to floor" and will be field-cut by the installer to final length.




Do not use a wall channel to connect a door frame to a perpendicular wall.


► See *Wall Channel Flexibility*, page 77.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity.

Wiring & Cabling

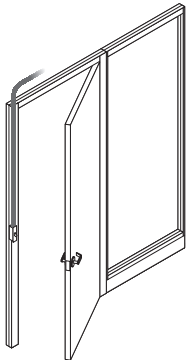


Pivot door
with switch

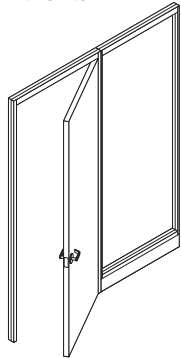


Pivot door
without switch


Installation of a switch in a door frame will limit the ability to route a power infeed through the frame. If the door frame has no switch, you can route power to the base of an adjacent glass panel.



In door frame with glass transom, switch wiring must run down through the floor. Wiring cannot be run up to the ceiling.




Left-hand
door

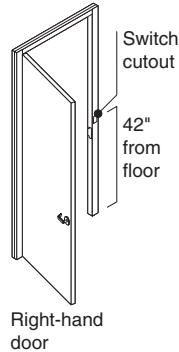


Right-hand
door

Switch cutout in pivot-hinged door frames is always on the strike jamb of the frame. Cutout is standard on the side that matches the direction in which the door swings. Switch cutout is located 42" from floor.



Low-voltage switches are available on all door frame types except pairs of doors.



Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.

Pivot-hinged door frames can remain non-handed by installing low-voltage switches in the feature strip rather than positioning them in the door frame.



High-voltage switches are available on all door frame types except Privacy Wall slider doors, Glass Selections slider doors, and pairs of doors. You must specify door frame for use with switch cutout.


Surface Materials

Door frame

- Paint

Glass Selections door frame

- Paint
- Clear anodized aluminum



Aluminum rails and stiles on glass door leaf

- Paint
- Clear anodized aluminum (Glass Selections only)

Solid door leaf

- Paint
- Wood veneer

Transom, glass door leaf

- Glass

Door stops

- 4710 Low Gloss Black
- 9200 Satin Chrome
- 9201 Polished Chrome

Strike plate

- 9200 Satin Chrome
 - 9201 Polished Chrome
- Tip: When the black finish is specified on latchsets, the strike plate will default to the satin chrome finish.*

Pivot hinges

- 4710 Low Gloss Black
- 9200 Satin Chrome
- 9201 Polished Chrome

Switch plate

- Paint

Feature strip

- Paint
- Fabric
- Vinyl
- Anodized aluminum

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.

Application Topics

Door Swing Orientation Choices

► Page 48

Feature Strip Application


► Page 88

Pivot-Hinged Frames and Door Leaves — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

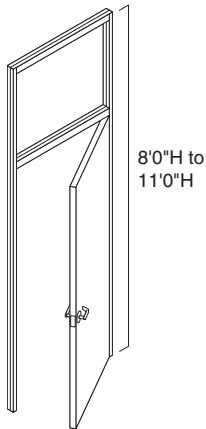


Privacy Wall door frames with transom



can be specified from 8' 0"H to 11' 0"H, in one-inch increments, to accommodate different ceiling heights.

Exception: Glass Selections door frames are available in a maximum of 10'0".


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




When planning with 4" high base, or low profile base, specify door frames to accept 4"H or 2 1/2"H base and receive special height plinths to match base trim.



A single muntin can be added to a Privacy Wall transom height door frame to create two lites. Muntins and glass horizontals can be no closer than 6 7/8".



Muntin size can be specified as 1 1/2" or 2 1/4".




Glass Selections door frames can be specified with painted surfaces as an alternative to anodized aluminum.


Door Swing Orientation Choices

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Butt-Hinged Door Frames




Left-hand swing orientation




Right-hand swing orientation




Left-hand active swing orientation on active leaf



Right-hand active swing orientation on active leaf




Left-hand swing orientation plus switch cutout



Right-hand swing orientation plus switch cutout

Tip: Transom-height door frames are also available.


Pivot-Hinged Door Frames




Left-hand swing
orientation




Reverse swing orientation
on site at the time of
installation




Left-hand active swing
orientation on active leaf



Reverse swing orientation
on site at the time on
installation



Left-hand swing
orientation on door frame
with switch cutout



Right hand swing
orientation on door frame
with switch cutout

Tip: Glass pivot doors are handed to ensure that glass is properly oriented.

► Page 42

Tip: Transom-height door frames are also available.

Privacy Wall Slider Doors

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall slider doors include door frame, slider door, fixed panel, and hardware.

► Specifying, page 168

Post extensions are available in two versions to accommodate both types of ceiling track.

Feature strip joins slider door to panels, posts, or adapters.

Recessed or overlapping ceiling track is available.

Fascia conceals track and ceiling mechanism and projects beyond the face of the wall.

Knockout for low-voltage switch is located on fixed panel 42" from floor.

Fixed panel does not move. It provides space for the overlapping door when it is in the open position.

Strike post marks the extreme limit of door's travel.


Door pull is available in brushed stainless or low gloss black.

Slider door slides in front of fixed panel.

Continuous base trim is 5"H and ordered separately.


Floor track connects base of fixed panel to floor, without fasteners.

Product Details




Slider doors can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Full glass




Two transom-aligned lites



Three equal divided lites




Four equal divided lites




Four transom-aligned lites


Slider door units are available with five different glass configurations.




Ceiling track allows $1/2"$ of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows $3/4"$ of vertical adjustment to accommodate variations at base.

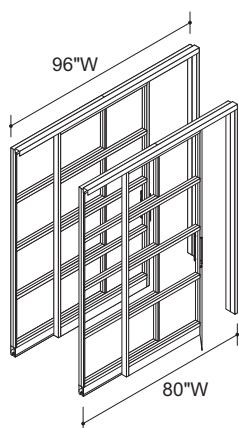

Width of slider door is 80"W or 96"W. Full opening is slightly less than half of the total width of sliding door assembly.




Left-hand Slider door




Right-hand Slider door


Slider door is available left hand and right hand when viewed from slider door side.

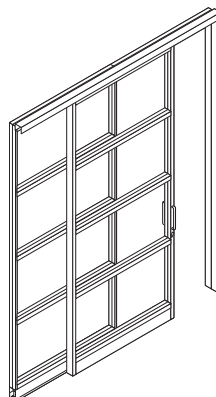


Glass lite types can be specified individually per row.
▶ See *Surface Materials*, page 362.
Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.



Some pattern glass types have a linear pattern. These linear patterns are oriented vertically as shown.
▶ See page 98 to identify vertical pattern glass.


Frame
Muntin

Muntins are factory-installed horizontal framing elements that physically divide glass lites. Muntins match frame color specified.
Tip: All muntins in slider doors with four equal divided lites are $1\frac{1}{2}"$ H.




Low voltage switch cutout is located in the side face of the finished opening frame.

Tip: If slider door is oriented to the outside of the room, the switch cutout will be positioned on the inside of the room. If slider door is oriented to the inside of the room, the switch cutout will be positioned on the outside of the room.




Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.




Door lock with interior thumb latch is available as an option. Locks are keyed randomly.


If using an alternate pull, sliders can be specified to be provided without a pull and without mounting holes in the door. Care should be taken to use an offset pull, and to avoid interference with the lock mechanism.



Plinths are included to finish the bottom of both sides of a door frame.



Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels and slider doors to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.




Back-to-back slider cover is available to trim the gap produced when two slider doors are installed side by side.


Tip: Back-to-back slider cover is used in a strike-to-strike centerline planning application only.

Privacy Wall Slider Doors, continued


Connections



Feature strips, ordered separately, join slider doors to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.



Recessed








Overlapping

Ceiling track, ordered separately, joins the top of doors to the ceiling. Ceiling track is available recessed or overlapping.

► Page 62





In cases where overlapping ceiling track is specified with slider doors, and ceiling level is severely out of tolerance, the ceiling track may require additional field notching.

Panel-supported storage and worksurface components cannot be attached to slider doors. Use solid wall or Clerestory panels instead.




Posts join a slider door to a panel in an L-, T-, X-, or in-line configuration. A T-, X-, or in-line post can also be used between two slider doors.

► Page 84





Adapters connect a slider door to a panel in an L-, T-, or X-configuration. A T-adapter can also be used with two slider door strikes back to back.



► Page 80



Back-to-back slider doors will work at all adapters and posts when slider doors are on the outside of an office.




Plan view of T-post



Plan view of L-post


Slider doors will not work with an L- or T-adapter when slider doors are on the inside of an office. Use a post when positioning slide doors to the inside of an office.

Tip: Slider door handing is oriented to the door side of the unit. Be sure to consider door position when determining handing.




Mini end connects a slider door unit to a perpendicular building wall.

► Page 70



When positioned next to a door frame, the mini end should be specified "to floor" and will be field-cut by the installer to final length.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity.



Slider doors are compliant with ADA guidelines for door openings, door hardware, and pull force.

Clear opening width when door is open is as follows:

Dimensions	
A	B
80"	34 1/4"
96"	42 1/4"

Wiring & Cabling

Slider door does not accommodate vertical wire and cable routing.

Knockout is available on Privacy Wall slider doors for low-voltage switches.

Surface Materials

Door frame and muntins

- Paint

Lite

- Glass

Floor track

- Paint

Base trim

- Paint

Feature strip

- Plastic
- Fabric
- Vinyl

Hardware (door pull, lock and hangar)

- 4710 Low Gloss Black
- 8031 Brushed Stainless

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.

Application Topics

Feature Strip Application


▶ Page 88

Privacy Wall Slider Doors — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.





Slider doors can be specified from 7' 5"H to 10' 0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Variable widths – side panel only: variable slider door assembly widths can be achieved by varying the width of the side panel while the door and frame remain unchanged.

80"W: 80" min – 103" max
96"W: 96" min – 111" max



Variable widths – door and side panel: variable slider door assembly widths can be achieved by varying the size of both the side panel and the door, keeping both symmetrical in width.

80"W: 76" min – 95" max
96"W: 96" min – 113" max




4" high continuous base trim, ordered separately, can also be specified and is available in 10' lengths. When using 4" high base, panels and other vertical components must be specified with a modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Other modified components that must be specified to accept 4" H base:


Panels
Posts and adapters
Feature strips
Door frame
Mini end
Wall channels and cut kits
Base trim

Tip: 4" high base cannot be used with base-located power.




Any or all of the standard muntin positions can be moved. Muntins and glass horizontals can be no closer than 6 7/8".

Muntin locations apply to both the slider door and side panel.



Muntin sizes can be specified as 1 1/2" or 2 1/4".



Additional muntins can be added to a four divided lite slider to make up to six lites. Muntins and glass horizontals can be no closer than 6 7/8".

Glass Selections Polished Edge Slider Doors

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Glass Selections slider doors include door frame, slider door, fixed panel, and hardware.

► Specifying, page 224

Recessed ceiling track is recommended for use with Glass Selections slider.

Feature strip joins slider door to panels, posts, or adapters.

Door pull is available in brushed stainless or low gloss black.

Fixed panel does not move. It provides space for the overlapping door when it is in the open position.

Continuous base trim is 5"H and ordered separately.

Floor track connects base of slider door to floor, without fasteners.


Post extensions are available in two versions to accommodate both types of ceiling track.

Door can be full-height or transom-height.

Strike post limits travel of slider door.


Slider door slides in front of fixed panel and is oriented to the outside of the panel.

Product Details




Full-height slider doors can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



Transom-height slider doors can be specified from 8'0"H to 10'0"H, in one-inch increments. Door height is always 7'. Transom-height varies depending on ceiling height.




Ceiling track allows 1/2" of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows 3/4" of vertical adjustment to accommodate variations at base.

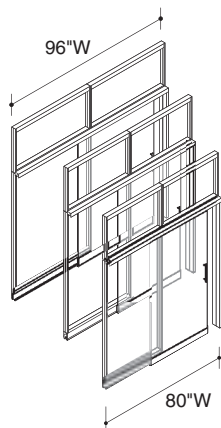


Width of slider door is 80"W, 84"W, or 96"W. Full opening is slightly less than half of the total width of sliding door assembly.

The glass selections slider door is available with a close-assist feature. The close-assist mechanism offers the convenience of controlling the door through its final closing motion and provides an additional safety measure by slowing the door as it contacts the door frame. The glass selections slider door can be specified in the following configurations: close-assist on the leading edge of the door or close-assist on both edges.

It is not recommended to use the close-assist mechanism on doors that exceed 32 square feet in size, as the weight of the door may diminish the performance of the close-assist functionality to the point where it may not meet customer expectations. If specifying a full height door that is greater than 9' ceiling height, it is recommended to specify the overall slider assembly width at 80" or less (using a nominal 40" wide door).

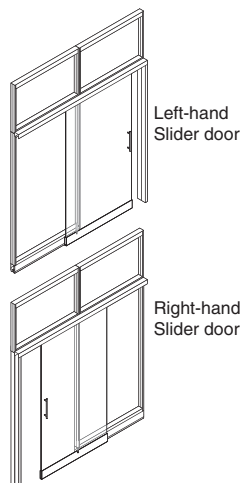

Slider door is available left-hand and right-hand. *Tip: Slider door handing is oriented to the door side of the unit. Be sure to consider door position when determining handing.*




Glass lite types can be specified individually per section. *► See Surface Materials, page 362*

Tip: For information regarding Etched and Pattern Glass Planning. ► Page 98


Door pull locations for Glass Selections polished edge butt-hinged and slider doors can be changed through the Alternate Pull Manager in SmartTools as part of the design/planning process.




Some pattern glass types have a linear pattern. These linear patterns are oriented vertically as shown. *► See page 98 to identify vertical pattern glass.*




Muntins are factory-installed horizontal framing elements that physically divide glass lites. Muntins are anodized aluminum. *Tip: Glass Selections muntins are 2 1/2"H.*




Low-voltage switch cutout is located in the side face of the finished opening frame.



Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.




Door lock with interior thumb latch is available as an option. Locks are keyed randomly on single slider door only.

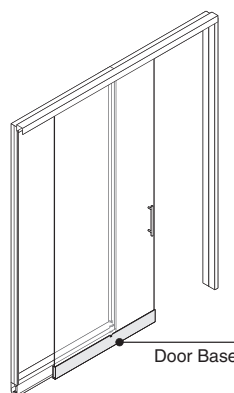


Door base is painted to match adjacent base trim. Base trim for the adjacent fixed panel is ordered separately.


Glass Selections Polished Edge Slider Doors, continued



Plinths are included to finish the bottom of both sides of a door frame.




Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels and slider doors to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.





A vertical seal can be specified and installed between the door frame and side panel to engage the trailing edge of the door when closed.

The vertical seal can be specified with Glass Selections.

Connections









Feature strips, ordered separately, join slider doors to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.








Ceiling track, ordered separately, joins the top of doors to the ceiling. Ceiling track is available recessed or overlapping.

In cases where overlapping ceiling track is specified with slider doors, and ceiling level is severely out of tolerance, the ceiling track may require additional field notching.


Panel-supported storage and worksurface components cannot be attached to slider doors. Use solid wall or Clerestory panels instead.





Posts join a slider door to a panel in an L-, T-, X-, or in-line configuration. A T-, X-, or in-line post can also be used between two slider doors. [▶ Page 84](#)





Adapters connect a slider door to a panel in an L-, T-, or X-configuration. A T-adapter can also be used with two slider door strikes back to back. [▶ Page 80](#)



Back-to-back slider doors will work with all adapters and posts when slider doors are on the outside of an office.




Plan view of T-post




Plan view of L-post

Slider doors will not work with an L- or T-adapter when slider doors are on the inside of an office. Use a post when positioning slide doors to the inside of an office.

Tip: Slider door handing is oriented to the door side of the unit. Be sure to consider door position when determining handing.




Mini end connects a slider door unit to a perpendicular building wall.
► Page 70



When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity.



Slider doors are compliant with ADA guidelines for door openings, door hardware, and pull force.

Clear opening width when door is open is as follows:

Dimensions

A	B
80"	33 ⁵ / ₁₆ "
84"	35 ⁵ / ₁₆ "
96"	41 ⁵ / ₁₆ "

Wiring & Cabling

Slider door does not accommodate vertical wire and cable routing.

Low-voltage switches are available for Glass Selections slider doors.

Surface Materials

Door frame and muntins

- Clear anodized aluminum
- Paint

Lite

- Glass

Door base

- Paint

Base trim

- Paint

Feature strip

- Plastic
- Fabric
- Vinyl
- Anodized aluminum

Hardware (door pull and lock)

- 4710 Low Gloss Black
 - 8031 Brushed Stainless
- Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.*

Application Topics

Feature Strip Application


► Page 88

Glass Selections Polished Edge Slider Doors — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.





Full-height slider doors can be specified from 7'5"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.





Special widths – side panel only: special slider door assembly widths can be achieved by varying the width of the side panel while the door and frame remain unchanged.

80"W: 80" min – 100" max
84"W: 84" min – 102" max
96"W: 96" min – 108" max

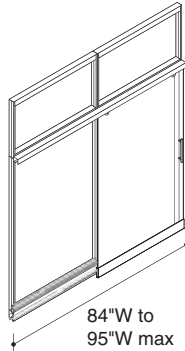

Special widths – door and side panel: special slider door assembly widths can be achieved by varying the size of both the side panel and the door, keeping both symmetrical in width.


80"W: 78" min – 83" max
84"W: 84" min – 95" max
96"W: 96" is maximum width

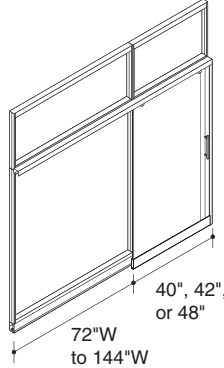

Slider doors with frame kit as side panel: slider door frames and doors can be combined with frame kits and glass kits in variable widths.

40" door frame: 101" min – 184" max
42" door frame: 103" min – 186" max
48" door frame: 109" min – 192" max


Glass kit must be ordered separately for slider with frame kit as a side panel.



4" high continuous base trim, ordered separately, can also be specified and is available in 10' lengths. When using 4"H base, slider door units and other vertical components must be specified with a modified height to accept 4"H base trim and to ensure that the correct overall ceiling height is achieved.

Other modified components that must be specified to accept 4"H base:

Panels
Posts and adapters
Feature strips
Door frame
Mini end
Wall channels and cut kits
Base trim
Tip: 4" high base cannot be used with base-located power.



Low profile base trim, ordered separately, can be specified on Glass Selections slider units. The base height is 2½"H and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using low profile base, slider door units and other vertical components must be specified with a modified height to accept 2½" base trim and to ensure that the correct overall ceiling height is achieved.

Other modified components that must be specified to accept profile base:

Panels
Frame kits and glass kits
Feature strips
Posts
Door frame
Mini end
Tip: Low profile base cannot be used with power.

Glass Selections slider doors, when used with low profile base trim, have no bottom trim.

Panels with low profile base have reduced vertical adjustment at the floor (plus/minus ⅜").

Ceiling Tracks

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Ceiling track attaches the top of Privacy Wall panels, door frames, and other components to the ceiling. Ceiling track is available in recessed or overlapping versions.

► Specifying, page 240

Recessed ceiling track is set back from the surface of the panel on both sides.

Recessed ceiling track is recommended for use with Glass Selections to optimize aesthetics and functionality.

Factory-formed corner pieces are available to form L- and V-configurations.


Tip: Use overlapping ceiling track with enhanced core panel to achieve greatest acoustical performance.

Flexible seal ensures tight fit to ceiling to block light and sound leaks.



Overlapping ceiling track covers the top of panel face.

Finished end


Product Details




Straight ceiling track is available in 120" lengths. It can be cut on site to accommodate any condition. Multiple straight lengths can be joined in line.




Finished-end ceiling track is available to finish the exposed end of a straight run of overlapping or recessed ceiling track.




L corner pieces are available recessed or overlapping to form 90° corners.




V corner pieces are available recessed or overlapping to form 120° or 135° corners.




To join panels in a Y-configuration, use straight ceiling track with an L corner piece.



For panels joined in a T-configuration, use two straight lengths of ceiling track, placed perpendicular to each other.




For panels joined in an X-configuration, use multiple straight lengths of ceiling track placed perpendicular to each other.



T-clip can be used for panels joined in a T-configuration to improve track alignment. Use two T-clips for panels joined in an X-configuration.

Connections

Ceiling track can be removed and repositioned using optional hardware, without damaging ceiling grid or tile.




Attachment hardware is available in a variety of types to accommodate most standard ceiling types and other field conditions. To discuss unusual field conditions, call the Steelcase Solutions Resource Team at 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com.


Ceiling clip attachment hardware is included with ceiling track. Additional ceiling clips can be ordered separately for inventory or changes.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. When required by the local seismic design criteria, additional ceiling fasteners and/or structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

Wiring & Cabling



Overlapping ceiling track conceals power harnesses and cables routed vertically from the ceiling into a run of panels.



Bypass cover is available to conceal power harnesses and cables routed next to a recessed ceiling track as the conduit travels from the ceiling into a run of panels or a door frame.

Tip: Bypass cover must be used to conceal a ceiling infeed when the ceiling track is directly under a T-runner and when a modular infeed is being used.

Surface Materials

Ceiling track


- Paint

Ceiling Tracks — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.




V corner ceiling track sections, 24" x 24" are available recessed or overlapping, in 5° increments, from 70° minimum to 175° maximum.

Cornice Track


Privacy Wall is designed and intended for use with ceiling track that is connected to a suspended ceiling grid. In some cases, it may be desirable to install Privacy Wall in an application where there is no ceiling. In these cases, in order to provide an acceptable level of stability, it is necessary to follow the panel stability guidelines for cornice application. Also, cornice track is inserted into the top of the walls and fastened in place. Ceiling track is not used.

► Specifying, page 245

Glass Selections is not approved for applications with cornice track.

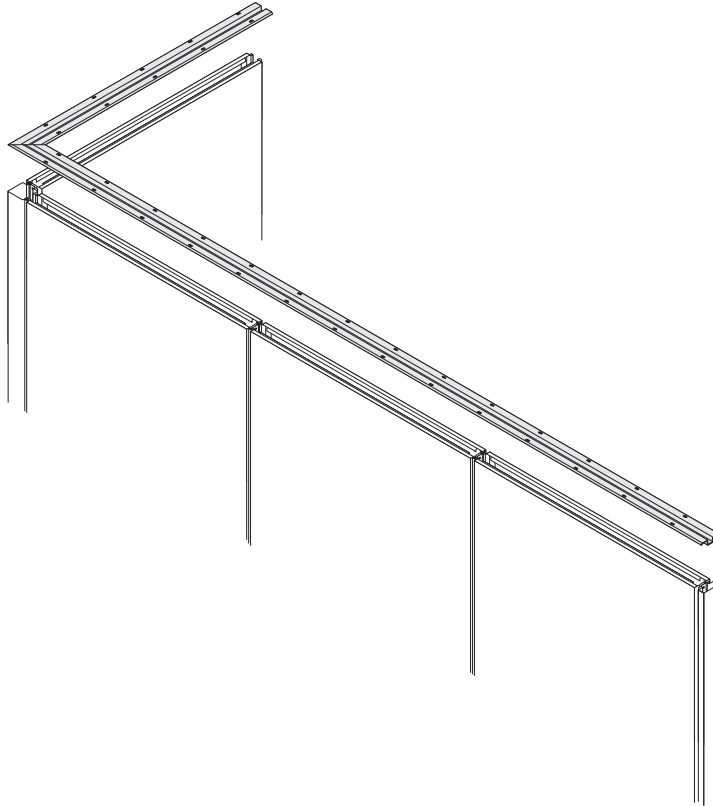

Product Details




Cornice track is available in 120" lengths. It can be cut on site to accommodate any condition. Multiple straight lengths can be joined in line.

When ordering panels and door frames, specify the recessed option for ceiling track.


Glass Selections is not approved for applications with cornice track.

Cornice-supported walls cannot support panel-hung furniture components.


Connections




For panels joined in an L-configuration, use two straight lengths of ceiling track, placed perpendicular to each other using a cornice track L bracket.



For panels joined in a T-configuration, use two straight lengths of ceiling track, placed perpendicular to each other using a cornice track T bracket.



For panels joined in a X-configuration, use three straight lengths of ceiling track, placed perpendicular to each other using a cornice track X bracket.




When installing on hard surface floors, it is recommended to use the universal floor grippers (GPUFG) at each in-line panel joint.


Termination at wall channels or mini ends requires a mechanical fastening to the foreign wall. Either plastic anchors or toggle bolts at drywall, or tapcons at concrete or masonry.

When ordering panels and door frames, specify recessed option for ceiling track.


Glass Selections is not approved for applications with cornice track.






Cornice supported walls cannot support panel hung furniture components.




Maximum runs for solid panels are 20 feet or 5 panels and both ends must terminate at an intersection or properly anchored termination. An intersecting wall must be at least 48" long.




Maximum runs for solid panels including a door unit is 16 feet, and both ends must terminate at an intersection or properly anchored termination.




A maximum run for all glass fronts or all glass with a door unit is 12 feet and both ends must terminate at an intersection or properly anchored termination.



If intersecting wall includes two panels or more, another intersecting panel is required at the end.



Pair of doors are not recommended for use in cornice height applications.




When a single wall exceeds the maximum length as defined above, an intermediate intersecting panel can be inserted to stabilize the wall. If both ends of the wall intersect with either a fixed wall or a connecting wall that is 72" in length, then the intermediate panel can be as small as 24" wide.

When required by the local seismic design criteria, structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

Ceiling Clip Application


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Exposed Tee Grids – Privacy Wall Fastener Kits

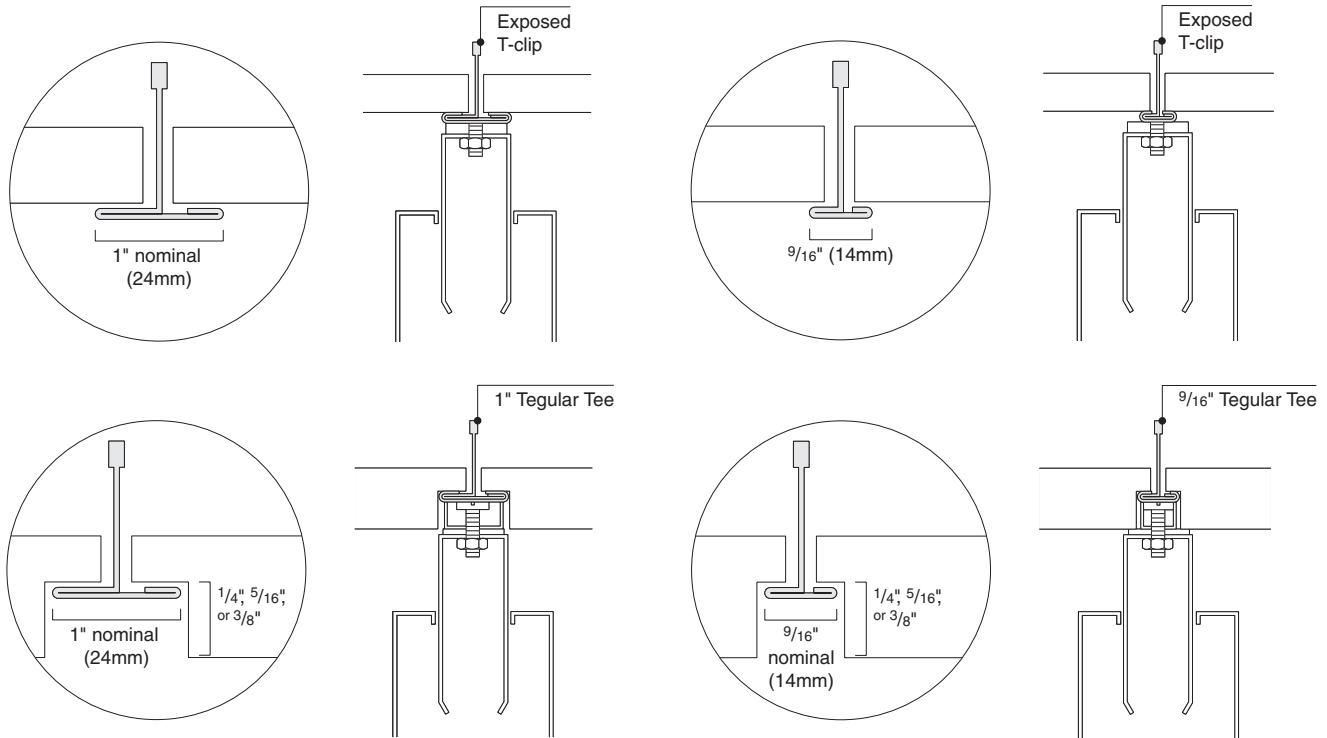


Ceiling clips support the most common types of ceiling systems.

Bolt and Screw Grids – Privacy Wall Fastener Kits

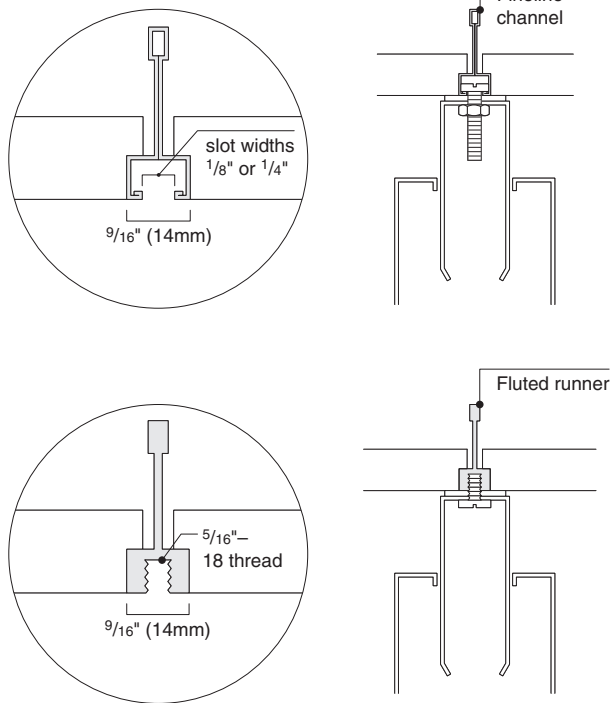

Concealed Grids – Field-Purchased Generic Fasteners

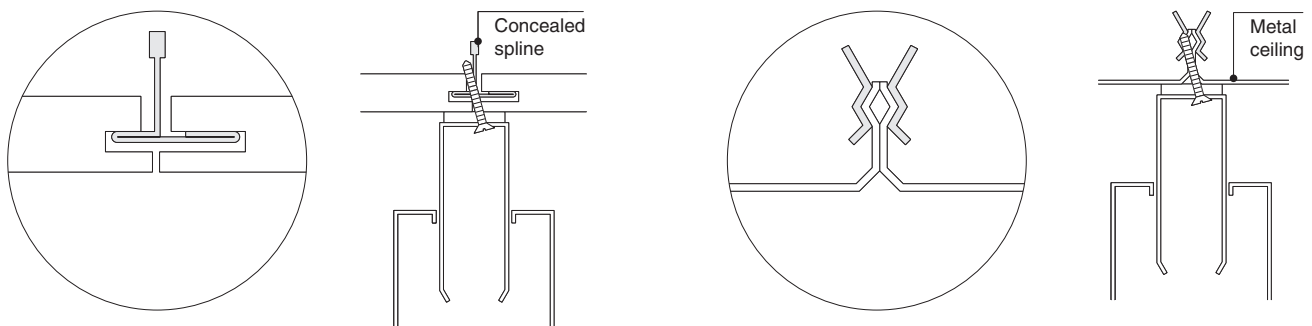

For these and other types of ceilings, the following fasteners can be sourced locally by the installer:

Concealed spline	#7 – 17 x 1 5/8" Bugle Head Self-Drilling Screws
Drywall	#14 – 1" Phillips Head SMS with plastic anchor
Plaster	1/4 – 20 Toggle Bolt
Concrete	Tapcon Anchor x 2"
Metal pan	#7 – 17 x 1" Bugle Head Self-Drilling Screws

Mini Ends


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Mini ends connect a panel to another panel or to a perpendicular building wall or column.

► Specifying, pages 180 and 232

Verticals on inner channel allows the mini end to connect to adjacent panel using feature strips. Panel slots remain accessible to support panel-supported furniture. The mini end has no slots and cannot support components.

Neoprene seals provide light and sound seal between the mini end and the building wall.

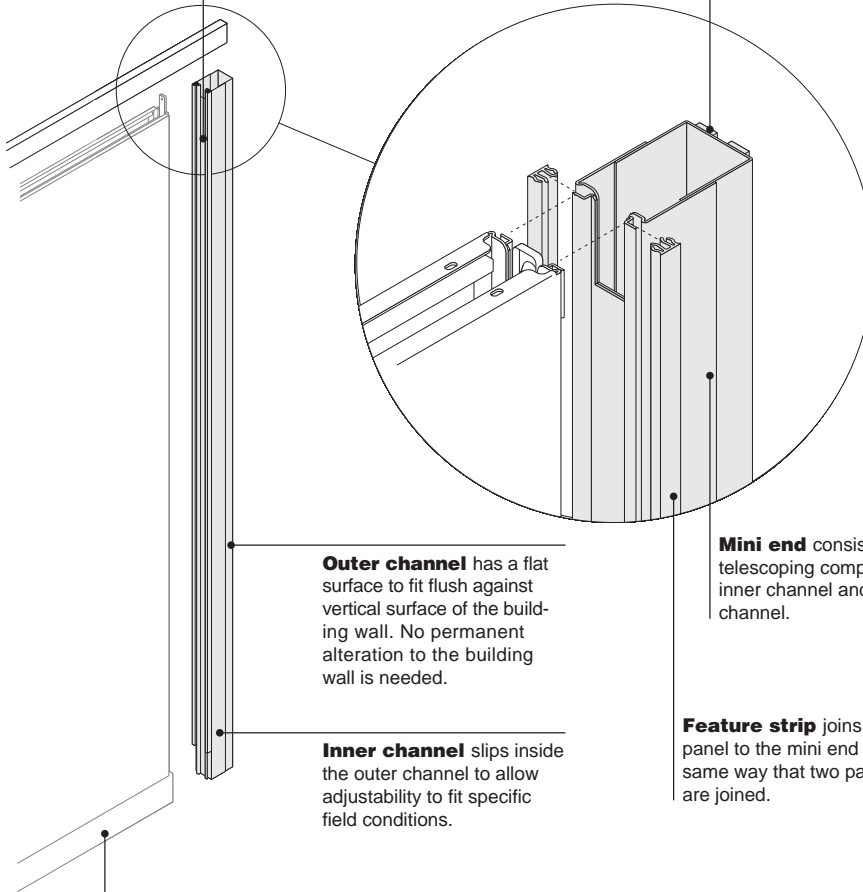

Outer channel has a flat surface to fit flush against vertical surface of the building wall. No permanent alteration to the building wall is needed.

Inner channel slips inside the outer channel to allow adjustability to fit specific field conditions.


Mini end consists of two telescoping components—inner channel and outer channel.

Feature strip joins the panel to the mini end in the same way that two panels are joined.

Continuous base trim, ordered separately, is added in the field. Mini end extends into the base cavity and is covered by base trim.

Product Details

Height of mini end must be the same as the adjacent panel. Mini ends are available in all the same heights as panels. Indicate height when you order by specifying the ceiling height of the installation.


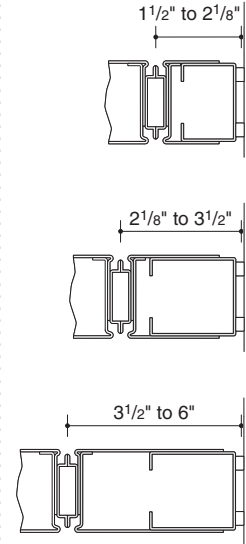


Three sizes of mini ends are available. Each telescopes to accommodate a different range of dimensions. For installations that require a dimension smaller than 1 1/2", use a wall channel.


► Page 74

For installations that require a dimension larger than 6", consider using a larger panel somewhere in the run or use a panel end cut kit.


► Page 78



Both recessed and overlapping ceiling tracks can be used with mini ends.




Base of mini end is finished with continuous base trim, ordered separately, like any panel.




When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.

Connections

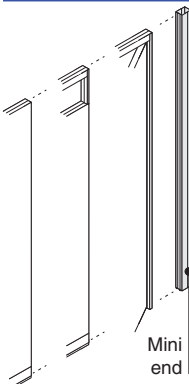

All panel types and door frames can connect to a mini end.




Adjacent panels connect to a mini end in the same way all panels connect. Feature strip on both sides of the panel form a continuous link to the mini end by engaging the verticals of the mini end and the adjacent panel.

Acoustic packing, when used with mini ends, may help to improve acoustical performance.


Physical connection to the building is not needed. Mini end fits tightly against the building wall, and the contact points are sealed with continuous neoprene strips to form a light and sound seal.

Panel-supported components cannot be attached to a mini end. Use the adjacent panel to support storage and work surface components.

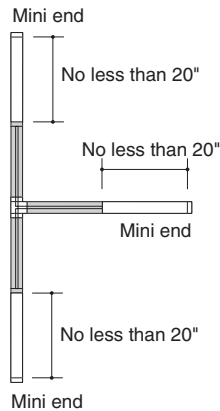

Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini-end or wall channel.

Wiring & Cabling



Wire and cable routing vertically through a mini end is possible. Mini ends are often used to route power to a run of glass panels which don't have sufficient space to accommodate vertical power and cable routing.

Surface Materials

Surfaces of mini ends can be paint, fabric, vinyl, or anodized aluminum for Glass Selections. Both sides must be the same material and color.

Mini end


- Paint
- Fabric
- Anodized aluminum (Glass Selections only)

Mini Ends — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

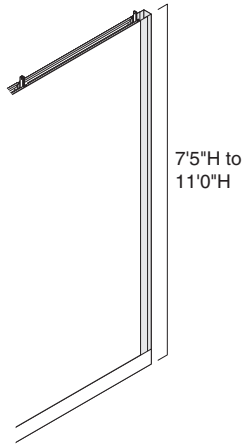



Privacy Wall mini ends can be specified from 7' 5"H to 11' 0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

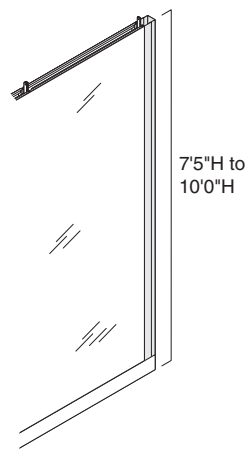


Glass Selections mini ends can be specified from 7' 5"H to 10' 0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



When planning with 4" high base, or low profile base, specify mini ends with modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Mini ends to the floor do not need to be modified for use with 4" base or low profile base.

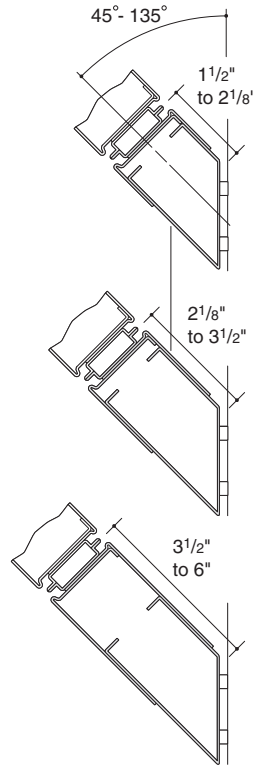

Mini ends can be specified with an angled interface for end conditions that are not perpendicular to fixed surfaces. Angles are available in 5° increments ranging from 45° to 135°.


Tip: Mini ends can be adjusted during installation by as much as 3°.

Wall Channels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Wall channels connect panels with uncut edges to a perpendicular building wall or column.

► Specifying, page 182

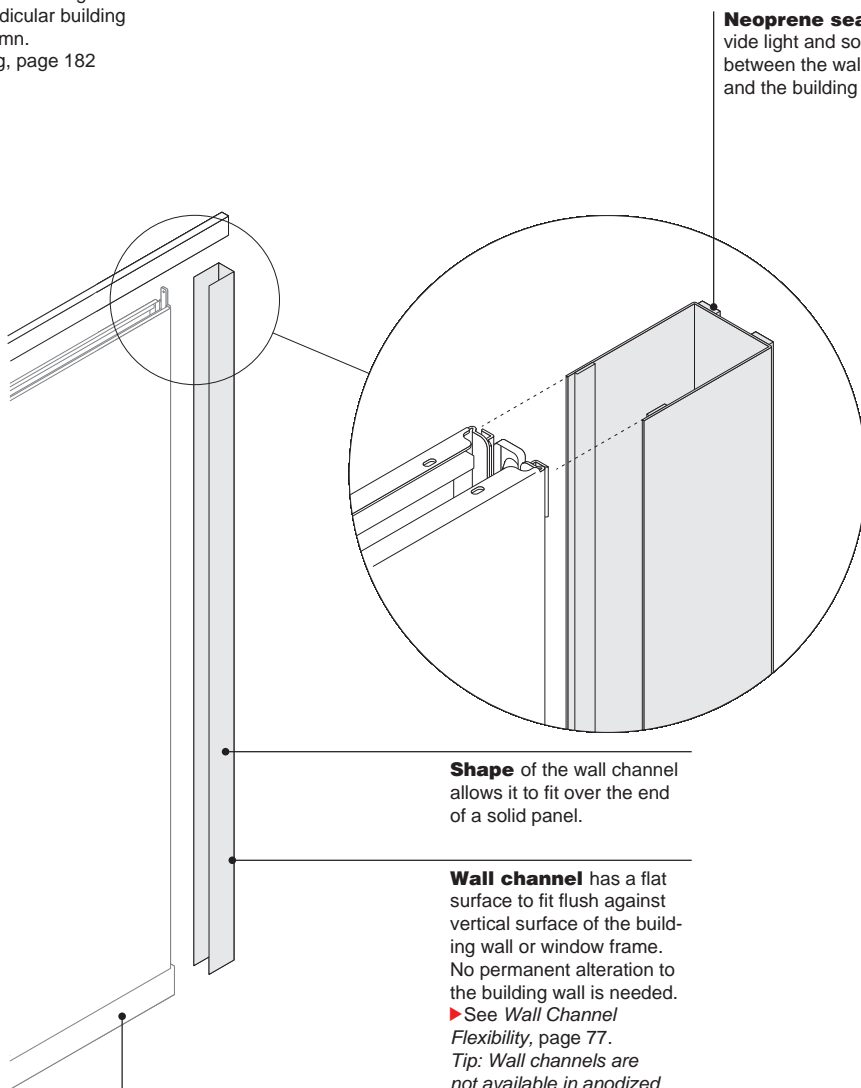

Neoprene seals provide light and sound seal between the wall channel and the building wall.

Shape of the wall channel allows it to fit over the end of a solid panel.

Wall channel has a flat surface to fit flush against vertical surface of the building wall or window frame. No permanent alteration to the building wall is needed.


► See *Wall Channel Flexibility*, page 77.

Tip: Wall channels are not available in anodized aluminum. Dimensions of wall channel do not allow for use with Glass Selections panels.

Continuous base trim, ordered separately, is added in the field. Wall channel extends into the base cavity and is covered by base trim.



Product Details

Height of wall channel must be the same as the adjacent panel. Wall channels are available in all the same heights as panels. Wall channel ships in 10' lengths and is cut to size in the field.

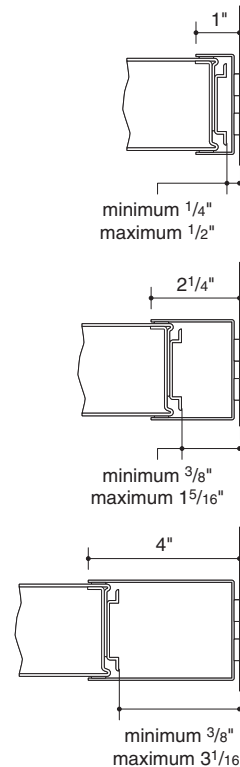


Three sizes of wall channels are available. Each accommodates a range of different dimensions.

► For the dimensions of glass panels and doors, see *Wall Channel Flexibility*, page 77.




Both recessed and overlapping ceiling tracks can be used with wall channels.




Wall channel is cut to the top of the base trim and covered by the base trim.

Solid panels can be inserted to make use of full dimension of the wall channel.

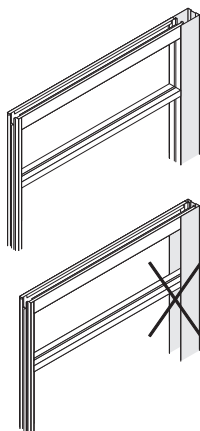


Glass panels should not be inserted too deeply into the wall channel because the wall channel will overlap the glass.

► See *Wall Channel Flexibility*, page 77.

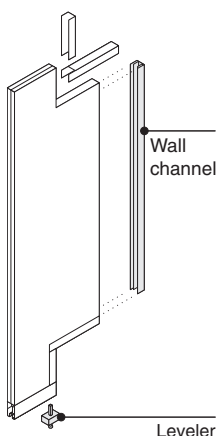

Specify an end filler cut kit when cutting a panel into a wall channel. The end filler cut kit includes a wall channel and spreader.

Connections



All panel types can be used with a wall channel. Adjacent panel is inserted inside the wall channel.


Acoustic packing, when used with wall channels, may help improve acoustical performance.

Physical connection to the building is not needed. Wall channel fits tightly against the building wall, and the contact points are sealed with continuous neoprene strips to form a light and sound seal.

Slotted edges of the adjacent panel are blocked by wall channel. Use mini ends if planning with panel-supported furniture.

► For installations with cut panels, see *Cut Panels*, page 78.

Wiring & Cabling



Wire and cable routing vertically through a wall channel is possible. Wall channels can be used to route power to a run of glass panels which don't have sufficient space to accommodate vertical power and cable routing.


Surface Materials

Surfaces of wall channels can be paint, fabric, or vinyl. Both sides must be the same material and color.

Wall channel

- Paint
- Fabric

Application Topics

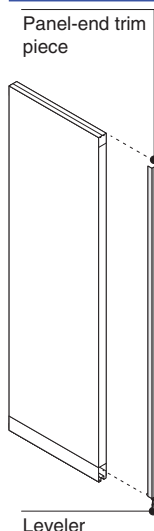

Panel end cut kit connects a cut panel to another panel in line. It restores leveler and housing that is removed when panel is cut on site. Kit includes trim piece to finish the cut side of the panel and to enable feature strip connection to an adjacent panel.

► Page 78


Tip: Hang-on components are not allowed on cut panels.

Wall Channels — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

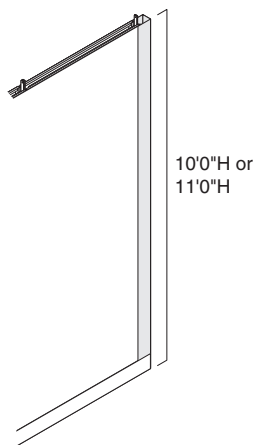

Wall channels can be specified as 10'0"H or 11'0"H.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

Wall Channel Flexibility

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Wall channels allow panels to telescope inside. The amount of flexibility varies depending on the size of the wall channel and what type of panel it is or whether it is a door frame.

Tip: Wall channels are not recommended for use with Glass Selections.


Tip: Order an end filler cut kit when positioning a cut panel at a wall channel.

Tip: 1" wall channel is recommended for use with glass panels. The 2 1/4" and 4" wall channels may overlap a portion of the glass area.


Solid Panels

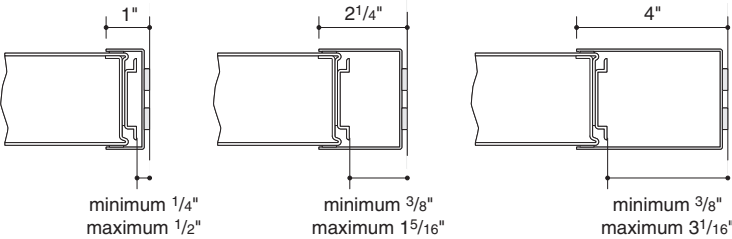

Glass Panels

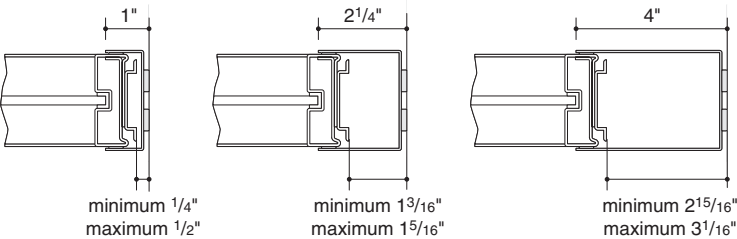

Door Frames

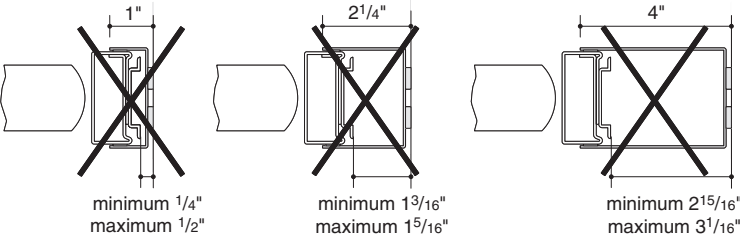


Door frames must be joined to a perpendicular building wall with a mini end, not a wall channel.

Cut Panels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Cut panels are typically positioned at the end of a run, adjacent to a wall channel. Cut panels can also be positioned in the middle of a run. All cut panels require an end filler cut kit.

Solid panels can be cut on site to allow walls to fit with existing building conditions. Glass panels cannot be cut.

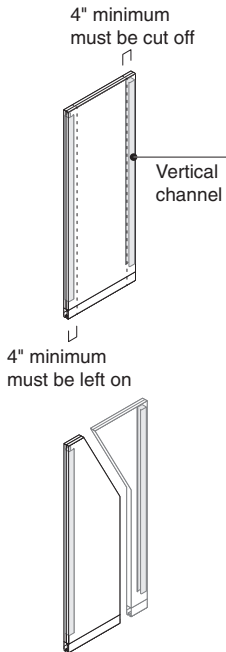


Plan your cuts so that at least 4" of panel width is removed and at least 4" of panel remains. Angled cuts are possible if they conform to these guidelines.

Tip: When you need multiple cut panels, you may be able to specify a larger panel and cut it to produce two smaller cut panels.



Cut section of panel must have at least one vertical edge intact to be functional.

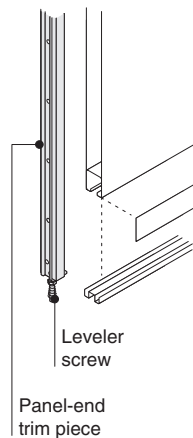


Panel end cut kit is available to restore leveler and housing that is removed when panel is cut on site. Kit includes trim piece to finish the cut side of the panel and to enable feature strip connection to an adjacent panel.


Tip: Hang-on components are not allowed on cut panels.

An end filler cut kit is used when a cut panel is positioned adjacent to a fixed wall.

A panel end cut kit is used when a cut panel is positioned in the middle of a run or adjacent to a corner.

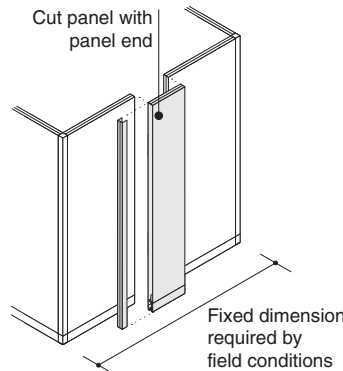


Panel end finishes the edge of a cut panel installed in line with other panels to produce a wall of a specific length. A panel end is typically used to achieve a specific length in a wall that has no wall channel. Panel end trim piece is included in the panel end cut kit.

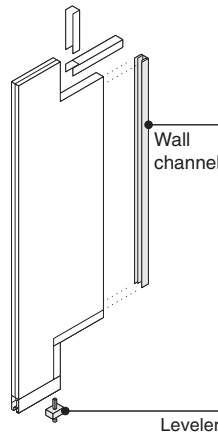

End filler cut kits can be used to finish the edge of a panel that has been cut to conform to the specific shape of a perpendicular building wall, or when a panel is next to an architectural element such as a drywall partition. In this case, you will need to apply an end filler cut kit, which includes a wall channel, spreaders, and a leveler.

Surface materials don't affect cutting. Painted, fabric, and vinyl surfaces can all be cut on site.




Plan your cuts with installation in mind to make sure that it will be possible to fit behind any soffits. Aligning cuts with boundaries may simplify installation.


Adapters

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Adapters engage the verticals on the edge of a panel to allow perpendicular panels to connect.
 ▶ Specifying, page 186

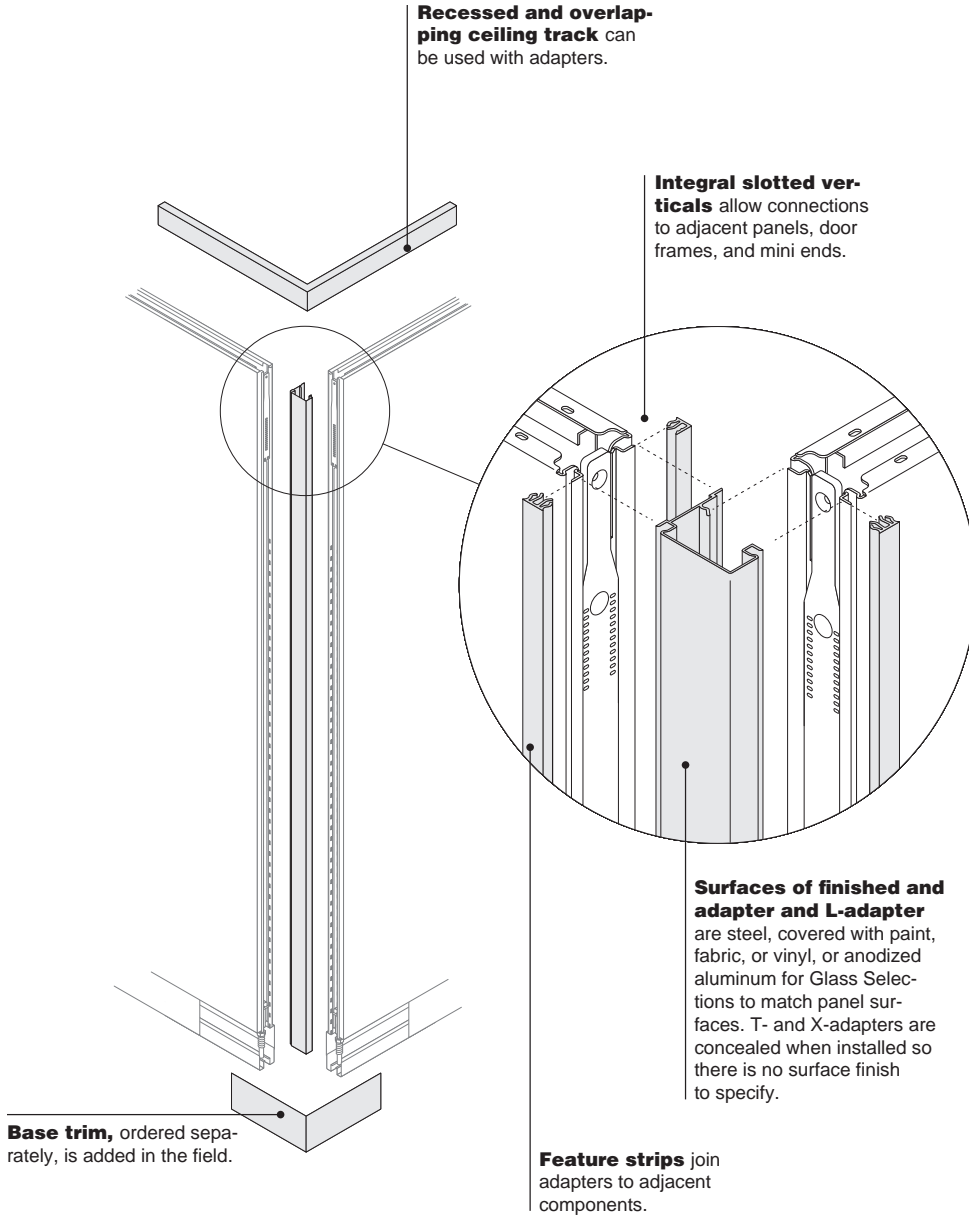


Product Details



Height can be specified from 8'0" to 10'0", in one-inch increments, to accommodate different ceiling heights.




Ceiling track allows $1/2"$ of vertical adjustment to accommodate variations in field conditions. Floor track allows $3/4"$ of vertical adjustment to accommodate variations at base.




Finished-end adapter caps the exposed vertical edge of the last panel in a run. Surface of the adapter is steel, covered in paint, fabric, or vinyl, or anodized aluminum for Glass Selections. The plinth, which is included in the finished end assembly, is painted to match the adjacent base trim. Finished-end adapter adds approximately $1\frac{3}{16}"$ to the length of the wall.

▶ See *Feature Strip Application*, page 88.




L-adapter allows a perpendicular panel to attach at the end of a panel. Surface of the adapter is steel, covered in paint, fabric, or vinyl, or anodized aluminum for Glass Selections.

► See *Feature Strip Application*, page 88.



T-adapter allows a perpendicular panel to attach on the centerline between two panels joined in line.


► See *Feature Strip Application*, page 88.



X-adapter allows two perpendicular panels to attach on opposite sides of the centerline between two panels joined in line.

Tip: Base trim projects $\frac{1}{16}$ " from the face of the panel.

► See *Feature Strip Application*, page 88.




Panel end cut kit can be used to finish the end of a cut panel so that it functions like a conventional panel and can make connections to an adjacent panel, door frame, or mini end. Surface of the adapter is painted steel.

Tip: Panel end is included in panel end cut kit.

Connections



Any panel, door frame, or mini end can be connected to an adapter.



Feature strips, ordered separately, join panels and other components to adapters and prevent light and sound leaks. Feature strip can be cut on site to provide access to the integral slotted verticals so that panel-supported components can be attached. To rearrange panels, feature strips can be removed and reused.


► Page 88

Tip: Anodized feature strips are designed for use with Glass Selection anodized door and glass frames. They are not compatible with upholstered panels.





Overlapping or recessed finished-end ceiling track is available for use with finished end adapter. This ceiling track component finishes the end of the ceiling track in the same way that the finished end adapter completes the exposed vertical edge of the last panel.

► Page 62




Blocked slots occur on the edges of some panels in configurations with adapters. This makes it impractical to attach panel-supported components at these points.

► For an overview of the planning choices, see *Centerline Versus Interior Dimension Planning*, page 90.

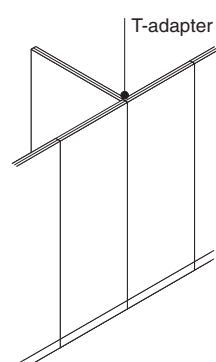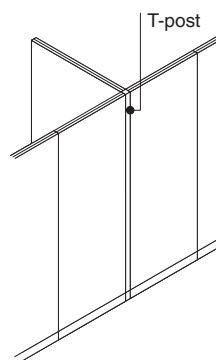

T-adapters, unlike T-posts, produce a simpler, cleaner visual by presenting one joint instead of two.



Exact fit between fixed elements, such as building columns, is possible by using a panel end cut kit. The cut panel behaves exactly like a conventional panel but its width dimension can be modified on site to match field conditions.

Tip: You cannot hang furniture on a cut panel.

► See *Cut Panels*, page 78.

Wiring & Cabling

Adapters do not accommodate vertical wire and cable routing.

Surface Materials

Finished-end adapter and L-adapter

- Paint
- Fabric
- Anodized aluminum

Application Topics

Feature Strip Application

► Page 88

Centerline Versus Interior Dimension Planning

► Page 90

Base Trim Details

► Page 92

Adapters — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.




7'5"H to 11'0"H

Privacy Wall adapters can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights. *Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.*



7'5"H to 10'0"H

Glass Selections adapters can be specified from 7'5"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights. *Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.*




When planning with 4" high base or low profile base, specify adapters with modified height to accept 4"H or 2 1/2"H base trim and to ensure that the correct overall ceiling height is achieved. *Tip: Base trim is ordered separately.*


Posts

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Posts join panels in a variety of configurations.
 ▶ Specifying, page 188

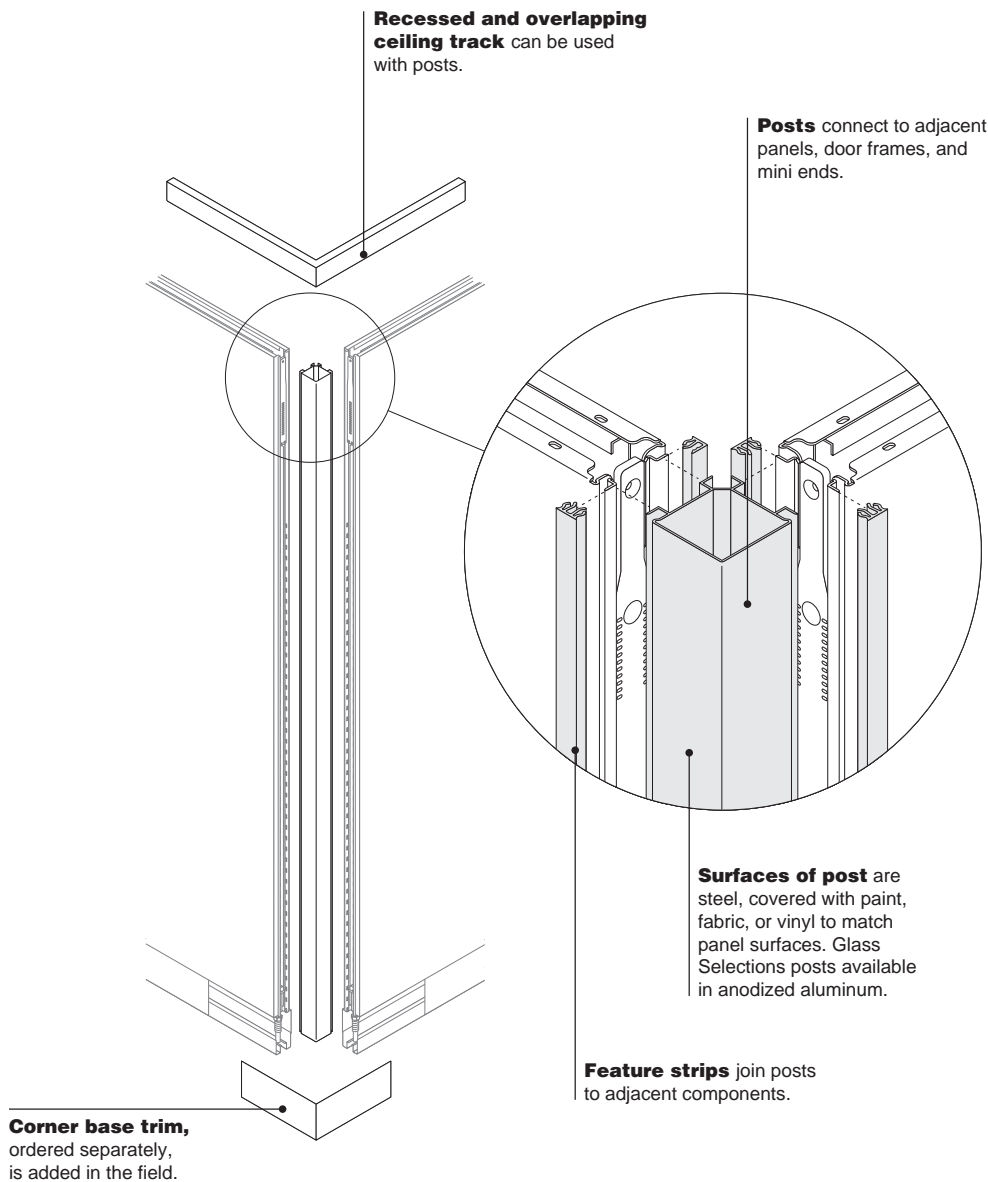





Product Details



Height can be specified from 8'0" to 10'0", in one-inch increments, to accommodate different ceiling heights.




Ceiling track allows $1/2"$ of vertical adjustment to accommodate variations in field conditions. Floor track allows $3/4"$ of vertical adjustment to accommodate variations at base.

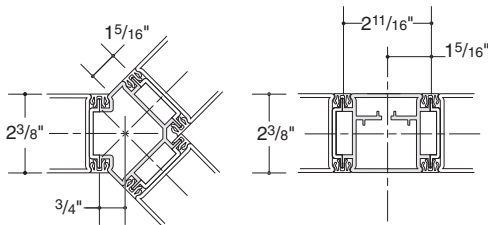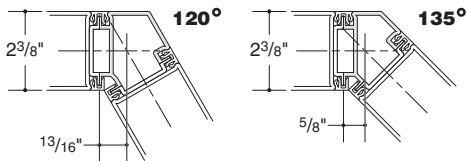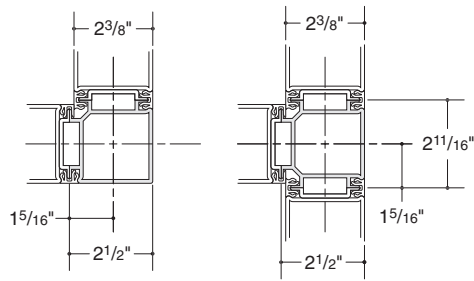


Configurations for posts include in-line, L, T, X, V, Y, and I-Line interface.

Tip: Base trim projects 1/16" from the face of the panel.





L-post

L-post has a square profile.




Y-post is made up of a 90° corner and two 135° angles.



V-post is available either 120° or 135°.

Connections

Any panel, door frame, or mini end can be connected to a post.




Feature strips, ordered separately, join panels and other components to posts and prevent light and sound leaks. Feature strip can be cut on site to provide access to the integral slotted verticals so that panel-supported components can be attached. To rearrange panels, feature strips can be removed and reused.

► Page 18

Posts are often more appropriate when planning with interior room dimensions.

Tip: Remember to allow for post dimensions when calculating the overall length of a wall.

► See *Centerline Versus Interior Dimension Planning*, page 90.



Slotted verticals are available when using posts.

► For an overview of the planning choices, see *Centerline Versus Interior Dimension Planning*, page 90.

Wiring & Cabling

Posts can be used to vertically route power and cable infeeds down from the ceiling or up from the floor.

Post

- Paint
- Fabric
- Vinyl
- Anodized aluminum

Base trim

- Paint

Feature strip

- Paint
- Fabric
- Anodized aluminum

Application Topics

Feature Strip Application

► Page 88

Centerline Versus Interior Dimension Planning


► Page 90

Posts — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.




Privacy Wall posts can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Glass Selections posts can be specified from 7'5"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



When planning with 4" high base or low profile base, specify adapters with modified height to accept 4"H or 2 1/2"H base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Base trim is ordered separately.



V-post can be specified at different angles in 5° increments, from 70° minimum to 175° maximum.

Tip: Base trim and ceiling track can also be ordered in corresponding angled configurations.


Tip: Each angled post has different dimensions. Exact dimensions should be requested through the quote process.

Feature Strip Application


Use the table at right to determine the quantity of individual feature strips you need in specific applications.

Tip: For correct fit of feature strips, you must specify type of components that will be used in conjunction with feature strips. Example: One painted component and one upholstered component.


► See page 250 to order feature strips.



Two kinds of feature strips are available. They are available individually (style numbers GPFS1, GPFSH1, GPFS1A, or GPFSH1A available in 10' only) or in packages of 25 (style numbers GPFS, GPFSH, GPFS1A, or GPFSH1A ordered by 1" increments).




When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.



In-line feature strips are used when joining two surfaces on the same plane. They can be specified to correspond to the installation height, or 120"-long feature strips are available to be field-cut.


To rearrange panels, painted and anodized feature strips can be removed and reused. Fabric covered feature strips cannot be reused, and will need to be replaced as part of rearrangement process.




Half feature strips are used in combination with in-line feature strips for inside corner applications. *Tip: To ensure best fit for feature strips, specify a wall application option.*

Specify both a painted and fabric half feature strip for Clerestory panels with one painted and one upholstered component.


When ordering painted feature strips, specify the type of wall application for the adjoining components.




For use with two painted components.




For use with one painted and one upholstered component.



For use with two upholstered components.




For Clerestory panels, you can specify two different feature strips when the solid-panel finish is different from the upper-glass frame finish.



Furniture reveal strips, ordered separately, are positioned between two sections of in-line feature strip to allow access to one set of panel slots when a single component is mounted on a Privacy Wall panel. When components are mounted side by side, both sets of slots are left exposed, and there is no need for a furniture reveal strip. Furniture reveal strips are painted to match the adjacent wall panel or to match the component bracket.

Tip: Use of hang-on components with enhanced core panels may reduce acoustic effectiveness.

► Page 19




Furniture reveal strips are used when hanging components on Privacy Wall panels. The furniture reveal strip finishes off one half of an in-line panel joint, while allowing access to panel slots. They are cut to size from a 34" length as part of the installation process. Typically, one 34" strip is adequate to trim out both edges of a worksurface or storage cabinet.


► Page 19

Privacy Wall uses the same furniture interface as Answer. When specifying overhead storage and worksurfaces to be mounted on Privacy Wall, select the Answer bracket option.

Product	Number of in-line feature strips GPFS, GPFS1, GPFS1A, or GPFS1A	Number of half feature strips GPFSH, GPFSH1, GPFSHA, or GPFSH1A
Panel	2	0
Hinged door frame	2	0
Slider door unit	4	0
Mini end	2	0
Panel end cut kit	2	0
Finished-end adapter	2	0
L-adapter	1	1
T-adapter	0	2
X-adapter	0	4
L-post	1	1
T-post	2	2
X-post	0	4
In-line post	2	0
V-post	0	2
Y-post	1	1
I-Line interface post	2	0



When hanging furniture on panels, optional acoustic seals can be field-applied to the cantilever or shelf brackets to minimize sound transmission through the wall.




Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.

Centerline Versus Interior Dimension Planning


Planning Choices

Architects and designers typically use either centerline planning or inside-dimension planning when laying out walls. Privacy Wall supports either approach or a combination. Your decision about which strategy to use will depend on your building and integration and interface issues. Each approach offers its own advantages and disadvantages.




Centerline planning

concerns the distance between the centerline of walls; the thickness of the walls is a secondary consideration. For example, two parallel walls that are $2\frac{3}{8}$ " thick and with centerlines that are 96" apart will produce an interior space that is $93\frac{5}{8}$ "W.



Interior planning concerns the physical dimensions of the room created by walls. For example, to create an interior space that is 96"W, two parallel walls that are $2\frac{3}{8}$ " thick would have a centerline dimension of $98\frac{9}{16}$ ".

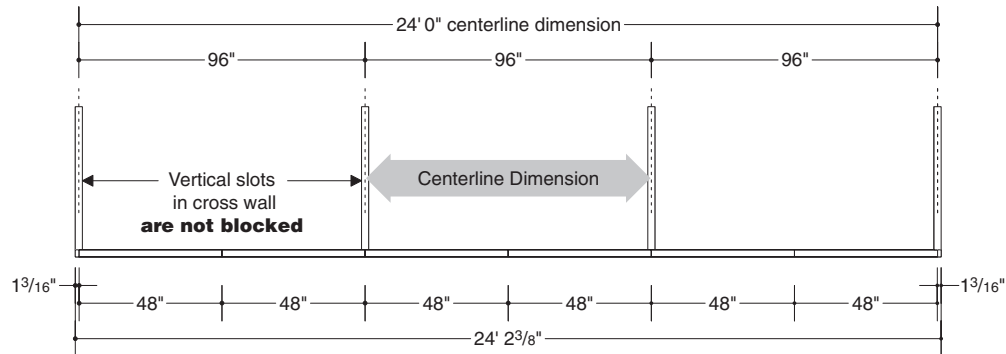


Using Adapters

Advantages

- Allows centerline planning.
- No creep added to the dimensions of the run of panels in one axis.
- Lower cost than using posts at T- and X-corners.
- Clean visuals. No double feature strips visible when the back side of the wall doesn't have perpendicular panels.

Disadvantages

- Vertical slots in some panels will be blocked by overlapping panels and therefore cannot accommodate panel-supported storage or worksurface components.

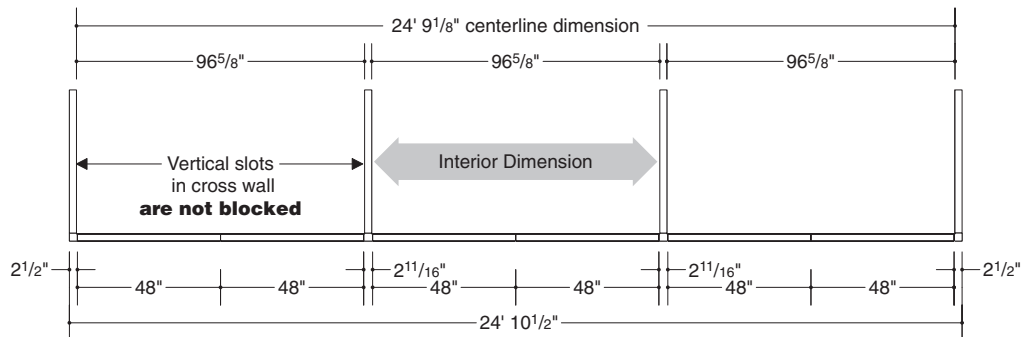


Using Posts

Advantages

- Ideal for interior dimension planning because the inside dimensions of the room will always match the dimensions of the panels that make up the wall.
- Vertical slots will never be blocked, so adding panel-supported storage or worksurfaces is never a problem.

Disadvantages


- Must allow the $2\frac{11}{16}$ " increment that each L-post adds and $2\frac{11}{16}$ " increment that each T-post adds to the length of the run of panels.



- Posts and two feature strips will be visible on the opposite side of the wall if no panels are joined at those points.
- More expensive than using adapters at T- and X-corners.


Combining Techniques

In some applications it is desirable to combine centerline planning with inside-dimension planning. For example, you might want a front wall that produces alignment in a building that has columns or window elements on centerlines that are spaced 96" apart. But along the cross walls, you may want to use inside-dimension planning to ensure that standard-sized furniture components, such as workspaces and bins, will match panel dimensions.

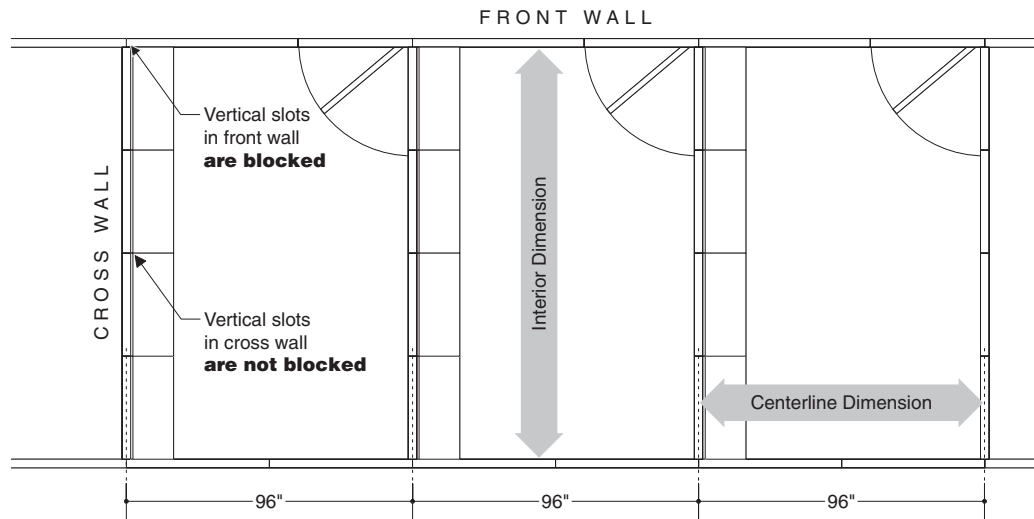

Interior dimension planning along cross walls means that vertical slots will be available to attach storage components and workspaces to cross wall panels.

Centerline planning along front wall allows fin walls to match centerlines of building elements such as columns, window frames, and ceiling grid.

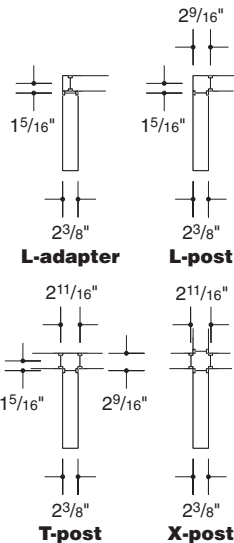


Adapters and posts add different dimensions to a run of panel depending on the configuration.

Base Trim Details




Panels

In-line

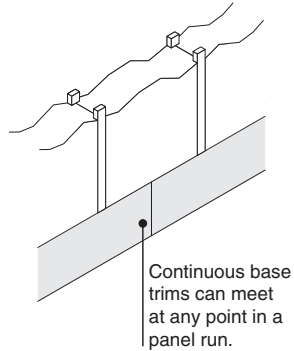




Inside corner

Continuous base trims meet at an inside corner regardless of angle.

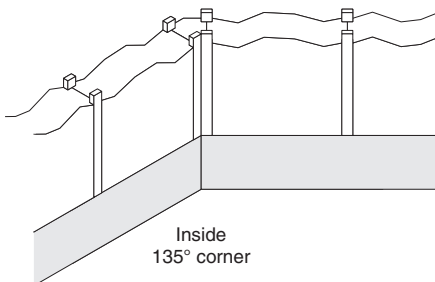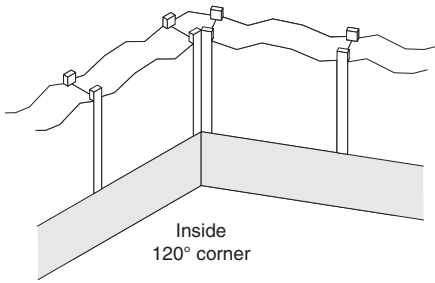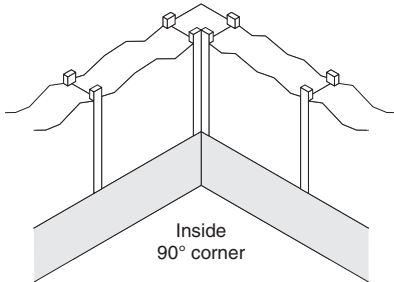


Outside corner

One-piece outside corner base trim must be specified to trim outside panel corners regardless of angle.

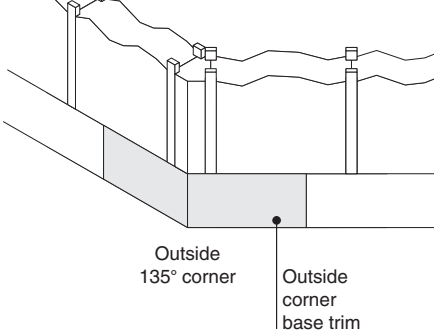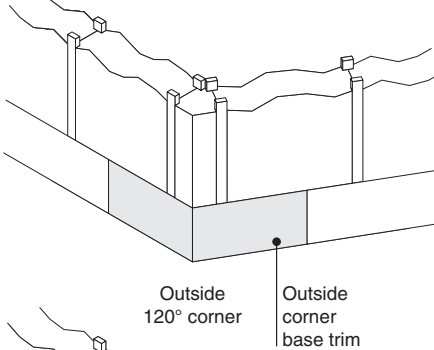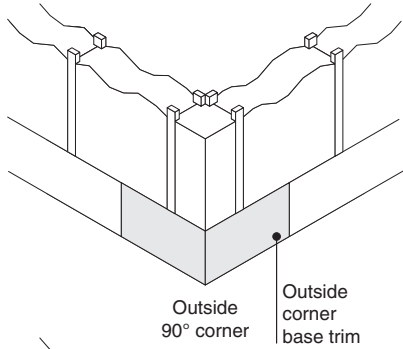


Doors


Inside corner

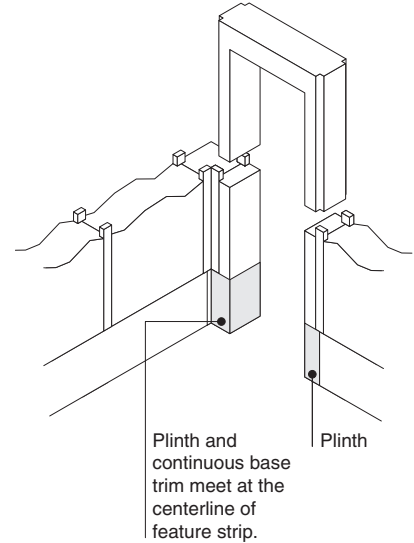


Outside corner

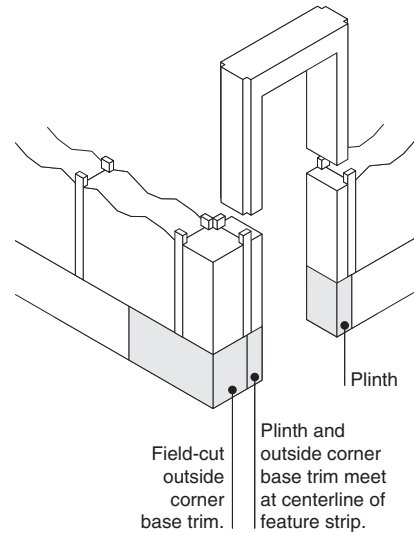


Back-to-back

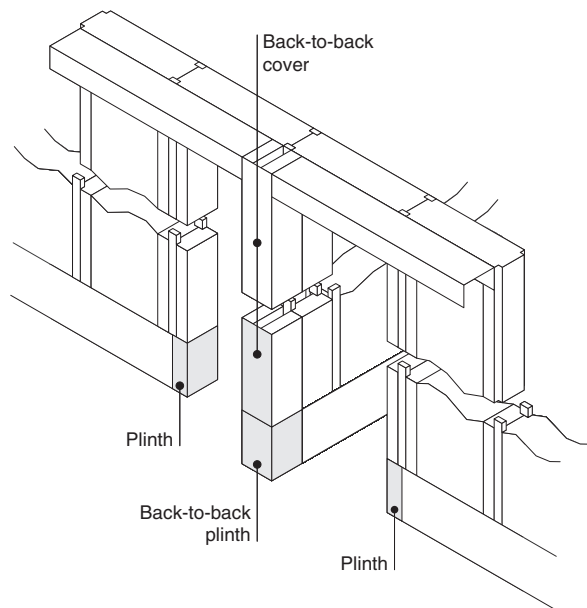


Inside slider door

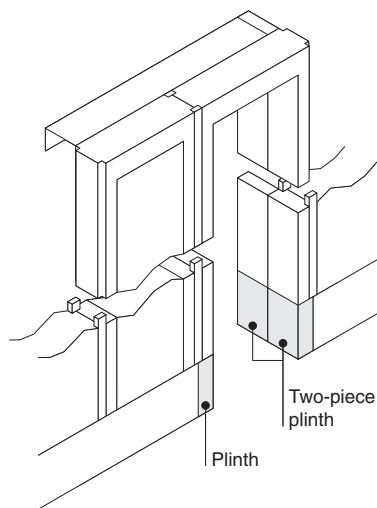

Outside slider door

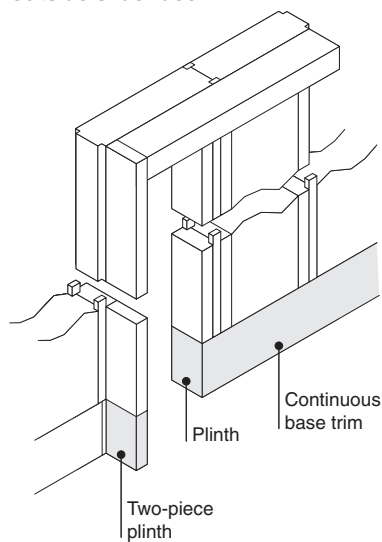


Two doors separated by a post

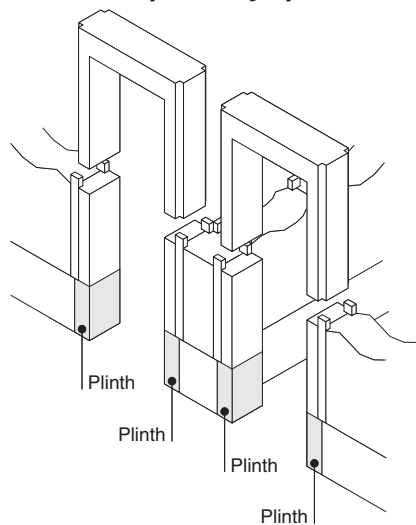

Base Trim Details, continued

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

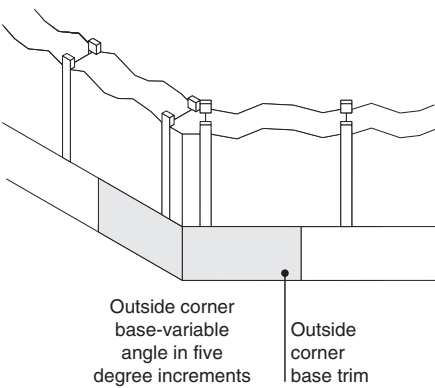


How to Connect Privacy Wall to I-Line Moveable Walls

I-Line interface posts connect Privacy Wall to its predecessor, I-Line Moveable Walls.


Two I-Line feature strips are required for the I-Line side of the connection.

Two Privacy Wall feature strips are required for the Privacy Wall side of the connection.

I-Line interface post can be cut in the field.

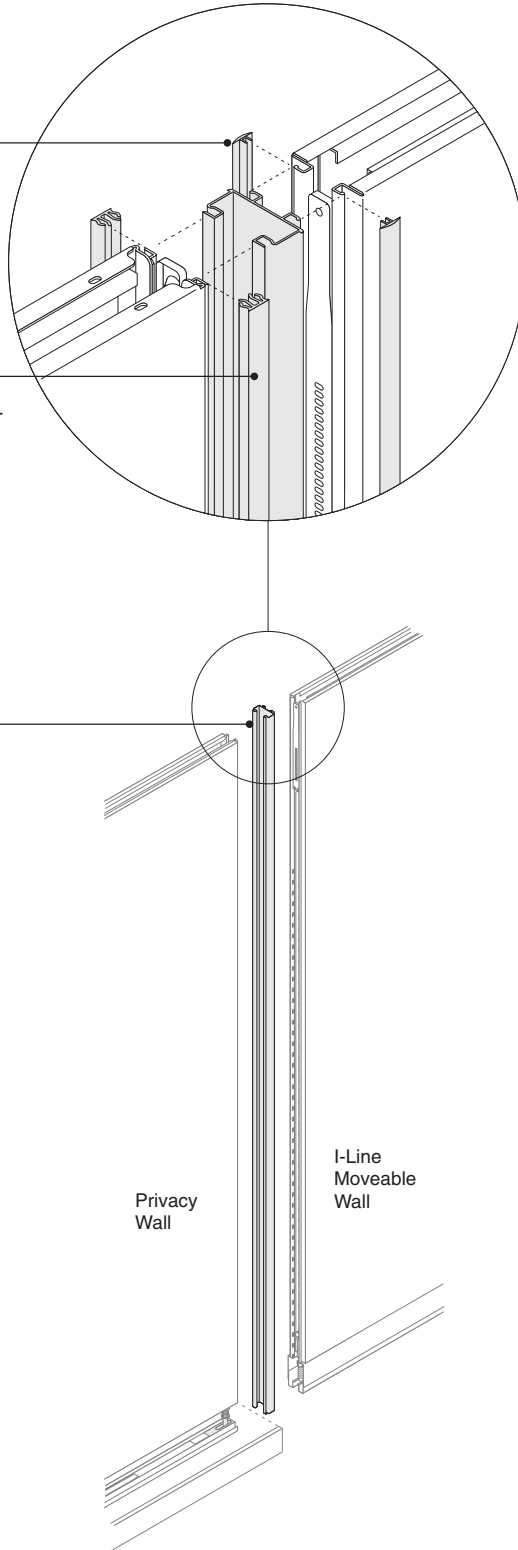

Product Details




Width of I-Line interface post adds $1\frac{1}{4}$ " to the width of any panel it is attached to. Because a Privacy Wall modular panel is $1\frac{1}{4}$ " less wide than a standard panel, using an I-Line interface post with a Privacy Wall modular panel will retain the overall dimension of a regular panel.


Ceiling track, ordered separately, continues uninterrupted from the I-Line panel to the Privacy Wall panel. Ceiling track is available recessed or overlapping.

Continuous base trim on Privacy Wall panels extends over the I-Line interface post. I-Line panels have their own base trim. Height of both I-Line and Privacy Wall base trims may vary slightly.



Connections




In-line connections are possible by adding an I-Line interface post between Privacy Wall and I-Line panels.



Any Privacy Wall panel or door frame can connect to I-Line using an I-Line interface post.



I-Line interface posts attach to adjacent posts in L-, T-, X-, V-, and Y-configurations.



T- and X-adapters can be used to connect Privacy Wall to I-Line Moveable Walls.

Wiring & Cabling

Power cannot be routed vertically inside an I-Line interface post. The post allows horizontal cable routing at the base.

Surface Materials

I-Line interface post

- Paint
- Tip: Not all Privacy Wall paint colors match classic I-Line paint colors.*
- Fabric
- Vinyl

Etched and Pattern Glass Planning

Planning Guidelines

You should consider the orientation of the faces of etched and pattern glass in relation to the insides and outsides of rooms.

Etched glass should be installed with the rough side facing the inside of the room and the smooth side facing the corridor. This placement allows for easier cleaning of the more heavily traveled corridor.

Pattern glass should be installed with the rough side facing the corridor and the smooth side facing the inside of the room. This placement allows more people to appreciate the visually interesting and attractive side of the glass.

When using etched and/or pattern glass on the slider doors, the glass will be oriented as outlined above when the door is positioned on the outside of the room. If slider doors are to be positioned on the inside of the room and glass surfaces are desired to be oriented outlined above, the slider door units must be ordered through specials.

Clerestory panels that are ordered with split finish surfaces or single sided electricals will be oriented to side one and side two. When determining how to order these, keep in mind that glass surfaces are always oriented as follows: for etched glass, the rough side will be oriented to side two; for pattern glass, the rough side will be oriented to side one.

Etched glass






Satin

Pattern glass

Bamboo
Harp
Mirage

All other glass types

are either rough on both faces or smooth on both faces.

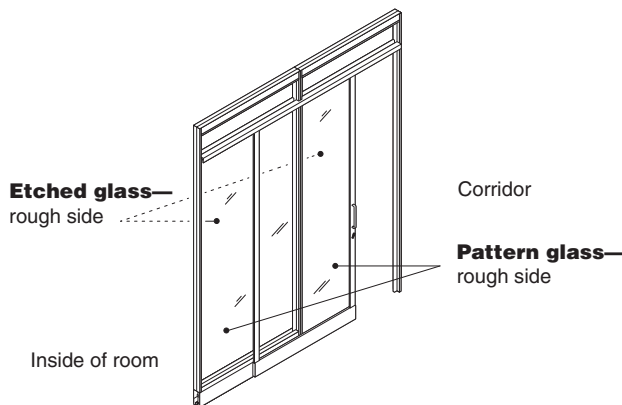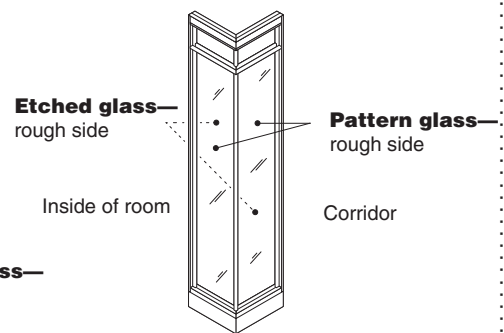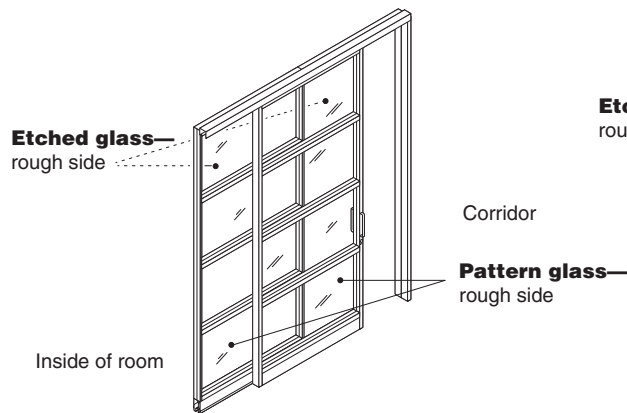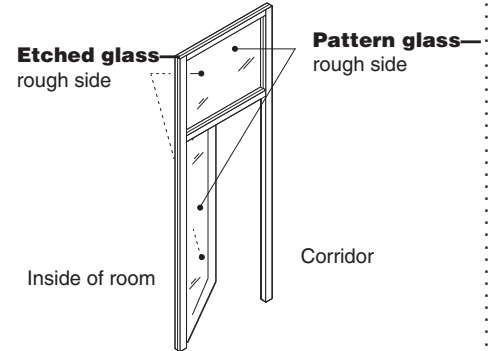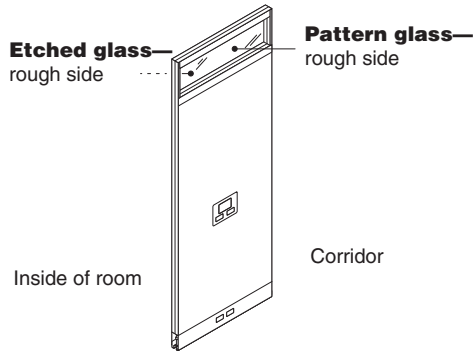

How to Power a Panel

Factory-installed components are available to power panels with receptacles at desk height, ADA height, or at the base of the panel. Power infeeds can feed through the ceiling or the floor.

Tip: Bypass cover may be required when specifying recessed ceiling track.
► Page 63

Ceiling infeed can be factory installed in panel to ADA or desk height, or field installed at base height.

Communication cable, field installed.

Power and communication receptacles are factory installed at ADA height, desk height, or base height.

Modular harness, field installed.

Vertical jumper, factory installed to extend power between power blocks at base height, desk height, and ADA height.

Power blocks, factory or field installed at base height.


Base power infeed
Tip: Multipurpose infeeds can be installed to route power to base from floor or ceiling.

Floor infeed can be factory installed in panel at ADA or desk height, or field installed at base height.


Power blocks can be factory or field installed at ADA height, desk height, or base height. ADA and desk-height power blocks are available in hollow core panels only.
Tip: For power installation at ADA or desk height in the field, you must use a power and communication powerkit and cover plate. Powerkits with power blocks and communication openings can only be installed in the field at ADA- or desk-height locations.

Powering a Privacy Wall panel requires five things—power blocks, receptacles, cutouts in the surface of the panel to access the receptacles, a harness or infeed to bring power to the power block, and a cover plate or power and communication base trim to trim the opening.

Power Blocks




Power blocks must be installed in a panel in order to accommodate power receptacles. Power blocks can accommodate receptacles on one side or both sides of a panel.




Three different heights are possible for power blocks—desk height, ADA height, and base height. Any combination of these heights is possible. ADA and desk-height power blocks are available in hollow core panels only.

Tip: When placing furniture on or in front of a powered panel, review the furniture type and position to avoid obstructing the power or communication termination.

Utilities can be specified on either side of the panel or on both sides. Receptacles can be installed on either side of the panel or on both sides. Fillers can be installed in any unused cutouts.



Power is located in the center of a panel except in Glass Selections frame kits, where power is located 12" from the panel edge.
Tip: If using base trim with power and communication cutout, plan on placing cutouts at right edge of panel.




Power blocks can be located in the base without cutouts to continue distribution of power between panels.

Panel type determines which receptacle locations are available. For example, solid wall panels can have receptacles in any position, but glass wall panels can have receptacles in the base only.


Panel Type	Desk-height	ADA-height	Base
Solid	●	●	●
Glass	N.A.	N.A.	●
Clerestory	●	●	●

Field-installed power-kits, infeeds, and jumpers can be ordered separately and added on site. For installations at desk or ADA height, solid panel surface must be cut carefully to position power block correctly and to accommodate cover plate. Power and communication is available in panel face only.


Receptacles




Receptacles are ordered separately and field installed in power blocks. Separate duplex receptacles are available to engage each of the different circuits that are possible in the electrical system. Receptacles are coded to indicate which circuit and type of ground they engage.
▶ Page 101



Controlled receptacle must be indicated when tying into the building management system. Duplex receptacles have an option for a factory permanent, pad stamp power icon symbol with the word controlled per compliance with the Energy Code.




USB receptacles are ordered separately and installed on site. They are available in three wiring schematics with multiple line options. USB receptacles offer easy access to two charging ports. Each port provides 1 ampere of output. USB receptacles conveniently charge a wide range of electronic devices. Some devices may not be compatible.




Installation is done on site. Receptacles snap into power block. Tools are not required for installation.


Cutouts

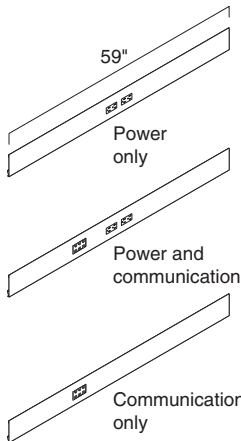


Power and communication base trim, ordered separately, are factory punched for modular power receptacles and communication outlets. Three kinds are available—power only, power and communication, and communication only.
Tip: Base communication cutouts are designed to accommodate only NEMA faceplates. Cutout is 3"W x 2"H.



Power and communication base trim for Chicago and New York City power, ordered separately, are factory punched for hardwired power receptacles (not by Steelcase) and communication outlets. Two kinds are available - power only, and power communication.
Tip: Base communication cutouts are designed to accommodate only NEMA faceplates. Cutout is 3"W x 2"H.
Tip: Power cutouts are 4 1/8"W x 2 1/4"H.



The floor track is factory cut at both ends to provide access for multipurpose infeeds that are routed up from the floor.




Plastic cover plate, ordered separately, frames receptacles and communication outlets in the panel face. Two kinds of cover plates are available—power only and power and communication. They are required for utilities in the panel surface.
▶ Page 101


How to Power a Panel, continued

Width of panel must be adequate to accommodate cutouts.

- Panels that are 30"W (standard or modular) can accommodate power and/or communication in any position or configuration.
- Panels that are smaller than 30"W cannot accommodate power or communication in any configuration.




Communication opening is sized to accommodate a standard NEMA-size faceplate, modular furniture faceplate, or Decora mount-style outlet supplied by the electrician.



Fillers, ordered separately, fill empty receptacle and communication openings.


Tip: Power and communication filler is not designed for use with the base communication cutout. Fillers for this NEMA-size cutout should be sourced locally.

Infeeds



Ceiling infeeds are factory installed to bring power to a power block installed at desk height or ADA height. Harness orientation is standard on the left side when facing side 1.

Tip: Panels that are less than 24"W are not factory punched for infeeds.




Floor infeeds, for use with raised floor systems, are factory installed to bring power to a power block installed at desk height or ADA height. Harness orientation is standard on the left side when facing side 1. Factory-installed infeeds extend a minimum of 12' from the panel.


Tip: Panels that are less than 24"W are not factory punched for infeeds.

Base power blocks always receive their power from field-installed harnesses or factory-installed jumper harnesses.


► Page 140



Field-installed multi-purpose infeed can be used to bring power from the ceiling or floor by routing it through an adjacent component such as a mini end or post.




Field-installed base power infeed can bring power from a floor monument to a power block in the base of a panel. Floor infeed harness at the base occupies one receptacle location in the base power block.




Field-installed modular harness can bring power from a power block installed in the base of an adjacent panel.


► To calculate harness length, see page 108.




Harness-to-harness connector or branching harness-to-harness connector, ordered separately, links harnesses. Harness-to-harness connector allows multiple harnesses to connect to allow power networks to branch.






End of the power infeed can be hardwire or modular. Hardwire allows the electrician to make a conventional connection to the building's power inside a junction box. Modular allows the infeed to connect to any corresponding modular connector or harness using a harness-to-harness connector. This is the same modular connector used by Answer, Montage, and Architectural Solutions Modular Power System.



Modular infeed cover is included with modular multi-purpose infeed to hardwire to a junction box. It allows modular connector to snap into position. This allows walls to be disconnected, moved, and reconnected later.



Vertical jumper is factory installed to extend power between power blocks at base height, desk height, and ADA height. Jumper can also be field installed to achieve same configuration.

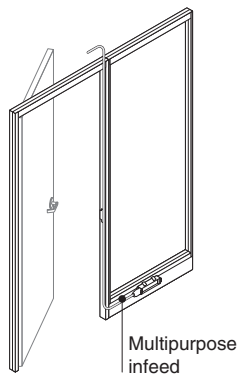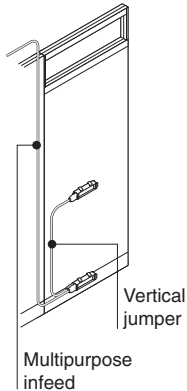

Glass panels cannot accommodate vertical routing of power harnesses through the glass portion of the panel. Use adjacent panels, mini ends, or door frames to accommodate a field-installed multipurpose infeed.


Tip: A power switch installed in a door frame will block the path of a multipurpose infeed.

Chicago and New York City electrical code

requires that all power be hardwired in the field. Modular power systems are not permitted. All panels can be hardwired on site using conventional electrical components.

Desk or ADA power and communication in Chicago and New York City

can be accommodated in two ways.



Specify the Chicago/New York City hardwire power prep option


and the factory will cut the panel at desk and/or ADA height on one side of the panel. This allows the electrician to install a Chicago/New York City junction box and hardwire standard Decora-style receptacle(s) in the field. Order power/communication Chicago/New York City junction box and cover plate separately. Only power/communication is available with this option.

Tip: Hardwire power boxes cannot be double sided.


New York City/Chicago prep option requires use of Privacy Wall cover plate, ordered separately.

► Page 101

San Francisco electrical code requires that base power infeeds be encased in metallic liquid-tight conduit.



Electrician can cut solid or Clerestory panels in the field and install conventional components (junction box, receptacle, outlet cover, and conduit) as in typical drywall construction.



Base power for panels installed in Chicago or New York City

is hardwired in the field using conventional components (Decora-style receptacle, junction box, conduit) supplied by the electrician.

Tip: Order Chicago/New York City base trim.

All Privacy Wall electrical components are listed by Underwriters Laboratory (UL) and certified by the Canadian Standards Association (CSA).

All Steelcase electrical systems are designed in compliance with the National Electrical Code (NEC) and Canadian Electrical Code (CEC) to function as a multi-wire branch circuit. Installations should be made in accordance with the NEC or CEC provisions for multi-wire branch circuits.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical equipment.


Specifying

For guidelines about the steps to specify power components for a panel, see *Power Options*.


► Page 140

Overview of Powered Panels


Power in Base

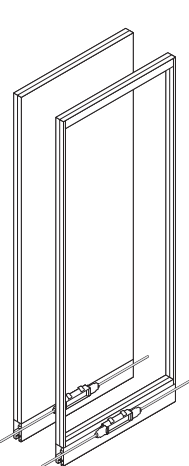


Power in the base of a solid or glass panel can be energized using field-installed harnesses or infeeds.

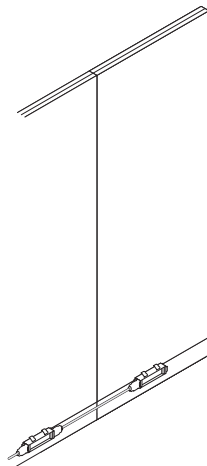


Power source A: Field-installed harness from adjacent panel with power in base.
▶ Page 140

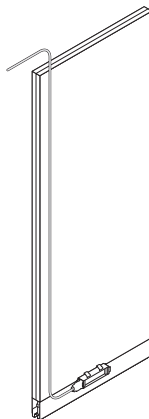

Power source B: Field-installed multipurpose infeed from ceiling through hollow core in solid panel.
▶ Page 140




Power source C: Field-installed multipurpose infeed from floor.
▶ Page 140




Power source D: Field-installed base power infeed from floor monument or adjacent wall. Occupies one receptacle location.
▶ Page 140


Power at Desk Height or ADA Height




Power source E: Factory-installed ceiling infeed.
▶ Page 140

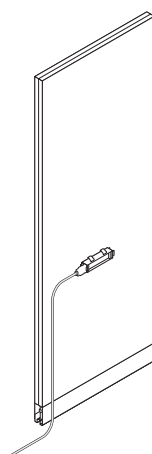


Power source F: Factory-installed floor infeed.
▶ Page 140



Power source G: Factory-installed vertical jumper. Base must receive power using one of the approaches shown at the top of the page. When base/ADA/desk combinations are specified, a jumper will be factory installed.
▶ Page 140

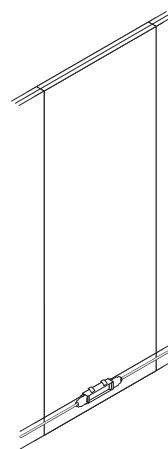


Power blocks can be located in the base without cutouts to allow for distribution of power or to bring power from floor or ceiling.

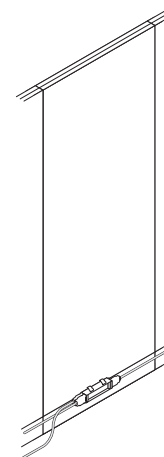


Power in Panels with Glass

Power cannot be routed vertically through the glass portion of a Clerestory panel so desk-height and ADA-height receptacles in glass panels always receive power from below.


Tip: Power block in base doesn't have to be expressed. You may choose to use it only as a connection point for an infeed and not install base trim with receptacle openings.




Power source F:
Factory-installed floor infeed.
► Page 140



Power source G:
Factory-installed vertical jumper. Base must receive power using one of the approaches shown on previous page.
► Page 140
Tip: When base/ADA/desk combinations are specified, a jumper will be factory installed.

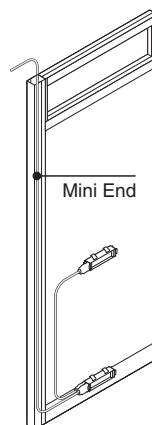

Adjacent mini end can be used to route a field-installed multipurpose infeed. Factory-installed vertical jumper can extend power to desk height or ADA height.
Tip: When base/ADA/desk combinations are specified, a jumper will be factory installed.

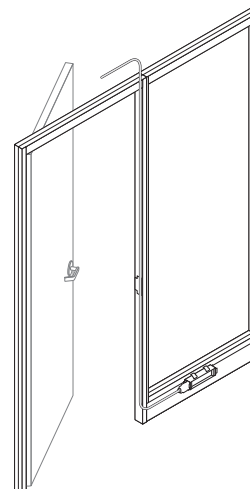

Adjacent door frame can be used to route a field-installed multipurpose infeed.
Exception: Switch installed in routing side of door frame will block harness.

Wiring Schematics

Details for the Electrician

Privacy Wall modular power components are offered in three different wiring schematics to allow you to match your specific wiring strategy to any typical building wiring plan.

Tip: All the components in an electrical system must use the same wiring schematic. The components are color coded and keyed to make it impossible to connect mismatched parts.

Black = Four-circuit, 3+1

Brown = Four-circuit, 2+2

Rust = Three-circuit, separate neutrals



Shared neutral conductors = 10 gauge

Separate neutral conductors = 12 gauge


Hot conductors = 12 gauge

Grounding conductors = 12 gauge

Four-Circuit, 3+1

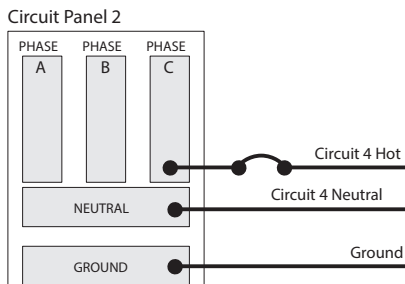
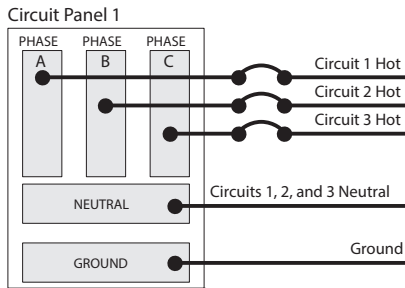


In the four-circuit 3+1 schematic, circuits 1, 2, and 3 are distributed from the first circuit panel and are supported with one shared neutral and one shared ground. Circuit 4 is distributed from a second circuit panel and is supported with a separate neutral and ground.

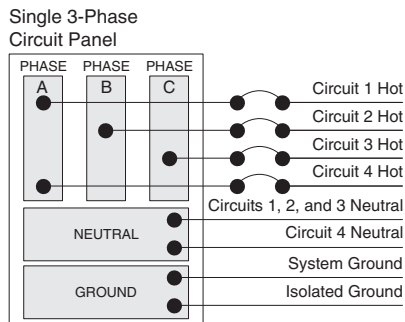


On a single 3-phase circuit panel, all four circuits are distributed as shown.


Four-Circuit, 2+2

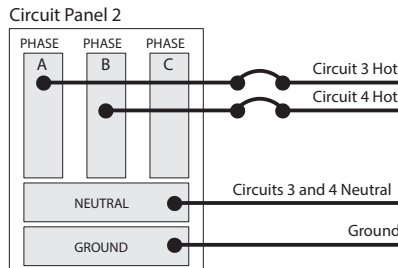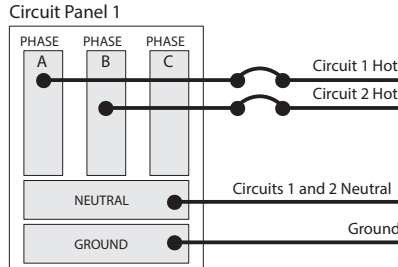

In the four-circuit 2+2 schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel and are supported with one shared neutral and one shared ground. Circuits 3 and 4 are distributed from a second circuit panel and supported by their own shared neutral and ground.


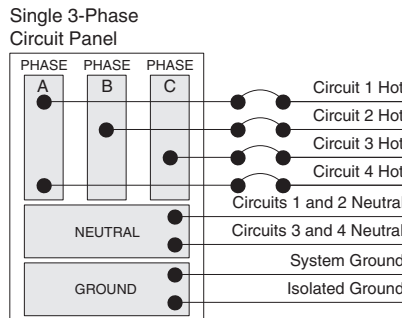


On a single 3-phase circuit panel, all four circuits are distributed as shown.

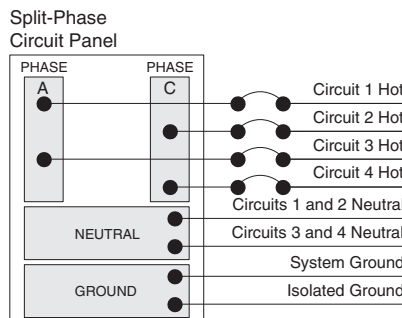


On a split-phase circuit panel, all four circuits are distributed as shown.


Three-Circuit, Separate Neutrals

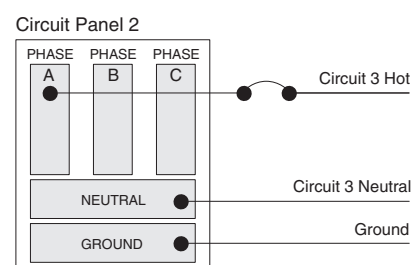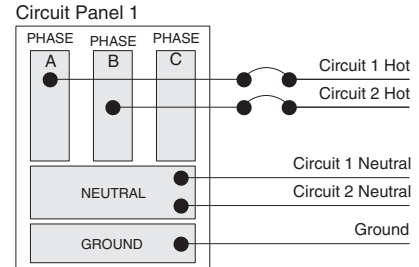

In the three-circuit, separate neutral schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel. Each circuit is supported with its own neutral and a common ground. Circuit 3 is distributed from the second circuit panel and is supported by its own neutral and ground.

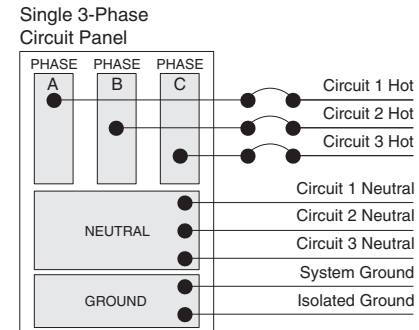

On a single 3-phase circuit panel, three circuits are distributed as shown.

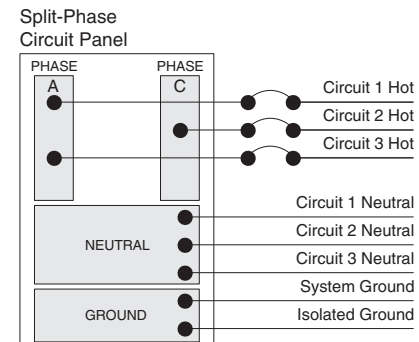

On a split-phase circuit panel, three circuits are distributed as shown.

How to Calculate Power Needs

Use This to Determine How Many Power-Ins You'll Need

How to Calculate
Power Needs

When planning a power network, you must calculate the amperage requirements of all your electrical components so you can provide sufficient electricity to power them.

If your usage is not known in advance:
The National Electrical Code (NEC) allows a maximum of 13 receptacles on each 20-amp circuit. This provides up to 30 receptacles for each 3-circuit power-in.

If your usage is known in advance:
Add up the amperage used by each piece of equipment in the workstation. Whenever you reach 60 amps (20 amps times 3 circuits) from items that are likely to be used at the same time, you have reached the limit for a single power-in. Specify another power-in and continue until all equipment is powered.

If the circuits will normally be subject to a continuous load (three or more hours of continuous use, such as lights or computers), the NEC requires that circuit capacity be "de-rated" by 20 percent. Therefore, treat circuits used for continuous loads as if they were rated at 16 amps instead of the regular 20 amps.

Try to anticipate future increases in power requirements and build some excess capacity into your plan.
▶ See table at right for typical and actual amperage usages for components.

To calculate amperage when the wattage of a device is known, divide watts by 120.

Some appliances, such as large copiers, coffee makers, or space heaters require most of the current available on a 20-amp circuit. It is recommended that such devices be supplied with their own receptacle/circuit, directly from the building. This leaves the capacity of the furniture circuits available for the more dynamic requirements of the office equipment.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper planning of electrical circuits in your locale.

Approximate power consumption for common devices

• Device	• Wattage	• Amperage	• Voltage	• Number of Devices Supported on Single 20 Amp Circuit*
Laptop	90	0.8	110	20
CPU/Desktop Computer	120	1.1	110	15
Monitor	60	0.5	110	29
Phone	5	0.0	110	352
High Power Tablet (e.g. Surface Pro)	40	0.4	110	44
Low Power Tablet (e.g. iPad Air)	15	0.1	110	117
Desktop Printer	40	0.4	110	44
42" LCD Screen	210	1.9	110	8
DVD Player	25	0.2	110	70
Projector	175	1.6	110	10
Desktop Lamp	19	0.2	110	93
Large Printer/Copier (high)	1900	17.3	110	1
Large Printer/Copier (low)	850	7.7	110	2
Paper Shredder	360	3.3	110	5
Desktop Fan	20	0.2	110	88
Standing Fan	180	1.6	110	10
Coffee Maker (high)	1200	10.9	110	1
Coffee Maker (low)	600	5.5	110	3
Microwave (high)	400	13.6	110	1
Microwave (low)	150	5.5	110	3
Refrigerator (high)	1500	3.6	110	4
Refrigerator (low)	200	1.4	110	12
Vacuum (high)	1500	13.6	110	1
Vacuum (low)	200	1.8	110	9
Space Heater (high)	1500	13.6	110	1
Space Heater (low)	750	6.8	110	2


Tip: These calculations are estimations and are meant solely for informational purposes. It is important to conduct proper power planning for each installation to prevent overloading a circuit.

Field-Installed Modular Harness Length Guidelines

Modular harnesses

allow power to be extended from one power block to another. Use the guidelines on this page to determine harness length.


► Page 102



Tip: For field-installed ADA-to-desk connections, order desk-height to ADA-height jumper.






Tip: Harnesses stretch 3". For example, a 33" harness will allow for a 33" to 36" connection.

Tip: When two powered panels are separated by a third panel, calculate the harness length by adding the result of these tables plus the width of the third (middle) panel.



Tip: Power is located in the center of a panel except in Glass Selections frame kits, where the center of the power is located 12" from the panel edge. All GS frame kits connect with the same size harnesses, regardless of width.

GS = Glass Selections



Desk or ADA to Base within Same Panel

Panel 24"W	30"W	36"W	40"W	42"W	48"W	60"W
N.A.	62"	62"	76"	74"	74"	86"

Desk to Base for Two Adjacent Panels

Panel B	Panel A 24"W	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	N.A.	62"	62"	74"	74"	74"	86"
30"W	N.A.	62"	62"	74"	74"	74"	86"
36"W	N.A.	62"	62"	74"	74"	74"	86"
40"W	N.A.	62"	62"	74"	74"	74"	86"
42"W	N.A.	62"	62"	74"	74"	74"	86"
48"W	N.A.	62"	62"	74"	74"	86"	86"
60"W	N.A.	62"	62"	74"	74"	86"	86"

ADA to Base for Two Adjacent Panels

Panel B	Panel A 24"W	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	N.A.	62"	62"	74"	74"	74"	86"
30"W	N.A.	62"	62"	74"	74"	74"	86"
36"W	N.A.	62"	62"	74"	74"	74"	86"
40"W	N.A.	62"	62"	74"	74"	74"	86"
42"W	N.A.	62"	62"	74"	74"	74"	86"
48"W	N.A.	62"	62"	74"	74"	86"	86"
60"W	N.A.	62"	62"	74"	74"	86"	86"

Base to Base for Two Adjacent Panels

Panel B	Panel A GS Frame Kit	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	16"	21"	21"	25"	25"	29"	33"
30"W	21"	21"	25"	29"	29"	33"	37"
36"W	21"	25"	29"	29"	33"	33"	41"
40"W	25"	29"	29"	33"	33"	37"	41"
42"W	25"	29"	33"	33"	33"	37"	46"
48"W	29"	33"	33"	37"	37"	41"	46"
60"W	33"	37"	41"	41"	46"	46"	54"

Base to Base for Two Adjacent Panels Separated by a Post

Panel B	Panel A GS Frame Kit	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	21"	21"	25"	29"	29"	33"	37"
30"W	21"	25"	29"	29"	33"	33"	41"
36"W	25"	29"	33"	33"	33"	37"	46"
40"W	29"	29"	33"	37"	37"	41"	46"
42"W	29"	33"	33"	37"	37"	41"	46"
48"W	33"	33"	37"	41"	41"	46"	50"
60"W	37"	41"	46"	46"	46"	50"	54"

Specifying Privacy Wall

Privacy Wall

Solid Wall Panels with Hollow Core	110
All-Glass Wall Panels	116
Glass Wall Panels with Three Equal Divided Lites	120
Glass Wall Panels with Four Equal Divided Lites	124
Glass Wall Panels with Four Divided Lites	128
Glass Wall Panels with Two Divided Lites	132
Clerestory Wall Panels	136
Power Options	140
Butt-Hinged Door Frames	142
Pivot-Hinged Door Frames	144
Pivot-Hinged Door Frames with Switch Cutout	146
Full-Height Butt-Hinged Door Leaves	148
Transom-Height Butt-Hinged Door Leaves	150
Full-Height Pivot-Hinged Door Leaves	152
Transom-Height Pivot-Hinged Door Leaves	154
Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	156
Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	158
Hardware and Accessories for Swing Doors	160
Privacy Wall Slider Doors with Tubular Pull	168
Back-to-Back Cover	179
Mini Ends, Wall Channels, Adapters, and Posts	180
I-Line Interface Post	190

Glass Selections

Glass Selections All-Glass Wall Panels	192
Glass Selections All-Glass Frame Kits	194
Glass Selections All-Glass Glass Kits	196
Glass Selections Wall Panels with Two Divided Lites	198
Glass Selections Two Divided Lite Frame Kits	202
Glass Selections Two Divided Lite Glass Kits	204
Glass Selections Clerestory Wall Panels	206
Glass Selections Pivot-Hinged Door Frames	210
Glass Selections Full-Height Butt-Hinged Door Frames	212
Glass Selections Full-Height Pivot-Hinged Door Leaves	214
Glass Selections Transom-Height Pivot-Hinged Door Leaves	216


Glass Selections, continued

Glass Selections Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	218
Glass Selections Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	220
Glass Selections Butt-Hinged Door Leaf	222
Glass Selections Full-Height Polished Edge Slider Doors with Close-Assist	224
Glass Selections Transom-Height Polished Edge Slider Doors with Close-Assist	228
Glass Selections Polished Edge Slider Door Vertical Seal for Use with GS Slider Door	231
Glass Selections Mini Ends	232
Glass Selections Transitions	234

Miscellaneous

Ceiling Tracks	240
Cornice Track and Brackets	245
Trim and Accessories	246
Load Bar	255
Accessories	256
Wiring and Cabling	257

Solid Wall Panels with Hollow Core



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Paint price group 2 is only available on panels 36"W or smaller.

Tip: Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity.

Standard Includes		Required to Specify	
► Need help? Product details, page 18	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel surfaces: paint Integral slotted verticals Hollow core panel for cable and power routing Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	1 Style number 2 Ceiling height 3 Paint color number for side 1 4 Paint color number for side 2 5 Post extension 6 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	
Options		U.S. Price	
Surface Materials	Panel surfaces 8'0"H through 10'0"H (per side) 6"W to 30"W		Required to Specify
	<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 5 Customer's Own Material/Vinyl (COM) 	No cost +\$ 26 +\$ 45 +\$246 +\$336 +\$425 +\$521 +\$240	Specify paint color number for side 1 and/or side 2. Specify paint color number for side 1 and/or side 2. Specify paint color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. ► See <i>Surface Materials Reference Manual</i> .
	Panel surfaces 8'0"H through 10'0"H (per side) 36"W to 60"W		
	<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 5 Customer's Own Material/Vinyl (COM) 	No cost +\$ 45 +\$ 66 +\$334 +\$487 +\$716 +\$912 +\$312	Specify paint color number for side 1 and/or side 2. Specify paint color number for side 1 and/or side 2. Specify paint color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. Specify fabric color number for side 1 and/or side 2. ► See <i>Surface Materials Reference Manual</i> .
Post Extension	<ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$141	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.

► Options, continued on next page



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ► See page 1 for details.

► Options, continued from previous page

Tip: To price power in two locations, add the upcharges together.

Tip: Infeed is included in price of ADA- or desk-height receptacle power location option. Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: NYC/CHI prices replace the receptacle power location option prices when selected.

Tip: Order power and communication and power-only cover plates separately.

Tip: Panels that are less than 24"W are not factory punched for infeeds.

Options	U.S. Price	Required to Specify
Electrical Power (for panels 30"W through 60"W)		
Power block locations		
• Base	+\$ 306	Specify with power block location at base.
• ADA height	+\$1116	Specify with power block location at ADA height.
• Desk height	+\$1116	Specify with power block location at desk height.
New York City/Chicago Power Prep		
• NYC/CHI side 1	+\$ 37	Specify with NYC/CHI side 1.
• NYC/CHI side 2	+\$ 37	Specify with NYC/CHI side 2.
• NYC/CHI sides 1 and 2	+\$ 77	Specify with NYC/CHI sides 1 and 2.
Receptacle cutouts		
• Power side 1	No cost	Specify with power side 1.
• Power side 2	No cost	Specify with power side 2.
• Power sides 1 and 2	+\$ 37	Specify with power sides 1 and 2.
• Power/comm side 1	No cost	Specify with power/comm side 1.
• Power/comm side 2	No cost	Specify with power/comm side 2.
• Power/comm sides 1 and 2	+\$ 37	Specify with power/comm sides 1 and 2.
Power schematic		
• 3+1	No cost	Specify with 3+1 power.
• 2+2	No cost	Specify with 2+2 power.
• 3SN	No cost	Specify with 3SN power.
Ceiling infeeds		
• Top left hardwire	No cost	Specify with top left hardwire.
• Top left modular	+\$ 130	Specify with top left modular.
Floor infeeds		
• Bottom left hardwire	No cost	Specify with bottom left hardwire.
• Bottom left modular	+\$ 130	Specify with bottom left modular.
Related Products		
• Ceiling tracks		► Page 240
• Continuous base trim		► Page 246
• Feature strips		► Page 250
• Power receptacles		► Page 257
• Power and communication cover plates		► Page 241
• Infeeds		► Page 260
• Modular harnesses		► Page 241
• Field-installed powerkits		► Page 264
• Cornice track		► Page 245

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W or 120" in height.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

SmartTools Options	U.S. Price	Required to Specify
7610 White Markerboard Surface		
• 6"W through 24"W	+\$ 657	Specify with markerboard.
• 25"W through 36"W	+\$ 704	Specify with markerboard.
• 37"W through 48"W	+\$ 754	Specify with markerboard.
Parametric Ceiling Height (Available in 1" increments)		
• 7'5" through 7'11"	No cost	Specify ceiling height in 1" increments.
• 10'1" through 11'0"	+\$ 220	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)		
• Non standard widths	No cost	Specify panel widths in 1" increments.
• Non standard modular widths	No cost	Specify panel widths in 1" increments.
Base		
• 4"H base	+\$ 84	Specify to accept 4"H base.


► Specification Information, on next page

Solid Wall Panels with Hollow Core, continued

► Options, on previous page

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Solid Wall Panels			Modular Solid Wall Panels			
6"	GPSS06	\$1296				
8"	GPSS08	\$1296	8"	6 ¹¹ / ₁₆ "	GPSM08	\$1296
18"	GPSS18	\$1393	18"	16 ¹¹ / ₁₆ "	GPSM18	\$1393
20"	GPSS20	\$1393	20"	18 ¹¹ / ₁₆ "	GPSM20	\$1393
24"	GPSS24	\$1482	24"	22 ¹¹ / ₁₆ "	GPSM24	\$1482
30"	GPSS30	\$1555	30"	28 ¹¹ / ₁₆ "	GPSM30	\$1555
36"	GPSS36	\$1599	36"	34 ¹¹ / ₁₆ "	GPSM36	\$1599
40"	GPSS40	\$1662	40"	38 ¹¹ / ₁₆ "	GPSM40	\$1662
42"	GPSS42	\$1662	42"	40 ¹¹ / ₁₆ "	GPSM42	\$1662
48"	GPSS48	\$1716	48"	46 ¹¹ / ₁₆ "	GPSM48	\$1716
60"	GPSS60	\$2224	60"	58 ¹¹ / ₁₆ "	GPSM60	\$2224
:	:	:	:	:	:	:



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Solid Wall Panels with Enhanced Core



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Paint price group 2 is only available on panels 36"W or smaller.

Tip: Enhanced core panels are intended for use with overlapping ceiling track in order to maximize their acoustical properties.

Tip: Multipurpose infeeds are ordered separately, and route through the floor, adjacent posts, mini ends, or door frames.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 18</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel surfaces: paint Integral slotted verticals Insulated core for improved acoustical performance Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) Post extension for overlapping ceiling track 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for side 1 Paint color number for side 2 Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials		
Panel surfaces 8'0"H through 10'0"H (per side) 6"W to 30"W		
• Paint price group 1	No cost	Specify paint color number for side 1 and/or side 2.
• Paint price group 2	+\$ 26	Specify paint color number for side 1 and/or side 2.
• Paint price group 3	+\$ 45	Specify paint color number for side 1 and/or side 2.
• Fabric price group 1	+\$246	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$336	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$425	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$521	Specify fabric color number for side 1 and/or side 2.
• Customer's Own Material/ Vinyl (COM)	+\$240	► See <i>Surface Materials Reference Manual</i> .
Panel surfaces 8'0"H through 10'0"H (per side) 36"W to 48"W		
• Paint price group 1	No cost	Specify paint color number for side 1 and/or side 2.
• Paint price group 2	+\$ 45	Specify paint color number for side 1 and/or side 2.
• Paint price group 3	+\$ 66	Specify paint color number for side 1 and/or side 2.
• Fabric price group 1	+\$334	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$487	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$716	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$912	Specify fabric color number for side 1 and/or side 2.
• Customer's Own Material/ Vinyl (COM)	+\$312	► See <i>Surface Materials Reference Manual</i> .
Ceiling Height		
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
• 9'1" through 10'0"	+\$141	Specify ceiling height in 1" increments.
Electrical Power (for panels 30"W through 60"W)		
Power block locations		
• Base	+\$306	Specify with power block location at base.
Power schematic		
• 3+1	No cost	Specify with 3+1 power.
• 2+2	No cost	Specify with 2+2 power.
• 3SN	No cost	Specify with 3SN power.
Related Products		
• Ceiling tracks		► Page 240
• Continuous base trim		► Page 246
• Feature strips		► Page 250
• Power receptacles		► Page 257
• Infeeds		► Page 260
• Modular harnesses		► Page 241
• Field-installed powerkits		► Page 264
• Cornice track		► Page 245


► Options, continued on next page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W or 120" in height.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.




► Options, continued from previous page

SmartTools Options		U.S. Price	Required to Specify
7610 White Markerboard Surface	• 6"W through 24"W	+\$657	Specify <i>with markerboard</i> .
	• 25"W through 36"W	+\$704	Specify <i>with markerboard</i> .
	• 37"W through 48"W	+\$754	Specify <i>with markerboard</i> .
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	No cost	Specify ceiling height in 1" increments.
	• 10'1" through 11'0"	+\$220	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	No cost	Specify panel widths in 1" increments.
	• Non standard modular widths	No cost	Specify panel widths in 1" increments.
Base	• 4"H base	+\$ 84	Specify to accept 4"H base.

Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Solid Wall Panels with Enhanced Core			Modular Solid Wall Panels with Enhanced Core			
6"	GPSAS06	\$1369				
8"	GPSAS08	\$1369	8"	61 ¹ / ₁₆ "	GPSAM08	\$1369
18"	GPSAS18	\$1467	18"	16 ¹ / ₁₆ "	GPSAM18	\$1467
20"	GPSAS20	\$1562	20"	18 ¹ / ₁₆ "	GPSAM20	\$1562
24"	GPSAS24	\$1562	24"	22 ¹ / ₁₆ "	GPSAM24	\$1562
30"	GPSAS30	\$1638	30"	28 ¹ / ₁₆ "	GPSAM30	\$1638
36"	GPSAS36	\$1690	36"	34 ¹ / ₁₆ "	GPSAM36	\$1690
40"	GPSAS40	\$1752	40"	38 ¹ / ₁₆ "	GPSAM40	\$1752
42"	GPSAS42	\$1752	42"	40 ¹ / ₁₆ "	GPSAM42	\$1752
48"	GPSAS48	\$1808	48"	46 ¹ / ₁₆ "	GPSAM48	\$1808
:	:	:	:	:	:	:

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

All-Glass Wall Panels



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify
► Need help? Product details, page 24	<ul style="list-style-type: none">• Ceiling height from 8'0"H to 10'0"H, in one-inch increments• 2³/₈"-thick panel with steel frame: paint• 1/4"-thick factory-installed lite: glass• Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)	<ul style="list-style-type: none">1 Style number2 Ceiling height3 Paint color number for frame4 Glass number for lite5 Post extension6 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.

Options	U.S. Price	Required to Specify
Surface Materials		
Glass frame surface		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 41	Specify paint color number.
• Paint price group 3	+\$ 72	Specify paint color number.
Panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 146	Specify glass number for lite.
• Glass price group 3	+\$ 180	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$ 776	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 446	Specify glass number for lite.
• Glass price group 3	+\$ 535	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$2330	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 669	Specify glass number for lite.
• Glass price group 3	+\$ 798	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$3497	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 894	Specify glass number for lite.
• Glass price group 3	+\$1059	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$4660	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 60"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$1114	Specify glass number for lite.
• Glass price group 3	+\$1324	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$5825	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

► Options, continued on next page

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify <i>with post extensions for recessed ceiling track interface</i> .
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify <i>with post extensions for overlapping ceiling track interface</i> .
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$141	Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1	+\$306	Specify <i>with 3+1 power</i> .
	• 2+2	+\$306	Specify <i>with 2+2 power</i> .
	• 3SN	+\$306	Specify <i>with 3SN power</i> .
Related Products	• Ceiling tracks		► Page 240
	• Continuous base trim		► Page 246
	• Feature strips		► Page 250
	• Power receptacles		► Page 257
	• Power and communication cover plates		► Page 241
	• Infeeds		► Page 260
	• Modular harnesses		► Page 241
	• Field-installed powerkits		► Page 264
	• Cornice track		► Page 245

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
	• 10'1" through 11'0"	+\$220	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	No cost	Specify panel widths in 1" increments.
	• Non standard modular widths	No cost	Specify panel widths in 1" increments.
Base	• 4"H base	+\$307	Specify to accept 4"H base.

► Specification Information, on next page

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

All-Glass Wall Panels, continued

► Options, on previous page

Specification Information


Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
All-Glass Wall Panels			Modular All-Glass Wall Panels			
6"	GPGS06	\$ 883				
8"	GPGS08	\$ 883	8"	6 ¹¹ / ₁₆ "	GPGM08	\$ 883
18"	GPGS18	\$ 979	18"	16 ¹¹ / ₁₆ "	GPGM18	\$ 979
20"	GPGS20	\$ 979	20"	18 ¹¹ / ₁₆ "	GPGM20	\$ 979
24"	GPGS24	\$1074	24"	22 ¹¹ / ₁₆ "	GPGM24	\$1074
30"	GPGS30	\$1090	30"	28 ¹¹ / ₁₆ "	GPGM30	\$1090
36"	GPGS36	\$1234	36"	34 ¹¹ / ₁₆ "	GPGM36	\$1234
40"	GPGS40	\$1249	40"	38 ¹¹ / ₁₆ "	GPGM40	\$1249
42"	GPGS42	\$1249	42"	40 ¹¹ / ₁₆ "	GPGM42	\$1249
48"	GPGS48	\$1395	48"	46 ¹¹ / ₁₆ "	GPGM48	\$1395
60"	GPGS60	\$1791	60"	58 ¹¹ / ₁₆ "	GPGM60	\$1791
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Three Equal Divided Lites



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 24</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel frame: paint Three, 1/4"-thick factory-installed lites: glass Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for frame and muntin Glass number for lite 1 (from top) Glass number for lite 2 Glass number for lite 3 Post extension Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface <ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 2 +\$ 41 Paint price group 3 +\$ 72 	Specify paint color number. Specify paint color number. Specify paint color number.
Panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 51 Glass price group 3 +\$ 62 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$ 259 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
Panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 146 Glass price group 3 +\$ 180 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$ 777 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
Panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 225 Glass price group 3 +\$ 263 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$1164 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
Panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 300 Glass price group 3 +\$ 358 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$1553 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
Panel surfaces 8'0"H through 10'0"H (per lite), 60"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 372 Glass price group 3 +\$ 443 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$1940 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .

► Options, continued on next page



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$141	Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1	+\$306	Specify with 3+1 power.
	• 2+2	+\$306	Specify with 2+2 power.
	• 3SN	+\$306	Specify with 3SN power.
Related Products	<ul style="list-style-type: none"> • Ceiling tracks • Continuous base trim • Feature strips • Acoustic packing • Power receptacles • Power and communication cover plates • Infeeds • Modular harnesses • Field-installed powerkits • Cornice track 		
	<ul style="list-style-type: none"> ► Page 240 ► Page 246 ► Page 250 ► Page 254 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264 ► Page 245 		

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Muntin	Change muntin size		
	• Change to 1½"H or 2¼"H	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
	• 10'1" through 11'0"	+\$220	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	No cost	Specify panel widths in 1" increments.
	• Non standard modular widths	No cost	Specify panel widths in 1" increments.
Base	• 4"H base	+\$307	Specify to accept 4"H base.

► Specification Information, on next page


 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Glass Wall Panels with Three Equal Divided Lites, continued

► Options, on previous page

Specification Information


Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS3E06	\$1294				
8"	GPGS3E08	\$1294	8"	6 ¹¹ / ₁₆ "	GPGM3E08	\$1294
18"	GPGS3E18	\$1360	18"	16 ¹¹ / ₁₆ "	GPGM3E18	\$1360
20"	GPGS3E20	\$1360	20"	18 ¹¹ / ₁₆ "	GPGM3E20	\$1360
24"	GPGS3E24	\$1424	24"	22 ¹¹ / ₁₆ "	GPGM3E24	\$1424
30"	GPGS3E30	\$1438	30"	28 ¹¹ / ₁₆ "	GPGM3E30	\$1438
36"	GPGS3E36	\$1528	36"	34 ¹¹ / ₁₆ "	GPGM3E36	\$1528
40"	GPGS3E40	\$1541	40"	38 ¹¹ / ₁₆ "	GPGM3E40	\$1541
42"	GPGS3E42	\$1541	42"	40 ¹¹ / ₁₆ "	GPGM3E42	\$1541
48"	GPGS3E48	\$1638	48"	46 ¹¹ / ₁₆ "	GPGM3E48	\$1638
60"	GPGS3E60	\$2007	60"	58 ¹¹ / ₁₆ "	GPGM3E60	\$2007
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Four Equal Divided Lites



Tip: Order ceiling track, feature strip, and continuous base trim separately.

	Standard Includes	Required to Specify
► Need help? Product details, page 24	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel frame: paint Four, 1/4"-thick factory-installed lites: glass Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	1 Style number 2 Ceiling height 3 Paint color number for frame and muntin 4 Glass number for lite 1 (from top) 5 Glass number for lite 2 6 Glass number for lite 3 7 Glass number for lite 4 8 Post extension 9 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.

	Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$ 41 +\$ 72	Specify paint color number. Specify paint color number. Specify paint color number.
	Panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 36 +\$ 47 N.A. N.A. N.A. +\$ 196	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		
	Panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 111 +\$ 134 N.A. N.A. N.A. +\$ 584	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		
	Panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 169 +\$ 201 N.A. N.A. N.A. +\$ 874	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		
	Panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 225 +\$ 263 N.A. N.A. N.A. +\$1164	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		
	Panel surfaces 8'0"H through 10'0"H (per lite), 60"W		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 280 +\$ 331 N.A. N.A. N.A. +\$1457	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		

► Options, continued on next page



For Canadian Pricing
 Multiply U.S. Price by the
 Canadian price factor.
 ► See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify <i>with post extensions for recessed ceiling track interface</i> .
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify <i>with post extensions for overlapping ceiling track interface</i> .
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$141	Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1	+\$306	Specify <i>with 3+1 power</i> .
	• 2+2	+\$306	Specify <i>with 2+2 power</i> .
	• 3SN	+\$306	Specify <i>with 3SN power</i> .
Related Products	• Ceiling tracks		► Page 240
	• Continuous base trim		► Page 246
	• Feature strips		► Page 250
	• Power receptacles		► Page 257
	• Power and communication cover plates		► Page 241
	• Infeeds		► Page 260
	• Modular harnesses		► Page 241
	• Field-installed powerkits		► Page 264
	• Cornice track		► Page 245

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass for 5th and 6th lite opening		
	• See standard options for glass price group above		Specify glass number for lite 5 or 6.
Muntin	Additional muntin		
	• Muntin	+\$239	Specify <i>with muntin</i> .
	Change muntin size		
	• Change to 1½"H or 2¼"H	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
	• 10'1" through 11'0"	+\$220	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	No cost	Specify panel widths in 1" increments.
	• Non standard modular widths	No cost	Specify panel widths in 1" increments.
Base	• 4"H base	+\$307	Specify to accept 4"H base.

► Specification Information, on next page

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.


► See page 1 for details.

Glass Wall Panels with Four Equal Divided Lites, continued

► Options, on previous page

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS4E06	\$1386				
8"	GPGS4E08	\$1386	8"	6 ¹¹ / ₁₆ "	GPGM4E08	\$1386
18"	GPGS4E18	\$1457	18"	16 ¹¹ / ₁₆ "	GPGM4E18	\$1457
20"	GPGS4E20	\$1457	20"	18 ¹¹ / ₁₆ "	GPGM4E20	\$1457
24"	GPGS4E24	\$1527	24"	22 ¹¹ / ₁₆ "	GPGM4E24	\$1527
30"	GPGS4E30	\$1540	30"	28 ¹¹ / ₁₆ "	GPGM4E30	\$1540
36"	GPGS4E36	\$1642	36"	34 ¹¹ / ₁₆ "	GPGM4E36	\$1642
40"	GPGS4E40	\$1656	40"	38 ¹¹ / ₁₆ "	GPGM4E40	\$1656
42"	GPGS4E42	\$1656	42"	40 ¹¹ / ₁₆ "	GPGM4E42	\$1656
48"	GPGS4E48	\$1757	48"	46 ¹¹ / ₁₆ "	GPGM4E48	\$1757
60"	GPGS4E60	\$2156	60"	58 ¹¹ / ₁₆ "	GPGM4E60	\$2156
⋮	⋮	⋮	⋮	⋮	⋮	⋮


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Four Divided Lites

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify	
► Need help? Product details, page 24	<ul style="list-style-type: none">Ceiling height from 8'0"H to 10'0"H, in one-inch increments2³/₈"-thick panel with steel frame: paintFour, 1/4"-thick factory-installed lites—top lite is transom aligned, bottom three are of equal height: glassFloor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		<ul style="list-style-type: none">1 Style number2 Ceiling height3 Paint color number for frame and muntin4 Glass number for lite 1 (from top)5 Glass number for lite 26 Glass number for lite 37 Glass number for lite 48 Post extension9 Options, if selected (see below)
	► See <i>Surface Materials</i> , page 362.		
Options		U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 41	Specify paint color number.
	• Paint price group 3	+\$ 72	Specify paint color number.
	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 25	Specify glass number for lite.
	• Glass price group 3	+\$ 34	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$137	Specify glass number for lite.	
► See <i>Surface Materials Reference Manual</i> .			
Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 41	Specify glass number for lite.	
• Glass price group 3	+\$ 51	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$206	Specify glass number for lite.	
► See <i>Surface Materials Reference Manual</i> .			
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 81	Specify glass number for lite.	
• Glass price group 3	+\$ 97	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$412	Specify glass number for lite.	
► See <i>Surface Materials Reference Manual</i> .			
Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$122	Specify glass number for lite.	
• Glass price group 3	+\$144	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$617	Specify glass number for lite.	
► See <i>Surface Materials Reference Manual</i> .			
► Options, continued on next page			



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

Options		U.S. Price	Required to Specify
Surface Materials, continued	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 119	Specify glass number for lite.
	• Glass price group 3	+\$ 140	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$ 617	Specify glass number for lite.
	▶ See Surface Materials Reference Manual.		
	Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 183	Specify glass number for lite.	
• Glass price group 3	+\$ 218	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$ 925	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 159	Specify glass number for lite.	
• Glass price group 3	+\$ 190	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$ 822	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 239	Specify glass number for lite.	
• Glass price group 3	+\$ 289	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$1235	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 60"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 201	Specify glass number for lite.	
• Glass price group 3	+\$ 237	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$1028	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 60"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 303	Specify glass number for lite.	
• Glass price group 3	+\$ 360	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$1541	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued on next page

Glass Wall Panels with Four Divided Lites Transom-Aligned Top Lite, continued

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$141	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic <ul style="list-style-type: none"> 3+1 2+2 3SN 	+\$306 +\$306 +\$306	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	<ul style="list-style-type: none"> Ceiling tracks Continuous base trim Feature strips Power receptacles Power and communication cover plates Infeeds Modular harnesses Field-installed powerkits Cornice track 		<ul style="list-style-type: none"> ► Page 240 ► Page 246 ► Page 250 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264 ► Page 245

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Specify additional muntin(s) for use in five- or six-lite assembly applications. Maximum of six lites. ► See Understanding page 30.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".


Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass for 5th and 6th lite opening <ul style="list-style-type: none"> See standard options for lower three lites glass price group above 		Specify glass number for lite 5 or 6.
Muntin	Additional muntin <ul style="list-style-type: none"> Muntin 	+\$239	Specify with muntin.
	Change muntin size <ul style="list-style-type: none"> Change to 1½"H or 2¼"H 	No cost	Specify muntin size.
	Change muntin location <ul style="list-style-type: none"> Change muntin location 	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 7'5" through 7'11" 10'1" through 11'0" 	Use 8'0" price +\$220	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	<ul style="list-style-type: none"> Non standard widths Non standard modular widths 	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	<ul style="list-style-type: none"> 4"H base 	+\$307	Specify to accept 4"H base.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.



Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS4L06	\$1305				
8"	GPGS4L08	\$1305	8"	6 ¹¹ / ₁₆ "	GPGM4L08	\$1305
18"	GPGS4L18	\$1372	18"	16 ¹¹ / ₁₆ "	GPGM4L18	\$1372
20"	GPGS4L20	\$1372	20"	18 ¹¹ / ₁₆ "	GPGM4L20	\$1372
24"	GPGS4L24	\$1439	24"	22 ¹¹ / ₁₆ "	GPGM4L24	\$1439
30"	GPGS4L30	\$1450	30"	28 ¹¹ / ₁₆ "	GPGM4L30	\$1450
36"	GPGS4L36	\$1542	36"	34 ¹¹ / ₁₆ "	GPGM4L36	\$1542
40"	GPGS4L40	\$1559	40"	38 ¹¹ / ₁₆ "	GPGM4L40	\$1559
42"	GPGS4L42	\$1559	42"	40 ¹¹ / ₁₆ "	GPGM4L42	\$1559
48"	GPGS4L48	\$1655	48"	46 ¹¹ / ₁₆ "	GPGM4L48	\$1655
60"	GPGS4L60	\$2028	60"	58 ¹¹ / ₁₆ "	GPGM4L60	\$2028
.

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Two Divided Lites

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify
► Need help? Product details, page 24	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel frame: paint Two, 1/4"-thick factory-installed lites—top lite is transom aligned: glass Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	1 Style number 2 Ceiling height 3 Paint color number for frame and muntin 4 Glass number for lite 1 (from top) 5 Glass number for lite 2 6 Post extension 7 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 41	Specify paint color number.
• Paint price group 3	+\$ 72	Specify paint color number.
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 25	Specify glass number for lite.
• Glass price group 3	+\$ 34	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$ 137	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 122	Specify glass number for lite.
• Glass price group 3	+\$ 144	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$ 640	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 81	Specify glass number for lite.
• Glass price group 3	+\$ 97	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$ 412	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 362	Specify glass number for lite.
• Glass price group 3	+\$ 429	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$1919	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Surface Materials, continued	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 119	Specify glass number for lite.
	• Glass price group 3	+\$ 140	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$ 617	Specify glass number for lite.
	▶ See Surface Materials Reference Manual.		
	Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 542	Specify glass number for lite.	
• Glass price group 3	+\$ 645	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$2880	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 159	Specify glass number for lite.	
• Glass price group 3	+\$ 190	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$ 822	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 720	Specify glass number for lite.	
• Glass price group 3	+\$ 860	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$3837	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 60"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 201	Specify glass number for lite.	
• Glass price group 3	+\$ 237	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$1028	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 60"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 899	Specify glass number for lite.	
• Glass price group 3	+\$1075	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$4799	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued on next page

Glass Wall Panels with Two Divided Lites Transom-Aligned Top Lite, continued

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$141	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic <ul style="list-style-type: none"> 3+1 2+2 3SN 	+\$306 +\$306 +\$306	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	<ul style="list-style-type: none"> Ceiling tracks Continuous base trim Feature strips Power receptacles Power and communication cover plates Infeeds Modular harnesses Field-installed powerkits Cornice track 		<ul style="list-style-type: none"> ► Page 240 ► Page 246 ► Page 250 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264 ► Page 245

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".


Tip: Panels for ceiling height of 10'1" to 11' are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Muntin	Change muntin size <ul style="list-style-type: none"> Change to 1½"H or 2¼"H 	No cost	Specify muntin size.
	Change muntin location <ul style="list-style-type: none"> Change muntin location 	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 7'5" through 7'11" 10'1" through 11'0" 	Use 8'0" price +\$220	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	<ul style="list-style-type: none"> Non standard widths Non standard modular widths 	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	<ul style="list-style-type: none"> 4"H base 	+\$307	Specify to accept 4"H base.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.



Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS2L06	\$1061				
8"	GPGS2L08	\$1061	8"	6 ¹¹ / ₁₆ "	GPGM2L08	\$1061
18"	GPGS2L18	\$1143	18"	16 ¹¹ / ₁₆ "	GPGM2L18	\$1143
20"	GPGS2L20	\$1143	20"	18 ¹¹ / ₁₆ "	GPGM2L20	\$1143
24"	GPGS2L24	\$1226	24"	22 ¹¹ / ₁₆ "	GPGM2L24	\$1226
30"	GPGS2L30	\$1249	30"	28 ¹¹ / ₁₆ "	GPGM2L30	\$1249
36"	GPGS2L36	\$1365	36"	34 ¹¹ / ₁₆ "	GPGM2L36	\$1365
40"	GPGS2L40	\$1379	40"	38 ¹¹ / ₁₆ "	GPGM2L40	\$1379
42"	GPGS2L42	\$1379	42"	40 ¹¹ / ₁₆ "	GPGM2L42	\$1379
48"	GPGS2L48	\$1502	48"	46 ¹¹ / ₁₆ "	GPGM2L48	\$1502
60"	GPGS2L60	\$1896	60"	58 ¹¹ / ₁₆ "	GPGM2L60	\$1896
.


**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Clerestory Wall Panels

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Paint price group 2 is only available on panels 36"W or smaller.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Customer's Own Glass is available as a special at this time.

Standard Includes		Required to Specify
▶ Need help? Product details, page 24	<ul style="list-style-type: none"> Frame: paint Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel surfaces: paint 1/4"-thick factory-installed Clerestory lite: glass Integral slotted verticals Hollow core panel for cable and power routing Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	1 Style number 2 Paint color number for frame 3 Ceiling height 4 Paint color number for side 1 5 Paint color number for side 2 6 Glass number for Clerestory lite 7 Post extension 8 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.

Surface Materials	Options	U.S. Price	Required to Specify
	Glass frame surface		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 19	Specify paint color number.
	• Paint price group 3	+\$ 34	Specify paint color number.
	Lower panel solid surfaces 8'0"H through 10'0"H (per side), 18"W to 24"W		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 26	Specify paint color number.
	• Paint price group 3	+\$ 47	Specify paint color number.
	• Fabric price group 1	+\$202	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$284	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$375	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$475	Specify fabric color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$196	▶ See <i>Surface Materials Reference Manual</i> .
	Clerestory Lite Glass Panels 8'0"H through 10'0"H		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 81	Specify glass number for lite.
	• Glass price group 3	+\$ 97	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$412	Specify glass number for lite.
	Lower panel surfaces 8'0"H through 10'0"H (per side), 30"W to 36"W		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 53	Specify paint color number.
	• Paint price group 3	+\$ 82	Specify paint color number.
	• Fabric price group 1	+\$307	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$457	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$677	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$880	Specify fabric color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$284	▶ See <i>Surface Materials Reference Manual</i> .

▶ Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

► Options, continued from previous page

Options	U.S. Price	Required to Specify
Surface Materials, continued		
Materials Clerestory Lite Glass Panels 8'0"H through 10'0"H		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 119	Specify glass number for lite.
• Glass price group 3	+\$ 140	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$ 617	Specify glass number for lite.
Lower panel surfaces 8'0"H through 10'0"H (per side), 40"W to 48"W		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 82	Specify paint color number.
• Fabric price group 1	+\$ 307	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$ 457	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$ 677	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$ 880	Specify fabric color number for side 1 and/or side 2.
• Customer's Own Material/Vinyl (COM)	+\$ 284	► See <i>Surface Materials Reference Manual</i> .
Clerestory Lite Glass Panels 8'0"H through 10'0"H		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 159	Specify glass number for lite.
• Glass price group 3	+\$ 190	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$ 822	Specify glass number for lite.
Lower panel surfaces 8'0"H through 10'0"H (per side) 60"W		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 53	Specify paint color number.
• Paint price group 3	+\$ 82	Specify paint color number.
• Fabric price group 1	+\$ 307	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$ 457	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$ 677	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$ 880	Specify fabric color number for side 1 and/or side 2.
• Customer's Own Material/Vinyl (COM)	+\$ 284	► See <i>Surface Materials Reference Manual</i> .
Clerestory Lite Glass Panels 8'0"H through 10'0"H		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 201	Specify glass number for lite.
• Glass price group 3	+\$ 237	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$1028	Specify glass number for lite.

► Options, continued on next page

Tip: Customer's Own Glass is available as a special at this time.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Clerestory Wall Panels Transom-Aligned Top Lite, continued

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Post Extension (For panels 30"W through 60"W)	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 141	Specify ceiling height in 1" increments.
Electrical Power	Power block location		
	• Base	+\$ 306	Specify with power block location at base.
	• ADA height	+\$1116	Specify with power block location at ADA height.
	• Desk height	+\$1116	Specify with power block location at desk height.
	Power schematic		
	• 3+1	No cost	Specify with 3+1 power.
	• 2+2	No cost	Specify with 2+2 power.
	• 3SN	No cost	Specify with 3SN power.
	New York City/Chicago power prep		
	• NYC/CHI at base	N.A.	Specify with NYC/CHI at base.
	• NYC/CHI at ADA or desk height side 1	+\$ 37	Specify with NYC/CHI at ADA or desk height side 1.
	• NYC/CHI at ADA or desk height side 2	+\$ 37	Specify with NYC/CHI at ADA or desk height side 2.
	• NYC/CHI at ADA or desk height sides 1 and 2	+\$ 77	Specify with NYC/CHI at ADA or desk height sides 1 and 2.
	Receptacle cutouts		
	• Power side 1	No cost	Specify with power side 1.
	• Power side 2	No cost	Specify with power side 2.
	• Power sides 1 and 2	+\$ 37	Specify with power sides 1 and 2.
	• Power/comm side 1	No cost	Specify with power/comm side 1.
	• Power/comm side 2	No cost	Specify with power/comm side 2.
	• Power/comm sides 1 and 2	+\$ 37	Specify with power/comm sides 1 and 2.
	Floor infeeds		
	• Bottom left hardwire	No cost	Specify with bottom left hardwire.
	• Bottom left modular	+\$ 141	Specify with bottom left modular.
Related Products	• Ceiling tracks		► Page 240
	• Continuous base trim		► Page 246
	• Feature strips		► Page 250
	• Power receptacles		► Page 257
	• Power and communication cover plates		► Page 241
	• Infeeds		► Page 260
	• Modular harnesses		► Page 241
	• Field-installed powerkits		► Page 264
	• Cornice track		► Page 245

► Options, continued on next page

Tip: To price power in two locations, add the upcharges together.

Tip: Infeed is included in the price of ADA- or desk-height receptacle power location option.

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: NYC/CHI prices replace the receptacle power location option prices when selected.

Tip: Order power and communication and power-only cover plates separately.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W.

Tip: Maximum of two lites. See Understanding page 29.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

SmartTools Options		U.S. Price	Required to Specify
7610 White Markerboard Surface	<ul style="list-style-type: none"> 6"W through 24"W 25"W through 36"W 37"W through 48"W 	+\$657 +\$704 +\$754	Specify with markerboard. Specify with markerboard. Specify with markerboard.
Muntin	Add muntin <ul style="list-style-type: none"> Muntin 	+\$281	Specify with muntin.
	Muntin size <ul style="list-style-type: none"> Change to 1½"H or 2¼"H 	No cost	Specify muntin size.
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 10'1" through 11'0" 	+\$220	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	<ul style="list-style-type: none"> Non standard widths Non standard modular widths 	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	<ul style="list-style-type: none"> 4"H base 	+\$ 84	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Clerestory Panels			Modular Clerestory Panels			
18"	GPGSC18	\$1643	18"	16 ¹¹ / ₁₆ "	GPGMC18	\$1643
20"	GPGSC20	\$1643	20"	18 ¹¹ / ₁₆ "	GPGMC20	\$1643
24"	GPGSC24	\$1731	24"	22 ¹¹ / ₁₆ "	GPGMC24	\$1731
30"	GPGSC30	\$1820	30"	28 ¹¹ / ₁₆ "	GPGMC30	\$1820
36"	GPGSC36	\$1881	36"	34 ¹¹ / ₁₆ "	GPGMC36	\$1881
40"	GPGSC40	\$1938	40"	38 ¹¹ / ₁₆ "	GPGMC40	\$1938
42"	GPGSC42	\$1938	42"	40 ¹¹ / ₁₆ "	GPGMC42	\$1938
48"	GPGSC48	\$2005	48"	46 ¹¹ / ₁₆ "	GPGMC48	\$2005
60"	GPGSC60	\$2592	60"	58 ¹¹ / ₁₆ "	GPGMC60	\$2592
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Power Options

This page guides you through specifying Privacy Wall panels. Use these steps to specify factory-installed power components or communication openings in panels, or to have the factory alter panels to accommodate field-installed power.

Tip: Chicago and New York City electrical code requires field-supplied components to be field installed.

Factory-installed power components are available in all Privacy Wall panels. Use the options on this page to tell the factory how to assemble your panels so they include the power components you want.

Field-installed power components are required in New York City and Chicago. To streamline installation, use the options on this page to tell the factory how to modify the panels so they are ready to accept the power components you must order or supply separately. For details about how power is accommodated in Privacy Wall panels, see:

► *How to Power a Panel*, page 100

► *Overview of Powered Panels*, page 104

Specifying

Panels

1 Choose appropriate panel width to accommodate power and communication receptacles. See the table below for minimum widths.

Power and Communication

Desk height and ADA height

- 30"W standard panel
- 30"W (nominal) modular panel

At base

- 30"W standard panel
- 30"W (nominal) modular panel

2 Power schematic

Specify the power schematic:

- 4-circuit, 3+1
- 4-circuit, 2+2
- 3-circuit, separate neutrals (3SN)
- Chicago and New York City power and communication power prep

3 Power locations

Specify one or more of the following power locations that is available on the panel type you have chosen:

- Desk height
- ADA height
- Base
- Base and desk height
- Base and ADA height
- Desk and ADA
- Desk, ADA, and base

4 Utility choices by locations

Cutouts are only available in the positions you specified for power locations in step 3. See the table below for utility choices and designate side 1, side 2, or both side 1 and side 2.

Tip: For New York City and Chicago power prep options, no specification for utility choice at base height is needed because you add components in the field.

Desk height

- Power only
- Power and communication

ADA height

- Power only
- Power and communication

Base height

- Power only
- Power and communication
- Communication only

5 Remember to specify

receptacles, cover plates, and power and communication base trim to finish your panel.

Tip: For Chicago and New York City installations, electrician must supply conduit, receptacles, and junction boxes for base of panel. Junction box for desk or ADA height is available from Steelcase and is required when using Privacy Wall power and communication cover plates.

► Page 265

Infeeds

6 Power infeeds

Panels with factory-installed power blocks at desk or ADA height can have a factory-installed power infeed harness to supply power from the ceiling or floor. Factory-installed infeeds extend a minimum of 12' from the panel. Specify one of the following:

- Hardwire ceiling infeed
- Modular ceiling infeed
- Hardwire floor infeed
- Modular floor infeed

Tip: If you do not specify one of the above infeeds, a hardwire infeed, located top left in a solid panel and bottom left in a Clerestory panel, will be provided.

When ADA- and/or desk-height power is specified, a factory-installed jumper is included to link the two locations. When ADA-, desk-, ADA- and desk-, and base-height power is specified, a factory-installed jumper is included to link ADA/desk to base.

► Multipurpose power infeeds, page 260


Tip: Infeeds are not required on panels with the Chicago or New York City power prep option.

Example

- One GPSS60
- 9' 0" ceiling height
- 4843 Linen side 1
- 4844 Glacier side 2
- 4750 Champagne Metallic floor track
- 2+2 wiring schematic
- Power base height
- Power only side 1 ADA height
- Power and communication side 2 ADA height
- Modular ceiling infeed

Order receptacles, cover plates, and power and communication base trim separately.

Butt-Hinged Door Frames



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98

Tip: Recommended for use with Privacy Wall only. Not for use with Glass Selections.

Tip: Door frame glass option is available on transom door frames only.

Tip: Remember to specify switch cutout option if you want a butt-hinged door frame with a switch.

Tip: Switch cutout is located in strike jamb of single door frame and not available in pair frames. Order switch separately.
▶ Page 167

Tip: Cutout option is not available on pair door frames.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 32	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Factory prep for butt hinges <i>Tip: Order door hardware separately.</i> Hardware cutout for strike plate Transom, if selected: glass Plinths: paint 	1 Style number 2 Ceiling height 3 Swing orientation 4 Paint color number for frame and plinths 5 Glass number for transom, if selected 6 Post extension 7 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.	
Surface Materials	Options	U.S. Price	Required to Specify
	<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$ 41 +\$ 72	Specify paint color number. Specify paint color number. Specify paint color number.
Single door frames with transom 8'0"H through 10'0"H			
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 132 +\$ 159 N.A. N.A. N.A. +\$ 822	Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Pair door frames with transom 8'0"H through 10'0"H			
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 261 +\$ 318 N.A. N.A. N.A. +\$1645	Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Post Extension	<ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) 	No cost	Specify <i>with post extensions for recessed ceiling track interface.</i>
	<ul style="list-style-type: none"> Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost	Specify <i>with post extensions for overlapping ceiling track interface.</i>
Ceiling Height	Single door frames with transom		
	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
	Pair door frames with transom		
	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 138	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Swing Orientation	<ul style="list-style-type: none"> Left-hand door frame Right-hand door frame 	No cost No cost	Specify <i>with left-hand door frame.</i> Specify <i>with right-hand door frame.</i>
Switch Cutout	<ul style="list-style-type: none"> Without cutout With low-voltage switch cutout With high-voltage switch cutout 	No cost +\$ 52 +\$ 52	Specify <i>without cutout.</i> Specify <i>with low-voltage switch cutout.</i> Specify <i>with high-voltage switch cutout.</i>
Related Products	<ul style="list-style-type: none"> Door leaves Passage sets and locksets Hinges Stops Switches Ceiling tracks Feature strips 		▶ Page 148 ▶ Page 160 ▶ Page 165 ▶ Page 165 ▶ Page 167 ▶ Page 240 ▶ Page 250

▶ Options, continued on next page

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Muntin (Transom only)	Additional muntin		
	• Muntin	+\$281	Specify <i>with muntin</i> .
	Change muntin size		
	• Change to 1½"H or 2¼"H	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Transom only)	• 10'1" through 11'0" (Available in 1" increments)	+\$220	Specify ceiling height in 1" increments.
Base	• 4"H base	+\$ 84	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•

Single Door Frames

Full-Height

40"	GPDSBF	\$1491
-----	---------------	--------

With Transom

40"	GPDSBT	\$2303
-----	---------------	--------



Pair Frames

Full-Height

76"	GPDPBF	\$1521
-----	---------------	--------


With Transom

76"	GPDPBT	\$2443
-----	---------------	--------



 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Pivot-Hinged Door Frames



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged frames work with Privacy Wall door leaves only.

Tip: Strike plate finish is available on single frames only.

Tip: Door frame glass option is available on transom door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98

Tip: Cutout option is not available on pair door frames.

Tip: Swing orientation is available on single pivot-hinged door frame with transom only to properly orient etched and patterned glass.
► Page 48



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Standard Includes		Required to Specify	
► Need help? Product details, page 42	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Reversible, pivot-hinged door frame with plinths: paint Factory prep for pivot hinges Tip: Order door hardware separately. Transom, if selected: glass Strike plate 	1 Style number 2 Ceiling height 3 Swing orientation 4 Paint color number for frame and plinths 5 Glass number for transom, if selected 6 Metal color number for strike plate: 9200 Satin Chrome 9201 Polished Chrome 7 Post extension 8 Factory prep for cylindrical or mortise passage set or lockset, if selected 9 Options, if selected (see below) ► See Surface Materials, page 362.	
Options	U.S. Price	Required to Specify	
Surface Materials	Door frame	Specify paint color number.	
	<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$ 41 +\$ 72	Specify paint color number. Specify paint color number. Specify paint color number.
	Strike plate	No cost	Specify with 9200 Satin Chrome.
	<ul style="list-style-type: none"> Satin chrome Polished chrome 	+\$ 36	Specify with 9201 Polished Chrome.
	Single door frames with transom 8'0"H through 10'0"H		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 132 +\$ 159 N.A. N.A. N.A. N.A. +\$ 822	Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
	Pair door frames with transom 8'0"H through 10'0"H		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 261 +\$ 318 N.A. N.A. N.A. N.A. +\$1645	Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Post Extension	<ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	Single door frames		
	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
	Pair door frames		
	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 138	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Swing Orientation	For single pivot-hinged door frame with transom		
► Page 48	<ul style="list-style-type: none"> Left-hand door frame Right-hand door frame 	No cost No cost	Specify with left-hand door frame. Specify with right-hand door frame.
Lock Prep	<ul style="list-style-type: none"> Strike plate and factory prep for cylindrical passage set or lockset Strike plate and factory prep for mortise passage set or lockset 	No cost +\$ 107	Specify with cylindrical prep. Specify with mortise prep.
► Page 44			

► Options, continued on next page

► Options, continued from previous page

Related Products

- Door leaves
 - Passage sets and locksets
 - Hinges
 - Stops
 - Ceiling tracks
 - Feature strips
- Page 152
 - Page 160
 - Page 165
 - Page 165
 - Page 240
 - Page 250

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Muntin (Transom only)	Additional muntin		
	• Muntin	+\$281	Specify with muntin.
	Change muntin size		
	• Change to 1½"H or 2¼"H	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Transom only)	• 10'1" through 11'0" (Available in 1" increments)	+\$220	Specify ceiling height in 1" increments.
Base	• 4"H base	+\$ 84	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

Single Door Frames**Full-Height**

40"	GPDSPF	\$ 943
-----	---------------	--------

With Transom



40"	GPDSPT	\$1882
-----	---------------	--------

Pair Door Frames**Full-Height**

80"	GPDPFF	\$ 969
-----	---------------	--------


With Transom

80"	GPDPPT	\$2325
-----	---------------	--------



 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Pivot-Hinged Door Frames with Switch Cutout



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged frames work with Privacy Wall door leaves only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98

Tip: Glass surface option for transom door frames only.

Tip: Order switch separately.

Tip: As an alternative to a 42"W frame with switch cutout, you can position a low-voltage switch in an in-line feature strip adjacent to a door frame.
▶ Page 45

Tip: Door frame glass surface option is available on transom door frames only.

Tip: Swing orientation is available on single pivot-hinged door frame with transom only to properly orient etched and patterned glass.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.


Standard Includes		Required to Specify	
► Need help? Product details, page 42	<ul style="list-style-type: none">• Ceiling height from 8'0"H to 10'0"H, in one-inch increments• Left-hand reversible, pivot-hinged door frame with plinths: paint• Factory prep for pivot hinges <i>Tip: Order door hardware separately.</i> <ul style="list-style-type: none">• Transom, if selected: glass• Strike plate	<ul style="list-style-type: none">1 Style number2 Ceiling height3 Swing orientation4 Paint color number for frame and plinths5 Glass number for transom, if selected6 Metal color number for strike plate:<ul style="list-style-type: none">9200 Satin Chrome9201 Polished Chrome7 Post extension8 Factory prep for cylindrical or mortise passage set or lockset, if selected9 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	
Options		U.S. Price	Required to Specify
Surface Materials	Door frame		
	<ul style="list-style-type: none">• Paint price group 1• Paint price group 2• Paint price group 3	No cost +\$ 41 +\$ 72	Specify paint color number. Specify paint color number. Specify paint color number.
	Strike plate		
	<ul style="list-style-type: none">• Satin chrome• Polished chrome	No cost +\$ 36	Specify <i>with 9200 satin chrome</i> . Specify <i>with 9201 polished chrome</i> .
	Single door frames with transom 8'0"H through 10'0"H		
	<ul style="list-style-type: none">• Glass price group 1• Glass price group 2• Glass price group 3• Glass price group 4• Glass price group 5• Glass price group 6• Glass price group 7	No cost +\$132 +\$159 N.A. N.A. N.A. +\$822	Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Post Extension	<ul style="list-style-type: none">• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify <i>with post extensions for recessed ceiling track interface</i> .
	<ul style="list-style-type: none">• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify <i>with post extensions for overlapping ceiling track interface</i> .
Ceiling Height	Single door frames with transom		
	<ul style="list-style-type: none">• 8'0" through 9'0"• 9'1" through 10'0"	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Swing Orientation	<ul style="list-style-type: none">• Left-hand door frame• Right-hand door frame	No cost No cost	Specify <i>with left-hand door frame</i> . Specify <i>with right-hand door frame</i> .
	► Page 48		
Switch Cutout	<ul style="list-style-type: none">• With low-voltage switch cutout	No cost	Specify <i>with low-voltage switch cutout</i> .
	<ul style="list-style-type: none">• With high-voltage switch cutout	No cost	Specify <i>with high-voltage switch cutout</i> .
► Page 35			
Lock Prep	<ul style="list-style-type: none">• Strike plate and factory prep for cylindrical passage set or lockset	No cost	Specify <i>with cylindrical prep</i> .
	<ul style="list-style-type: none">• Strike plate and factory prep for mortise passage set or lockset	+\$107	Specify <i>with mortise prep</i> .
► Page 44			
Related Products	<ul style="list-style-type: none">• Door leaves• Passage sets and locksets• Hinges• Stops• Ceiling tracks• Feature strips		► Page 152 ► Page 160 ► Page 165 ► Page 165 ► Page 240 ► Page 250
	► Options, continued on next page		

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Options, continued from previous page

	SmartTools Options	U.S. Price	Required to Specify
Muntin (Transom only)	Additional muntin <ul style="list-style-type: none">Muntin	+\$281	Specify with muntin.
	Change muntin size <ul style="list-style-type: none">Change to 1½"H or 2¼"H	No cost	Specify muntin size.
	Change muntin location <ul style="list-style-type: none">Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Transom only)	<ul style="list-style-type: none">10'1" through 11'0" (Available in 1" increments)	+\$220	Specify ceiling height in 1" increments.
Base	<ul style="list-style-type: none">4"H base	+\$ 84	Specify to accept 4"H base.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".



Specification Information		
Width	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

Single Door Frames

Full-Height		
42"	GPDSPFS	\$1924
With Transom		
42"	GPDSPTS	\$2614
:	:	:

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Full-Height Butt-Hinged Door Leaves



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Standard Includes		Required to Specify	
► Need help? Product details, page 32	<ul style="list-style-type: none">Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i>Butt-hinged door: paint price group 1, glass price group 1, or flat-cut wood group 1 veneerFactory prep for butt hinges	<ul style="list-style-type: none">1 Style number2 Ceiling height3 Swing orientation4 Paint color number for door, if solid door selected5 Glass number for glass door, if glass door selected6 Paint color number for glass door, if glass door selected7 Wood veneer color number, if selected8 Factory prep for cylindrical or mortise passage set or lockset, if selected9 Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>	
Options		U.S. Price	Required to Specify
Surface Materials	Glass door surface <ul style="list-style-type: none">Paint price group 1Paint price group 2Paint price group 3	No cost +\$ 41 +\$ 72	Specify paint color number. Specify paint color number. Specify paint color number.
	36"W solid single door leaves 8'0"H through 10'0"H <ul style="list-style-type: none">Paint price group 1Paint price group 3Flat-cut wood group 1 veneerQuarter-cut wood group 1 veneerCustomiz stain	No cost +\$ 165 No cost +\$ 261 No cost	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify <i>with Customiz stain</i> .
	72"W solid pair door leaves 8'0"H through 10'0"H <ul style="list-style-type: none">Paint price group 1Paint price group 3Flat-cut wood group 1 veneerQuarter-cut wood group 1 veneerCustomiz stain	No cost +\$ 328 No cost +\$ 529 No cost	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify <i>with Customiz stain</i> .
	Glass single door 8'0"H through 10'0"H <ul style="list-style-type: none">Glass price group 1Glass price group 2Glass price group 3Glass price group 4Glass price group 5Glass price group 6Glass price group 7	No cost +\$ 585 +\$ 698 N.A. N.A. N.A. +\$3077	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Ceiling Height	36"W solid single door leaves butt-hinged 8'0"H through 10'0"H <ul style="list-style-type: none">8'0" through 9'0"9'1" through 10'0"	No cost +\$ 417	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
	72"W solid pair door leaves butt-hinged 8'0"H through 10'0"H <ul style="list-style-type: none">8'0" through 9'0"9'1" through 10'0"	No cost +\$ 834	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Swing Orientation	<ul style="list-style-type: none">Left-hand door frameRight-hand door frame	No cost No cost	Specify <i>with left-hand door frame</i> . Specify <i>with right-hand door frame</i> .
Lock Prep	<ul style="list-style-type: none">Strike plate and factory prep for cylindrical passage set or locksetStrike plate and factory prep for mortise passage set or lockset	No cost +\$ 68	Specify <i>with cylindrical prep</i> . Specify <i>with mortise prep</i> .
Related Products	<ul style="list-style-type: none">Door framesPassage sets and locksetsHingesStops		<ul style="list-style-type: none">► Page 142► Page 160► Page 165► Page 165



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price



Solid Single Door

35 ¹³ / ₁₆ "	40"	GPLSSBF40	\$2590




5"H

Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.

Glass Single Door with 5"H Bottom Rail


35 ¹³ / ₁₆ "	40"	GPLGSBF40	\$6209



12"H

Glass Single Door with 12"H Bottom Rail

35 ¹³ / ₁₆ "	40"	GPLGSBF40B	\$6209



Solid Pair Door

71 ⁵ / ₈ "	76"	GPLSPBF76	\$5290

Transom-Height Butt-Hinged Door Leaves



Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Door frame glass surface option is available on transom door frames only.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 32	<ul style="list-style-type: none"> 7'0"H Butt-hinged door: paint price group 1, glass price group 1, or flat-cut wood group 1 veneer Factory prep for butt hinges 	1 Style number 2 Paint color number for door, if solid door selected 3 Swing orientation 4 Glass number for glass door, if glass door selected 5 Paint color number for glass door, if glass door selected 6 Wood veneer color number, if selected 7 Factory prep for cylindrical or mortise passage set or lockset, if selected 8 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials	Glass door surface	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 2 +\$ 41 Paint price group 3 +\$ 72 	Specify paint color number. Specify paint color number. Specify paint color number.
	36"W solid single door leaves 7'0"H	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 3 +\$ 165 Flat-cut wood group 1 veneer No cost Quarter-cut wood group 1 veneer +\$ 237 Customiz stain No cost 	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify <i>with Customiz stain</i> .
	72"W solid pair door leaves 7'0"H	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 3 +\$ 328 Flat-cut wood group 1 veneer No cost Quarter-cut wood group 1 veneer +\$ 475 Customiz stain No cost 	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify <i>with Customiz stain</i> .
	Glass single door 7'0"H	
	<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 585 Glass price group 3 +\$ 698 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$3077 	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Swing Orientation ▶ Page 48	<ul style="list-style-type: none"> Left-hand door frame No cost Right-hand door frame No cost 	Specify <i>with left-hand door frame</i> . Specify <i>with right-hand door frame</i> .
Lock Prep ▶ Page 44	<ul style="list-style-type: none"> Strike plate and factory prep for cylindrical passage set or lockset No cost Strike plate and factory prep for mortise passage set or lockset +\$ 68 	Specify <i>with cylindrical prep</i> . Specify <i>with mortise prep</i> .
Related Products	<ul style="list-style-type: none"> Door frames Passage sets and locksets Hinges Stops 	▶ Page 142 ▶ Page 160 ▶ Page 165 ▶ Page 165



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Specification Information			
Width	Corresponding Frame Width	Style Number	U.S. Base Price


Solid Single Door

35 ¹³ / ₁₆ "	40"	GPLSSBT40	\$2376
:	:	:	:



Glass Single Door with 5"H Bottom Rail


35 ¹³ / ₁₆ "	40"	GPLGSBT40	\$6048
:	:	:	:



Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.


Glass Single Door with 12"H Bottom Rail

35 ¹³ / ₁₆ "	40"	GPLGSBT40B	\$6048
:	:	:	:



Solid Pair Door

71 ⁵ / ₈ "	76"	GPLSPBT76	\$4867
:	:	:	:



Full-Height Pivot-Hinged Door Leaves



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Door frame glass surface option is available on transom door frames only.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Tip: Ceiling height option is available on solid door leaves only.

Tip: Swing orientation is available on single pivot-hinged door frame with transom only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 42	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> Reversible pivot-hinged door: paint, glass, or flat-cut veneer Factory prep for pivot hinges 	1 Style number 2 Ceiling height 3 Paint color number for door, if solid door selected 4 Glass number for glass door, if glass door selected 5 Paint color number for glass door, if glass door selected 6 Wood veneer color number, if selected 7 Factory prep for cylindrical or mortise passage set or lockset, if selected 8 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials	Glass door surface	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 2 +\$ 41 Paint price group 3 +\$ 72 	Specify paint color number. Specify paint color number. Specify paint color number.
	37³/₁₆"W solid single door leaf 8'0"H through 10'0"H	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 3 +\$ 165 Flat-cut wood group 1 veneer No cost Quarter-cut wood group 1 veneer +\$ 261 Customiz stain No cost 	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify with <i>Customiz stain</i> .
	77¹/₂"W solid pair door leaves 8'0"H through 10'0"H	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 3 +\$ 328 Flat-cut wood group 1 veneer No cost Quarter-cut wood group 1 veneer +\$ 529 Customiz stain No cost 	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify with <i>Customiz stain</i> .
	Glass single door 8'0"H through 9'0"H	
	<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 585 Glass price group 3 +\$ 698 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$3077 	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Ceiling Height	Solid single door leaves	
	<ul style="list-style-type: none"> 8'0" through 9'0" No cost 9'1" through 10'0" +\$ 417 	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
	Solid pair door leaves	
	<ul style="list-style-type: none"> 8'0" through 9'0" No cost 9'1" through 10'0" +\$ 834 	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Lock Prep ▶ Page 44	<ul style="list-style-type: none"> Strike plate and factory prep for cylindrical passage set or lockset No cost Strike plate and factory prep for mortise passage set or lockset +\$ 68 	Specify with <i>cylindrical prep</i> . Specify with <i>mortise prep</i> .
Related Products	<ul style="list-style-type: none"> Door frames Passage sets and locksets Hinges Stops 	▶ Page 144 ▶ Page 160 ▶ Page 165 ▶ Page 165



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:

Solid Single Door

37 ³ / ₁₆ "	40"	GPLSSPF40	\$3159
:	:	:	:



Glass Single Door with 5"H Bottom Rail

37 ³ / ₁₆ "	40"	GPLGSPF40	\$6209
:	:	:	:



5"H □

Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.

Glass Single Door with 12"H Bottom Rail


37 ³ / ₁₆ "	40"	GPLGSPF40B	\$6209
:	:	:	:



12"H □

Solid Pair Door

77 ¹ / ₂ "	80"	GPLSPPF80	\$6432
:	:	:	:



Transom-Height Pivot-Hinged Door Leaves



Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 42	<ul style="list-style-type: none"> 7'0"H Reversible pivot-hinged door: paint price group 1, glass price group 1, or flat-cut wood group 1 veneer Factory prep for pivot hinges 	1 Style number 2 Paint color number for door, if solid door selected 3 Glass number for glass door, if glass door selected 4 Paint color number for glass door, if glass door selected 5 Wood veneer color number, if selected 6 Factory prep for cylindrical or mortise passage set or lockset, if selected 7 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials	Transom-height glass door leaves	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 2 +\$ 41 Paint price group 3 +\$ 72 	Specify paint color number. Specify paint color number. Specify paint color number.
	37³/₁₆"W solid single door leaves 7'0"H	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 3 +\$ 165 Flat-cut wood group 1 veneer No cost Quarter-cut wood group 1 veneer +\$ 237 Customiz stain No cost 	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify with <i>Customiz stain</i> .
	77¹/₂"W solid pair door leaves 7'0"H	
	<ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 3 +\$ 328 Flat-cut wood group 1 veneer No cost Quarter-cut wood group 1 veneer +\$ 475 Customiz stain No cost 	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify with <i>Customiz stain</i> .
	Glass single door 7'0"H	
	<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 585 Glass price group 3 +\$ 698 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$3077 	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Lock Prep ▶ Page 44	<ul style="list-style-type: none"> Strike plate and factory prep for cylindrical passage set or lockset No cost Strike plate and factory prep for mortise passage set or lockset +\$ 68 	Specify with <i>cylindrical prep</i> . Specify with <i>mortise prep</i> .
Related Products	<ul style="list-style-type: none"> Door frames Passage sets and locksets Hinges Stops 	▶ Page 144 ▶ Page 160 ▶ Page 165 ▶ Page 165



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:

Solid Single Door

37 ³ / ₁₆ "	40"	GPLSSPT40	\$2895
:	:	:	:

Glass Single Door with 5"H Bottom Rail


37 ³ / ₁₆ "	40"	GPLGSPT40	\$6048
:	:	:	:

Glass Single Door with 12"H Bottom Rail

37 ³ / ₁₆ "	40"	GPLGSPT40B	\$6048
:	:	:	:

Solid Pair Door

77 ¹ / ₂ "	80"	GPLSPPT80	\$5908
:	:	:	:




5"H

Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.



12"H



Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Ceiling height option is available on solid door leaves only.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 42	<ul style="list-style-type: none">Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i>Reversible pivot-hinged door: paint price group 1, glass price group 1, or flat-cut wood group 1 veneerFactory prep for pivot hinges	<div>1 Style number</div> <div>2 Ceiling height</div> <div>3 Paint color number for door, if solid door selected</div> <div>4 Glass number for glass door, if glass door selected</div> <div>5 Paint color number for glass door, if glass door selected</div> <div>6 Wood veneer color number, if selected</div> <div>7 Factory prep for cylindrical or mortise passage set or lockset, if selected</div> <div>8 Options, if selected (see below)</div> <div>▶ See <i>Surface Materials</i>, page 362.</div>

Options	U.S. Price	Required to Specify
Surface Materials	Full-height glass door leaves surface options	
<ul style="list-style-type: none">Paint price group 1Paint price group 2Paint price group 3	<div>No cost</div> <div>+\$ 41</div> <div>+\$ 72</div>	<div>Specify paint color number.</div> <div>Specify paint color number.</div> <div>Specify paint color number.</div>
	36³/₈"W solid door leaves 8'0"H through 10'0"H	
<ul style="list-style-type: none">Paint price group 1Paint price group 3Flat-cut wood group 1 veneerQuarter-cut wood group 1 veneerCustomiz stain	<div>No cost</div> <div>+\$ 165</div> <div>No cost</div> <div>+\$ 261</div> <div>No cost</div>	<div>Specify paint color number.</div> <div>Specify paint color number.</div> <div>Specify wood veneer color number.</div> <div>Specify wood veneer color number.</div> <div>Specify <i>with Customiz stain</i>.</div>
	Glass single door	
<ul style="list-style-type: none">Glass price group 1Glass price group 2Glass price group 3Glass price group 4Glass price group 5Glass price group 6Glass price group 7	<div>No cost</div> <div>+\$ 585</div> <div>+\$ 698</div> <div>N.A.</div> <div>N.A.</div> <div>N.A.</div> <div>+\$3263</div>	<div>Specify glass number for lite.</div> <div>Specify glass number for lite.</div> <div>Specify glass number for lite.</div> <div>Specify glass number for lite.</div> <div>Specify glass number for lite.</div> <div>Specify glass number for lite.</div> <div>Specify glass number for lite.</div>
Ceiling Height	Solid single door leaves	
	<ul style="list-style-type: none">8'0" through 9'0"9'1" through 10'0"	<div>No cost</div> <div>+\$ 417</div> <div>Specify ceiling height in 1" increments.</div> <div>Specify ceiling height in 1" increments.</div>
Lock Prep ▶ Page 44	<ul style="list-style-type: none">Strike plate and factory prep for cylindrical passage set or locksetStrike plate and factory prep for mortise passage set or lockset	<div>No cost</div> <div>+\$ 68</div> <div>Specify <i>with cylindrical prep</i>.</div> <div>Specify <i>with mortise prep</i>.</div>
Related Products	<ul style="list-style-type: none">Door framesPassage sets and locksetsHingesStops	<div>▶ Page 146</div> <div>▶ Page 160</div> <div>▶ Page 165</div> <div>▶ Page 165</div>



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.


Full-Height Pivot-Hinged Door
Leaves for Use with Switch
Cutout

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:
:	:	:	:
:	:	:	:

Solid Single Door

36 $\frac{3}{8}$ "	42"	GPLSSPF42	\$3159
:	:	:	:



5"H

Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.

Glass Single Door with 5"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPLGSPF42	\$6209
:	:	:	:

Glass Single Door with 12"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPLGSPF42B	\$6209
:	:	:	:



12"H



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Door frame glass surface option is available on transom door frames only.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 42	• 7'0"H	1 Style number
	• Reversible pivot-hinged door: paint price group 1, glass price group 1, or flat-cut wood group 1 veneer	2 Paint color number for door, if solid door selected
	• Factory prep for pivot hinges	3 Glass number for glass door, if glass door selected
		4 Paint color number for glass door, if glass door selected
		5 Wood veneer color number, if selected
		6 Factory prep for cylindrical or mortise passage set or lockset, if selected
		7 Options, if selected (see below)
		▶ See <i>Surface Materials</i> , page 362.

Options	U.S. Price	Required to Specify
Surface Materials		
Transom-height glass door leaves surface options		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 41	Specify paint color number.
• Paint price group 3	+\$ 72	Specify paint color number.
36³/₈"W solid door leaves 8'0"H through 10'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 165	Specify paint color number.
• Flat-cut wood group 1 veneer	No cost	Specify wood veneer color number.
• Quarter-cut wood group 1 veneer	+\$ 237	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
Glass single door 7'0"H		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 585	Specify glass number for lite.
• Glass price group 3	+\$ 698	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$3263	Specify glass number for lite.
Lock Prep		
▶ Page 44	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
	• Strike plate and factory prep for mortise passage set or lockset	+\$ 68
		Specify with <i>cylindrical prep</i> .
		Specify with <i>mortise prep</i> .
Related Products		
• Door frames		▶ Page 146
• Passage sets and locksets		▶ Page 160
• Hinges		▶ Page 165
• Stops		▶ Page 165



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.


Transom-Height Pivot-Hinged
Door Leaves for Use with
Switch Cutout

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:

Solid Single Door

36 $\frac{3}{8}$ "	42"	GPLSSPT42	\$2895
:	:	:	:



5"H


Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance

Glass Single Door with 5"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPLGSPT42	\$6048
:	:	:	:

Glass Single Door with 12"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPLGSPT42B	\$6048
:	:	:	:



12"H




For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Hardware and Accessories for Swing Doors

Cylindrical Passage Set and Lockset



Tip: When the black finish is specified on latchsets, the strike plate will default to the satin chrome finish.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> ▶ Need help? Product details, page 34 • Cylindrical passage set or lockset, keyed randomly • Strike plate: 9200 Satin Chrome or 9201 Polished Chrome 	<ol style="list-style-type: none"> 1 Style number 2 Metal color number for passage set or lockset: 4710 Low Gloss Black 9200 Satin Chrome 9201 Polished Chrome 3 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials		
• 9200 Satin Chrome	No cost	Specify <i>with satin chrome</i> .
• 9201 Polished Chrome	+\$ 36	Specify <i>with polished chrome</i> .
• 4710 Low Gloss Black		
– Cylindrical Passage Set	+\$680	Specify <i>with low gloss black</i> .
– Cylindrical Lockset	+\$768	Specify <i>with low gloss black</i> .

Specification Information	
• Style Number	• U.S. Base Price
•	•
•	•
•	•

Cylindrical Passage Set

GPDCLA \$ 907

•

Cylindrical Lockset

GPDCLC \$1238

•




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Mortise Passage Set and Lockset



Tip: When the black finish is specified on latchsets, the strike plate will default to the satin chrome finish.

Tip: Door frame glass surface option is available on transom door frames only.

Tip: Ceiling height option is available on solid door leaves only.

Tip: Swing orientation is available on single-pivot-hinged door frame with transom only.

Standard Includes	Required to Specify
<div><div>▶ Need help? Product details, page 34</div><div><ul style="list-style-type: none">Mortise passage set or lockset, keyed randomlyStrike plate: 9200 Satin Chrome or 9201 Polished Chrome</div></div>	<div><div>1 Style number</div><div>2 Metal color number for passage set or lockset: 4710 Low Gloss Black 9200 Satin Chrome 9201 Polished Chrome</div><div>3 Options, if selected (see below)</div></div>

Options	U.S. Price	Required to Specify
<div><div>Surface Materials</div><div><ul style="list-style-type: none">9200 Satin Chrome9201 Polished Chrome4710 Low Gloss Black<ul style="list-style-type: none">– Mortise Passage Set– Mortise Lockset</div></div>	<div><div>No cost</div><div>+\$ 53</div><div>+\$205</div><div>+\$109</div></div>	<div><div>Specify with satin chrome.</div><div>Specify with polished chrome.</div><div>Specify with low gloss black.</div><div>Specify with low gloss black.</div></div>

Specification Information	
• Style Number	• U.S. Base Price
•	•
•	•
•	•

Mortise Passage Set

GPDMLA	\$1534
•	•
•	•

Mortise Lockset

GPDMLO	\$1830
•	•
•	•

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Hardware and Accessories for Swing Doors, continued

Butt Hinge Kits



Standard Includes	Required to Specify
<p>► Need help? Product details, page 32</p> <ul style="list-style-type: none"> Set of butt hinges Hinge kits for pair doors include flush bolts for inactive doors 	<p>1 Style number</p> <p>2 Metal color number for set of hinges and flush bolts: 4710 Low Gloss Black 9200 Satin Chrome 9201 Polished Chrome</p> <p>3 Options, if selected (see below)</p>

	Options	U.S. Price	Required to Specify
Surface Materials	Three hinges <ul style="list-style-type: none"> 9200 Satin Chrome 9201 Polished Chrome 4710 Low Gloss Black 	<p>No cost</p> <p>+\$ 51</p> <p>+\$157</p>	<p>Specify <i>with satin chrome</i>.</p> <p>Specify <i>with polished chrome</i>.</p> <p>Specify <i>with low gloss black</i>.</p>
	Four hinges <ul style="list-style-type: none"> 9200 Satin Chrome 9201 Polished Chrome 4710 Low Gloss Black 	<p>No cost</p> <p>+\$ 65</p> <p>+\$210</p>	<p>Specify <i>with satin chrome</i>.</p> <p>Specify <i>with polished chrome</i>.</p> <p>Specify <i>with low gloss black</i>.</p>
	Six or eight hinges <ul style="list-style-type: none"> 9200 Satin Chrome 9201 Polished Chrome 4710 Low Gloss Black – Six hinges – Eight hinges 	<p>No cost</p> <p>+\$100</p> <p>+\$313</p> <p>+\$418</p>	<p>Specify <i>with satin chrome</i>.</p> <p>Specify <i>with polished chrome</i>.</p> <p>Specify <i>with low gloss black</i>.</p> <p>Specify <i>with low gloss black</i>.</p>

Specification Information		
Number of Hinges	Style Number	U.S. Base Price

Butt Hinges for Single Doors and Frames

For Use with 84"H Door

3	GPDBH3	\$221
---	---------------	-------

For Use with Full-Height Door

4	GPDBH4	\$291
---	---------------	-------

Butt Hinges for Pair Doors and Frames

For Use with 84"H Door

6	GPDBH3P	\$646
---	----------------	-------

For Use with Full-Height Door

8	GPDBH4P	\$724
---	----------------	-------




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.


► See page 1 for details.

Butt Hinge Kits—Glass Selections Polished Edge Door



Standard Includes		Required to Specify	
▶ Need help? Product details, page 38	• Set of four hinges for use with Glass Selections polished edge butt-hinged door	1 Style number 2 Paint or metal color number for hinge 3 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.	
Surface Materials	Hinge	U.S. Price	Required to Specify
	• Satin chrome	No cost	Specify with <i>satin chrome</i> .
	• Black	+\$215	Specify with <i>black</i> .
Swing Orientation	• Left hand door leaf	No cost	Specify with <i>left hand door leaf</i> .
	• Right hand door leaf	No cost	Specify with <i>right hand door leaf</i> .
Specification Information			
Style Number	U.S. Base Price		
GPDBHPE	\$1995		

Slim Line Hinge Kits—Glass Selections Polished Edge Door




Standard Includes		Required to Specify	
▶ Need help? Product details, page 38	• Set of two hinges for use with Glass Selections polished edge butt-hinged door	1 Style number 2 Paint or metal color number for hinge 3 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.	
	• Self close functionality, if specified		
Surface Materials	Hinge	U.S. Price	Required to Specify
	• Satin chrome	No cost	Specify with <i>satin chrome</i> .
	• Polished chrome	+\$ 85	Specify with <i>polished chrome</i> .
	• Black	+\$117	Specify with <i>black</i> .
Swing Orientation	• Left hand door leaf	No cost	Specify with <i>left hand door leaf</i> .
	• Right hand door leaf	No cost	Specify with <i>right hand door leaf</i> .
Hinge Functionality	• Free-swinging	No cost	Specify with <i>free-swinging</i> .
	• Self-closing 90°	+\$281	Specify with <i>self-closing 90°</i> .
	• Self-closing 180°	+\$281	Specify with <i>self-closing 180°</i> .
Specification Information			
Style Number	U.S. Base Price		
GPDSHPE	\$2001		



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Hardware and Accessories for Swing Doors, continued

Drop Seal—Glass Selections Butt-Hinged Polished Edge Door



Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 38 Drop seal for butt-hinged polished edge door 	<ol style="list-style-type: none"> Style number Width (see below under Required Selections) Paint or metal color number for drop seal Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Required Selections	U.S. Price	Required to Specify
Width		
• 40"	No cost	Specify 40".
• 42"	No cost	Specify 42".

Options	U.S. Price	Required to Specify
Surface Materials		
Drop seal		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$23	Specify paint color number.
• Paint price group 3	+\$34	Specify paint color number.
• Anodized aluminum	No cost	Specify <i>with anodized aluminum</i> .

Tip: In order to ensure proper engagement at the drop seal, door frame cannot accommodate any fluctuation in floor height when drop seal is specified.

Specification Information	
Style Number	U.S. Base Price
GPDDS	\$396

Roller Latch—Glass Selections Butt-Hinged Polished Edge Door



Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 38 Roller latch: 8031 Brushed Stainless 	Style number


Specification Information	
Style Number	U.S. Price
GPDL	\$206

Tip: Roller latch housing is included with polished edge door leaf when specified.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Pivot Hinge Kits



Tip: Hardware finish option applies to flush bolts only as used in pair doors.

Tip: If satin chrome is specified on the pivot hinges, then the flush bolts can be specified in satin chrome or polished chrome. If black is specified on the pivot hinges, then the flush bolts will only be specifiable in black.

Standard Includes		Required to Specify	
► Need help? Product details, page 42	<ul style="list-style-type: none"> Set of pivot hinges: 9200 Satin Chrome Hinge kits for pair doors include flush bolts for inactive doors 	1 Style number	2 Metal color number for flush bolts: 9200 Satin Chrome 9201 Polished Chrome
		3 Options, if selected (see below)	
Surface Materials	Options	U.S. Price	Required to Specify
	Single doors and frames		
	• 9200 Satin Chrome	No cost	Specify <i>with satin chrome</i> .
	• 4710 Low Gloss Black	+\$273	Specify <i>with low gloss black</i> .
	Pair doors and frames		
	• 9200 Satin Chrome	No cost	Specify <i>with satin chrome</i> .
	• 9201 Polished Chrome	+\$ 47	Specify <i>with polished chrome</i> .
	• 4710 Low Gloss Black	+\$545	Specify <i>with low gloss black</i> .

Specification Information

Style Number	U.S. Base Price
GPDPHS	\$ 446

Pivot Hinges for Single Doors and Frames

GPDPHS \$ 446

Pivot Hinges for Pair Doors and Frames

GPDPHSP \$1483

Magnetic Wall Stop



Tip: For use with painted solid or Clerestory panels only.

Standard Includes		Required to Specify	
► Need help? Product details, page 34	<ul style="list-style-type: none"> Magnetic wall stop 	1 Style number	2 Metal color number: 9200 Satin Chrome 9201 Polished Chrome
		3 Options, if selected (see below)	
Surface Materials	Options	U.S. Price	Required to Specify
	• 9200 Satin Chrome	No cost	Specify <i>with satin chrome</i> .
	• 9201 Polished Chrome	+\$36	Specify <i>with polished chrome</i> .
	• 4710 Low Gloss Black	+\$59	Specify <i>with low gloss black</i> .

Specification Information

Style Number	U.S. Base Price
GPDMWS	\$59



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


Hardware and Accessories for Swing Doors, continued

Dome-Style Floor Stop



Standard Includes		Required to Specify	
► Need help? Product details, page 34	• Dome-style floor stop	1 Style number	
		2 Metal color number: 9200 Satin Chrome 9201 Polished Chrome	
		3 Options, if selected (see below)	
Options		U.S. Price	Required to Specify
Surface Materials	• 9200 Satin Chrome	No cost	Specify <i>with satin chrome</i> .
	• 4710 Low Gloss Black	+\$27	Specify <i>with low gloss black</i> .
	• 9201 Polished Chrome	+\$36	Specify <i>with polished chrome</i> .
Specification Information			
Style Number	U.S. Base Price		
GPDDFS	\$26		

Screw-In Base Stop



Standard Includes		Required to Specify	
► Need help? Product details, page 34	• Screw-in base stop	1 Style number	
		2 Metal color number: 9200 Satin Chrome 9201 Polished Chrome	
		3 Options, if selected (see below)	
Options		U.S. Price	Required to Specify
Surface Materials	• 9200 Satin Chrome	No cost	Specify <i>with satin chrome</i> .
	• 9201 Polished Chrome	+\$ 36	Specify <i>with polished chrome</i> .
	• 4710 Low Gloss Black	+\$100	Specify <i>with low gloss black</i> .
Specification Information			
Style Number	U.S. Base Price		
GPDSBS	\$100		




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Low-Voltage Switches




Tip: Switches are UL- and CSA-rated.

Tip: Low-voltage switch assemblies are specified by voltage rating to correspond to the voltage of the lighting system. This ensures that the transformer will be compatible with the lighting system.

Standard Includes		Required to Specify
▶ Need help? Product details, page 35	<ul style="list-style-type: none">• Switch: black• 18-gauge wire• Switch plate: black• Transformer	Style number
Specification Information		
• Style Number	• U.S. Price	
Low-Voltage Switch (24V) with 120V Transformer		
GPDS120	\$427	
Low-Voltage Switch (24V) with 277V Transformer		
GPDS277	\$443	
Low-Voltage Switch (24V) with 347V Transformer		
GPDS347	\$530	

High-Voltage Switches




Tip: Switches are UL- and CSA-rated.

Standard Includes		Required to Specify
▶ Need help? Product details, page 35	<ul style="list-style-type: none">• Switch: ivory• Electrical box and related hardware• Switch plate: clear anodized satin	Style number
Specification Information		
• Style Number	• U.S. Price	
Single Pole Single Switch		
GPDSS1	\$273	
Single Pole Double Switch		
GPDS1	\$412	

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull

All Glass



Tip: For information regarding Etched and Pattern Glass Planning.

► Page 98.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Standard Includes		Required to Specify
► Need help? Product details, page 50	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Slider door: glass 1/4"-thick clear tempered glass Door frame: paint Hardware (tubular door pull, slider lock, and cylinder): metal Side panel Slide hardware Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint Low-voltage knockout for door switch 	<ol style="list-style-type: none"> Style number Ceiling height Paint for frame and muntins Glass color number for full glass, if selected Glass color number(s) for three or four equal divided lites, if selected Glass color number(s) for two or four transom-aligned lites, if selected Paint color number for floor track Post extension Slide orientation Hardware (tubular pull, slider lock, and cylinder) finish, if selected: 4710 Low Gloss Black 8031 Brushed Stainless Options, if selected (see below) ► See <i>Surface Materials</i>, page 362.

	Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 77	Specify paint color number.
	• Paint price group 3	+\$ 138	Specify paint color number.
	80"W doors 96"H through 120"H		
	• Glass price group 1	No cost	Specify glass number for door.
	• Glass price group 2	+\$1487	Specify glass number for door.
	• Glass price group 3	+\$1770	Specify glass number for door.
	• Glass price group 4	N.A.	Specify glass number for door.
	• Glass price group 5	N.A.	Specify glass number for door.
	• Glass price group 6	N.A.	Specify glass number for door.
	• Glass price group 7	+\$7964	Specify glass number for door.
	96"W doors 96"H through 120"H		
	• Glass price group 1	No cost	Specify glass number for door.
	• Glass price group 2	+\$1787	Specify glass number for door.
	• Glass price group 3	+\$2124	Specify glass number for door.
	• Glass price group 4	N.A.	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.	
• Glass price group 6	N.A.	Specify glass number for door.	
• Glass price group 7	+\$9577	Specify glass number for door.	
Hardware (pull, slider lock, and cylinder)	• 8031 Brushed Stainless	No cost	Specify <i>with brushed stainless</i> .
	• 4710 Low Gloss Black		
	– No lock	+\$ 32	Specify <i>with low gloss black</i> .
	– Lock	+\$ 341	Specify <i>with low gloss black</i> .
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 138	Specify ceiling height in 1" increments.
Pull	• No pull and no door prep for pull	–\$ 135	Specify <i>with no pull</i> .
Lock	• Door lock with interior thumb latch	+\$ 649	Specify <i>with lock</i> .

► Options, continued on next page

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

Options	U.S. Price	Required to Specify
Slide Orientation ► Page 51 <ul style="list-style-type: none"> Left-hand slider door Right-hand slider door 	No cost No cost	Specify with left-hand slider door. Specify with right-hand slider door.
Post Extension <ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Related Extension <ul style="list-style-type: none"> Switches Ceiling tracks Continuous base trim Feature strips 		► Page 167 ► Page 240 ► Page 246 ► Page 250

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.


SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments) <ul style="list-style-type: none"> 7'5"H through 7'11"H 	No cost	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel <ul style="list-style-type: none"> 76"W through 79"W and 81"W through 95"W 97"W through 113"W 	No cost +\$234	Specify slider door assembly widths in 1" increments. Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel <ul style="list-style-type: none"> 40"W doors: 81"W through 103"W 48"W doors: 97"W through 111"W 	+\$239 +\$239	Specify slider door assembly widths in 1" increments. Specify slider door assembly widths in 1" increments.
Base <ul style="list-style-type: none"> 4"H base 	+\$307	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•

All Glass


80"	GPDSSTF80	\$5282
96"	GPDSSTF96	\$5476
•	•	•



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull

Two Transom-Aligned Lites



Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 50	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 120"H, in one-inch increments Slider door: glass 1/4"-thick clear tempered glass Door frame: paint Hardware (tubular door pull, slider lock, and cylinder) Side panel Slide hardware Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint Tubular door pull: brushed stainless Low-voltage knockout for door switch 	<ol style="list-style-type: none"> Style number Ceiling height Paint for frame and muntins Glass color number for full glass, if selected Glass color number(s) for three or four equal divided lites, if selected Glass color number(s) for two or four transom-aligned lites, if selected Paint color number for floor track Post extension Slide orientation Hardware finish (tubular pull, slider lock, and cylinder), if selected: 4710 Low Gloss Black 8031 Brushed Stainless Options, if selected (see below) ▶ See Surface Materials, page 362. 	
Options	U.S. Price	Required to Specify	
Surface Materials	Glass frame surface		
	<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	No cost	Specify paint color number.
		+\$ 77	Specify paint color number.
		+\$ 138	Specify paint color number.
	80"W doors 96"H through 120"H (per top lite row of glass)		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost	Specify glass number for door.
		+\$ 277	Specify glass number for door.
		+\$ 331	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		+\$1645	Specify glass number for door.
	80"W doors 96"H through 120"H (per lower lite row of glass)		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost	Specify glass number for door.
		+\$1264	Specify glass number for door.
		+\$1501	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		+\$6318	Specify glass number for door.
	96"W doors 96"H through 120"H (per top lite row of glass)		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost	Specify glass number for door.
		+\$ 318	Specify glass number for door.
		+\$ 377	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		+\$2057	Specify glass number for door.
	96"W doors 96"H through 120"H (per lower lite row of glass)		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost	Specify glass number for door.
		+\$1439	Specify glass number for door.
		+\$1719	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		N.A.	Specify glass number for door.
		+\$7521	Specify glass number for door.
Hardware (pull, slider lock, and cylinder)	<ul style="list-style-type: none"> 8031 Brushed Stainless 4710 Low Gloss Black – No lock – Lock 	No cost	Specify with brushed stainless.
		+\$ 32	Specify with low gloss black.
		+\$ 341	Specify with low gloss black.
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost	Specify ceiling height in 1" increments.
		+\$138	Specify ceiling height in 1" increments.

▶ Options, continued on next page

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Pull	<ul style="list-style-type: none">No pull and no door prep for pull	-\$135	Specify with no pull.
Lock	<ul style="list-style-type: none">Door lock with interior thumb latch	+\$649	Specify with lock.
Slide Orientation	<ul style="list-style-type: none">Left-hand slider doorRight-hand slider door	No cost No cost	Specify with left-hand slider door. Specify with right-hand slider door.
► Page 51	Post Extension <ul style="list-style-type: none">Post extensions modified to accommodate recessed ceiling track (ordered separately)Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
		No cost	Specify with post extensions for overlapping ceiling track interface.
Related Products	<ul style="list-style-type: none">SwitchesCeiling tracksContinuous base trimFeature strips		► Page 167 ► Page 240 ► Page 246 ► Page 250

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.


	SmartTools Options	U.S. Price	Required to Specify
Muntin	Change muntin size <ul style="list-style-type: none">Change to 1½"H or 2¼"H	No cost	Specify change muntin size.
	Change muntin location <ul style="list-style-type: none">Change muntin location	No cost	Specify change muntin location.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	<ul style="list-style-type: none">76"W through 79"W and 81"W through 95"W	No cost	Specify slider door assembly widths in 1" increments.
	<ul style="list-style-type: none">97"W through 113"W	+\$234	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	<ul style="list-style-type: none">40"W doors: 81"W through 103"W	+\$239	Specify slider door assembly widths in 1" increments.
	<ul style="list-style-type: none">48"W doors: 97"W through 111"W	+\$239	Specify slider door assembly widths in 1" increments.
Base	<ul style="list-style-type: none">4"H base	+\$307	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
...


Two Transom-Aligned Lites

80"	GPDSST2L80	\$5352
96"	GPDSST2L96	\$5586
...



Privacy Wall Slider Doors with Tubular Pull

Three Equal Divided Lites



Tip: For information regarding Etched and Pattern Glass Planning.

► Page 98.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.

	Standard Includes	Required to Specify
► Need help? Product details, page 50	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 120"H, in one-inch increments Slider door: glass 1/4"-thick clear tempered glass Door frame: paint Hardware (tubular door pull, slider lock, and cylinder) Side panel Slide hardware Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint Tubular door pull: brushed stainless Low-voltage knockout for door switch 	<ol style="list-style-type: none"> Style number Ceiling height Paint for frame and muntins Glass color number for full glass, if selected Glass color number(s) for three or four equal divided lites, if selected Glass color number(s) for two or four transom-aligned lites, if selected Paint color number for floor track Post extension Slide orientation Hardware finish (tubular pull, slider lock, and cylinder), if selected: 4710 Low Gloss Black 8031 Brushed Stainless Options, if selected (see below) ► See <i>Surface Materials</i>, page 362.

	Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 77	Specify paint color number.
	• Paint price group 3	+\$ 138	Specify paint color number.
	80"W doors 8'0"H through 10'0"H (per row of glass)		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 494	Specify glass number for lite.
	• Glass price group 3	+\$ 592	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$2652	Specify glass number for lite.	
96"W doors 8'0"H through 10'0"H (per row of glass)			
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 595	Specify glass number for lite.
	• Glass price group 3	+\$ 713	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$3192	Specify glass number for lite.
Hardware (pull, slider lock, and cylinder)	• 8031 Brushed Stainless	No cost	Specify <i>with brushed stainless</i> .
	• 4710 Low Gloss Black		
	– No lock	+\$ 32	Specify <i>with low gloss black</i> .
	– Lock	+\$ 341	Specify <i>with low gloss black</i> .
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 138	Specify ceiling height in 1" increments.
Pull	• No pull	–\$ 135	Specify <i>with no pull</i> .
Lock	• Door lock with interior thumb latch	+\$ 649	Specify <i>with lock</i> .
Slide Orientation	• Left-hand slider door	No cost	Specify <i>with left-hand slider door</i> .
	• Right-hand slider door	No cost	Specify <i>with right-hand slider door</i> .
Page 51			
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify <i>with post extensions for recessed ceiling track interface</i> .
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify <i>with post extensions for overlapping ceiling track interface</i> .

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

Related Products

- Switches ► Page 167
- Ceiling tracks ► Page 240
- Continuous base trim ► Page 246
- Feature strips ► Page 250

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

Tip: Muntin quantity and location must match door assembly and side panel. See Privacy Wall Slider Doors.
► Page 51.


	SmartTools Options	U.S. Price	Required to Specify
Muntin	Change muntin size <ul style="list-style-type: none">• Change to 1½"H or 2¼"H	No cost	Specify muntin size.
	Change muntin location <ul style="list-style-type: none">• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none">• 7½"H through 7'11"H	No cost	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	<ul style="list-style-type: none">• 76"W through 79"W and 81"W through 95"W	No cost	Specify slider door assembly widths in 1" increments.
	<ul style="list-style-type: none">• 97"W through 113"W	+\$234	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	<ul style="list-style-type: none">• 40"W doors: 81"W through 103"W	+\$239	Specify slider door assembly widths in 1" increments.
	<ul style="list-style-type: none">• 48"W doors: 97"W through 111"W	+\$239	Specify slider door assembly widths in 1" increments.
Base	<ul style="list-style-type: none">• 4"H base	+\$307	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•

Three Equal Divided Lites


80"	GPDSST3E80	\$5439
96"	GPDSST3E96	\$5676
•	•	•



 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull

Four Equal Divided Lites



Tip: For information regarding Etched and Pattern Glass Planning.

► Page 98.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


	Standard Includes	Required to Specify
► Need help? Product details, page 50	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 120"H, in one-inch increments Slider door: glass 1/4"-thick clear tempered glass Door frame: paint Hardware (tubular door pull, slider lock, and cylinder): metal Side panel Slide hardware Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint Tubular door pull: brushed stainless Low-voltage knockout for door switch 	<ol style="list-style-type: none"> Style number Ceiling height Paint for frame and muntins Glass color number for full glass, if selected Glass color number(s) for three or four equal divided lites, if selected Glass color number(s) for two or four transom-aligned lites, if selected Paint color number for floor track Post extension Slide orientation Hardware (tubular pull, slider lock, and cylinder) finish, if selected: 4710 Low Gloss Black 8031 Brushed Stainless Options, if selected (see below) ► See <i>Surface Materials</i>, page 362.

	Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$ 77 +\$ 138	Specify paint color number. Specify paint color number. Specify paint color number.
	80"W doors 8'0"H through 10'0"H (per row of glass) <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 372 +\$ 446 N.A. N.A. N.A. N.A. +\$1989	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	96"W doors 8'0"H through 10'0"H (per row of glass) <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 446 +\$ 537 N.A. N.A. N.A. +\$2394	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Hardware (pull, slider lock, and cylinder)	<ul style="list-style-type: none"> 8031 Brushed Stainless 4710 Low Gloss Black – No lock – Lock 	No cost +\$ 32 +\$ 341	Specify <i>with brushed stainless</i> . Specify <i>with low gloss black</i> . Specify <i>with low gloss black</i> .
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 138	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Pull	<ul style="list-style-type: none"> No pull 	–\$ 135	Specify <i>with no pull</i> .
Lock	<ul style="list-style-type: none"> Door lock with interior thumb latch 	+\$ 649	Specify <i>with lock</i> .
Slide Orientation	<ul style="list-style-type: none"> Left-hand slider door Right-hand slider door 	No cost No cost	Specify <i>with left-hand slider door</i> . Specify <i>with right-hand slider door</i> .
► Page 51			
Post Extension	<ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost	Specify <i>with post extensions for recessed ceiling track interface</i> . Specify <i>with post extensions for overlapping ceiling track interface</i> .

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Specify additional muntin(s) for use in five- or six-lite assembly applications. Maximum of six lites. See Privacy Wall Slider Doors. ▶ Page 51.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.



 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Related Products

- Switches ▶ Page 167
- Ceiling tracks ▶ Page 240
- Continuous base trim ▶ Page 246
- Feature strips ▶ Page 250

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass for 5th and 6th lite opening <ul style="list-style-type: none">• See standard options for glass price group above		Specify glass number for lite 5 or 6.
Muntin	Change muntin size <ul style="list-style-type: none">• Change to 1½"H or 2¼"H	No cost	Specify muntin size.
	Change muntin location <ul style="list-style-type: none">• Change muntin location	No cost	Specify muntin location.
	Additional muntin <ul style="list-style-type: none">• Muntin	+\$239	Specify with muntin.
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none">• 7½"H through 7'11"H	No cost	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	<ul style="list-style-type: none">• 76"W through 79"W and 81"W through 95"W	No cost	Specify slider door assembly widths in 1" increments.
	<ul style="list-style-type: none">• 97"W through 113"W	+\$234	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	<ul style="list-style-type: none">• 40"W doors: 81"W through 103"W	+\$239	Specify slider door assembly widths in 1" increments.
	<ul style="list-style-type: none">• 48"W doors: 97"W through 111"W	+\$239	Specify slider door assembly widths in 1" increments.
Base	<ul style="list-style-type: none">• 4"H base	+\$307	Specify to accept 4"H base.

Specification Information


Width	Style Number	U.S. Base Price
...
...
...

Four Equal Divided Lites

80"	GPDSST4E80	\$5525
96"	GPDSST4E96	\$5769
...

Privacy Wall Slider Doors with Tubular Pull

Four Transom-Aligned Lites



Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98

Tip: Upcharge per lite includes the glass in the door and the side panel.

	Standard Includes	Required to Specify
▶ Need help? Product details, page 50	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 120"H, in one-inch increments Slider door: glass 1/4"-thick clear tempered glass Door frame: paint Hardware (tubular door pull, slider lock, and cylinder): metal Side panel Slide hardware Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint Tubular door pull: brushed stainless Low-voltage knockout for door switch 	<ol style="list-style-type: none"> Style number Ceiling height Paint for frame and muntins Glass color number for full glass, if selected Glass color number(s) for three or four equal divided lites, if selected Glass color number(s) for two or four transom-aligned lites, if selected Paint color number for floor track Post extension Slide orientation Hardware (tubular pull, slider lock, and cylinder) finish, if selected: 4710 Low Gloss Black 8031 Brushed Stainless Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 362.

	Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 77	Specify paint color number.
	• Paint price group 3	+\$ 138	Specify paint color number.
	80"W doors 96"H through 120"H (per top lite row of glass)		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 277	Specify glass number for lite.
	• Glass price group 3	+\$ 331	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$1645	Specify glass number for lite.
	80"W doors 96"H through 120"H (per lower lite row of glass)		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 400	Specify glass number for lite.
	• Glass price group 3	+\$ 484	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$2106	Specify glass number for lite.
	96"W doors 96"H through 120"H (per top lite row of glass)		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 318	Specify glass number for lite.
	• Glass price group 3	+\$ 377	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$2506	Specify glass number for lite.
	96"W doors 96"H through 120"H (per lower lite row of glass)		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 481	Specify glass number for lite.
	• Glass price group 3	+\$ 577	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$2506	Specify glass number for lite.

▶ Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Hardware (pull, slider lock, and cylinder)	• 8031 Brushed Stainless	No cost	Specify with brushed stainless.
	• 4710 Low Gloss Black		
	– No lock – Lock	+\$ 32 +\$341	Specify with low gloss black. Specify with low gloss black.
Ceiling Height	• 8'0" through 9'0" • 9'1" through 10'0"	No cost +\$138	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Pull	• No pull	–\$135	Specify with no pull.
Lock	• Door lock with interior thumb latch	+\$649	Specify with lock.
Slide Orientation	• Left-hand slider door	No cost	Specify with left-hand slider door.
	• Right-hand slider door	No cost	Specify with right-hand slider door.
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Related Products	• Switches • Ceiling tracks • Continuous base trim • Feature strips		► Page 167 ► Page 240 ► Page 246 ► Page 250

► Page 51

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

Tip: Specify additional muntin(s) for use in five- or six-lite assembly applications. Maximum of six lites.
► See Understanding page 51.

Tip: Muntin quantity and location must match door assembly and side panel.
► See Understanding page 51.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass for 5th and 6th lite opening • See standard options for lower lite row glass price group above		Specify glass number for lite 5 or 6.
Muntin	Change muntin size • Change to 1½"H or 2¼"H	No cost	Specify change muntin size.
	Change muntin location • Change muntin location	No cost	Specify change muntin location.
	Additional muntin • Muntin	+\$239	Specify with muntin.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	• 76"W through 79"W and 81"W through 95"W	No cost	Specify slider door assembly widths in 1" increments.
	• 97"W through 113"W	+\$234	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	• 40"W doors: 81"W through 103"W	+\$239	Specify slider door assembly widths in 1" increments.
	• 48"W doors: 97"W through 111"W	+\$239	Specify slider door assembly widths in 1" increments.
Base	• 4"H base	+\$307	Specify to accept 4"H base.

► Specification Information, on next page



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull Four Transom-Aligned Lites, continued


► SmartTools options, on previous page

Specification Information

Width	Style Number	U.S. Base Price

Four Transom-Aligned Lites

80"	GPDSST4L80	\$5525
96"	GPDSST4L96	\$5769




For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Back-to-Back Cover

For Privacy Wall Slider Doors

Back-to-Back Cover



Standard Includes		Required to Specify
▶ Need help? Product details, page 52	<ul style="list-style-type: none">Back-to-back cover: paint price group 1Plinth: paint	<ol style="list-style-type: none">Style numberPaint color number for cover and plinthOptions, if selected (see below) <p>▶ See <i>Surface Materials</i>, page 362.</p>

	Options	U.S. Price	Required to Specify
Surface Materials	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 9	Specify paint color number.
	• Paint price group 3	+\$23	Specify paint color number.


Specification Information	
• Style • Number • • • •	• U.S. • Base • Price • • • •
GPDSCB	\$253
•	•
•	•

Privacy Wall


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Mini Ends

Mini Ends



Standard Includes		Required to Specify	
► Need help? Product details, page 70	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Telescoping mini end: paint 	1 Style number 2 Ceiling height 3 Paint color number for mini end 4 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	
Surface Materials	Options	U.S. Price	Required to Specify
	<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 5 Customer's Own Material/Vinyl (COM) 	No cost +\$ 9 +\$ 23 +\$125 +\$161 +\$214 +\$262 +\$125	Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. ► See <i>Surface Materials Reference Manual</i> .
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 10'0" 	No cost	Specify ceiling height in 1" increments.
Related Product	<ul style="list-style-type: none"> Wall panels 		► Page 110

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.


	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height	<ul style="list-style-type: none"> 7'5" through 7'11" 10'1" through 11'0" 	No cost +\$ 24	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Modified Angle (45° to 135° in 5° increments)	<ul style="list-style-type: none"> For GPMES For GPMEM For GPMEL 	+\$221 +\$234 +\$253	Specify <i>with modified angle</i> . Specify <i>with modified angle</i> . Specify <i>with modified angle</i> .
Base	<ul style="list-style-type: none"> 4"H base 	+\$ 24	Specify to accept 4"H base.

Specification Information		
Size	Style Number	U.S. Base Price
1½" to 2½"	GPMES	\$370
2½" to 3½"	GPMEM	\$370
3½" to 6"	GPMEL	\$480
:	:	:



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ► See page 1 for details.

Mini Ends to the Floor



Tip: Mini ends should be specified to the floor when positioned next to a door frame. Mini ends will be field-cut by installer to final length.

► Page 70

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify	
► Need help? Product details, page 70	<ul style="list-style-type: none">• Mini end: 10'1"H• Telescoping mini end: paint	1 Style number 2 Paint color number for mini end 3 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	
	Options	U.S. Price	Required to Specify
Surface Materials	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 9	Specify paint color number.
	• Paint price group 3	+\$ 23	Specify paint color number.
	• Fabric price group 1	+\$125	Specify fabric color number.
	• Fabric price group 2	+\$161	Specify fabric color number.
	• Fabric price group 3	+\$214	Specify fabric color number.
	• Fabric price group 5	+\$262	Specify fabric color number.
	• Customer's Own Material/ Vinyl (COM)	+\$125	► See <i>Surface Materials Reference Manual</i> .
Related Product	<ul style="list-style-type: none">• Wall panels	► Page 110	

	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height	<ul style="list-style-type: none"> 10'1" through 11'0" 	+\$ 24	Specify ceiling height in 1" increments.
Modified Angle (45° to 135° in 5° increments)	<ul style="list-style-type: none"> For GPMESF For GPMEMF For GPMELF 	+\$221 +\$234 +\$253	Specify with <i>modified angle</i> . Specify with <i>modified angle</i> . Specify with <i>modified angle</i> .

Specification Information		
Size	Style Number	U.S. Base Price
1½" to 2½"	GPMESF	\$370
2½" to 3½"	GPMEMF	\$370
3½" to 6"	GPMELF	\$480
.	.	.




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Wall Channels

Wall Channels



Tip: Wall channels are cut to size in the field.

Tip: Specify an end filler cut kit when cutting a panel into a wall channel. The end filler cut kit includes a wall channel and spreader.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 74 Wall channel, 10'0": paint 	<ul style="list-style-type: none"> 1 Style number 2 Paint color number for wall channel 3 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 362.

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 5 Customer's Own Material/ Vinyl (COM) 	<ul style="list-style-type: none"> No cost +\$ 9 +\$ 23 +\$125 +\$161 +\$214 +\$262 +\$125 	<ul style="list-style-type: none"> Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. ▶ See <i>Surface Materials Reference Manual</i>.

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 10'1" through 11'0" +\$ 24 	<ul style="list-style-type: none"> Specify ceiling height in 1" increments.

Specification Information			
Size	Length	Style Number	U.S. Base Price
1"	10'	GPWC1	\$195
2¼"	10'	GPWC2	\$195
4"	10'	GPWC4	\$228
:	:	:	:



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Panel End Cut Kit



Standard Includes		Required to Specify	
▶ Need help? Product details, page 78	• Panel spreader	1 Style number	
	• Leveler for 5" base	2 Paint color number	
	• Leveler reinforcement	3 Options, if selected (see below)	
	• Finished end: paint	▶ See <i>Surface Materials</i> , page 362.	

Options	U.S. Price	Required to Specify	
Surface Materials		Specify paint color number.	
• Paint price group 1	No cost	Specify paint color number.	
• Paint price group 2	+\$ 9	Specify paint color number.	
• Paint price group 3	+\$ 23	Specify paint color number.	
• Fabric price group 1	+\$125	Specify fabric color number.	
• Fabric price group 2	+\$161	Specify fabric color number.	
• Fabric price group 3	+\$214	Specify fabric color number.	
• Fabric price group 5	+\$262	Specify fabric color number.	
• Customer's Own Material/ Vinyl (COM)	+\$125	▶ See <i>Surface Materials Reference Manual</i> .	

Related Product	• Wall panels	▶ Page 110
------------------------	---------------	------------

Specification Information

Height	Style Number	U.S. Base Price
10'	GPWCCP	\$234




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

End Filler Cut Kit



Standard Includes		Required to Specify	
► Need help? Product details, page 78	<ul style="list-style-type: none"> Panel spreader Leveler for 5" base Leveler reinforcement Wall channel: paint 	1 Style number 2 Paint color number 3 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	
Options		U.S. Price	Required to Specify
Surface Materials	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 9	Specify paint color number.
	• Paint price group 3	+\$ 23	Specify paint color number.
	• Fabric price group 1	+\$125	Specify fabric color number.
	• Fabric price group 2	+\$161	Specify fabric color number.
	• Fabric price group 3	+\$214	Specify fabric color number.
	• Fabric price group 5	+\$262	Specify fabric color number.
	• Customer's Own Material/Vinyl (COM)	+\$125	► See <i>Surface Materials Reference Manual</i> .
Related Product	• Wall panels		► Page 110

Specification Information


• Style Number	• U.S. Base Price
GPWCCPSK	\$162

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Adapters



Tip: T- and X-adapter do not require finishes as those are not visible.

Tip: Panel end aligns to top of 5"H base.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify
<ul style="list-style-type: none"> ▶ Need help? Product details, page 80 Ceiling height from 8'0"H to 10'0"H, in one-inch increments Finished-end adapter or L-adapter: paint or anodized aluminum Plinth for finished-edge: paint 		1 Style number 2 Ceiling height on adapters 3 Paint color number for finished-end and L-adapter, if selected 4 Paint color number for plinths 5 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials Finished-end and L-adapters <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 5 Customer's Own Material/Vinyl (COM) Anodized aluminum 	No cost +\$ 4 +\$ 9 +\$ 56 +\$ 80 +\$100 +\$125 +\$ 56 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. ▶ See <i>Surface Materials Reference Manual</i> . Specify anodized aluminum.
Finished-end base plinth 96"W doors 96"H through 120"H		
<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$ 2 +\$ 4	Specify paint color number. Specify paint color number. Specify paint color number.
Ceiling Height for L-, T-, and X-adapters	<ul style="list-style-type: none"> 8'1" through 10'0" No cost	Specify ceiling height in 1" increments.
Related Products	<ul style="list-style-type: none"> Continuous base trim Feature strips 	▶ Page 246 ▶ Page 250
SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 7'5" through 7'11" 10'1" through 11'0" No cost +\$ 24	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Base	<ul style="list-style-type: none"> 4"H base +\$ 24	Specify to accept 4"H base.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Specification Information

Style Number	U.S. Base Price
-----------------	-----------------------

Finished-End Adapter with Base

GPAFEB	\$238
--------	-------

L-Adapter





GPAL	\$238
------	-------

T-Adapter

GPAT	\$125
------	-------


X-Adapter

GPAX	\$174
------	-------




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Posts



Tip: X-post does not require a finish since the post is not visible.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify	
► Need help? Product details, page 84	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Post: paint or anodized aluminum (except X-post) 	1 Style number 2 Ceiling height 3 Paint color number for post 4 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	

Options	U.S. Price	Required to Specify	
Surface Materials Post (except X-post) <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 5 Customer's Own Material/Vinyl (COM) Anodized aluminum 	No cost +\$ 9 +\$ 23 +\$125 +\$161 +\$214 +\$262 +\$125 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. ► See <i>Surface Materials Reference Manual</i> . Specify anodized aluminum.	
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 10'0" No cost	Specify ceiling height in 1" increments.	

SmartTools Options	U.S. Price	Required to Specify	
Parametric Ceiling Height (Available in 1" increments) <ul style="list-style-type: none"> 7'5" through 7'11" 10'1" through 11'0" 	No cost +\$ 24	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.	
Base	<ul style="list-style-type: none"> 4"H base +\$ 24	Specify to accept 4"H base.	
Modified Angle (70° to 175° in 5° increments) <ul style="list-style-type: none"> For GPP120V 70°-85° For GPP120V 95°-115° For GPP135V 125°-175° 	+\$633 +\$561 +\$561	Specify <i>with modified angle</i> . Specify <i>with modified angle</i> . Specify <i>with modified angle</i> .	




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Specification Information

L-Post




•Style
Number

•U.S.
Base
Price

GPPL

\$232

T-Post




•Style
Number

•U.S.
Base
Price

GPPT

\$276

X-Post




•Style
Number

•U.S.
Base
Price

GPPX

\$313

In-Line Post




•Style
Number

•U.S.
Base
Price

GPPI

\$232

V-Posts



•Configuration

•Style
Number

•U.S.
Base
Price

120° V-Post

GPP120V


\$276

135° V-Post

GPP135V

\$276

135° Y-Post



•Style
Number

•U.S.
Base
Price

GPP135Y

\$313




For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

I-Line Interface Post



Standard Includes		Required to Specify
► Need help? Product details, page 20	<ul style="list-style-type: none"> Interface post: paint 	1 Style number 2 Paint color number 3 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials I-Line post <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 5 Customer's Own Material/Vinyl (COM) 	No cost +\$ 9 +\$ 23 +\$125 +\$161 +\$214 +\$262 +\$125	Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. ► See <i>Surface Materials Reference Manual</i> .
Related Products	<ul style="list-style-type: none"> Feature strips 	► Page 250

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.


SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 10'1" through 11'0" +\$ 24 	Specify ceiling height in 1" increments.

Specification Information		
Length	Style Number	U.S. Base Price
10'	GPIA	\$197



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ► See page 1 for details.

Glass Selections All-Glass Wall Panels



Tip: Order ceiling track, feature strip, and continuous base trim separately.

	Standard Includes	Required to Specify
► Need help? Product details, page 24	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with frame: paint or anodized aluminum 1/4"-thick factory-installed lite: glass Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	1 Style number 2 Ceiling height 3 Paint color number for frame 4 Glass number for lite 5 Post extension 6 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.

Surface Materials	Options	U.S. Price	Required to Specify
	Frame <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Anodized aluminum 	No cost +\$ 41 +\$ 72 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
	Panels 96"H through 120"H, 6"W to 8"W <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 146 +\$ 180 N.A. N.A. N.A. +\$ 776	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Panels 96"H through 120"H, 18"W to 24"W <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 446 +\$ 535 N.A. N.A. N.A. +\$2330	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Panels 96"H through 120"H, 30"W to 36"W <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 669 +\$ 798 N.A. N.A. N.A. +\$3497	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Panels 96"H through 120"H, 40"W to 48"W <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 894 +\$1059 N.A. N.A. N.A. +\$4660	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Panels 96"H through 120"H, 60"W <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$1114 +\$1324 N.A. N.A. N.A. +\$5825	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .

► Options, continued on next page



For Canadian Pricing
 Multiply U.S. Price by the
 Canadian price factor.
 ► See page 1 for details.

► Options, continued from previous page


	Options	U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify <i>with post extensions for recessed ceiling track interface.</i>
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify <i>with post extensions for overlapping ceiling track interface.</i>
Ceiling Height	• 8'0" through 9'0" • 9'1" through 10'0"	No cost +\$141	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic • 3+1 • 2+2 • 3SN	+\$306 +\$306 +\$306	Specify <i>with 3+1 power.</i> Specify <i>with 2+2 power.</i> Specify <i>with 3SN power.</i>
Related Products	• Power options • Ceiling tracks • Continuous base trim • Feature strips • Power receptacles • Power and communication cover plates • Infeeds • Modular harnesses • Field-installed powerkits		▶ Page 140 ▶ Page 240 ▶ Page 246 ▶ Page 250 ▶ Page 257 ▶ Page 241 ▶ Page 260 ▶ Page 241 ▶ Page 264

Tip: Base power block location does not include infeed. Infeed must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.


	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	Use U.S. Base Price of next larger width	Specify panel widths in 1" increments.
	• Non standard modular widths	Use U.S. Base Price of next larger width	Specify panel widths in 1" increments.
Base	• 2½"H base • 4"H base	+\$124 +\$307	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information							
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price	
All-Glass Wall Panels							
6"	GPGSSG06	\$1088					
8"	GPGSSG08	\$1088					
18"	GPGSSG18	\$1208					
20"	GPGSSG20	\$1208					
24"	GPGSSG24	\$1341					
30"	GPGSSG30	\$1418					
36"	GPGSSG36	\$1576					
40"	GPGSSG40	\$1656					
42"	GPGSSG42	\$1656					
48"	GPGSSG48	\$1861					
60"	GPGSSG60	\$2235					
Modular All-Glass Wall Panels							
8"			16½"	GPGSMG08	\$1088		
18"			16½"	GPGSMG18	\$1208		
20"			18½"	GPGSMG20	\$1208		
24"			22½"	GPGSMG24	\$1341		
30"			28½"	GPGSMG30	\$1418		
36"			34½"	GPGSMG36	\$1576		
40"			38½"	GPGSMG40	\$1656		
42"			40½"	GPGSMG42	\$1656		
48"			46½"	GPGSMG48	\$1861		
60"			58½"	GPGSMG60	\$2235		



Tip: Ceiling height panels from 10'0"H through 11'0"H are available in widths up to 48" only.

Glass Selections All-Glass Frame Kits



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: When power option is specified, connector harness is included to join power blocks with frame kit.

Tip: Frame kits include two power blocks per kit.

Tip: Frame kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 24</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with frame: paint or anodized aluminum Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for frame Post extension Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Anodized aluminum 	No cost +\$ 41 +\$ 72 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
Post Extension <ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost	Specify <i>with post extensions for recessed ceiling track interface</i> . Specify <i>with post extensions for overlapping ceiling track interface</i> .
Ceiling Height <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power <ul style="list-style-type: none"> 3+1 2+2 3SN 	Base power block power schematic +\$747 +\$747 +\$747	Specify <i>with 3+1 power</i> . Specify <i>with 2+2 power</i> . Specify <i>with 3SN power</i> .
Related Products <ul style="list-style-type: none"> Power options Ceiling tracks Continuous base trim Feature strips Power receptacles Power and communication cover plates Infeeds Modular harnesses Field-installed powerkits 		► Page 140 ► Page 240 ► Page 246 ► Page 250 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264


SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11" Use 8'0" price	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths • Non standard modular widths Use U.S. Base Price of next larger width Use U.S. Base Price of next larger width	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base <ul style="list-style-type: none"> 2½"H base 4"H base 	+\$253 +\$462	Specify to accept 2½"H base. Specify to accept 4"H base.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.




Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
All-Glass Frame Kits			Modular All-Glass Frame Kits			
72"	GPGSSGFK72	\$1558	72"	70 ¹¹ / ₁₆ "	GPGSMGFK72	\$1558
80"	GPGSSGFK80	\$1668	80"	78 ¹¹ / ₁₆ "	GPGSMGFK80	\$1668
84"	GPGSSGFK84	\$1787	84"	82 ¹¹ / ₁₆ "	GPGSMGFK84	\$1787
96"	GPGSSGFK96	\$1915	96"	94 ¹¹ / ₁₆ "	GPGSMGFK96	\$1915
108"	GPGSSGFK108	\$2043	108"	106 ¹¹ / ₁₆ "	GPGSMGFK108	\$2043
120"	GPGSSGFK120	\$2189	120"	118 ¹¹ / ₁₆ "	GPGSMGFK120	\$2189
144"	GPGSSGFK144	\$2344	144"	142 ¹¹ / ₁₆ "	GPGSMGFK144	\$2344
.

Privacy Wall


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Glass Selections All-Glass Glass Kits



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Glass kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: Glass kits 72"W to 96"W have two pieces of glass. Kits 108"W to 144"W have three pieces of glass.

Standard Includes			Required to Specify
► Need help? Product details, page 24	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 3/8"-thick clear tempered glass 		1 Style number 2 Ceiling height 3 Glass number for lite 4 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.
Options			Required to Specify
Surface Materials	Glass Panels 8'0" through 10'0" for 72"W and 80"W Kits		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost N.A. +\$3418 N.A. N.A. N.A. N.A. N.A.	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		
	Glass Panels 8'0" through 10'0" for 84"W and 96"W Kits		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost N.A. +\$4103 N.A. N.A. N.A. N.A. N.A.	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		
	Glass Panels 8'0" through 10'0" for 108"W, 120"W, and 144"W Kits		
	<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost N.A. +\$5130 N.A. N.A. N.A. N.A. N.A.	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	► See <i>Surface Materials Reference Manual</i> .		
Ceiling Height	<ul style="list-style-type: none"> 8'0"H through 9'0"H 9'1"H through 10'0"H 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products	<ul style="list-style-type: none"> Power options Ceiling tracks Continuous base trim Feature strips Power receptacles Power and communication cover plates Infeeds Modular harnesses Field-installed powerkits 		► Page 140 ► Page 240 ► Page 246 ► Page 250 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

► Options, continued from previous page

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 7'5"H through 7'11"H (for widths 96" or less) 7'5"H through 7'11"H (for widths 97"W and greater) 	No cost No cost Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	Overall unit widths <ul style="list-style-type: none"> 61"W through 97"W (excludes standard widths) 97"W through 143"W (excludes standard widths) 	No cost No cost Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	2½"H base <ul style="list-style-type: none"> 61"W through 96"W 97"W through 144"W 4"H base <ul style="list-style-type: none"> 4"H base 	+\$27 +\$41 No cost Specify to accept 2½"H base. Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
All-Glass Glass Kits			Modular All-Glass Glass Kits			
72"	GPGSSGGK72	\$2468	72"	70 ¹¹ / ₁₆ "	GPGSMGGK72	\$2468
80"	GPGSSGGK80	\$2747	80"	78 ¹¹ / ₁₆ "	GPGSMGGK80	\$2747
84"	GPGSSGGK84	\$2883	84"	82 ¹¹ / ₁₆ "	GPGSMGGK84	\$2883
96"	GPGSSGGK96	\$3297	96"	94 ¹¹ / ₁₆ "	GPGSMGGK96	\$3297
108"	GPGSSGGK108	\$3707	108"	106 ¹¹ / ₁₆ "	GPGSMGGK108	\$3707
120"	GPGSSGGK120	\$4120	120"	118 ¹¹ / ₁₆ "	GPGSMGGK120	\$4120
144"	GPGSSGGK144	\$4788	144"	142 ¹¹ / ₁₆ "	GPGSMGGK144	\$4788
:	:	:	:	:	:	:


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Wall Panels with Two Divided Lites

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> ▶ Need help? Product details, page 24 Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with frame: paint or anodized aluminum Two, 1/4"-thick factory-installed lites—top lite is transom aligned: glass Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	<ol style="list-style-type: none"> 1 Style number 2 Ceiling height 3 Paint color number for frame 4 Glass number for lite 1 (from top) 5 Glass number for lite 2 6 Post extension 7 Options, if selected (see below) <p>▶ See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Frame <ul style="list-style-type: none"> Paint price group 1 No cost Paint price group 2 +\$ 41 Paint price group 3 +\$ 72 Anodized aluminum No cost 		Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
Top Lite Glass Panels 8'0" through 10'0", 6"W through 8"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 25 Glass price group 3 +\$ 34 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$ 137 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 6"W through 8"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 122 Glass price group 3 +\$ 144 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$ 640 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 18"W through 24"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 81 Glass price group 3 +\$ 97 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$ 412 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 18"W through 24"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 362 Glass price group 3 +\$ 429 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$1919 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 30"W through 36"W		
<ul style="list-style-type: none"> Glass price group 1 No cost Glass price group 2 +\$ 119 Glass price group 3 +\$ 140 Glass price group 4 N.A. Glass price group 5 N.A. Glass price group 6 N.A. Glass price group 7 +\$ 617 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		

▶ Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Surface Materials, continued	Lower Lite Glass Panels 8'0" through 10'0" (per lite), 30"W through 36"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 542	Specify glass number for lite.
	• Glass price group 3	+\$ 645	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$2880	Specify glass number for lite.
	▶ See Surface Materials Reference Manual.		
	Top Lite Glass Panels 8'0" through 10'0", 40"W through 48"W		
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 159	Specify glass number for lite.	
• Glass price group 3	+\$ 190	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$ 822	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 40"W through 48"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 720	Specify glass number for lite.	
• Glass price group 3	+\$ 860	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$3837	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Top Lite Glass Panels 8'0" through 10'0", 60"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 201	Specify glass number for lite.	
• Glass price group 3	+\$ 237	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$1028	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 60"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 899	Specify glass number for lite.	
• Glass price group 3	+\$1075	Specify glass number for lite.	
• Glass price group 4	N.A.	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	N.A.	Specify glass number for lite.	
• Glass price group 7	+\$4799	Specify glass number for lite.	
▶ See Surface Materials Reference Manual.			
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 141	Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1	+\$ 306	Specify with 3+1 power.
	• 2+2	+\$ 306	Specify with 2+2 power.
	• 3SN	+\$ 306	Specify with 3SN power.

► Options, continued on next page

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Glass Selections Wall Panels with Two Divided Lites, Transom-Aligned Top Lite, continued

► Options, continued from previous page

Related Products


- Power options ► Page 140
- Ceiling tracks ► Page 240
- Continuous base trim ► Page 246
- Feature strips ► Page 250
- Power receptacles ► Page 257
- Power and communication cover plates ► Page 241
- Infeeds ► Page 260
- Modular harnesses ► Page 241
- Field-installed powerkits ► Page 264

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	Use U.S. Base Price of next larger standard width	Specify panel widths in 1" increments.
	• Non standard modular widths	Use U.S. Base Price of next larger standard width	Specify panel widths in 1" increments.
Base	• 2½"H base	+\$124	Specify to accept 2½"H base.
	• 4"H base	+\$307	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGSS2L06	\$1357				
8"	GPGSS2L08	\$1357	8"	611/16"	GPGSM2L08	\$1357
18"	GPGSS2L18	\$1474	18"	1811/16"	GPGSM2L18	\$1474
20"	GPGSS2L20	\$1474	20"	1811/16"	GPGSM2L20	\$1474
24"	GPGSS2L24	\$1565	24"	2211/16"	GPGSM2L24	\$1565
30"	GPGSS2L30	\$1602	30"	2811/16"	GPGSM2L30	\$1602
36"	GPGSS2L36	\$1751	36"	3411/16"	GPGSM2L36	\$1751
40"	GPGSS2L40	\$1757	40"	3811/16"	GPGSM2L40	\$1757
42"	GPGSS2L42	\$1757	42"	4011/16"	GPGSM2L42	\$1757
48"	GPGSS2L48	\$1918	48"	4611/16"	GPGSM2L48	\$1918
60"	GPGSS2L60	\$2414	60"	5811/16"	GPGSM2L60	\$2414
:	:	:	:	:	:	:



For Canadian Pricing


Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections
Wall Panels with
Two Divided Lites

Glass Selections Two Divided Lite Frame Kits

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Frame kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: Frame kits include two power blocks per kit.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 24</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with frame: paint or anodized aluminum Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for frame Post extension Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Frame Paint price group 1 Paint price group 2 Paint price group 3 Anodized aluminum 	No cost +\$ 41 +\$ 72 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
Post Extension <ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Ceiling Height <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power <ul style="list-style-type: none"> Base power block power schematic 3+1 2+2 3SN 	+\$747 +\$747 +\$747	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products <ul style="list-style-type: none"> Power options Ceiling tracks Continuous base trim Feature strips Power receptacles Power and communication cover plates Infeeds Modular harnesses Field-installed powerkits 		► Page 140 ► Page 240 ► Page 246 ► Page 250 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264


SmartTools Options	U.S. Price	Required to Specify
Parametric Panel Widths (Available in 1" increments) <ul style="list-style-type: none"> Non standard widths Non standard modular widths 	Use U.S. Base Price of next larger standard width Use U.S. Base Price of next larger standard width	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base <ul style="list-style-type: none"> 2½"H base 4"H base 	+\$253 +\$462	Specify to accept 2½"H base. Specify to accept 4"H base.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.



Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Two Divided Lite Frame Kits			Modular Two Divided Lite Frame Kits			
72"	GPGSS2FK72	\$1943	72"	70 ¹¹ / ₁₆ "	GPGSM2FK72	\$1943
80"	GPGSS2FK80	\$2078	80"	78 ¹¹ / ₁₆ "	GPGSM2FK80	\$2078
84"	GPGSS2FK84	\$2223	84"	82 ¹¹ / ₁₆ "	GPGSM2FK84	\$2223
96"	GPGSS2FK96	\$2381	96"	94 ¹¹ / ₁₆ "	GPGSM2FK96	\$2381
108"	GPGSS2FK108	\$2546	108"	106 ¹¹ / ₁₆ "	GPGSM2FK108	\$2546
120"	GPGSS2FK120	\$2726	120"	118 ¹¹ / ₁₆ "	GPGSM2FK120	\$2726
144"	GPGSS2FK144	\$2915	144"	142 ¹¹ / ₁₆ "	GPGSM2FK144	\$2915


**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Selections Two Divided Lite Glass Kits

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Glass kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: Glass kits 72"W to 96"W have two pieces of glass. Kits 108"W to 144"W have three pieces of glass.

Standard Includes		Required to Specify
► Need help? Product details, page 24	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 3/8"-thick clear tempered glass Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	1 Style number 2 Ceiling height 3 Glass number for lite 1 (from top) 4 Glass number for lite 2 5 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.

Options	U.S. Price	Required to Specify
Surface Materials		
Top Lite Glass Panels 8'0" through 10'0", 72"W through 80"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 687	Specify glass number for lite.
• Glass price group 3	+\$ 863	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$3107	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 72"W through 80"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$2078	Specify glass number for lite.
• Glass price group 3	+\$2528	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$4660	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 84"W through 96"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 863	Specify glass number for lite.
• Glass price group 3	+\$1068	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$3729	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 84"W through 96"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$2399	Specify glass number for lite.
• Glass price group 3	+\$2917	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$5591	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 108"W through 144"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$1117	Specify glass number for lite.
• Glass price group 3	+\$1379	Specify glass number for lite.
• Glass price group 4	N.A.	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	N.A.	Specify glass number for lite.
• Glass price group 7	+\$5591	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


► Options, continued from previous page

Options	U.S. Price	Required to Specify
Surface Materials, continued Lower Lite Glass Panels 8'0" through 10'0" (per lite), 108"W through 144"W <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$3045 +\$3689 N.A. N.A. N.A. +\$8389	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
Ceiling Height <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products <ul style="list-style-type: none"> Power options Ceiling tracks Continuous base trim Feature strips Power receptacles Power and communication cover plates Infeeds Modular harnesses Field-installed powerkits 		► Page 140 ► Page 240 ► Page 246 ► Page 250 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal *Specials RFQ (Request For Quote)* process.

SmartTools Options	U.S. Price	Required to Specify
Parametric Panel Widths (Available in 1" increments)		
Overall unit widths <ul style="list-style-type: none"> 61"W through 95"W (excludes standard widths) 97"W through 143"W (excludes standard widths) 	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base <ul style="list-style-type: none"> 2½"H base <ul style="list-style-type: none"> 61"W through 96"W 97"W through 144"W 4"H base <ul style="list-style-type: none"> 4"H base 	+\$ 27 +\$ 41 No cost	Specify to accept 2½"H base. Specify to accept 2½"H base. Specify to accept 4"H base.


Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Two Divided Lite Glass Kits			Modular Two Divided Lite Glass Kits			
72"	GPGSS2GK72	\$2801	72"	70 ¹¹ / ₁₆ "	GPGSM2GK72	\$2801
80"	GPGSS2GK80	\$3065	80"	78 ¹¹ / ₁₆ "	GPGSM2GK80	\$3065
84"	GPGSS2GK84	\$3194	84"	82 ¹¹ / ₁₆ "	GPGSM2GK84	\$3194
96"	GPGSS2GK96	\$3580	96"	91 ¹¹ / ₁₆ "	GPGSM2GK96	\$3580
108"	GPGSS2GK108	\$3973	108"	106 ¹¹ / ₁₆ "	GPGSM2GK108	\$3973
120"	GPGSS2GK120	\$4367	120"	118 ¹¹ / ₁₆ "	GPGSM2GK120	\$4367
144"	GPGSS2GK144	\$5143	144"	142 ¹¹ / ₁₆ "	GPGSM2GK144	\$5143
.



For Canadian Pricing
 Multiply U.S. Price by the
 Canadian price factor.
 ► See page 1 for details.

Glass Selections Clerestory Wall Panels

Transom-Aligned Top Lite



Tip: Order ceiling track feature strip, and continuous base trim separately.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Metallic paint is available on panel skins that are 36" wide or less.

Standard Includes	Required to Specify
<p>▶ Need help? Product details, page 24</p> <ul style="list-style-type: none"> • Frame: paint or anodized aluminum • Ceiling height from 8'0"H to 10'0"H, in one-inch increments • 2³/₈"-thick panel with steel surfaces: paint • Factory-installed Clerestory lite: glass • Integral slotted verticals • Hollow core panel for cable and panel routing • Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) 	<ol style="list-style-type: none"> 1 Style number 2 Ceiling height 3 Paint color number for frame 4 Paint color number for side 1 5 Paint color number for side 2 6 Glass number for Clerestory lite 7 Post extension 8 Options, if selected (see below) <p>▶ See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials	Frame <ul style="list-style-type: none"> • Paint price group 1 No cost • Paint price group 2 +\$ 41 • Paint price group 3 +\$ 72 • Anodized aluminum No cost 	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
Lower panel surfaces 8'0"H through 10'0"H (per side), 18"W to 24"W		
<ul style="list-style-type: none"> • Paint price group 1 No cost • Paint price group 2 +\$ 26 • Paint price group 3 +\$ 47 • Fabric price group 1 +\$202 		Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Fabric price group 2 +\$284 		Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Fabric price group 3 +\$375 		Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Fabric price group 5 +\$475 		Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Customer's Own Material/Vinyl (COM) +\$196 		▶ See <i>Surface Materials Reference Manual</i> .
Clerestory lite glass panels 8'0"H through 10'0"H		
<ul style="list-style-type: none"> • Glass price group 1 No cost • Glass price group 2 +\$ 81 • Glass price group 3 +\$ 97 • Glass price group 4 N.A. • Glass price group 5 N.A. • Glass price group 6 N.A. • Glass price group 7 +\$412 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Lower panel surfaces 8'0"H through 10'0"H (per side), 30"W to 36"W		
<ul style="list-style-type: none"> • Paint price group 1 No cost • Paint price group 2 +\$ 53 • Paint price group 3 +\$ 82 • Fabric price group 1 +\$307 		Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Fabric price group 2 +\$457 		Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Fabric price group 3 +\$677 		Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Fabric price group 5 +\$880 		Specify fabric color number for side 1 and/or side 2.
<ul style="list-style-type: none"> • Customer's Own Material/Vinyl (COM) +\$284 		▶ See <i>Surface Materials Reference Manual</i> .
Clerestory lite glass panels 8'0"H through 10'0"H		
<ul style="list-style-type: none"> • Glass price group 1 No cost • Glass price group 2 +\$119 • Glass price group 3 +\$140 • Glass price group 4 N.A. • Glass price group 5 N.A. • Glass price group 6 N.A. • Glass price group 7 +\$617 		Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.

▶ Options, continued on next page



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Surface Materials, continued	Lower panel surfaces 8'0"H through 10'0"H (per side) 40"W to 48"W		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 3	+\$ 82	Specify paint color number.
	• Fabric price group 1	+\$ 307	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$ 457	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$ 677	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$ 880	Specify fabric color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$ 284	► See <i>Surface Materials Reference Manual</i> .
	Clerestory lite glass panels 8'0"H through 10'0"H, 40"W to 48"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 159	Specify glass number for lite.
	• Glass price group 3	+\$ 190	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$ 822	Specify glass number for lite.
	Lower panel surfaces 8'0"H through 10'0"H (per side) 60"W		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 3	+\$ 82	Specify paint color number.
	• Fabric price group 1	+\$ 307	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$ 457	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$ 677	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$ 880	Specify fabric color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$ 284	► See <i>Surface Materials Reference Manual</i> .
	Clerestory lite glass panels 8'0"H through 10'0"H, 60"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 201	Specify glass number for lite.
	• Glass price group 3	+\$ 237	Specify glass number for lite.
	• Glass price group 4	N.A.	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	N.A.	Specify glass number for lite.
	• Glass price group 7	+\$1028	Specify glass number for lite.
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify <i>with post extensions for recessed ceiling track interface</i> .
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify <i>with post extensions for overlapping ceiling track interface</i> .
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 141	Specify ceiling height in 1" increments.

► Options, continued on next page

Tip: Customer's Own Glass is available as a special at this time.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Clerestory Wall Panels, Transom-Aligned Top Lite, continued

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Electrical Power (30"W through 60"W)	Power block location <ul style="list-style-type: none"> • Base • ADA height • Desk height 	+\$ 306 +\$1116 +\$1116	Specify with power block location at base. Specify with power block location at ADA height. Specify with power block location at desk height.
	Power schematic <ul style="list-style-type: none"> • 3+1 • 2+2 • 3SN 	No cost No cost No cost	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
	New York City/Chicago power prep <ul style="list-style-type: none"> • NYC/CHI at base • NYC/CHI at ADA or desk height side 1 • NYC/CHI at ADA or desk height side 2 • NYC/CHI at ADA or desk height sides 1 and 2 	N.A. +\$ 37 +\$ 37 +\$ 77	Specify with NYC/CHI at base. Specify with NYC/CHI at ADA or desk height side 1. Specify with NYC/CHI at ADA or desk height side 2. Specify with NYC/CHI at ADA or desk height sides 1 and 2.
	Receptacle cutouts <ul style="list-style-type: none"> • Power side 1 • Power side 2 • Power sides 1 and 2 • Power/comm side 1 • Power/comm side 2 • Power/comm sides 1 and 2 	No cost No cost +\$ 37 No cost No cost +\$ 37	Specify with power side 1. Specify with power side 2. Specify with power sides 1 and 2. Specify with power/comm side 1. Specify with power/comm side 2. Specify with power/comm sides 1 and 2.
	Floor Infeeds <ul style="list-style-type: none"> • Bottom left hardwire • Bottom left modular 	No cost +\$ 141	Specify with bottom left hardwire. Specify with bottom left modular.
	Related Products <ul style="list-style-type: none"> • Power options • Ceiling tracks • Continuous base trim • Feature strips • Power receptacles • Power and communication cover plates • Infeeds • Modular harnesses • Field-installed powerkits 		► Page 140 ► Page 240 ► Page 246 ► Page 250 ► Page 257 ► Page 241 ► Page 260 ► Page 241 ► Page 264

Tip: To price power in two locations, add the upcharges together.

Tip: Infeed is included in the price of ADA- or desk-height receptacle power location option.

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: NYC/CHI prices replace the receptacle power location option prices when selected.


Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W.

	SmartTools Options	U.S. Price	Required to Specify
7610 White Markerboard Surface	<ul style="list-style-type: none"> • 6"W through 24"W • 25"W through 36"W • 37"W through 48"W 	+\$ 657 +\$ 704 +\$ 754	Specify with markerboard. Specify with markerboard. Specify with markerboard.
Parametric Panel Widths (Available in 1" increments)	<ul style="list-style-type: none"> • Non standard widths • Non standard modular widths 	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	<ul style="list-style-type: none"> • 2½"H base • 4"H base 	+\$ 113 +\$ 83	Specify to accept 2½"H base. Specify to accept 4"H base.



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ► See page 1 for details.



Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Clerestory Panels			Modular Clerestory Panels			
18"	GPGSSC18	\$1785	18"	16 ¹¹ / ₁₆ "	GPGSMC18	\$1785
20"	GPGSSC20	\$1785	20"	18 ¹¹ / ₁₆ "	GPGSMC20	\$1785
24"	GPGSSC24	\$1888	24"	22 ¹¹ / ₁₆ "	GPGSMC24	\$1888
30"	GPGSSC30	\$1982	30"	28 ¹¹ / ₁₆ "	GPGSMC30	\$1982
36"	GPGSSC36	\$2046	36"	34 ¹¹ / ₁₆ "	GPGSMC36	\$2046
40"	GPGSSC40	\$2109	40"	38 ¹¹ / ₁₆ "	GPGSMC40	\$2109
42"	GPGSSC42	\$2109	42"	40 ¹¹ / ₁₆ "	GPGSMC42	\$2109
48"	GPGSSC48	\$2182	48"	46 ¹¹ / ₁₆ "	GPGSMC48	\$2182
60"	GPGSSC60	\$2809	60"	58 ¹¹ / ₁₆ "	GPGSMC60	\$2809

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Selections Pivot-Hinged Door Frames



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Recommended for use with Glass Selections panels only.

Tip: Glass Selections pivot-hinged door frames work with Glass Selections door leaves only.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.

Tip: Order switch separately.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 42</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Reversible, pivot-hinged door frame with plinths: paint or anodized aluminum Door base: paint Factory prep for pivot hinges <i>Tip: Order door hardware separately.</i> Transom, if selected: glass 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for frame Paint color number for door base Swing orientation Glass number for transom, if selected Metal color number for strike plate, if selected: <ul style="list-style-type: none"> 9200 Satin Chrome 9201 Polished Chrome Post extension Factory prep for cylindrical or mortise passage set or lockset, if selected Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials	Frame <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Anodized aluminum 	No cost +\$ 41 +\$ 74 No cost
	Base <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$ 9 +\$ 23
	Strike plate <ul style="list-style-type: none"> Satin chrome Polished chrome 	No cost +\$ 36
	Single door frames with transom 8'0"H through 10'0"H <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 136 +\$ 164 N.A. N.A. N.A. N.A. +\$ 850
	Pair door frames with transom 8'0"H through 10'0"H <ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 267 +\$ 329 N.A. N.A. N.A. N.A. +\$1700
Post Extension	<ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost
Ceiling Height	Single door frames <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75
	Pair door frames <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 138

► Options, continued on next page



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

► Options, continued from previous page

Options	U.S. Price	Required to Specify
Swing Orientation ► Page 48	For single pivot-hinged door frame with transom <ul style="list-style-type: none"> Left-hand door frame Right-hand door frame 	No cost No cost
Lock Prep ► Page 44	<ul style="list-style-type: none"> Strike plate and factory prep for cylindrical passage set or lockset Strike plate and factory prep for mortise passage set or lockset 	No cost +\$107
Related Products	<ul style="list-style-type: none"> Door leaves Passage sets and locksets Hinges Stops Ceiling tracks Feature strips 	Specify with left-hand door frame. Specify with right-hand door frame. Specify with cylindrical prep. Specify with mortise prep. ► Pages 214–220 ► Page 160 ► Page 165 ► Page 165 ► Page 240 ► Page 250

Tip: Swing orientation is available on single pivot-hinged door frame with transom only to properly orient etched and patterned glass.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

SmartTools Options	U.S. Price	Required to Specify
Base <ul style="list-style-type: none"> 2½"H base 4"H base 	+\$ 78 +\$ 83	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information		
Width	Style Number	U.S. Base Price
:	:	:

Single Door Frames

Full-Height

40"	GPGSDSPF	\$1172
-----	-----------------	--------

With Transom

40"	GPGSDSPT	\$2297
-----	-----------------	--------

:	:	:
---	---	---

Pair Frames

Full-Height

80"	GPGSDPPF	\$1228
-----	-----------------	--------

With Transom

80"	GPGSDPPT	\$2449
-----	-----------------	--------

:	:	:
---	---	---

Single Door Frames for Use with Switch Cutout


Full-Height

42"	GPGSDSPFS	\$2079
-----	------------------	--------


With Transom

42"	GPGSDSPTS	\$3180
-----	------------------	--------

:	:	:
---	---	---

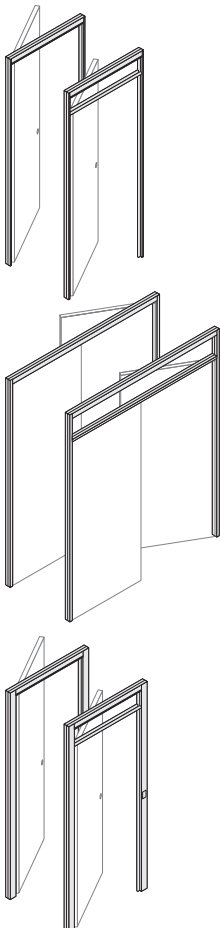

Glass Selections Full-Height Butt-Hinged Door Frame



► Need help?
Product details,
page 38

Standard Includes

- Ceiling height from 7'5"H to 10'0"H, in 1" increments
Exception: maximum height of 42" wide door is 9'0" ceiling height.
- Factory prep for hinges
- Plinths for base trim
Tip: Door hardware is ordered separately.

Required to Specify

- Style number
 - Ceiling height (see below under Required Selections)
 - Width (see below under Required Selections)
 - Post extension (see below under Required Selections)
 - Paint color number for door frame
 - Paint color number for base
 - Options, if selected (see below)
- See *Surface Materials*, page 362.

Tip: 42" wide door frame has maximum height 108".

Tip: In order to ensure proper engagement at the drop seal, door frame cannot accommodate any fluctuation in floor height when drop seal is specified.

	Required Selections	U.S. Price	Required to Specify
--	---------------------	------------	---------------------

Ceiling Height	• 7'5"–10'0"	No cost	Specify ceiling height in 1" increments.
-----------------------	--------------	---------	--

Width	• 40" • 42"	No cost No cost	Specify 40". Specify 42".
--------------	----------------	--------------------	------------------------------

Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately) • Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
-----------------------	---	--------------------	---

	Options	U.S. Price	Required to Specify
--	---------	------------	---------------------

Surface Materials	Door frame • Paint price group 1 • Paint price group 2 • Paint price group 3 • Anodized aluminum	No cost +\$39 +\$65 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify with anodized aluminum.
--------------------------	---	--------------------------------------	--

	Base • Paint price group 1 • Paint price group 2 • Paint price group 3 • Anodized aluminum	No cost +\$ 9 +\$22 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify with anodized aluminum.
--	---	--------------------------------------	--

Base	• 2½" base • 5" base	No cost No cost	Specify with 2½" base. Specify with 5" base.
-------------	-------------------------	--------------------	---

Swing Orientation	• Left hand door leaf • Right hand door leaf	No cost No cost	Specify with left hand door leaf. Specify with right hand door leaf.
--------------------------	---	--------------------	---


Latch prep	• Cylindrical • Mortise • Push/pull • Ladder aligned • Ladder offset • Custom pull	No cost No cost No cost No cost No cost No cost	Specify with cylindrical. Specify with mortise. Specify with push/pull. Specify with ladder aligned. Specify with ladder offset. Specify with custom pull.
-------------------	---	--	---

Roller Latch	• No roller latch • Top roller latch	No cost No cost	Specify with no roller latch. Specify with top roller latch
---------------------	---	--------------------	--

Hinge Type	• Butt hinge • Slim line hinge	No cost No cost	Specify with butt hinge. Specify with slim line hinge.
-------------------	-----------------------------------	--------------------	---

Switch Cutout	• No switch cutout • Low voltage cutout	No cost +\$41	Specify with no switch cutout. Specify with low voltage switch cutout.
----------------------	--	------------------	---

Tip: As an alternative to a frame with switch cutout, you can position a low-voltage switch in an in-line feature strip adjacent to the door frame.



Specification Information		
Width	Style Number	U.S. Base Price
40" or 42"	GPGSDSBF	\$2112


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Glass Selections Full-Height Pivot-Hinged Door Leaves



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Tip: Ceiling height option is available on solid door leaves only.

Standard Includes		Required to Specify
► Need help? Product details, page 42	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> Reversible pivot-hinged door: paint price group 1, glass price group 1, flat-cut wood group 1 veneer, or anodized aluminum Door frame: paint price group 1 or anodized aluminum Factory prep for pivot hinges 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for door, if solid door selected Paint color number for door frame Glass number for glass door, if glass door selected Paint color number for glass door, if glass door selected Wood veneer color number, if selected Factory prep for cylindrical or mortise passage set or lockset, if selected Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials	Glass door frame surface	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 41	Specify paint color number.
• Paint price group 3	+\$ 72	Specify paint color number.
• Anodized aluminum	No cost	Specify anodized aluminum.
37³/₁₆"W solid single door leaf 8'0"H through 10'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 165	Specify paint color number.
• Flat-cut wood group 1 veneer	No cost	Specify wood veneer color number.
• Quarter-cut wood group 1 veneer	+\$ 261	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
77¹/₂"W solid pair door leaves 8'0"H through 10'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 328	Specify paint color number.
• Flat-cut wood group 1 veneer	No cost	Specify wood veneer color number.
• Quarter-cut wood group 1 veneer	+\$ 529	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
Glass single door 8'0"H through 9'0"H		
• Glass price group 1	No cost	Specify glass number for door.
• Glass price group 2	+\$ 585	Specify glass number for door.
• Glass price group 3	+\$ 698	Specify glass number for door.
• Glass price group 4	N.A.	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.
• Glass price group 6	N.A.	Specify glass number for door.
• Glass price group 7	+\$3077	Specify glass number for door.
Ceiling Height	Solid single door leaves	
	• 8'0" through 9'0"	No cost
	• 9'1" through 10'0"	+\$ 417
	Solid pair door leaves	
	• 8'0" through 9'0"	No cost
	• 9'1" through 10'0"	+\$ 834
Lock Prep ► Page 44	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
	• Strike plate and factory prep for mortise passage set or lockset	+\$ 68
Related Products	<ul style="list-style-type: none"> Door frames Passage sets and locksets Hinges Stops 	<ul style="list-style-type: none"> ► Page 144 ► Page 160 ► Page 165 ► Page 165



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
-------	------------------------------	-----------------	-----------------------


Solid Single Door

37 $\frac{3}{16}$ "	40"	GPGSLSPF40	\$3096
---------------------	-----	------------	--------




Glass Single Door with 5"H Bottom Rail

37 $\frac{3}{16}$ "	40"	GPGSLGSPF40	\$6395
---------------------	-----	-------------	--------




Glass Single Door with 12"H Bottom Rail

37 $\frac{3}{16}$ "	40"	GPGSLGSPF40B	\$6209
---------------------	-----	--------------	--------



Solid Pair Door


77 $\frac{1}{2}$ "	80"	GPGSLSPF80	\$6307
--------------------	-----	------------	--------

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Selections Transom-Height Pivot-Hinged Door Leaves



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Standard Includes		Required to Specify
► Need help? Product details, page 42	<ul style="list-style-type: none">7'0"HReversible pivot-hinged door: paint price group 1, glass price group 1, flat-cut wood group 1 veneer, or anodized aluminumDoor frame: paint or anodized aluminumFactory prep for pivot hinges	<ol style="list-style-type: none">Style numberPaint color number for door, if solid door selectedGlass number for glass door, if glass door selectedPaint color number for framePaint color number for glass door, if glass door selectedWood veneer color number, if selectedFactory prep for cylindrical or mortise passage set or lockset, if selectedOptions, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify	
Surface Materials	Transom-height glass door frame leaves		
<ul style="list-style-type: none">Paint price group 1Paint price group 2Paint price group 3Anodized aluminum	No cost +\$ 41 +\$ 72 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.	
	37³/₁₆"W solid single door leave 7'0"H		
<ul style="list-style-type: none">Paint price group 1Paint price group 3Flat-cut wood group 1 veneerQuarter-cut wood group 1 veneerCustomiz stain	No cost +\$ 165 No cost +\$ 237 No cost	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify <i>with Customiz stain</i> .	
	77¹/₂"W solid pair door leaves 7'0"H		
<ul style="list-style-type: none">Paint price group 1Paint price group 3Flat-cut wood group 1 veneerQuarter-cut wood group 1 veneerCustomiz stain	No cost +\$ 328 No cost +\$ 475 No cost	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number. Specify <i>with Customiz stain</i> .	
	Glass single door 7'0"H		
<ul style="list-style-type: none">Glass price group 1Glass price group 2Glass price group 3Glass price group 4Glass price group 5Glass price group 6Glass price group 7	No cost +\$ 585 +\$ 698 N.A. N.A. N.A. +\$3077	Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.	
Lock Prep ► Page 44	<ul style="list-style-type: none">Strike plate and factory prep for cylindrical passage set or locksetStrike plate and factory prep for mortise passage set or lockset	No cost +\$ 68	Specify <i>with cylindrical prep</i> . Specify <i>with mortise prep</i> .
Related Products	<ul style="list-style-type: none">Door framesPassage sets and locksetsHingesStops	<ul style="list-style-type: none">► Page 144► Page 160► Page 165► Page 165	



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
-------	------------------------------	-----------------	-----------------------

Solid Single Door

37 $\frac{3}{16}$ "	40"	GPGSLSSPT40	\$2741
---------------------	-----	-------------	--------



Glass Single Door with 5"H Bottom Rail

37 $\frac{3}{16}$ "	40"	GPGSLGSPT40	\$5660
---------------------	-----	-------------	--------



5"H

Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.

Glass Single Door with 12"H Bottom Rail


37 $\frac{3}{16}$ "	40"	GPGSLGSPT40B	\$6048
---------------------	-----	--------------	--------



12"H

Solid Pair Door


77 $\frac{1}{2}$ "	80"	GPGSLSPPT80	\$5588
--------------------	-----	-------------	--------

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Tip: Ceiling height option is available on solid door leaves only.

Standard Includes		Required to Specify
► Need help? Product details, page 42	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> Reversible pivot-hinged door: paint price group 1, glass price group 1, flat-cut wood group 1 veneer, or anodized aluminum Door frame: paint or anodized aluminum Factory prep for pivot hinges 	<ol style="list-style-type: none"> Style number Ceiling height Swing orientation Paint color number for door, if solid door selected Paint color number for door frame, if glass door selected Glass number for glass door, if glass door selected Paint color number for glass door, if glass door selected Wood veneer color number, if selected Factory prep for cylindrical or mortise passage set or lockset, if selected Options, if selected (see below) <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials	Full-height glass door frame leaves surface options	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 41	Specify paint color number.
• Paint price group 3	+\$ 72	Specify paint color number.
• Anodized aluminum	No cost	Specify paint color number.
	36³/₈"W solid door leaves 8'0"H through 10'0"H	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 165	Specify paint color number.
• Flat-cut wood group 1 veneer	No cost	Specify wood veneer color number.
• Quarter-cut wood group 1 veneer	+\$ 261	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
	Glass single door 8'0"H through 9'0"H	
• Glass price group 1	No cost	Specify glass number for door.
• Glass price group 2	+\$ 585	Specify glass number for door.
• Glass price group 3	+\$ 698	Specify glass number for door.
• Glass price group 4	N.A.	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.
• Glass price group 6	N.A.	Specify glass number for door.
• Glass price group 7	+\$3263	Specify glass number for door.
Ceiling Height	Solid single door leaves	
	• 8'0" through 9'0" No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0" +\$ 417	Specify ceiling height in 1" increments.
Swing Orientation	For single pivot-hinged door frame	
► Page 48	• Left-hand door frame No cost	Specify with <i>left-hand door frame</i> .
	• Right-hand door frame No cost	Specify with <i>right-hand door frame</i> .
Lock Prep	• Strike plate and factory prep for cylindrical passage set or lockset No cost	Specify with <i>cylindrical prep</i> .
► Page 44	• Strike plate and factory prep for mortise passage set or lockset +\$ 68	Specify with <i>mortise prep</i> .
Related Products	<ul style="list-style-type: none"> Door frames Passage sets and locksets Hinges Stops 	<p>► Page 146</p> <p>► Page 160</p> <p>► Page 165</p> <p>► Page 165</p>



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Glass Selections Full-Height
Pivot-Hinged Door Leaves for
Use with Switch Cutout



Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:

Solid Single Door

36 $\frac{3}{8}$ "	42"	GPGSLSSPF42	\$3096
:	:	:	:




5"H □

Glass Single Door with 5"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPGSLGSPF42	\$6395
:	:	:	:

Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.



12"H □

Glass Single Door with 12"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPGLGSPF42B	\$6209
:	:	:	:




For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Selections Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: In a Glass Selections door frame with glass transom, switch wiring must run down through the floor only. Wiring cannot run up to the ceiling.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 98.

Tip: Painted solid door leaf cannot ship to customer locations in Canada. Specify a veneer door leaf versus painted or source the door locally for shipments to Canada only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 42	<ul style="list-style-type: none"> 7'0"H Reversible pivot-hinged door: paint price group 1, glass price group 1, flat-cut wood group 1 veneer, or anodized aluminum Door frame: paint or anodized aluminum Factory prep for pivot hinges 	1 Style number 2 Swing orientation 3 Paint color number for door, if solid door selected 4 Paint color number for door frame 5 Glass number for glass door, if glass door selected 6 Paint color number for glass door, if glass door selected 7 Wood veneer color number, if selected 8 Factory prep for cylindrical or mortise passage set or lockset, if selected 9 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials	Transom-height glass frame door leaves surface options	
<ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Anodized aluminum 	No cost +\$ 41 +\$ 72 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
	36³/₈"W solid door leaves 7'0"H	
<ul style="list-style-type: none"> Paint price group 1 Paint price group 3 Flat-cut wood group 1 veneer Quarter-cut wood group 1 veneer Customiz stain 	No cost +\$ 165 No cost +\$ 237 No cost	Specify paint color number. Specify paint color number. Specify wood veneer color number. Specify wood veneer color number Specify with <i>Customiz stain</i> .
	Glass single door 7'0"H	
<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 585 +\$ 698 N.A. N.A. N.A. +\$3263	Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
Lock Prep ▶ Page 44	<ul style="list-style-type: none"> Strike plate and factory prep for cylindrical passage set or lockset Strike plate and factory prep for mortise passage set or lockset 	No cost +\$ 68 Specify with <i>cylindrical prep</i> . Specify with <i>mortise prep</i> .
Related Products	<ul style="list-style-type: none"> Door frames Passage sets and locksets Hinges Stops 	▶ Page 146 ▶ Page 160 ▶ Page 165 ▶ Page 165



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Glass Selections
Transom-Height Pivot-Hinged
Door Leaves for Use
with Switch Cutout

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:


Solid Single Door

36 $\frac{3}{8}$ "	42"	GPGSLSSPT42	\$2741
:	:	:	:



Glass Single Door with 5"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPGSLGSPT42	\$5660
:	:	:	:




5"H

Tip: In some areas or applications, a 12" high bottom rail may be required by code. Check with local code officials to ensure compliance.

Glass Single Door with 12"H Bottom Rail

36 $\frac{3}{8}$ "	42"	GPGLGSPT42B	\$6048
:	:	:	:



12"H



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Full-Height Polished Edge Butt-Hinged Door Leaf



► Need help?
Product details,
page 38

Standard Includes

- Ceiling height from 7'5"H to 10'0"H, in one-inch increments
Exception: maximum height of 42" wide door is 9'0" ceiling height.
- Polished edge butt-hinged door with 1/2" tempered glass
- Housing for latch set or roller latch as specified
- Factory prep for hinges
Tip: Door hardware is ordered separately.

Required to Specify

- Style number
 - Ceiling height (see below under Required Selections)
 - Width (see below under Required Selections)
 - Glass finish number for door
 - Paint or metal color number for hardware
 - Options, if selected (see below)
- See *Surface Materials*, page 362.

Tip: 42" wide door frame has maximum height 108".

	Required Selections	U.S. Price	Required to Specify
Ceiling Height	• 7'5"–10'0"	+\$ 48 for every 4" increment over 89"	Specify ceiling height in 1" increments.

Width	• 40" • 42"	No cost +\$ 61	Specify 40". Specify 42".
--------------	----------------	-------------------	------------------------------

	Options	U.S. Price	Required to Specify
Surface Materials	Glass door surface		
	• Glass group 1 • Glass group 3	No cost +\$ 32.90 per SF (round up to nearest SF)	Specify paint color number. Specify paint color number.
	Hardware finish		
	• Satin chrome • Polished chrome • Black	No cost +\$ 51 +\$ 62	Specify with satin chrome. Specify with polished chrome. Specify with black.
Glass Surface Orientation	• Polished to inside • Polished to outside	No cost No cost	Specify with polished to inside. Specify with polished to outside.
Swing Orientation	• Left hand door leaf • Right hand door leaf	No cost No cost	Specify with left hand door leaf. Specify with right hand door leaf.
Latch prep	• Cylindrical • Mortise • Push/pull • Ladder aligned • Ladder offset	No cost +\$544 –\$534 –\$534 –\$534	Specify with cylindrical. Specify with mortise. Specify with push/pull. Specify with ladder aligned. Specify with ladder offset.
Roller Latch	• No roller latch • Top roller latch	No cost +\$535	Specify with no roller latch. Specify with top roller latch
Hinge Type	• Butt hinge • Slim line hinge	No cost No cost	Specify with butt hinge. Specify with slim line hinge.

Specification Information


Width	Style Number	U.S. Base Price
40" or 42"	GPLPESBF	\$2571



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Glass Selections
Full-Height Polished Edge
Butt-Hinged Door Leaf

Glass Selections Full-Height Polished Edge Slider Doors with Close-Assist



Tip: Full-height doors less than 108" ceiling height are standard with 3/8" thick glass. 1/2" thick glass can be selected for enhanced rigidity. Doors that are higher than 108" ceiling height are standard with 1/2" thick glass.

Tip: High-voltage switch is not available on Glass Selections slider door.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.

Tip: All locks are random keyed.

Tip: High-voltage switch is not available for Glass Selections slider door.

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Standard Includes		Required to Specify	
► Need help? Product details, page 56	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Slider door: glass with polished edges Frame: paint or anodized aluminum Hardware (door pull, slider cylinder, thumbturn, and hanger covers): metal Side panel Door base: paint Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) Slide hardware Door: 3/8" thick for full-height doors 9'-0" and less 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for frame Paint color number for base Glass thickness for door (if less than 108") Glass number for slider door Glass number for all-glass side panel Post extension Slide orientation Hardware (door pull, slider cylinder, thumbturn, and hanger covers), if selected: <ul style="list-style-type: none"> 4710 Low Gloss Black 8031 Brushed Stainless Options, if selected (see below) 	
		► See <i>Surface Materials</i> , page 362.	

Options	U.S. Price	Required to Specify
Surface Materials		
Frame		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 76	Specify paint color number.
• Paint price group 3	+\$ 135	Specify paint color number.
• Anodized aluminum	No cost	Specify anodized aluminum.
Base		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 23	Specify paint color number.
• Paint price group 3	+\$ 36	Specify paint color number.
Full-height slider doors		
• Glass price group 1	No cost	Specify glass number for door.
• Glass price group 2	N.A.	Specify glass number for door.
• Glass price group 3	+\$2054	Specify glass number for door.
• Glass price group 4	N.A.	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.
• Glass price group 6	N.A.	Specify glass number for door.
• Glass price group 7	N.A.	Specify glass number for door.
Full-height slider door panels		
• Glass price group 1	No cost	Specify glass number for door.
• Glass price group 2	+\$ 867	Specify glass number for door.
• Glass price group 3	+\$1030	Specify glass number for door.
• Glass price group 4	N.A.	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.
• Glass price group 6	N.A.	Specify glass number for door.
• Glass price group 7	+\$4660	Specify glass number for door.
Hardware (pull, slider lock, cylinder, thumbturn, and hanger covers)		
• 8031 Brushed Stainless	No cost	Specify with brushed stainless.
• 4710 Low Gloss Black		
– No lock	+\$ 32	Specify with low gloss black.
– Lock	+\$ 407	Specify with low gloss black.
Glass Thickness		
• 3/8"-thick glass	No cost	Specify with 3/8".
• 1/2"-thick glass	+\$ 397	Specify with 1/2".
Post Extension		
• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height		
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
• 9'1" through 10'0"	+\$ 288	Specify ceiling height in 1" increments.

► Options, continued on next page

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Slide Orientation ► Page 57	• Left-hand door frame	No cost	Specify with left-hand door frame.
	• Right-hand door frame	No cost	Specify with right-hand door frame.
Switch Cutout ► Page 35	• Without cutout	No cost	Specify without cutout.
	• With low-voltage switch cutout	+\$ 52	Specify with low-voltage switch cutout.
Lock	• No lock	No cost	Specify with no lock.
	• Door lock with interior thumb latch	+\$1664	Specify with lock.
Close-Assist	• Leading edge only	+\$ 433	Specify with leading edge only.
	• Leading and trailing edge	+\$ 866	Specify with leading and trailing edge.
Related Products	• Switches • Ceiling tracks • Continuous base trim • Feature strips		► Page 167 ► Page 240 ► Page 246 ► Page 250

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

Tip: For slider with frame kit as side panel, glass kit is ordered separately.

	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	No cost	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Slide Panel (Available in 1" increments)	• 78"W through 95"W (excludes standard widths)	No cost	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel (Available in 1" increments)	• 81"W through 108"W (excludes standard widths)	+\$ 206	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Variable Width Frame Kit (Available in 1" increments)	With 40" doors		
	• 101"W through 136"W	+\$ 183	Specify slider door assembly widths in 1" increments.
	• 137"W through 184"W	+\$ 540	Specify slider door assembly widths in 1" increments.
	With 42" doors		
	• 103"W through 136"W	+\$ 183	Specify slider door assembly widths in 1" increments.
	• 137"W through 186"W	+\$ 540	Specify slider door assembly widths in 1" increments.
	With 48" doors		
	• 109"W through 136"W	+\$ 183	Specify slider door assembly widths in 1" increments.
	• 137"W through 192"W	+\$ 540	Specify slider door assembly widths in 1" increments.
Jamb-Mounted Lock	• Jamb-mounted lock profile - No lock	+\$ 492	Specify with jamb-mounted lock - No lock.
	• Jamb-mounted lock - SFIC less core	+\$1313	Specify with jamb-mounted lock SFIC less core.
	• Jamb-mounted lock - Schlage cylinder without core	+\$1320	Specify with jamb-mounted lock Schlage cylinder.
	• Jamb-mounted lock - Sargent cylinder and random keyed core (SFIC)	+\$1756	Specify with jamb-mounted lock Sargent cylinder.


► SmartTools options, continued on next page



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Glass Selections Full-Height Polished Edge Slider Doors with Close-Assist, continued

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.



► SmartTools options, continued from previous page

	SmartTools Options	U.S. Price	Required to Specify
Base	• 2½"H base	No cost	Specify to accept 2½"H base.
	• 4"H base	+\$302	Specify to accept 4"H base.


Specification Information		
• Width	• Style Number	• U.S. Base Price
•	•	•
•	•	•
•	•	•

Full-Height Slider Doors		
80"	GPGSDFFSC80	\$8068
84"	GPGSDFFSC84	\$8227
96"	GPGSDFFSC96	\$8813
•	•	•

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Glass Selections
Full-Height Polished
Edge Slider Doors
with Close-Assist

Glass Selections Transom-Height Polished Edge Slider Doors with Close-Assist



Tip: Door height is always 7'. Transom height varies depending on ceiling height.

Tip: Transom-height doors are standard with $\frac{3}{8}$ " thick glass. $\frac{1}{2}$ " thick glass can be selected for enhanced rigidity.

Tip: High-voltage switch is not available on Glass Selections slider door.

Tip: All locks are random keyed.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 98.

► Need help?
Product details,
page 56

Standard Includes

- Ceiling height from 8'0"H to 10'0"H, in one-inch increments
- Slider door: glass with polished edges
- Frame: paint or anodized aluminum
- Hardware (door pull, slider cylinder and hanger covers): metal
- Side panel
- Door base: paint
- Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)
- Slide hardware
- Door: $\frac{3}{8}$ " thick

Required to Specify

- 1 Style number
- 2 Ceiling height
- 3 Paint color number for frame
- 4 Glass thickness for door
- 5 Glass number for door frame top lite (door 1)
- 6 Glass number for slider door (door 2)
- 7 Glass number for side panel top lite (glass 1)
- 8 Glass number for side panel (glass 2)
- 9 Paint color number for door base
- 10 Post extension
- 11 Slide orientation
- 12 Hardware (door pull, slider cylinder and hanger covers), if selected:
4710 Low Gloss Black
8031 Brushed Stainless
- 13 Options, if selected (see below)
► See *Surface Materials*, page 362.

	Options	U.S. Price	Required to Specify
Surface Materials	Frame		
	<ul style="list-style-type: none"> • Paint price group 1 • Paint price group 2 • Paint price group 3 • Anodized aluminum 	No cost +\$ 76 +\$ 135 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
	Base		
	<ul style="list-style-type: none"> • Paint price group 1 • Paint price group 2 • Paint price group 3 	No cost +\$ 23 +\$ 36	Specify paint color number. Specify paint color number. Specify paint color number.
	Transom-height slider door		
	<ul style="list-style-type: none"> • Glass price group 1 • Glass price group 2 • Glass price group 3 • Glass price group 4 • Glass price group 5 • Glass price group 6 • Glass price group 7 	No cost N.A. +\$1862 N.A. N.A. N.A. N.A.	Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
	Transom-height side panel		
	<ul style="list-style-type: none"> • Glass price group 1 • Glass price group 2 • Glass price group 3 • Glass price group 4 • Glass price group 5 • Glass price group 6 • Glass price group 7 	No cost +\$ 724 +\$ 860 N.A. N.A. N.A. +\$3887	Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
	Transom aligned top lites (per lite)		
	<ul style="list-style-type: none"> • Glass price group 1 • Glass price group 2 • Glass price group 3 • Glass price group 4 • Glass price group 5 • Glass price group 6 • Glass price group 7 	No cost +\$ 161 +\$ 190 N.A. N.A. N.A. +\$ 858	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.

► Options, continued on next page



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

► Options, continued from previous page

Options	U.S. Price	Required to Specify
Hardware (pull, slider lock, and cylinder) <ul style="list-style-type: none"> • 8031 Brushed Stainless • 4710 Low Gloss Black <ul style="list-style-type: none"> – No lock – Lock 	No cost +\$ 32 +\$ 407	Specify with brushed stainless. Specify with low gloss black Specify with low gloss black
Glass Thickness <ul style="list-style-type: none"> • 3/8"-thick glass • 1/2"-thick glass 	No cost +\$ 336	Specify with 3/8". Specify with 1/2".
Post Extension <ul style="list-style-type: none"> • Post extensions modified to accommodate recessed ceiling track (ordered separately) • Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Ceiling Height <ul style="list-style-type: none"> • 8'0" through 9'0" • 9'1" through 10'0" 	No cost +\$ 165	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Slide Orientation <ul style="list-style-type: none"> • Left-hand door frame • Right-hand door frame 	No cost No cost	Specify with left-hand door frame. Specify with right-hand door frame.
Switch Cutout <ul style="list-style-type: none"> • Without cutout • With low-voltage switch cutout 	No cost +\$ 52	Specify without cutout. Specify with low-voltage switch cutout.
Lock <ul style="list-style-type: none"> • Door lock with interior thumb latch 	+\$1664	Specify with lock.
Close-Assist <ul style="list-style-type: none"> • Leading edge only • Leading and trailing edge 	+\$ 433 +\$ 866	Specify with leading edge only. Specify with leading and trailing edge.
Related Products <ul style="list-style-type: none"> • Switches • Ceiling tracks • Continuous base trim • Feature strips 		► Page 167 ► Page 240 ► Page 246 ► Page 250

► Page 57

► Page 35

Tip: Finishes for door hardware can vary slightly from one component to another depending on base metal materiality and finishing processes. When hardware is specified for common assemblies, all hardware components may not match exactly, but are designed to be compatible within a common door opening.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

SmartTools Options	U.S. Price	Required to Specify
Parametric Width Slider Door Assembly with Equal Width Door and Slide Panel (Available in 1" increments)	• 78"W through 95"W (excludes standard widths) No cost	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel (Available in 1" increments)	• 81"W through 108"W (excludes standard widths) +\$ 231	Specify slider door assembly widths in 1" increments.

► SmartTools Options, continued on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Transom-Height Polished Edge Slider Doors with Close-Assist, continued

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.


Tip: For slider with frame kit as side panel, glass kit is ordered separately.

SmartTools options, continued from previous page

	SmartTools Options	U.S. Price	Required to Specify
Parametric Width Slider Door Assembly with Variable Width Frame Kit (Available in 1" increments)	With 40" doors		
	• 101"W through 136"W	+\$368	Specify slider door assembly widths in 1" increments.
	• 137"W through 184"W	+\$795	Specify slider door assembly widths in 1" increments.
	With 42" doors		
	• 103"W through 136"W	+\$368	Specify slider door assembly widths in 1" increments.
	• 137"W through 186"W	+\$795	Specify slider door assembly widths in 1" increments.
Base	With 48" doors		
	• 109"W through 136"W	+\$368	Specify slider door assembly widths in 1" increments.
	• 137"W through 192"W	+\$795	Specify slider door assembly widths in 1" increments.
	• 2½"H base	No cost	Specify to accept 2½"H base.
	• 4"H base	+\$302	Specify to accept 4"H base.

Specification Information		
• Width	• Style Number	• U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•

Transom-Height Slider Doors		
80"	GPGSDFTSC80	\$8094
84"	GPGSDFTSC84	\$8220
96"	GPGSDFTSC96	\$8854
•	•	•



 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Glass Selections Polished Edge Slider Door Vertical Seal for Use with GS Slider Door

Glass Selections Polished
Edge Slider Door Vertical
Seal for Use with GS Slider
Door



Tip: Vertical seal assemblies are 120" long and are cut to the appropriate height during installation.

Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|---|---|
| ► Need help?
Product details,
page 58 | • Vertical seal: paint or anodized aluminum

1 Style number
2 Options, if selected (see below)
► See <i>Surface Materials</i> , page 362. |
|---|---|

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none">• Paint price group 1• Paint price group 2• Paint price group 3• Anodized aluminum	No cost +\$ 9 +\$23 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.


Specification Information	
---------------------------	--

Style Number	U.S. Base Price
GP GSDFSVS	\$87


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Glass Selections Mini Ends

Glass Selections Mini Ends to the Floor



Tip: Mini ends should be specified to the floor when positioned next to a door frame. Mini ends will be field-cut by installer to final length.

Tip: For painted mini ends, use Privacy Wall mini ends.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 70 Mini end: 10'1"H Outer channel: clear anodized aluminum Inner channel: clear anodized aluminum 	<ul style="list-style-type: none"> 1 Style number 2 Options, if selected (see below)

SmartTools Options	U.S. Price	Required to Specify
Modified Angle (45° to 135° in 5" increments)	<ul style="list-style-type: none"> For GPGSMESF +\$221 For GPGSMEMF +\$234 For GPGSMELF +\$253 	Specify with modified angle. Specify with modified angle. Specify with modified angle.

Specification Information		
Size	Style Number	U.S. Base Price
1 1/2" to 2 1/8"	GPGSMESF	\$400
2 1/8" to 3 1/2"	GPGSMEMF	\$447
3 1/2" to 6"	GPGSMELF	\$537
:	:	:




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Mini Ends



Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: For painted mini ends, use Privacy Wall mini ends.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 70</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments Telescoping mini end: clear anodized aluminum Aligns to top of 5"H base 	<ul style="list-style-type: none"> 1 Style number 2 Ceiling height 3 Options, if selected (see below)

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 7'5" through 7'11" 	No cost
Modified Angle (45° to 135° in 5° increments)	<ul style="list-style-type: none"> For GPGSMES +\$221 For GPGSMEM +\$234 For GPGSMEL +\$253 	Specify with modified angle. Specify with modified angle. Specify with modified angle.
Base	<ul style="list-style-type: none"> 2 1/2"H base 4"H base 	No cost +\$ 24
		Specify to accept 2 1/2"H base. Specify to accept 4"H base.

Specification Information		
Size	Style Number	U.S. Base Price
1 1/2" to 2 1/8"	GPGSMES	\$400
2 1/8" to 3 1/2"	GPGSMEM	\$447
3 1/2" to 6"	GPGSMEL	\$537
:	:	:


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Transitions

All-Glass L-Corner Units and All-Glass L-Corner Units with Two Transom-Aligned Lites



Tip: L-corner units are factory-assembled. Glass joint is field-glazed (glazing tape or silicone sealant) as part of the installation process.

Tip: L-corner units plan dimensionally in the same manner as individual panels that are joined by a post.


Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Standard Includes		Required to Specify	
► Need help? Product details, page 26	<ul style="list-style-type: none">Ceiling height from 8'0"H to 10'0"H, in one-inch increments2⅜"-thick panel with frame: paint or anodized aluminumAll glass, if selectedTwo factory-installed lites—top lite is transom aligned: glassFloor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint		<ul style="list-style-type: none">1 Style number2 Paint color number for frame3 Ceiling height4 Glass finish5 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.
	Options	U.S. Price	Required to Specify
Surface Materials	Frame		
	<ul style="list-style-type: none">Paint price group 1Paint price group 2Paint price group 3Anodized aluminum	<ul style="list-style-type: none">No cost+\$ 41+\$ 72No cost	<ul style="list-style-type: none">Specify paint color number.Specify paint color number.Specify paint color number.Specify anodized aluminum.
	L-corner unit glass panels 8'0" through 10'0"		
	<ul style="list-style-type: none">Glass price group 1Glass price group 2Glass price group 3Glass price group 4Glass price group 5Glass price group 6Glass price group 7	<ul style="list-style-type: none">No cost+\$ 643+\$ 737N.A.N.A.N.A.+\$1370	<ul style="list-style-type: none">Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.
	L-corner unit with two transom-aligned lites, top lite glass panels 8'0" through 10'0"		
	<ul style="list-style-type: none">Glass price group 1Glass price group 2Glass price group 3Glass price group 4Glass price group 5Glass price group 6Glass price group 7	<ul style="list-style-type: none">No cost+\$ 153+\$ 173N.A.N.A.N.A.+\$ 342	<ul style="list-style-type: none">Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.
	L-corner unit with two transom-aligned lites, lower lite glass panels 8'0" through 10'0"		
	<ul style="list-style-type: none">Glass price group 1Glass price group 2Glass price group 3Glass price group 4Glass price group 5Glass price group 6Glass price group 7	<ul style="list-style-type: none">No cost+\$ 488+\$ 564N.A.N.A.N.A.+\$1028	<ul style="list-style-type: none">Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.Specify glass number for lite.
Ceiling Height	<ul style="list-style-type: none">8'0" through 9'0"9'1" through 10'0"	<ul style="list-style-type: none">No cost+\$ 141	<ul style="list-style-type: none">Specify ceiling height in 1" increments.Specify ceiling height in 1" increments.
Related Products	<ul style="list-style-type: none">Ceiling tracksContinuous base trimFeature strips		<ul style="list-style-type: none">► Page 240► Page 246► Page 250

	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (All glass L-corner units only)	7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
Base	2 $\frac{1}{2}$ "H base 4"H base	+\$ 253 +\$ 455	Specify to accept 2 $\frac{1}{2}$ "H base. Specify to accept 4"H base.



Specification Information

• Width	• Style Number	• U.S. Base Price	• Nominal Width	• Modular Width	• Style Number	• U.S. Base Price
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•				




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Transitions, continued

Glass Selections T-Corner Unit All-Glass Frame Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 26</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2 3/8"-thick panel with clear frame: paint or anodized aluminum Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint 	<ol style="list-style-type: none"> Style number Ceiling height Paint color number for frame Glass number for lite <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Frame <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Anodized aluminum 	No cost +\$ 41 +\$ 72 No cost	Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
Ceiling Height <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products <ul style="list-style-type: none"> Ceiling tracks Continuous base trim Feature strips 		<p>► Page 240</p> <p>► Page 246</p> <p>► Page 250</p>

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments) <ul style="list-style-type: none"> 7'5" through 7'11" 	Use 8'0" price	Specify ceiling height in 1" increments.
Base <ul style="list-style-type: none"> 2 1/2"H base 4"H base 	+\$226 +\$455	Specify to accept 2 1/2"H base. Specify to accept 4"H base.

Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
...

All-Glass Frame Kits

18" x 18" x 18"	GPSSSGFKT	\$1931
...

Modular All-Glass Frame Kits

18" x 18" x 18"	16 3/4" x 16 3/4" x 16 3/4"	GPSSMGFKT	\$1931
...




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections T-Corner Units All-Glass Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: T-corner glass kits include three pieces of glass.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini-end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 26</p> <ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with clear anodized aluminum frame: paint Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint 	<ul style="list-style-type: none"> 1 Style number 2 Ceiling height 3 Glass number for lite <p>► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Top lite glass panels 8'0" through 10'0" Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$1199 +\$2172 N.A. N.A. N.A. N.A.	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Ceiling Height <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products <ul style="list-style-type: none"> Ceiling tracks Continuous base trim Feature strips 		► Page 240 ► Page 246 ► Page 250

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments) <ul style="list-style-type: none"> 7'5" through 7'11" 	Use 8'0" price	Specify ceiling height in 1" increments.
Base <ul style="list-style-type: none"> 2½"H base 4"H base 	+\$ 53 No cost	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price

All-Glass Glass Kits

18" x 18" x 18"	GPGSSGGKT	\$724

Modular All-Glass Glass Kits

18" x 18" x 18"	16¾" x 16¾" x 16¾"	GPGSMGGKT	\$724




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections T-Corner Units Two Divided Lite Frame Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a mini end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> ▶ Need help? Product details, page 26 Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2$\frac{3}{8}$"-thick panel with frame: paint or anodized aluminum Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint 	<ul style="list-style-type: none"> 1 Style number 2 Ceiling height 3 Paint color number for frame 4 Glass number for lite 5 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 362.

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Frame <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 Anodized aluminum 	<ul style="list-style-type: none"> No cost +\$ 41 +\$ 72 No cost 	<ul style="list-style-type: none"> Specify paint color number. Specify paint color number. Specify paint color number. Specify anodized aluminum.
Ceiling Height <ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	<ul style="list-style-type: none"> No cost +\$ 75 	<ul style="list-style-type: none"> Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products <ul style="list-style-type: none"> Ceiling tracks Continuous base trim Feature strips 		<ul style="list-style-type: none"> ▶ Page 240 ▶ Page 246 ▶ Page 250

SmartTools Options	U.S. Price	Required to Specify
Base <ul style="list-style-type: none"> 2$\frac{1}{2}$"H base 4"H base 	<ul style="list-style-type: none"> +\$226 +\$455 	<ul style="list-style-type: none"> Specify to accept 2$\frac{1}{2}$"H base. Specify to accept 4"H base.


Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Two Divided Lite Frame Kits			Modular Two Divided Lite Frame Kits			
18" x 18" x 18"	GPGSS2FKT	\$2220	18" x 18" x 18"	16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ "	GPGSM2FKT	\$2220

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Glass Selections T-Corner Units Two Divided Lite Glass Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be glazed with glazing tape or silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: T-corner glass kits include three pieces of glass.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini-end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify
▶ Need help? Product details, page 26	<ul style="list-style-type: none"> Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2$\frac{3}{8}$"-thick panel with clear anodized aluminum frame: paint Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint 	1 Style number 2 Ceiling height 3 Glass number for lite 4 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.
Options	U.S. Price	Required to Specify
Surface Materials	Top Lite Glass Panels 8'0" through 10'0"	
<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 362 +\$ 654 N.A. N.A. N.A. N.A.	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	Lower Lite Glass Panels 8'0" through 10'0"	
<ul style="list-style-type: none"> Glass price group 1 Glass price group 2 Glass price group 3 Glass price group 4 Glass price group 5 Glass price group 6 Glass price group 7 	No cost +\$ 863 +\$1560 N.A. N.A. N.A. +\$3124	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Ceiling Height	<ul style="list-style-type: none"> 8'0" through 9'0" 9'1" through 10'0" 	No cost +\$ 75 Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products	<ul style="list-style-type: none"> Ceiling tracks Continuous base trim Feature strips 	▶ Page 240 ▶ Page 246 ▶ Page 250

SmartTools Options	U.S. Price	Required to Specify
Base	<ul style="list-style-type: none"> 2$\frac{1}{2}$"H base 4"H base 	+\$ 53 No cost Specify to accept 2 $\frac{1}{2}$ "H base. Specify to accept 4"H base.

Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
...

Two Divided Lite Glass Kits

18" x 18" x 18"	GPGSS2GKT	\$778
...

Modular Two Divided Lite Glass Kits

18" x 18" x 18"	16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ "	GPGSM2GKT	\$778
...




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Ceiling Tracks

Ceiling Tracks



Recessed

Overlapping


Tip: No ceiling clip is included unless selected as an option.

Tip: For finished end ceiling track.
► See page 62.

Tip: Ceiling clip option is on straight and finished-end ceiling tracks only.

Tip: When required by the local seismic design criteria, additional ceiling fasteners and/or structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.



Standard Includes		Required to Specify	
► Need help? Product details, page 62	<ul style="list-style-type: none"> Ceiling track: paint 	1 Style number 2 Ceiling track 3 Paint color number for ceiling track 4 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	
Options		U.S. Price	Required to Specify
Surface Materials	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$23	Specify paint color number.
	• Paint price group 3	+\$36	Specify paint color number.
Ceiling Track	• Recessed ceiling track	No cost	Specify <i>with recessed ceiling track</i> .
	• Overlapping ceiling track	No cost	Specify <i>with overlapping ceiling track</i> .
Ceiling Clips	• No fastener	No cost	Specify <i>with no fastener</i> .
	• 1" x 1/4"D tegular	No cost	Specify <i>with 1" x 1/4"D tegular clip</i> .
	• 1" x 3/8"D tegular	No cost	Specify <i>with 1" x 3/8"D tegular clip</i> .
	• 1" x 1/2"D tegular	No cost	Specify <i>with 1" x 1/2"D tegular clip</i> .
	• 1" x 5/8"D tegular	No cost	Specify <i>with 1" x 5/8"D tegular clip</i> .
	• Donn Finline 1/4" slot	No cost	Specify <i>with Donn Finline with 1/4" slot clip</i> .
	• Donn Finline 1/8" slot	No cost	Specify <i>with Donn Finline with 1/8" slot clip</i> .
	• 1"W exposed T	No cost	Specify <i>with 1"W exposed T clip</i> .
	• 1" fluted runner 1/4" – 20"	No cost	Specify <i>with 1" fluted runner 1/4" – 20" clip</i> .
	• 1" tee quick clip	No cost	Specify <i>with 1" tee quick clip</i> .
	• 9/16"W exposed tee	No cost	Specify <i>with 9/16"W exposed tee clip</i> .
	• 9/16" x 1/4"D tegular	No cost	Specify <i>with 9/16" x 1/4"D tegular clip</i> .
	• 9/16" x 5/16"D tegular	No cost	Specify <i>with 9/16" x 5/16"D tegular clip</i> .
SmartTools Options		U.S. Price	Required to Specify
Modified Angle (70° to 175° in 5° increments)	• For GPCT120V 70°-115°	+\$49	Specify <i>with modified angle</i> .
	• For GPCT135V 125°-175°	+\$49	Specify <i>with modified angle</i> .

Specification Information

Width	Style Number	U.S. Base Price
120"	GPCTS	\$218
24"	GPCTLS	\$215

Straight Ceiling Track

120"	GPCTS	\$218
24"	GPCTLS	\$215

Finished-End Ceiling Track

120"	GPCTFE	\$254
24"	GPCTLS	\$215

Corner L Ceiling Track


24"	GPCTLS	\$215
120"	GPCTFE	\$254

► Specification Information, continued on next page

► Specification Information, continued from previous page


Specification Information		
Width	Style Number	U.S. Base Price
120° Corner V Ceiling Track		
24"	GPCT120V	\$215
135° Corner V Ceiling Track		
24"	GPCT135V	\$215

Privacy Wall



 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Ceiling Track Clip Kits



Tip: Ceiling clip attachment hardware is included with ceiling track. Additional ceiling clip kits can be ordered separately for inventory or changes.

Standard Includes	Required to Specify
<div><div>► Need help? Product details, page 63</div><div><ul style="list-style-type: none">Quantity of 200 ceiling track clips and necessary attachment hardware</div></div>	<div><div>1 Style number</div><div>2 Options, if selected (see below)</div></div>

Options	U.S. Price	Required to Specify
<div><div>Post Extensions</div><div><ul style="list-style-type: none">Post extensions modified to accommodate recessed ceiling track (ordered separately)Post extensions modified to accommodate overlapping ceiling track (ordered separately)</div></div>	<div><div>No cost</div><div>No cost</div></div>	<div><div>Specify with post extensions for recessed ceiling track interface.</div><div>Specify with post extensions for overlapping ceiling track interface.</div></div>

Specification Information	
Style Number	U.S. Price
1" x 1/4"D Tegalur	
GPCFKT	\$2456
1" x 3/8"D Tegalur	
GPCFKX	\$2456
1" x 5/8"D Tegalur	
GPCFKZ	\$2959
Donn Fineline 1/4" Slot	
GPCFKM	\$ 449
Donn Fineline 1/8" Slot	
GPCFKU	\$1125
1"W Exposed T	
GPCFKA	\$ 765

► Specification Information, continued on next page




For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

► Specification Information, continued from previous page

Specification Information

Style Number	U.S. Price
1" Tee Quick Clip	
GPCFKQ	\$1426
9/16"W Exposed Tee	
GPCFKR	\$ 765
9/16" x 1/4"D Tegular	
GPCFKT5	\$2669
9/16" x 5/16"D Tegular	
GPCFKX5	\$2669

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Ceiling Tracks, continued

Ceiling Track T-Clip




T-clip for recessed ceiling track



T-clip for overlapping ceiling track

Standard Includes		Required to Specify	
<p>► Need help? Product details, page 63</p>	<ul style="list-style-type: none"> T-clip for ceiling track: black paint only 	1 Style number 2 Options, if selected (see below)	
Options		U.S. Price	Required to Specify
Post Extensions	<ul style="list-style-type: none"> Post extensions modified to accommodate recessed ceiling track (ordered separately) 	No cost	Specify <i>with post extensions for recessed ceiling track interface.</i>
	<ul style="list-style-type: none"> Post extensions modified to accommodate overlapping ceiling track (ordered separately) 	No cost	Specify <i>with post extensions for overlapping ceiling track interface.</i>
Specification Information			
Style Number	U.S. Price		
GPCTT	\$7		

Ceiling Track Bypass Cover



Tip: Bypass cover is required if you are using a recessed ceiling track and the track is on the ceiling grid.

Standard Includes		Required to Specify	
<p>► Need help? Product details, page 63</p>	<ul style="list-style-type: none"> Bypass cover: paint 	1 Style number 2 Paint color number for bypass cover 3 Options, if selected (see below) ► See <i>Surface Materials</i> , page 362.	
Options		U.S. Price	Required to Specify
Surface Materials	Bypass cover surface options		
	<ul style="list-style-type: none"> Paint price group 1 	No cost	Specify paint color number.
	<ul style="list-style-type: none"> Paint price group 2 	+\$4	Specify paint color number.
	<ul style="list-style-type: none"> Paint price group 3 	+\$7	Specify paint color number.
Specification Information			
Style Number	U.S. Base Price		
GPCTB	\$259		

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Cornice Track and Brackets

Tip: When required by the local seismic design criteria, structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

Standard Includes	Required to Specify
<div>▶ Need help? Product details, page 66</div> <div>• Cornice track: paint</div>	1 Style number 2 Paint color number for cornice track 3 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.

Options	U.S. Price	Required to Specify
Surface Materials		
L,T, and X Cornice Brackets		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 4	Specify paint color number.
• Paint price group 3	+\$ 7	Specify paint color number.
Straight Cornice Track		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$23	Specify paint color number.
• Paint price group 3	+\$36	Specify paint color number.

Specification Information		
Length	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

Straight Cornice Track

120"	GPRTS	\$344
:	:	:

L Cornice Bracket



	GPRTL	\$ 65
:	:	:

T Cornice Bracket

	GPRTT	\$ 65
:	:	:

X Cornice Bracket


	GPRTX	\$ 65
:	:	:



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Trim and Accessories

Continuous Base Trim



Standard Includes	Required to Specify
<div><div>▶ Need help? Product details, page 19</div><div><ul style="list-style-type: none">5"H base trim: paint</div></div>	<div><div>1 Style number</div><div>2 Paint color number for base trim</div><div>3 Options, if selected (see below)</div><div>▶ See <i>Surface Materials</i>, page 362.</div></div>

Options	U.S. Price	Required to Specify
<div><div>Surface Materials</div><div>Base trim surface options</div><div><ul style="list-style-type: none">Paint price group 1Paint price group 2Paint price group 3</div></div>	<div><div>No cost</div><div>+\$23</div><div>+\$36</div></div>	<div><div>Specify paint color number.</div><div>Specify paint color number.</div><div>Specify paint color number.</div></div>

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

SmartTools Options	U.S. Price	Required to Specify
<div><div>Base</div><div><ul style="list-style-type: none">2½"H base4"H base</div></div>	<div><div>+\$12</div><div>+\$53</div></div>	<div><div>Specify 2½"H base.</div><div>Specify 4"H base.</div></div>

Specification Information		
Width	Style Number	U.S. Base Price
120"	GPBTC	\$126



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Corner Base Trim

Standard Includes	Required to Specify
<p>► Need help? Product details, page 84</p> <ul style="list-style-type: none"> 5"H base trim: paint 	<p>1 Style number 2 Paint color number for base trim 3 Options, if selected (see below) ► See <i>Surface Materials</i>, page 362.</p>

Options	U.S. Price	Required to Specify
<p>Surface Materials</p> <p>Base trim surface options</p> <ul style="list-style-type: none"> Paint price group 1 Paint price group 2 Paint price group 3 	<p>No cost +\$ 23 +\$ 36</p>	<p>Specify paint color number. Specify paint color number. Specify paint color number.</p>

SmartTools Options	U.S. Price	Required to Specify
<p>Base</p> <ul style="list-style-type: none"> 2½"H base 4"H base 	<p>+\$ 53 +\$ 53</p>	<p>Specify 2½"H base. Specify 4"H base.</p>
<p>Modified Angle (70° to 175° in 5° increments)</p> <ul style="list-style-type: none"> For GPCNRBT120 70°–85° For GPCNRBT120 95°–115° For GPCNRBT135 125°–175° 	<p>+\$138 +\$ 69 +\$ 69</p>	<p>Specify <i>with modified angle</i>. Specify <i>with modified angle</i>. Specify <i>with modified angle</i>.</p>

Specification Information		
Width	Style Number	U.S. Base Price
90° Corner Base Trim		
18"	GPCNRBT90	\$126
120° Corner Base Trim		
18"	GPCNRBT120	\$126
135° Corner Base Trim		
18"	GPCNRBT135	\$126
:	:	:



90° corner




120° corner



135° corner

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Power and Communication Base Trim

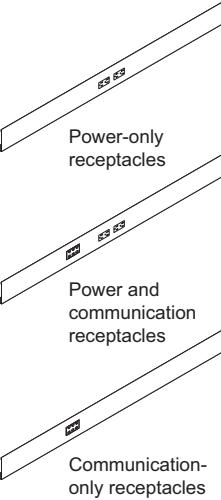

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
<div><div>▶ Need help? Product details, page 22</div><div>• 5"H base trim with cutouts: paint</div></div>	<div>1 Style number</div> <div>2 Paint color number for base trim</div> <div>3 Options, if selected (see below)</div> <div>▶ See <i>Surface Materials</i>, page 362.</div>

Options	U.S. Price	Required to Specify
Surface Materials <div>• Paint price group 1</div> <div>• Paint price group 2</div> <div>• Paint price group 3</div>	<div>No cost</div> <div>+\$23</div> <div>+\$36</div>	<div>Specify paint color number.</div> <div>Specify paint color number.</div> <div>Specify paint color number.</div>

Specification Information		
• Width	• Style Number	• U.S. Base Price
•	•	•

Power and Communication Base Trim


Power Only		
59"	GPBTP	\$37
Power and Communication		
59"	GPBTPC	\$37
Communication Only		
59"	GPBTCC	\$37
•	•	•

Chicago Base Trim

Power Only		
59"	GPBTCHIP	\$37
Power and Communication		
59"	GPBTCHIPC	\$37
Communication Only		
59"	GPBTCC	\$37
•	•	•

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Feature Strips



Tip: Single feature strips are 121" long and are cut to size in the field. They are required when joining door frames to other components.

Tip: To determine quantity and length of feature strips, see Feature Strip Application.
▶ Page 88.

Tip: Feature strip(s) may be shipped slightly longer than needed. Excess will be concealed behind base trim and no cutting is required.

Tip: Half feature strips are used in combination with in-line feature strips for inside corner applications.

Tip: For correct fit of feature strips, you must specify type of components that will be used in conjunction with feature strips. Example: One painted component and one upholstered component.

Tip: Fabric covered feature strips cannot be reused, and will need to be replaced as part of rearrangement process.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 18	<ul style="list-style-type: none"> Feature strip(s): paint Ceiling height from 8'0"H to 10'0"H, in one-inch increments, if package of 25 selected 	1 Style number 2 Paint color number for feature strip(s) 3 Ceiling height, if package of 25 selected 4 Wall application 5 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.	
Options	U.S. Price	Required to Specify	
Surface Materials	Single feature strips		
	Paint		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 4	Specify paint color number.
	• Paint price group 3	+\$ 9	Specify paint color number.
	Fabric		
	• Fabric price group 1	+\$ 56	Specify fabric color number.
	• Fabric price group 2	+\$ 80	Specify fabric color number.
	• Fabric price group 3	+\$100	Specify fabric color number.
	• Fabric price group 5	+\$125	Specify fabric color number.
	Vinyl		
	• Customer's Own Material/Vinyl (COM)	+\$ 56	▶ See <i>Surface Materials Reference Manual</i> .
	Package of 25 feature strips		
	Paint		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 9	Specify paint color number.
	• Paint price group 3	+\$ 23	Specify paint color number.
	Fabric		
	• Fabric price group 1	+\$125	Specify fabric color number.
	• Fabric price group 2	+\$161	Specify fabric color number.
	• Fabric price group 3	+\$214	Specify fabric color number.
	• Fabric price group 5	+\$262	Specify fabric color number.
	Vinyl		
	• Customer's Own Material/Vinyl (COM)	+\$125	▶ See <i>Surface Materials Reference Manual</i> .
Wall Application	<ul style="list-style-type: none"> For use with two painted components For use with two upholstered components For use with one painted and one upholstered component 	No cost No cost No cost	Specify <i>with two painted components</i> . Specify <i>with two upholstered components</i> . Specify <i>with one painted and one upholstered component</i> .
Ceiling Height	• 8'0" through 10'0"	No cost	Specify ceiling height in 1" increments.

▶ Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	<ul style="list-style-type: none"> 7'5"H through 7'11"H (for GPFS and GPFSH only) 10'1"H through 11'0"H 	Use 8'0" price No cost	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Base	<ul style="list-style-type: none"> 2½"H base (for GPFS and GPFSH only) 4"H base (for GPFS and GPFSH only) 	No cost No cost	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

Height	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:
:	:	:

Package of 25 Feature Strips

In-Line

8'0"–10'0"	GPFS	\$746
------------	-------------	-------

Half

8'0"–10'0"	GPFSH	\$746
------------	--------------	-------

:	:	:
---	---	---

Package of 1 Feature Strip

In-Line


121"	GPFS1	\$ 37
------	--------------	-------

Half

121"	GPFSH1	\$ 37
------	---------------	-------

:	:	:
---	---	---

In-line
feature
strip



Half
feature
strip




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Trim and Accessories, continued

Anodized Feature Strips



Tip: Single feature strips are 121" long and are cut to size in the field. They are required when joining door frames to other components.

Tip: To determine quantity and length of feature strips, see Feature Strip Application. ▶ Page 88.

Tip: Feature strip(s) may be shipped slightly longer than needed. Excess will be concealed behind base trim and no cutting is required.

Tip: Half feature strips are used in combination with in-line feature strips for inside corner applications.

Tip: Anodized feature strips are designed for use with Glass Selection anodized door and glass frames. They are not compatible with upholstered panels.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: For painted feature strips, use Privacy Wall feature strips.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> ▶ Need help? Product details, page 18 Feature strip(s): anodized aluminum Ceiling height from 8'0"H to 10'0"H, in one-inch increments, if package of 25 selected 	<ul style="list-style-type: none"> 1 Style number 2 Ceiling height, if package of 25 selected 3 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 362.

Options	U.S. Price	Required to Specify
Ceiling Height on Half Feature Strips <ul style="list-style-type: none"> 8'0" through 10'0" 	No cost	Specify ceiling height in 1" increments.

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments) <ul style="list-style-type: none"> 7'5"H through 7'11"H (for GPFSFA and GPFSHA only) 	No cost	Specify ceiling height in 1" increments.
Base <ul style="list-style-type: none"> 2½"H base (for GPFSFA and GPFSHA only) 4"H base (for GPFSFA and GPFSHA only) 	No cost No cost	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

Height	Style Number	U.S. Price
:	:	:

Package of 25 Feature Strips

In-Line

8'0"–10'0"	GPFSFA	\$1083
------------	---------------	--------

Half

8'0"–10'0"	GPFSHA	\$1083
------------	---------------	--------

Package of 1 Feature Strip

In-Line

121"	GPFS1A	\$ 55
------	---------------	-------

Half

121"	GPFSH1A	\$ 55
------	----------------	-------



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Furniture Reveal Strips



Tip: Furniture reveal strips are used when hanging components on Privacy Wall panels. The furniture reveal strip finishes off one half of an in-line panel joint, while allowing access to panel slots. They are cut to size from a 34" length as part of the installation process. Typically, one 34" strip is adequate to trim out both edges of a worksurface or storage cabinet.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> ▶ Need help? Product details, page 19 • Furniture reveal strip(s): paint price group 1 	1 Style number 2 Paint color number 3 Wall application 4 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> • Package of 4 furniture reveal strips <ul style="list-style-type: none"> • Paint price group 1 No cost • Paint price group 2 +\$ 4 • Paint price group 3 +\$ 9 • Package of 25 furniture reveal strips <ul style="list-style-type: none"> • Paint price group 1 No cost • Paint price group 2 +\$ 9 • Paint price group 3 +\$23 		Specify paint color number. Specify paint color number. Specify paint color number.
Wall Application <ul style="list-style-type: none"> • For use with two painted components No cost • For use with two upholstered components No cost • For use with one painted and one upholstered component No cost 		Specify <i>with two painted components</i> . Specify <i>with two upholstered components</i> . Specify <i>with one painted and one upholstered component</i> .

Specification Information

Height	Style Number	U.S. Base Price
34"	GPFRS4	\$ 65
34"	GPFRS	\$339

Package of 4 Furniture Reveal Strips

34"	GPFRS4	\$ 65
34"	GPFRS	\$339

Package of 25 Furniture Reveal Strips

34"	GPFRS	\$339
34"	GPFRS	\$339




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Trim and Accessories, continued

Acoustic Packing



Standard Includes		Required to Specify
► Need help? Product details, page 19	• 120" of acoustic packing for mini ends or wall channels to help improve acoustic performance	Style number
Specification Information		
• Style Number	• U.S. Price	
GPACoust	\$49	

Acoustic Seals




Standard Includes		Required to Specify
► Need help? Product details, page 89	• Acoustic seal: black • Package of 10	Style number
Specification Information		
• Height	• Style Number	• U.S. Price
18"	GPAS	\$124

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Load Bar

Load Bar



Standard Includes		Required to Specify
► Need help? Product details, page 20	• Load bar width: 18"W–60"W in 1/16" increments	1 Style number
	• Load bar: paint price group 1	2 Paint color number for load bar
	• Package quantity: two	3 Width type (see below under Required Selections)
		4 Width (see below under Required Selections)
		5 Options, if selected (see below)
		► See Surface Materials, page 362

	Required Selections	U.S. Price	Required to Specify
Width Type	• Modular	No cost	Specify modular.
	• Standard	No cost	Specify standard.
Width	• 18"W–30"W	No cost	Specify width in 1/16" increments.
	• 30 1/16"W–60"W	+\$33	Specify width in 1/16" increments.

	Options	U.S. Price	Required to Specify
Surface Materials	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$23	Specify paint color number.
	• Paint price group 3	+\$33	Specify paint color number.
Related Products	• Solid wall panels with hollow core		► Page 110
	• Solid wall panels with enhanced core		► Page 114
	• Clerestory wall panels		► Page 136
	• Glass selections clerestory panel		► Page 206
	• Furniture reveal strips		► Page 253


Specification Information		
Height	Style Number	U.S. Base Price
6"	GPLB	\$582



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.


Accessories

Universal Floor Gripper



Standard Includes		Required to Specify
► Need help? Product details, page 21	• Floor gripper	Style number
	• Double-sided hook and eye tape	
		• Double-sided adhesive tape
Specification Information		
• Height	• Style Number	• U.S. Price
16 1/8"	GPUFG	\$36


Wall-Lifting Tools



Standard Includes		Required to Specify
<ul style="list-style-type: none">• Wall-lifting tool• Package quantity: two		Style number
Specification Information		
• Style Number	• U.S. Price	
GPWT	\$165	

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Receptacles



Standard Includes		Required to Specify	
▶ Need help? Product details, page 101	• Receptacle: plastic	1 Style number 2 Plastic color number for receptacle 3 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 362.	
Options		U.S. Price	Required to Specify
Controlled Stamp	• No stamp	No cost	Specify <i>with no stamp</i> .
	• Controlled stamp	+\$5	Specify <i>with controlled stamp</i> .

Specification Information

15-Amp Receptacles					20-Amp Receptacles			
Line	Style Number	U.S. Base Price	Style Number	U.S. Base Price	Style Number	U.S. Base Price	Style Number	U.S. Base Price

4-Circuit, 3+1 Wiring Schematic

	System Ground		Isolated Ground		System Ground		Isolated Ground	
Line 1	GP1R1SGX	\$47	GP1R1IGX	\$47	GP1R1SGHX	\$72	GP1R1IGHX	\$72
Line 2	GP1R2SGX	\$47	GP1R2IGX	\$47	GP1R2SGHX	\$72	GP1R2IGHX	\$72
Line 3	GP1R3SGX	\$47	GP1R3IGX	\$47	GP1R3SGHX	\$72	GP1R3IGHX	\$72
Line 4	GP1R4SGX	\$47	GP1R4IGX	\$47	GP1R4SGHX	\$72	GP1R4IGHX	\$72

4-Circuit, 2+2 Wiring Schematic

	System Ground		Isolated Ground		System Ground		Isolated Ground	
Line 1	GP2R1SGY	\$47	GP2R1IGY	\$47	GP2R1SGHY	\$72	GP2R1IGHY	\$72
Line 2	GP2R2SGY	\$47	GP2R2IGY	\$47	GP2R2SGHY	\$72	GP2R2IGHY	\$72
Line 3	GP2R3SGY	\$47	GP2R3IGY	\$47	GP2R3SGHY	\$72	GP2R3IGHY	\$72
Line 4	GP2R4SGY	\$47	GP2R4IGY	\$47	GP2R4SGHY	\$72	GP2R4IGHY	\$72


3-Circuit, Separate Neutrals Wiring Schematic

	System Ground		Isolated Ground		System Ground		Isolated Ground	
Line 1	GP3R1SGZ	\$47	GP3R1IGZ	\$47	GP3R1SGHZ	\$72	GP3R1IGHZ	\$72
Line 2	GP3R2SGZ	\$47	GP3R2IGZ	\$47	GP3R2SGHZ	\$72	GP3R2IGHZ	\$72
Line 3	GP3R3SGZ	\$47	GP3R3IGZ	\$47	GP3R3SGHZ	\$72	GP3R3IGHZ	\$72



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

USB Receptacles



Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|---|
| ► Need help?
Product details,
page 101 | <ul style="list-style-type: none">• Receptacle: plastic <ul style="list-style-type: none">1 Style number2 Plastic color number for receptacle <p>► See <i>Surface Materials</i>, page 362.</p> |
|--|---|

Specification Information

Line	Style Number	U.S. Price

4-Circuit, 3+1 Wiring Schematic

Line 1	GPR1USBX	\$111
Line 2	GPR2USBX	\$111
Line 3	GPR3USBX	\$111
Line 4	GPR4USBX	\$111

4-Circuit, 2+2 Wiring Schematic

Line 1	GPR1USBY	\$111
Line 2	GPR2USBY	\$111
Line 3	GPR3USBY	\$111
Line 4	GPR4USBY	\$111

3-Circuit, Separate Neutrals Wiring Schematic


Line 1	GPR1USBZ	\$111
Line 2	GPR2USBZ	\$111
Line 3	GPR3USBZ	\$111

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Privacy Wall

Wiring and Cabling, continued

Cover Plates



Standard Includes		Required to Specify
▶ Need help? Product details, page 101	• Cover plate: plastic	1 Style number 2 Plastic color number for cover plate ▶ See <i>Surface Materials</i> , page 362.
Specification Information		
Style Number	U.S. Price	
Power and Communication		
GPPDC	\$72	
Power Only		
GPPC	\$62	

Power and Communication Fillers




Tip: This filler is not designed for use with the base communication cutout. Fillers for this NEMA-size cutout should be sourced locally.

Standard Includes		Required to Specify
▶ Need help? Product details, page 102	• Package of 20 fillers: plastic	1 Style number 2 Plastic color number for filler ▶ See <i>Surface Materials</i> , page 362.
Specification Information		
Style Number	U.S. Price	
GPRCE	\$133	




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Multipurpose Power Infeeds



Hardwire



Modular

Tip: If an infeed is needed, it must be ordered separately when you order a panel with base power option. When you order a panel with ADA- or desk-height power option, a factory-installed hardwire infeed is included.

Tip: Infeed is included in the price of ADA- or desk-height receptacle power location option. Base receptacle power location does not include infeed. It must be ordered separately, if needed.

Standard Includes	Required to Specify
<div><div>► Need help? Product details, pages 100, 140</div><div><ul style="list-style-type: none">• Hardwire infeed<ul style="list-style-type: none">—Junction box fittings—Conduit: metal• Modular infeed<ul style="list-style-type: none">—Conduit: metal• Modular infeed cover</div></div>	Style number

Specification Information		
Length and Connection	Style Number	U.S. Price

4-Circuit, 3+1 Wiring Schematic

24' Hardwire	GP1PIH24X	\$673
24' Modular	GP1PIM24X	\$812

4-Circuit, 2+2 Wiring Schematic

24' Hardwire	GP2PIH24Y	\$673
24' Modular	GP2PIM24Y	\$812


3-Circuit, Separate Neutrals Wiring Schematic

24' Hardwire	GP3PIH24Z	\$673
24' Modular	GP3PIM24Z	\$812



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.


Base Power Infeeds



Tip: For base power infeeds for use in San Francisco, see below.

Standard Includes		Required to Specify
<div><div>► Need help?</div><div>Product details, pages 100, 140</div></div> <div><div>• Junction box fittings for hardwired connection</div><div>• Liquid-tight flexible conduit: black plastic</div></div>		Style number
Specification Information		
Length	Style Number	U.S. Price
4-Circuit, 3+1 Wiring Schematic		
12'	GP1BPI12X	\$392
4-Circuit, 2+2 Wiring Schematic		
12'	GP2BPI12Y	\$392
3-Circuit, Separate Neutrals Wiring Schematic		
12'	GP3BPI12Z	\$392

Base Power Infeeds for Use in San Francisco




Standard Includes		Required to Specify
<div><div>► Need help?</div><div>Product details, page 103</div></div> <div><div>• Junction box fittings for hardwired connection</div><div>• Metallic liquid-tight flexible conduit: black plastic</div></div>		Style number
Specification Information		
Length	Style Number	U.S. Price
4-Circuit, 3+1 Wiring Schematic		
16"	GP1BPISF12X	\$392
4-Circuit, 2+2 Wiring Schematic		
16"	GP2BPISF12Y	\$392
3-Circuit, Separate Neutrals Wiring Schematic		
16"	GP3BPISF12Z	\$392



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Wiring and Cabling, continued

Modular Harnesses



Tip: For field-installed jumpers, order a 29" harness for desk to ADA height, order a 64" harness for ADA to base height, and order a 76" harness for desk to base height.

Tip: Harnesses stretch 3". For example, a 33" harness will allow for a 33" to 36" connection.

Standard Includes		Required to Specify	
► Need help? Product details, page 102	• Harness	1 Style number 2 Harness length (see below) 3 Options, if selected (see below)	

Options	U.S. Price	Required to Specify	
Harness Length		Specify <i>harness length of xx"</i> (designate length of 18", 21", 25", 29", 33", 37", 41", 46", or 50").	
► Page 108		Specify <i>harness length of xx"</i> (designate length of 54", 58", 62", 66", 70", 74", 78", 82", 90", 94", 99", or 103").	
• Harness length from 18" to 50"	No cost	Specify <i>harness length of xx"</i> (designate length of 107", 111", 115", 120", 124", 128", 132", 136", 140", 144", 148", 152", 156", 160", 166", 171", 175", 180", 184", 190", or 196").	
• Harness length from 54" to 103"	+\$ 77	Specify <i>harness length of 288"</i> .	
• Harness length from 107" to 196"	+\$225		
• Harness length 288"	+\$606		

Specification Information

Length	Style Number	U.S. Base Price
18" to 50"	GP1MHAX	\$180

4-Circuit, 3+1 Wiring Schematic

18" to 50"	GP1MHAX	\$180
------------	---------	-------

4-Circuit, 2+2 Wiring Schematic

18" to 50"	GP2MHAY	\$180
------------	---------	-------

3-Circuit, Separate Neutrals Wiring Schematic

18" to 50"	GP3MHAZ	\$180
------------	---------	-------




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Harness-to-Harness Connectors



Standard Includes		Required to Specify
▶ Need help? Product details, page 102		Style number
• Connector: black plastic only		
Specification Information		
Description	Style Number	U.S. Price
4-Circuit, 3+1 Wiring Schematic		
Harness-to-harness	GP1HHX	\$47
Branching harness-to-harness	GP1BHX	\$47
4-Circuit, 2+2 Wiring Schematic		
Harness-to-harness	GP2HHY	\$47
Branching harness-to-harness	GP2BHY	\$47
3-Circuit, Separate Neutrals Wiring Schematic		
Harness-to-harness	GP3HHZ	\$47
Branching harness-to-harness	GP3BHZ	\$47

Privacy Wall

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Field-Installed Powerkits

Tip: These powerkits are suitable for use in New York City.




Tip: Power and communication cover plate and base trim are ordered separately.
▶ Pages 248 and 241

Tip: Power and communication can be field installed in panel face. Power only cannot be field installed in panel face.

Tip: Powerkits can be installed in hollow core panels only.

Standard Includes	Required to Specify
▶ Need help? Product details, page 101	Style number

Related Products
<ul style="list-style-type: none">• Power and communication base trim• Cover plates• Multipurpose power infeeds• Base power infeeds• Harness-to-harness connectors

Specification Information					
Base Powerkit		ADA/Desk Single Powerkit		ADA/Desk Double Powerkit	
					
Style Number	U.S. Price	Style Number	U.S. Price	Style Number	U.S. Price

4-Circuit, 3+1 Wiring Schematic

GP1PKBX	\$245	GP1PKPSX	\$286	GP1PKPX	\$286

4-Circuit, 2+2 Wiring Schematic


GP2PKBY	\$245	GP2PKPSY	\$286	GP2PKPY	\$286

3-Circuit, Separate Neutrals Wiring Schematic

GP3PKBZ	\$245	GP3PKPSZ	\$286	GP3PKPZ	\$286


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Chicago & NYC Junction Box



Tip: Junction boxes for base power are provided by the electrician.

Tip: Powerkits can be installed in hollow core panels only.

Standard Includes		Required to Specify
► Need help? Product details, pages 103, 140	• Field-installed junction box for panel	Style number

Specification Information				
Dimensions			Style	U.S.
D	W	H	Number	Price
7 ²³ / ₃₂ "	5 ³ / ₄ "	1 ³ / ₃₂ "	GPJCH	\$292

Privacy Wall

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.


Understanding Thread

	
Statement of Line	268

<div></div>	
Product Details	
Thread	270


Statement of Line

Thread




Three-Prong Plug Adapter

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 276




Power Hub

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 277




Power Track Wall Infeed with Ramps

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 278




Power Track Wall Infeed with Infills

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 279




Power Track Floor Infeed with Ramps

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 280




Power Track Floor Infeed with Infills

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 281




Power Track with Ramps

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 282




Power Track with Infills

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 283



Connector

Understanding
 ▶ Page 270
 Specifying
 ▶ Page 284




Power Strip

Specifying
 ▶ Page 285

Thread

Power Track and Power Track Infeeds

Power hub

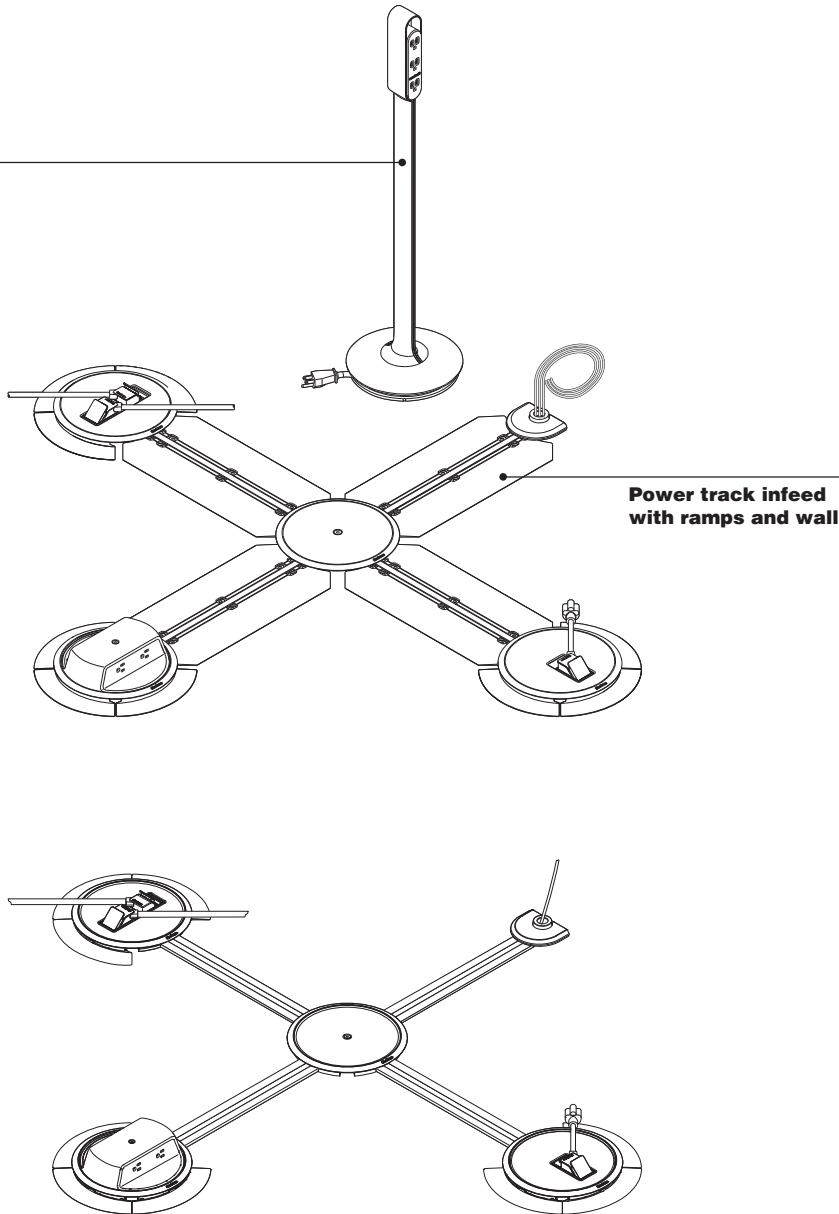

Power track infeed with ramps and wall


Product Details

Power track infeeds


provide the option of connecting the Thread system to the building power, either through the wall or through the floor. Infeed lengths are available from 24" to 144" in 12" increments and in single or dual circuit.

Available in single circuit and dual circuit.


Power track lengths are available from 24" to 144" in 12" increments. They connect to an infeed to distribute power. Power tracks can be ordered with ramps or with infills.




Connectors, four varieties: Blank low-profile (No power access), one-door low-profile (provides one access point utilizing Steelcase's proprietary low-profile plug), two-door low-profile (provides two access points utilizing Steelcase's proprietary low-profile plug), and the NEMA monument, which provides four standard three-prong plug (NEMA 5-15) receptacles. NEMA monument is available with standard and tamper resistant receptacles.




Power hub is available with a standard three-prong plug or Steelcase's proprietary low-profile plug. The hub provides a user interface for power that is off the floor and capable of moving around the space. It features an integrated cord wrap in the design of the base.



The Thread power hub provides six standard three-prong (NEMA 5-15) receptacles to provide power access where users need it. (indoor dry locations only).



The power hub is available in two heights, lounge height and desk height. The lounge height hub is 30" tall overall with the user interface starting at 22". The desk height hub is 37 1/8" tall overall with the user interface starting at 28".




Low-profile plug adapter is an 8 3/4" long adapter that allows a single three-prong plug to connect to Steelcase's proprietary low-profile connectors.

Proprietary low-profile plug can only be used with the Thread system and will not interface with existing receptacles. In order to achieve ADA compliance for connectors in an egress location, we developed our own plug design.

Note: Always consult your local inspector prior to purchasing the Thread system to ensure all local codes and ordinances are satisfied since local regulations may supersede those spelled out in the National Electric Code.

Connections




The single circuit power track infeeds utilize three standard 12 gauge insulated wires encased in a riveted metal housing.

The dual circuit power track infeeds utilize three 12 gauge insulated wires along with a 10 gauge shared neutral wire.


All infeeds stand 1/4" off of the subfloor.

The infeed track comes with 12' of extra wiring to easily connect to the building power through a new or existing junction box. If longer infeed wiring is necessary, it may be submitted to specials.




Thread power track and power track infeeds are prefabricated modular tracks capable of distributing up to 20 amps of power per circuit and come in lengths of 24" to 144" in 12" increments. These tracks must be fastened to subfloor, but can be reconfigured or removed without leaving substantial damage to the subfloor like more permanent solutions do. Thread power track cannot be field cut.


► Please refer to page 272 for more information on applications and reconfiguration.



Each power track and infeed track comes with either two flexible ramps or two infills. The ramps ease the transition between the subfloor and the height of the track. These ramps simply rest on top of the track and do not need to be adhered or fastened. The infills rest within the track to create a smooth surface for the floor covering to be applied over. When ordering a power track and/or infeed track, you can specify the track and ramps or the track and infills, depending on your installation method determined by your flooring selection.




Standard three-prong plug




Low-profile plug


The cord is 5' long and is available with either a standard three-prong plug for use with standard receptacles or with Steelcase's proprietary low-profile plug for use with one-door and two-door low-profile connectors. Cord length can be changed to be 2-9' by ordering through Specials. The base only has the capacity to wrap 5' of cord within.



The metal connector cover on the low-profile connectors is a stamped, painted steel plate. This connector cover is ADA compliant for egress locations.




The low-profile connector doors are made of cast zinc. They are spring loaded and gasketed to ensure compliance with small liquid spill requirements. The system is not fully waterproof and is only acceptable for use indoors in dry locations.



The plastic trim ring is spring loaded to provide a tight fit against the flooring. It provides a simple ramp transition to the 1/2" maximum height of the connector cover and hides any imperfections in the access hole cut in the carpet.

NEMA connector is designed to accept most standard NEMA three-prong plug and cord orientations. If cord exits in a non-standard fashion, please check for fit before ordering. A low-profile connector and adapter should be utilized for non-standard configurations.



The NEMA monument is made of a two piece plastic housing that provides access to four standard three-prong receptacles. This connector is not ADA compliant for egress locations. NEMA monument is available with standard and tamper resistant receptacles. *Tip: When connecting the Verbi active media table or Bivi to Thread, the NEMA tamper resistant monument orients receptacles in a way that allows additional plug orientations.*

When planning a power network, you must calculate the amperage requirements of all your electrical components so you can provide sufficient electricity to power them.

► See page 272 for additional power planning information.

Thread, Power Track and Power Track Infeeds, continued

Technical Electrical Information and Power Planning

The Thread system is listed as a 20 amp branch circuit. It utilizes three standard 12 gauge wires (hot, neutral, and ground). When more than one circuit is required to support a space or application, additional circuits will need to be provided using Thread power track infeeds connected to other circuits in the building. The number of circuits available to pull from will be determined by building construction. Please consult your electrician if you are unsure of the building power capabilities.

Thread is designed to accommodate 20 amps per circuit. Amps x volts = watts. In the U.S., this means 2,400 watts of potential. However, most locations only allow for power planning of up to 80% of potential. For example, 2,400 watts x 80% is 1,920 watts. When planning, consider whether a single or dual circuit is needed based on power needs.


► See page 376 for *How to Calculate Power Needs*.

The Thread power track infeed begins with a universal connector that is capable of connecting to any standard 1/2" conduit or other listed product such as Wiremold or Conduit. The building electrical supply connection must be performed by a licensed electrician. Please consult with your electrician if you have questions regarding what type of conduit will be used.

Due to voltage drop, the National Electric Code (NEC) recommends that the distance between the building circuit box and the user access point not exceed 75–150 feet (depending on gauge of wires running from the building circuit box to the Thread infeed junction). Since the distance from the Thread infeed junction to the building circuit box may be difficult to ascertain, we recommend planning conservatively for the total distance of any individual Thread branch and keep it as short as possible. Thread branches longer than 70 feet per circuit may risk contributing to voltage drop exceeding acceptable levels.

Listing categories: Thread power track is listed as a multi-outlet assembly and is considered a 20 amp branch circuit, which means it meets the same requirements as the hard wire outlets in the wall. The power hub is listed as a relocatable power tap (RPT, which means it is treated the same as a typical power strip). The plug adapter is listed as an accessory to the Thread system.

UL 5 is the standard for multi-outlet assembly (which correlates to article 380 in the National Electric Code) and UL1363 is the standard for RPT, but has no direct correlation in the NEC.



The power hub has a circuit breaker in the base that is intended to trip should excessive power draw occur. If the total draw from all receptacles on a hub exceed 15 amps, the breaker will trip and a black button will pop out of the base where it meets the stalk. Pressing the black button back in will reset the circuit.

It is important to plan for expected power consumption in a given application to ensure enough infeeds are present to prevent tripping the circuit breaker either at a hub or at the building circuit box.

Building construction varies and there may be components hidden below the floor surface that must be avoided when drilling holes to anchor the power track infeed and power track. Sub-flooring, including concrete, may contain electrical wiring, structural cabling, radiant heating lines, etc. To avoid potential property damage or unsafe conditions, consult with the building architect or Engineer of Record to plan accordingly. The sub-floor can only have 1/8" of variance under where the Thread power track lies. If greater than 1/8", floor leveling is required.

The building electrical supply connection must be performed by a licensed electrician. Only connect this system to a dedicated 120-127 V~ 60Hz 20A single phase GFCI protected building power circuit.

Codes Information

Thread is UL certified as a multi-outlet assembly and not a manufactured wiring assembly. Manufactured wiring systems are defined in Article 604 of the NEC and provide very clear guidelines regarding construction methods. Thread is constructed in a manner not consistent with any defined method in this section of the NEC and because of this, cannot be considered a manufactured wiring system. It is consistent with the definition for multi-outlet assemblies as defined in Article 380.

NEC 210.71: This 2017 code requires that any habitable room of at least 215 sq. ft. must have at least two floor outlets no less than 6 ft. from the wall. One outlet is required for every 215 sq. ft. of space. Thread is a solution to this code.

The system is capable of distributing 20 amps of power. Power planning to 80% consumption means the system is not designed to deliver more than 16 amps total. Each connection point can only connect to one circuit at a time. Thread is compatible with 5-15 plug types, not 5-20 plug types.


The NEC does not permit plugging an extension cord or relocatable power tap (RPT) into another extension cord or RPT. Many of the power units embedded in furniture are listed as a RPT and, per the NEC, are required to be plugged into a building hardwired receptacle. The Thread cord adapter is a listed multi outlet accessory and as such, is not considered an RPT, extension cord or a building receptacle. We recommend the NEMA monument for any Thread application where furniture-hosted power will be plugged in but some may desire to use the low-profile connector with an adapter for this application. Please note that while it is not a safety hazard, a local inspector may not approve because of the definitions and restrictions mentioned above.

Thread is listed as a multi outlet assembly in accordance with Article 380 of the NEC; it is not a flat conductor cable system (FCC) as identified in Article 324. FCC is not permitted in education, healthcare, or residential facilities.


The intent of this requirement within the code is that outlets are not to be covered by carpet. The traditional multi outlet assembly design was covered with receptacles across the entire face and field wired. With that type of design, it is easy to understand it applies to the entire product. Thread is a new design, yet certified as a multi outlet assembly. The raceway is factory wired and able to be covered with carpet, but the connector/receptacle still cannot.

Track Configurations


Inline

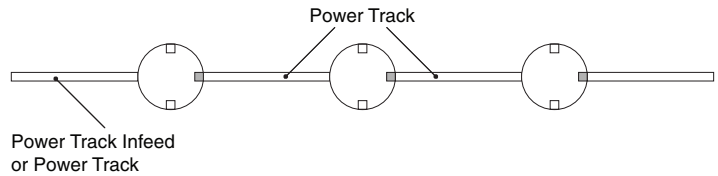


L 90°




End of Run




T

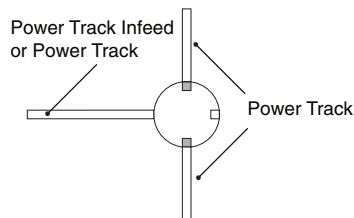

X



Single Circuit and Dual Circuit



Track Configurations and Power Access Points Legend

- Inline = connector of any type
- L/90° = one door or NEMA connector
- End of Run = connector of any type
- T = one door or NEMA connector
- X = blank connector only

Infeed Circuit Types: Single circuit infeeds distribute the same circuit through all tracks and power access points. Dual circuit infeeds distribute one circuit at 90° and 180° from the infeed track. The second circuit is distributed at 270° from the infeed track.

Steelcase has recommended a maximum of 10 receptacle outlets to avoid code variation and Hub maximization.

- Blank covers do not count towards the total number of receptacles because no access points are present in this configuration.
- One door and two door low profile connectors each count as a single receptacle.
- NEMA monument counts as two receptacles.
- Hub counts as zero receptacles.
- cULus listed.

Thread, Power Track and Power Track Infeeds, continued

Applications

Floor Specifications

The Thread power distribution system is intended for indoor use/dry locations only. Each connector in the system will require a hole to be cut in the flooring to permit access to the system. This is true for every connection point, even if only using a blank cover where no power access is needed. For this reason, we strongly recommend carpet tile when carpet is used. See installation guide for tools and direction.

Flooring surface compatibility is dependent on which track solution is used. Track with ramps is designed for carpet only. Carpet tile is preferred over broadloom. Carpet thickness must be between 0.225" and 0.450". Track with infill is used for carpet and resilient tiled surfaces with conforming properties (most types of LVT meet these standards). Rely on the flooring provider to determine if the surface meets the needs of the system (ability to screw down the connectors without the surface breaking). Flooring thickness must be between 0.100" to 0.250" for both carpet and LVT.


Tracks with infill require a field-supplied 6 mm underlayment.

Each piece of Thread power track or power track infeed must be fastened to the subfloor using one screw at each end of the track and one additional screw every 48". This means for power tracks that are shorter than 48" only two screws are required. For tracks 60" to 96" in length, three screws are required and for tracks longer than 96", four screws are required. Connectors require additional screws in to the subfloor. The track itself has multiple holes to allow it to be screwed down and has many more holes than are needed. For example, at the end of each track you will find four holes placed closely together but only one screw needs to be used. The extra holes are available in case of a damaged screw or some form of interference in the subfloor (like a rock in concrete) that might prevent a hole from being used. The same is true for holes all the rest of the way down the track; there are holes on both sides of the track and they are placed approximately every 12" to provide multiple options in case of interference in the subfloor. Please see installation guide for detailed instructions regarding this topic, including recommended types of fasteners and locating pilot holes.

A wall power infeed may be installed perpendicular to a wall or at any angle between 45° and 135°. However, it should be noted that once the infeed track is installed, all subsequent track connections will be either inline or at right angles to this track. There is no ability to create an angled connection between two tracks. Please refer to the installation guide for detailed instructions and drawings.

The Thread system does have some flexibility to accommodate uneven floors, however flooring elevation changes greater than 1/8" must be filled in or sanded down to even out the surface. The area underneath and immediately surrounding a junction (connector of any type, including a blank) must be flat within 1/16" in a 9" radius from the center of the junction. The Thread system is not designed for use on raised floors, across building expansion joints, or in areas where it will be subject to constant or rolling loads heavier than people. Please refer to the installation guide for additional details.

For connectors that will be in an ADA defined egress location, in order for the low-profile connector to be considered ADA compliant, the floor thickness stated above must be followed. Thinner surfaces can be used but will leave gaps and will not be ADA compliant. Thicker surfaces than stated are incompatible.

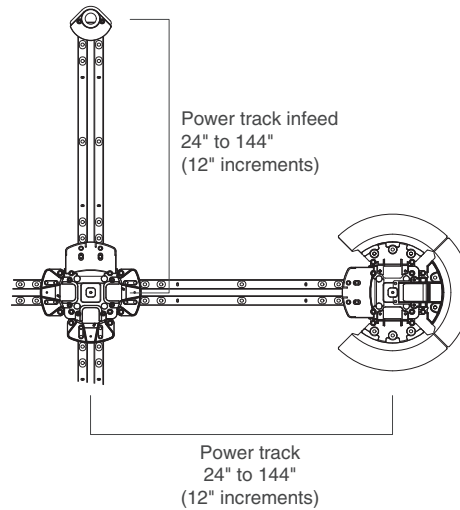

The length of a track is measured from the center of one connector to the center of another connector; a 24" power track by itself may not be precisely 24". This is intended to simplify planning and layouts.

Note: While this system has been developed to minimize its impact on the physical environment and to work with a broad range of existing furniture, certain conditions exist that may create undesirable interactions with other products. One example is the use of sled-base chairs since it may not sit flat when interacting with the track or connectors. Chairs utilizing pneumatic cylinders with minimum clearance of less than 1/2" should be used with care as the bottom of the cylinder can catch on a connector cover or on the slightly raised profile of the track beneath the carpet. Steelcase always strives to exceed the 1/2" clearance on our seating products but if you identify a seating product that does not have this level of clearance, a spacer ring is available from our service parts that can be placed between the cylinder and the base to increase the clearance. Please see part number 895446201SR in the Service Parts catalog, or part number 895446201MP for a quantity of 10 spacers.

Notice Regarding Installation: Thread must be anchored to the building floor for safe and proper use. Building construction varies and there may be components hidden below the floor surface that must be avoided when drilling holes to anchor the power track infeed and power track. Subflooring, including concrete, may contain electrical wiring, structural cabling, radiant heating lines, etc. To avoid potential property damage or unsafe conditions, consult with the building's architect or Engineer of Record to plan accordingly.

Specifying Thread

Specifying

Thread Plug Adapter	276
Thread Power Hub	277
Thread Power Track Wall Infeed with Ramps	278
Thread Power Track Wall Infeed with Infills	279
Thread Power Track Floor Infeed with Ramps	280
Thread Power Track Floor Infeed with Infills	281
Thread Power Track with Ramps	282
Thread Power Track with Infills	283
Thread Connector	284
Thread Power Strip	285

Thread Plug Adapter




Standard Includes		Required to Specify
▶ Need help? Product details, page 270	<ul style="list-style-type: none">• Plug adapter• Low-profile plug end: 6053 Seagull plastic	Style number

Related Products	
<ul style="list-style-type: none">• Power hub• Power track• Power track infeed	<ul style="list-style-type: none">▶ Page 277▶ Page 282▶ Page 278

Specification Information				
Dimensions			Style	U.S.
D	W	H	Number	Price
8¾"	2"	1½"	PFLADPTR	\$76

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.



Tip: Plugtop cap finish is 6053 Seagull. Hub receptacle faceplates are 7360 Merle.

Tip: Power cord is 5' in length.

Tip: 30" high power hub's lowest user interface is 22" off the floor. 37 1/8" high power hub's lowest user interface is 28" off the floor.

Tip: Neck is 1 3/4" wide and 1/2" deep.

Tip: Head is 2" wide and 1 1/2" deep.


Standard Includes	Required to Specify
<div>▶ Need help? Product details, page 270</div> <div><ul style="list-style-type: none">• Power hub: 7360 Merle paint• Six NEMA outlets (three on each side)• Integrated cord wrap• Reset button• Weighted base• Power cord with low-profile plug or NEMA plug</div>	<div>1 Style number</div> <div>2 Options, if selected (see below)</div>

Options	U.S. Price	Required to Specify
Surface Materials <div><ul style="list-style-type: none">• 7360 Merle• 4799 Platinum Metallic• 4140 Arctic White Gloss</div>	<div>No cost</div> <div>+\$12</div> <div>+\$12</div>	<div>Specify with 7360 Merle.</div> <div>Specify with 4799 Platinum Metallic.</div> <div>Specify with 4140 Arctic White Gloss.</div>
Height Options <div><ul style="list-style-type: none">• 30" lounge height• 37 1/8" desk height</div>	<div>No cost</div> <div>+\$ 7</div>	<div>Specify with lounge height.</div> <div>Specify with desk height.</div>
Plug Configuration Options <div><ul style="list-style-type: none">• Low-profile plug• Standard NEMA three-prong plug</div>	<div>No cost</div> <div>-\$44</div>	<div>Specify with low profile plug.</div> <div>Specify with standard NEMA three-prong plug.</div>
Related Products <div><ul style="list-style-type: none">• Power track• Power track infed• Plug adapter• Connector</div>		<div>▶ Page 282</div> <div>▶ Page 278</div> <div>▶ Page 276</div> <div>▶ Page 284</div>

Specification Information		
Diameter	Style Number	U.S. Base Price
8"	PFLHUB	\$630

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Thread Power Track Wall Infeed with Ramps



Tip: Length of power track infeed is measured from center of building infeed to center of connector.

Tip: Conduit and conduit collar are not included.
► See Understanding on page 272 for conduit sizing.

Standard Includes	Required to Specify
► Need help? Product details, page 270 <ul style="list-style-type: none"> • Power track infeed • Power track ramps • Infeed cover: 12' of insulated color-coded wires for hard-wire connection to building power source 	1 Style number 2 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> • Trim ring • 6527 Merle • 6249 Platinum 	No cost No cost	Specify with 6527 Merle. Specify with 6249 Platinum.
Circuit Type <ul style="list-style-type: none"> • Single circuit • Dual circuit 	See prices below See prices below	Specify with single circuit and length. Specify with dual circuit and length.
Related Products <ul style="list-style-type: none"> • Power track • Power hub • Plug adapter • Connector 		► Page 282 ► Page 277 ► Page 276 ► Page 284


Specification Information					
Style Number	Dimensions			U.S. Base Prices	
	W	H	L	Single Circuit	Dual Circuit
PFLTRKINF	8"	1"	24"	\$350	\$436
	8"	1"	36"	\$397	\$493
	8"	1"	48"	\$439	\$544
	8"	1"	60"	\$485	\$597
	8"	1"	72"	\$532	\$653
	8"	1"	84"	\$577	\$705
	8"	1"	96"	\$620	\$754
	8"	1"	108"	\$667	\$810
	8"	1"	120"	\$713	\$865
	8"	1"	132"	\$756	\$918
	8"	1"	144"	\$803	\$971



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Thread Power Track Infeed Wall with Infills

Thread Power Track Wall
Infeed with Infills



Tip: Length of power track infeed is measured from center of building infeed to center of connector.

Tip: Conduit and conduit collar are not included.
► See Understanding on page 272 for conduit sizing.

Standard Includes	Required to Specify
► Need help? Product details, page 270	1 Style number 2 Options, if selected (see below)
<ul style="list-style-type: none"> Power track infeed Power track infills Infeed cover: 12' of insulated color-coded wires for hard-wire connection to building power source 	


Options	U.S. Price	Required to Specify
Surface Materials Trim ring <ul style="list-style-type: none"> 6527 Merle 6249 Platinum 	No cost No cost	Specify with 6527 Merle. Specify with 6249 Platinum.
Circuit Type <ul style="list-style-type: none"> Single circuit Dual circuit 	See prices below See prices below	Specify with single circuit and length. Specify with dual circuit and length.
Related Products <ul style="list-style-type: none"> Power track Power hub Plug adapter Connector 		► Page 282 ► Page 277 ► Page 276 ► Page 284

Specification Information					
Style Number	Dimensions			U.S. Base Prices	
	W	H	L	Single Circuit	Dual Circuit
PFLTRKINFV	8"	1"	24"	\$350	\$436
	8"	1"	36"	\$397	\$493
	8"	1"	48"	\$439	\$544
	8"	1"	60"	\$485	\$597
	8"	1"	72"	\$532	\$653
	8"	1"	84"	\$577	\$705
	8"	1"	96"	\$620	\$754
	8"	1"	108"	\$667	\$810
	8"	1"	120"	\$713	\$865
	8"	1"	132"	\$756	\$918
	8"	1"	144"	\$803	\$971



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Thread Power Track Floor Infeed with Ramps



Tip: PerfectMatch is a service that allows you to create your own paint color. Refer to the Surface Materials Reference Manual for more information about this program.

Tip: Length of power track infeed is measured from center of building infeed to center of connector.

Standard Includes		Required to Specify
► Need help? Product details, page 270	<ul style="list-style-type: none"> Power track infeed Power track ramps Black connector cover: 18" of insulated color-coded wires for hardwire connection to building power source 	1 Style number 2 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials <ul style="list-style-type: none"> Trim ring <ul style="list-style-type: none"> 6527 Merle 6249 Platinum Stainless steel PerfectMatch paint 	No cost No cost +\$146 +\$158	Specify with 6527 Merle. Specify with 6249 Platinum. Specify with stainless steel. Specify with 4990 PerfectMatch.
Circuit Type <ul style="list-style-type: none"> Single circuit Dual circuit 	See prices below See prices below	Specify with single circuit and length. Specify with dual circuit and length.
Related Products <ul style="list-style-type: none"> Power track Power hub Plug adapter Connector 		► Page 282 ► Page 277 ► Page 276 ► Page 284

Specification Information

Style Number	Dimensions			U.S. Base Prices	
	W	H	L	Single Circuit	Dual Circuit
PFLINFFL	8"	1"	24"	\$ 578	\$ 724
	8"	1"	36"	\$ 625	\$ 777
	8"	1"	48"	\$ 667	\$ 828
	8"	1"	60"	\$ 713	\$ 884
	8"	1"	72"	\$ 760	\$ 936
	8"	1"	84"	\$ 804	\$ 990
	8"	1"	96"	\$ 848	\$1041
	8"	1"	108"	\$ 895	\$1095
	8"	1"	120"	\$ 941	\$1150
	8"	1"	132"	\$ 984	\$1201
	8"	1"	144"	\$1031	\$1256




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Thread Power Track Floor Infeed with Infills

Thread Power Track Floor
Infeed with Infills



Tip: PerfectMatch is a service that allows you to create your own paint color. Refer to the Surface Materials Reference Manual for more information about this program.

Tip: Length of power track infeed is measured from center of building infeed to center of connector.


Standard Includes		Required to Specify	
▶ Need help? Product details, page 270	<ul style="list-style-type: none"> Power track infeed Power track infills Black connector cover: 18" of insulated color-coded wires for hardwire connection to building power source 	1 Style number 2 Options, if selected (see below)	

Options	U.S. Price	Required to Specify	
Surface Materials	Trim ring <ul style="list-style-type: none"> 6527 Merle 6249 Platinum Stainless steel PerfectMatch paint 	No cost No cost +\$143 +\$158	Specify with 6527 Merle. Specify with 6249 Platinum. Specify with stainless steel. Specify with 4990 PerfectMatch.
Circuit Type	<ul style="list-style-type: none"> Single circuit Dual circuit 	See prices below See prices below	Specify with single circuit and length. Specify with dual circuit and length.
Related Products	<ul style="list-style-type: none"> Power track Power hub Plug adapter Connector 	▶ Page 282 ▶ Page 277 ▶ Page 276 ▶ Page 284	

Specification Information					
Style Number	Dimensions			U.S. Base Prices	
	W	H	L	Single Circuit	Dual Circuit
PFLINFFLV	8"	1"	24"	\$ 578	\$ 724
	8"	1"	36"	\$ 625	\$ 777
	8"	1"	48"	\$ 667	\$ 828
	8"	1"	60"	\$ 713	\$ 884
	8"	1"	72"	\$ 760	\$ 936
	8"	1"	84"	\$ 804	\$ 990
	8"	1"	96"	\$ 848	\$1041
	8"	1"	108"	\$ 895	\$1095
	8"	1"	120"	\$ 941	\$1150
	8"	1"	132"	\$ 984	\$1201
	8"	1"	144"	\$1031	\$1256

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Thread Power Track with Ramps



Tip: Length of power track is measured from center of connector to center of another connector.

Standard Includes		Required to Specify	
► Need help? Product details, page 270	<ul style="list-style-type: none"> Power track Power track ramps 	1 Style number	2 Options, if selected (see below)

Options	U.S. Price	Required to Specify	
Lengths		Specify with 24".	
• 24"	No cost	Specify with 36".	
• 36"	+\$ 47	Specify with 48".	
• 48"	+\$ 89	Specify with 60".	
• 60"	+\$135	Specify with 72".	
• 72"	+\$182	Specify with 84".	
• 84"	+\$227	Specify with 96".	
• 96"	+\$270	Specify with 108".	
• 108"	+\$317	Specify with 120".	
• 120"	+\$363	Specify with 132".	
• 132"	+\$407	Specify with 144".	
• 144"	+\$453		

Related Products	<ul style="list-style-type: none"> Power hub Power track infeed Plug adapter Connector 	► Page 277 ► Page 278 ► Page 276 ► Page 284
-------------------------	--	--

Specification Information

Dimensions		Style	U.S.
W	H	Number	Base Price
8"	3/4"	PFLTRK	\$323




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Thread Power Track with Infills

Thread Power Track
with Infills



Tip: Length of power track is measured from center of connector to center of another connector.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 270	• Power track	1 Style number	
	• Power track infills	2 Options, if selected (see below)	

Options		U.S. Price	Required to Specify
Lengths	• 24"	No cost	Specify with 24".
	• 36"	+\$ 47	Specify with 36".
	• 48"	+\$ 89	Specify with 48".
	• 60"	+\$135	Specify with 60".
	• 72"	+\$182	Specify with 72".
	• 84"	+\$227	Specify with 84".
	• 96"	+\$270	Specify with 96".
	• 108"	+\$317	Specify with 108".
	• 120"	+\$363	Specify with 120".
	• 132"	+\$407	Specify with 132".
	• 144"	+\$453	Specify with 144".
Related Products	• Power hub		▶ Page 277
	• Power track infeed		▶ Page 278
	• Plug adapter		▶ Page 276
	• Connector		▶ Page 284

Specification Information			
Dimensions		Style	U.S.
W	H	Number	Base Price
8"	3/4"	PFLTRKV	\$323

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Thread Connector



Tip: PerfectMatch is a service that allows you to create your own paint color. Refer to the Surface Materials Reference Manual for more information about this program.

Tip: NEMA monument is plastic molded. Specify with 6527 Merle plastic or 6249 Platinum plastic. Paint, including perfect match paint, is not available.

Tip: The painted connectors are only available with textured paint. When using perfect match paints, only textured paints will be permitted.

Tip: Not all junction configurations are compatible with connector types.

► See page 270

Tip: When connecting the Verb active media table or Bivi to Thread, the NEMA tamper resistant monument orients receptacles in a way that allows additional plug orientations.

Standard Includes		Required to Specify	
► Need help? Product details, page 270	<ul style="list-style-type: none"> Connector cover: 7360 Merle paint Connector trim ring: 6527 Merle plastic Fillers: 6000 Black Hardware 	1 Style number 2 Options, if selected (see below)	
Surface Materials	Options	U.S. Price	Required to Specify
	Cover <ul style="list-style-type: none"> 7360 Merle paint 7190 Platinum Solid paint 4990 PerfectMatch paint Stainless steel 	No cost No cost +\$158 +\$393	Specify with 7360 Merle. Specify with 7190 Platinum Solid. Specify with 4990 PerfectMatch. Specify with stainless steel.
	Trim ring <ul style="list-style-type: none"> 6527 Merle plastic 6249 Platinum plastic 	No cost No cost	Specify with 6527 Merle. Specify with 6249 Platinum.
	NEMA cover and trim ring <ul style="list-style-type: none"> 6527 Merle plastic 6249 Platinum plastic 	No cost No cost	Specify with 6527 Merle. Specify with 6249 Platinum.
Configurations	<ul style="list-style-type: none"> Blank low-profile connector, 9½" diameter x ¾" height One-door low-profile connector, 9½" diameter x ¾" height Two-door low-profile connector, 9½" diameter x ¾" height NEMA monument connector 9½" diameter and 2½" height NEMA monument connector with tamper-resistant receptacles 9½" diameter and 2½" height 	No cost +\$ 41 +\$ 83 +\$121 +\$140	Specify with blank low profile connector. Specify with one-door low profile connector. Specify with two-door low profile connector. Specify with NEMA monument connector. Specify with NEMA monument connector with tamper-resistant.
Related Products	<ul style="list-style-type: none"> Power track Power track infeed Plug adapter 		► Page 282 ► Page 278 ► Page 276

Specification Information

Style Number	U.S. Base Price
PFLCNCTR	\$242



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Thread Power Strip



Tip: Thread power strip with clamp-on mount works on worksurfaces that range from 3/4" to 2 1/2" thick.


Standard Includes			Required to Specify
<ul style="list-style-type: none">Rectangular shaped power and USB strip with Thread low-profile plug, 3 power / 1 USB formatNon tamper-resistant receptacles6' cordFreestanding mount			1 Style number 2 Options, if selected (see below)
Options		U.S. Price	Required to Specify
Cord Length	<ul style="list-style-type: none">10' cord	+\$38	Specify with 10' cord.
Power Plug	<ul style="list-style-type: none">Standard NEMA	-\$44	Specify NEMA plug.
Power	<ul style="list-style-type: none">1 USB / 2 power / 1 USB	+\$73	Specify with 1 USB / 2 power / 1 USB.
Tamper-Resistant	<ul style="list-style-type: none">With tamper-resistant	+\$31	Specify with tamper-resistant.
Mount	<ul style="list-style-type: none">Clamp-on mount	+\$27	Specify with clamp-on mount.
Related Products	<ul style="list-style-type: none">Power hubPower track infeedPower trackPlug adapterConnector		<ul style="list-style-type: none">▶ Page 277▶ Page 278▶ Page 282▶ Page 276▶ Page 284

Specification Information				
Dimensions			Style Number	Base Price
D	W	H		
7 5/16"	2 1/16"	2 3/4"	PFLPWRST	\$451

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.


Understanding Underscore Floor

	
Statement of Line	288

	
Product Details	
Underscore Floor Power and Communication Overview	289
Underscore Floor	290
Underscore Floor Specification Examples	294

Statement of Line

Underscore Floor




Triangle Tiles

Understanding

► Page 290

Specifying

► Page 298




Grommet Triangle Tiles

Understanding

► Page 290

Specifying

► Page 298




Seismic Triangle Tile

Understanding

► Page 290

Specifying

► Page 299




Rectangle Tiles

Understanding

► Page 290

Specifying

► Page 299




Square Tiles

Understanding

► Page 290

Specifying

► Page 299




Distribution Tiles

Understanding

► Page 290

Specifying

► Page 300




Ramp Kits

Understanding

► Page 290

Specifying

► Page 302



Corner Ramp Kit

Understanding


► Page 290

Specifying

► Page 302


Underscore Floor Power and Communication Overview

Architectural Power System




Grommet triangle tile provides pass-through of power harnesses and communication cables.

Understanding
► Page 291
Specifying
► Page 298




Transition harness routes power from the floor into panels or architecture.

Specifying
► Page 320




Communication cables can be routed beneath Underscore floor.




Floor access box provides access to power and communication.

Understanding
► Page 310
Specifying
► Page 324




Extension harness routes power to hub products from branching connector.

Specifying
► Page 315



Zone box allows electrical connection to a circuit breaker box.

Understanding
► Page 308
Specifying
► Page 317



Branching connector supplies power to a maximum of three harnesses.

Understanding
► Page 309
Specifying
► Page 318

Underscore Floor

Underscore floor is a raised platform of triangular tiles on 2½"H supports. It is designed for routing wiring and cabling to access tile locations determined by the user. It can be reconfigured to support changing utility needs.

► Specifying, page 298

Floor access boxes

provide access to power and communication routed beneath Underscore floor. Modular and hardwire versions are available.

Customer-supplied carpet tiles

cover Underscore floor tiles, trim, and ramps.

Edge trim is cut on site to finish exposed edges. It is available in two depths—2"D and 4"D.

Tiles interlock with supports without screws or adhesives.

Wall scribe trim is cut on site to accommodate field conditions such as building walls or structural columns.


Supports interlock with tiles for a tight fit.

Ramp kits provide a gradual transition from the subfloor to Underscore floor.

Actual Dimensions


► Page 293

Product Details



Supports are 2½"H. The overall height when tiles are installed is 2⁹/₁₆"H.


Underscore flooring supports do not meet ICC-ES code requirements for the cities of New York and Los Angeles. Waivers for this product can be attained from local authorities. Outside of these cities, Underscore is approved for the rest of California and New York State, and meets all national regulations and guidelines.




Customer-supplied carpet tiles are used to cover Underscore floor tiles, trim, and ramps. Follow floor covering manufacturer's recommendations concerning floor preparation, adhesive coverage and dry time.



Triangle tile is the primary tile used in an Underscore floor installation. Triangle tiles cannot be used against a wall. Instead use wall scribe trim or edge trim.




Grommet triangle tile provides pass-through of power harnesses and communication cables.




Seismic triangle tile provides lateral bracing of the Underscore floor in areas of seismic activity as required by local building codes. The seismic triangular tile Z bracket can also be used by the electrical contractor to make electrical ground connections of the floor installation to ground.

Tip: Any requirements for ground wiring should be addressed as part of the electrical contractor's work, along with other power connections to the building source.




Rectangular and square tiles are cut on site to accommodate field conditions such as structural columns. Extra supports are placed underneath the tiles to support the infill condition. Wall scribe trim can also be used for infill conditions.




Floor box access tile provides a factory formed opening for the Underscore floor box.


Some cords using 12 AWG may not fit. Please review specifications of the floor box openings to ensure the desired cord type fits.




Distribution tile must be positioned over a power distribution module, transition module, zone box, and consolidation point.




Edge trim is cut on site to finish exposed edges.




Corner edge trim has closed ends to finish the exposed edge at the end of the run. Both ends are closed so corner edge trim can be used in either left- or right-hand position.




Wall scribe trim is cut on site for a flush, finished edge against a building wall. Wall scribe trim requires extra supports underneath.



Ramp kit includes ramp tiles that can be inset or out-set. A corner ramp kit is also available.



Ramp edge trim finishes the exposed sides of a ramp. Edge trim is included with the ramp kit.



When positioning Privacy Wall on Underscore floor, include universal floor grippers in the wall specification.

► Page 20

Commercial handrails are customer-supplied. Most codes will not require handrails when the Underscore floor height is less than 6 inches above the slab or the length of the ramp is less than 72 inches.

Underscore Floor Performance Data (per CISC)

Concentrated point load - 32 square inches per triangular tile. 500 lb on 1 square inch.

Deflection
0.057"

Permanent set
0.002"

Recovery > 99%

Ultimate point load - 32 square inches per triangular tile. Edge - 1,291 lb on 1 square inch. Safety factor ultimate to concentrated > 2.5:1. Center - 2,399 lb on 1 square inch. Safety factor ultimate to concentrated > 4.5:1.


Rolling load (net weight per wheel)
500 lb (3" hard phenolic tread wheel at 10 cycles < 0.02" permanent set.)
350 lb (6" soft alathane tread wheel at 10,000 cycles < 0.02 permanent set.)

Supports Axial load 4,200 lb Slow buckling in failure.


System uniform load
320 psf < 0.02" deflection.

Underscore Floor, continued

Connections




Tiles interlock tightly into grooves on supports. Screws and glue are not needed.




Recommended Not Recommended

Place tiles in the recommended pattern for maximum stability.

8" Outset ramp




11 1/4" Outset ramp




Ramp tiles can be positioned on the 8" side or 11 1/4" side of the triangle tile. Connect as many ramp tiles as needed to create the ramp width needed. Individual ramp sections are manufactured at 8.3% slope (ratio of rise: run of 1:12) and designed to connect into the top of the individual supports when installed.

Wiring & Cabling



Routing space between supports is 4 3/8"W and 1 7/8"H.

Architectural power components are used to distribute and terminate power in Underscore floor and zone cabling.



Fire stop creates a draft-tight enclosure and accommodates routing of wiring and cabling. Local codes may require fire stops to be installed every 100 square feet.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical equipment. *Tip: Any requirements for ground wiring should be addressed as part of the electrical contractor's work, along with other power connections to the building source.*

Surface Materials

Tile

- Galvanized steel only

Support

- Black plastic only

Grommet on tile

- 6653 Solar Black plastic only

Access cover

- Galvanized steel only

Edge trim

- Paint

Wall scribe trim

- Galvanized steel only

Ramp surface

- Galvanized steel only

Ramp edge

- Paint

Fire stop

- Galvanized steel only

Application Topics


Underscore Floor Specification Examples

► Page 294


Underscore Floor Power and Communication Overview

► Page 289


Actual Dimensions




Triangle Tile




Grommet Triangle Tile




Seismic Triangle Tile




Rectangle Tile




Square Tile




Edge Trim




Corner Edge Trim




Ramp Kit




Ramp Kit

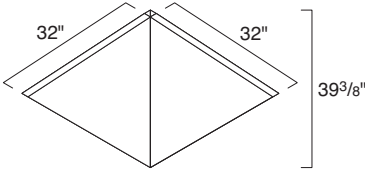


Corner Ramp




Wall Scribe Trim



Support




Fire Stop



Distribution Tile


Underscore Floor Specification Examples

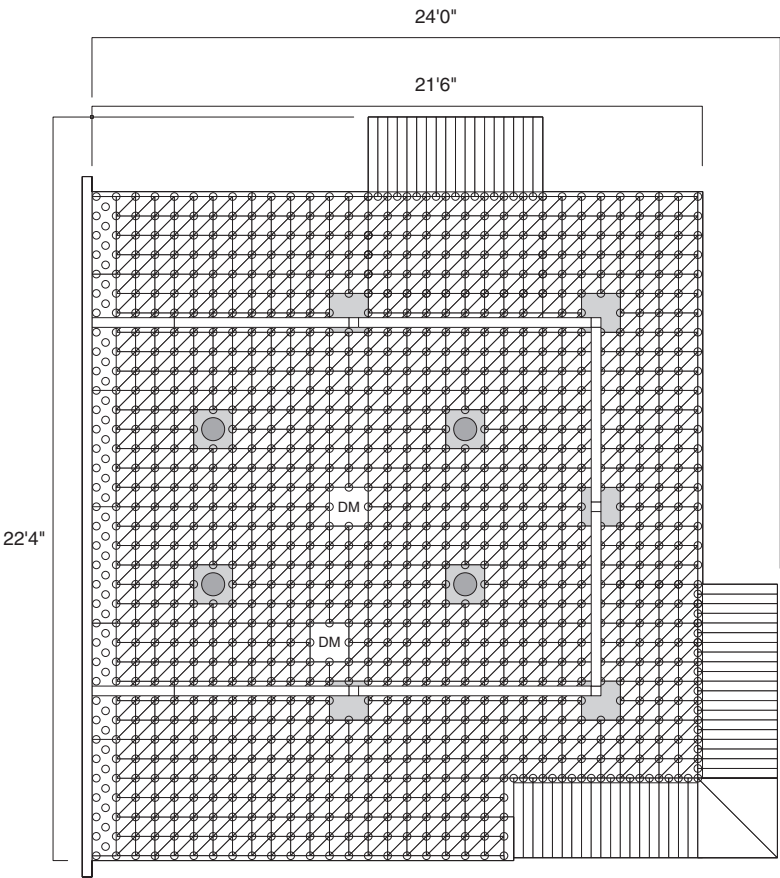

DM Distribution tile that covers a branching connector, zone box, distribution box, or consolidation point

Floor access box

Quantity	Style Number	Description
5	GUNTR450	Triangle tiles
14	GUNSU100	Supports
1	GUNSQ16161	Square tiles
1	GUNSQ16164	Square tiles
1	GUNCR3232	Corner ramp
2	GUNDS16161	Distribution tiles
3	GUNET248	2" Edge trim
1	GUNET448	4" Edge trim
1	GUNCT224	2" Corner edge trim
1	GUNCT424	4" Corner edge trim
1	GUNWT10486	Wall scribe trim
1	GUNRA36328	Ramp tiles
4	GUNRA48328	Ramp tiles
4	GAPFBD_(X,Y, or Z suffix)	Floor access box
4	GUNFBT1616	Floor box access tile

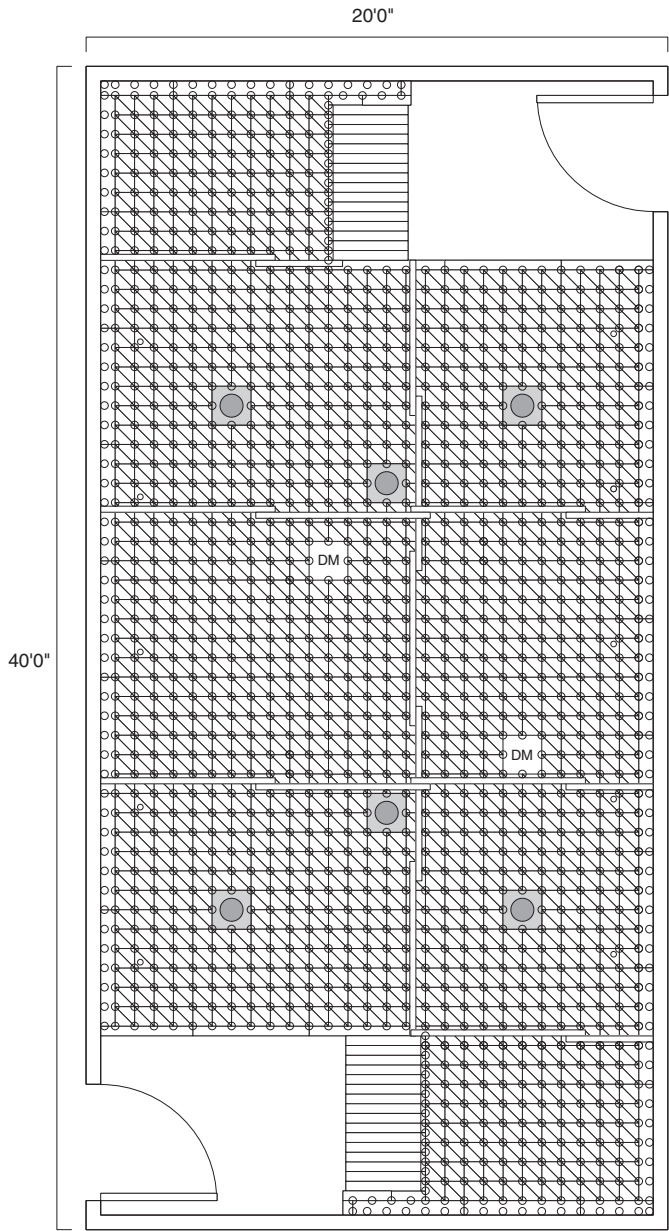

DM Distribution tile that covers a branching connector, zone box, distribution box, or consolidation point

⊗ Floor access box


Quantity	Style Number	Description
5	GUNTR450	Triangle tiles
6	GUNTR48	Triangle tiles
17	GUNSU100	Supports
2	GUNDS16161	Distribution tiles
1	GUNET448	4" Edge trim
1	GUNCT424	4" Corner edge trim
4	GUNRA36328	Ramp tiles
4	GUNWT10486	Wall scribe trim
3	GUNFS726	Fire stop
6	GUNFBT1616	Floor box access tile
6	GAPFBD_(X,Y, or Z suffix)	Floor access box

Specifying Underscore Floor

Specifying	
Triangle Tiles	298
Supports	298
Grommet Triangle Tiles	298
Seismic Triangle Tiles	299
Rectangle Tiles	299
Square Tiles	299
Distribution Tiles	300
Floor Box Access Tile	300
Edge Trim	300
Corner Edge Trim	301
Wall Scribe Trim	301
Ramp Kits	302
Corner Ramp Kit	302
Fire Stop	303

Underscore Floor

Triangle Tiles



Tip: Packages accommodate the approximate areas shown below:
 48 pkg. = 10 sq. ft. approx.
 450 pkg. = 100 sq. ft. approx.

Tip: The 450-piece package requires a forklift or pallet jack to facilitate transportation to the installation site.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 291		• Tile: galvanized steel only	Style number
Specification Information			
• Dimensions		• Quantity in	• Style
D	W	Package	Number
• U.S.			
Price			
8"	8"	48	GUNTR48
\$	305		
8"	8"	450	GUNTR450
\$	2788		


Supports



Tip: For projects 1000-3000 square feet in size, one package of 100 supports is needed for approximately every 40 square feet. For projects 3000 square feet and up in size, one package of 100 supports is needed for approximately every 42 square feet.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 290		• Supports, package of 100: black plastic only	Style number
Specification Information			
• Dimensions		• Style	• U.S.
H	Dia.	Number	Price
2½"	3⅞"	GUNSU100	\$299

Grommet Triangle Tiles




Standard Includes		Required to Specify	
▶ Need help? Product details, page 291	<ul style="list-style-type: none">• Tile: galvanized steel only• Grommet: 6653 Solar Black plastic only	Style number	
Specification Information			
• Dimensions • D W • •	• Quantity in • Package •	• Style • Number •	• U.S. • Price •
8" 8"	2	GUNGR2	\$ 61
8" 8"	10	GUNGR10	\$259
•	•	•	•




For Canadian Pricing
 Multiply U.S. Price by the
 Canadian price factor.
 ▶ See page 1 for details.

Seismic Triangle Tiles




Standard Includes		Required to Specify	
<p>► Need help? Product details, page 291</p> <ul style="list-style-type: none">• Tile: galvanized steel only• Mounting bracket		Style number	
Specification Information			
Dimensions D W	Quantity in Package	Style Number	U.S. Price
8" 8"	8	GUNST8	\$220

Rectangle Tiles



Standard Includes		Required to Specify	
▶ Need help? Product details, page 291		• Tile: galvanized steel only	Style number
Specification Information			
• Dimensions D W	• Quantity in Package	• Style Number	• U.S. Price
8" 16"	1	GUNRC8161	\$111
8" 16"	4	GUNRC8164	\$360

Square Tiles




Standard Includes		Required to Specify	
<div>► Need help? Product details, page 291</div> <div><ul style="list-style-type: none">• Tile: galvanized steel only</div>		Style number	
Specification Information			
• Dimensions • D W • •	• Quantity in • Package • •	• Style • Number • •	• U.S. • Price • •
16" 16"	1	GUNSQ16161	\$146
16" 16"	4	GUNSQ16164	\$471
• •	• •	• •	• •




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Distribution Tiles



Standard Includes				Required to Specify	
▶ Need help? Product details, page 291		• Distribution tile: galvanized steel only		Style number	
Specification Information					
• Dimensions			• Quantity in Package	• Style Number	• U.S. Price
D	W	H			
16"	16"	2½"	1	GUNDS16161	\$166
16"	16"	2½"	4	GUNDS16164	\$559


Floor Box Access Tile



Standard Includes			Required to Specify	
▶ Need help? Product details, page 291			• Floor box access tile: galvanized steel only	Style number

Specification Information				
• Dimensions			• Style	• U.S.
D	W	H	Number	Price
16"	16"	2½"	GUNFBT1616	\$185

Edge Trim



Tip: Edge trim can be cut on site to fit the exact dimensions.


Standard Includes			Required to Specify		
▶ Need help? Product details, page 290			• Trim: 0835 Black paint only		
			Style number		

Specification Information					
• Dimensions			• Quantity in Package	• Style Number	• U.S. Price
D	W	H			
2"	48"	2½"	6	GUNET248	\$330
4"	48"	2½"	6	GUNET448	\$405



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.


Corner Edge Trim



Tip: Corner edge trim can be cut on site to fit the exact dimensions.

Standard Includes				Required to Specify	
▶ Need help? Product details, page 291		• Trim: 0835 Black paint only		Style number	
Specification Information					
• Dimensions			• Quantity in Package	• Style Number	• U.S. Price
D	W	H			
2"	24"	2½"	2	GUNCT224	\$170
4"	24"	2½"	2	GUNCT424	\$378

Wall Scribe Trim



Tip: Wall scribe trim can be cut on site to fit the exact dimensions.

Standard Includes			Required to Specify		
▶ Need help? Product details, page 291			• Wall scribe trim: galvanized steel only		Style number
Specification Information					
• Dimensions		• Quantity in Package	• Style Number	• U.S. Price	
D	W				
10"	48"	6	GUNWT10486	\$480	

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Ramp Kits

Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 291 Ramp tiles with 1:12 incline: galvanized steel only Two ramp edge trims: 0835 Black paint only 	Style number

Specification Information



Dimensions	Quantity in Package	Style Number	U.S. Price
D W H			

8 Module to Attach to 8" Side of Triangle Tiles

30"	36"	2½"	1	GUNRA36328	\$1082
30"	48"	2½"	1	GUNRA48328	\$1383

11 Module to Attach to 11¼" Side of Triangle Tiles

30"	37"	2½"	1	GUNRA363211	\$1082
30"	48"	2½"	1	GUNRA483211	\$1383




Corner Ramp Kit

Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 291 Outside corner ramp kit with 1:12 incline: galvanized steel only Kit contains two pieces 	Style number

Specification Information

Dimensions	Style Number	U.S. Price
D W H		
32"	GUNCR3232	\$446




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Fire Stop



Standard Includes		Required to Specify
► Need help? Product details, page 292	• Fire stop barrier: galvanized steel only	Style number

Specification Information					
Dimensions			Quantity in	Style	U.S.
D	W	H	Package	Number	Price
3"	72"	2½"	6	GUNFS726	\$405
.

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Understanding Modular Power

	
Statement of Line	306


<div></div>	
Product Details	
Modular Power	307

Statement of Line


Modular Power

Modular components

provide branch circuit power distribution through a raised access floor or above a suspended ceiling. Eight, #10 gauge AWG conductors can be configured as 3+1, 2+2, or 3 circuits with separate neutrals.

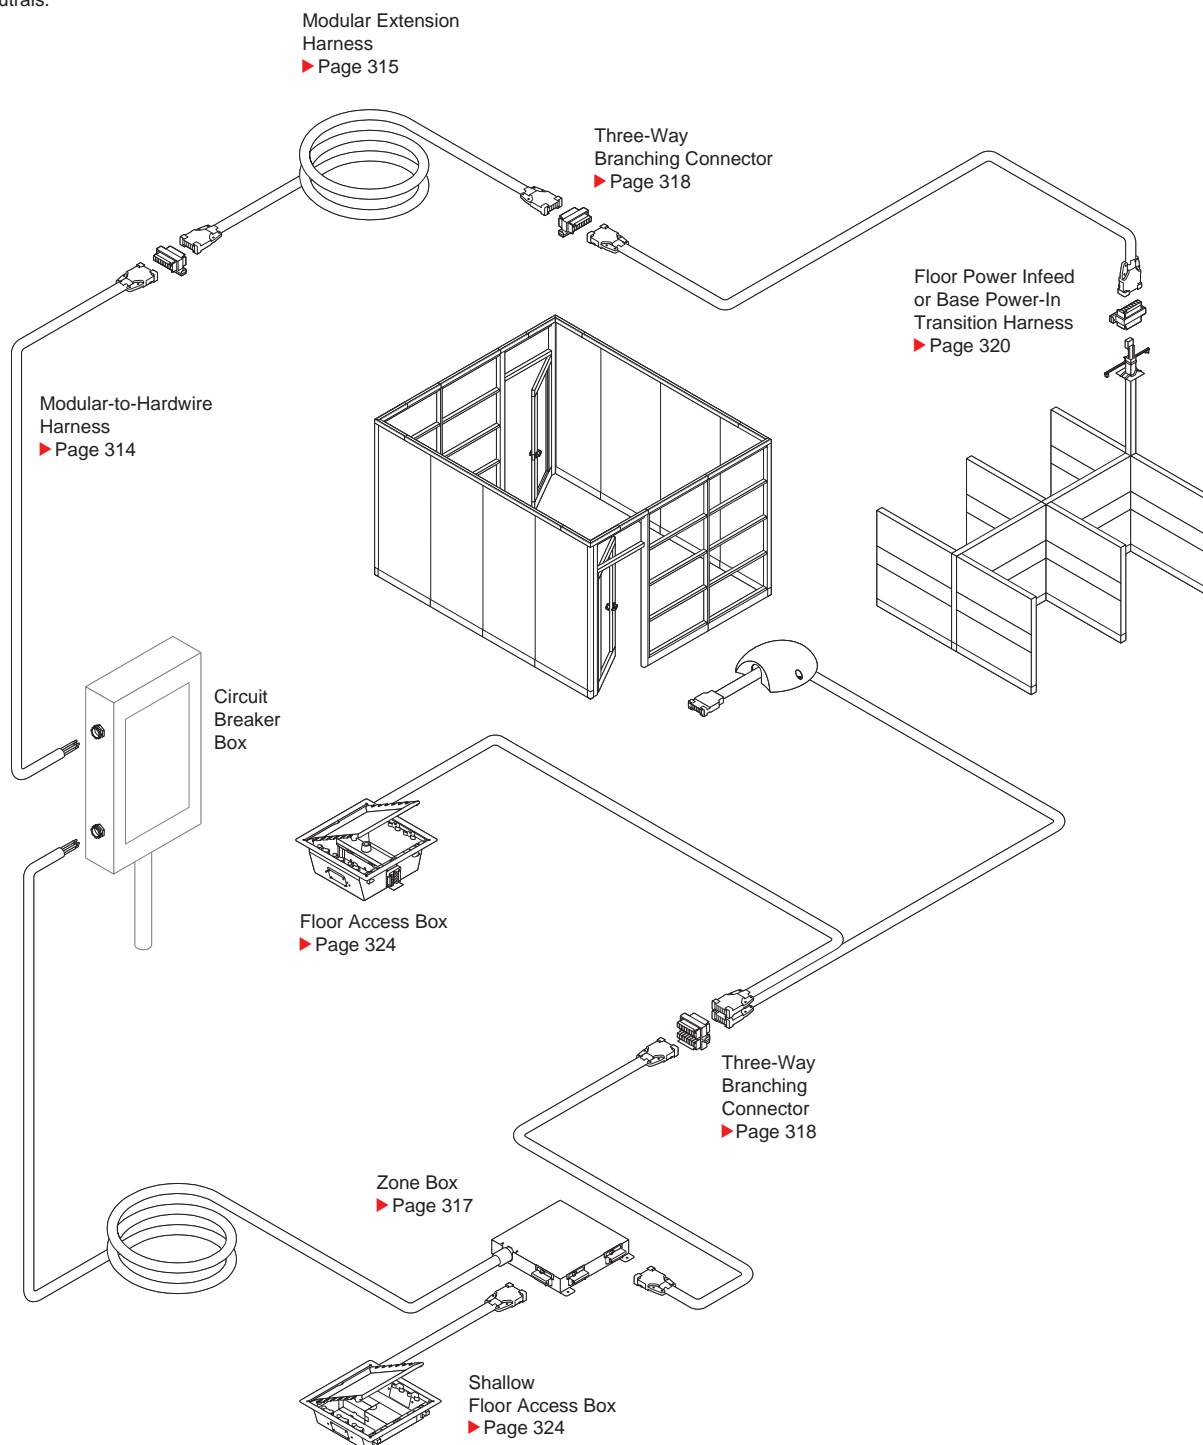

Modular-to-Hardwire Harnesses



► Specifying, page 314

Product Details

Modular-to-hardwire harness routes power from the building power source to modular components or to provide power to a customer-supplied device. It can be used either above a suspended ceiling or below a raised floor.

Connections

Modular connector located on one end of the harness connects to a modular extension harness or transition harness, using a harness-to-harness connector, or to a branching connector or access box.


Surface Materials

Modular-to-hardwire harness is concealed when it is properly installed.

Actual Dimensions

Lengths 5', 10', 30', and 50'

Modular Extension Harnesses



► Specifying, page 315

Product Details

Modular extension harness routes power from three-way branching connectors or lengthens the overall harness distance by using harness-to-harness connectors.

Modular extension harnesses can be connected or disconnected as needed with:

- Architectural Solutions Modular Power
- Answer
- Montage

Connections

Modular connectors located on each end of the modular extension harness, allow the harness to be relocated as power needs change.

Two modular extension harnesses can be connected together to extend the length by using a harness-to-harness connector.

Surface Materials


Harness is concealed when it is properly installed.

Actual Dimensions

Modular extension harness

Lengths 5', 10', 20', 30', 40', and 50'

Modular Connector Faceplates



► Specifying, page 316

Product Details

Modular connection faceplate provides a way to add a modular connection to a junction box. Faceplate available with a flush or 90° connection.

Connections

Faceplate is attached to junction box with screws. Hardwire connection to power source within conventional 4¹/₁₆" x 4¹/₁₆" x 6" junction box is completed by electrician in the field. Modular extension harness can be connected or disconnected from faceplate as needed.

Surface Materials

Faceplate is zinc-plated steel. Modular connector is black plastic for 3+1, brown plastic for 2+2, and rust plastic for 3 circuits with separate neutrals.


Actual Dimensions

Depth 4¹/₁₆"

Width 4¹/₁₆"

Height 6"

Zone Boxes



► Specifying, page 317

Product Details

Zone box includes an infeed harness to allow electrical connection to a circuit breaker box. Zone box includes three modular output connection points for power distribution for 10-gauge zone boxes, and two modular output connection points for 8-gauge zone boxes.

Connections

Zone boxes have either two or three output connection points. For 4-circuit, 3+1 and 2+2 configurations, twelve circuits are distributed to provide four circuits at each of the three connection points for 10-gauge zone boxes. For 8-gauge zone boxes, 8 circuits are distributed to provide four circuits at each of the two connection points. For 3-circuit, separate neutrals or configurations, nine circuits are distributed to provide three circuits at each of the three connection points for 10-gauge zone boxes and six circuits are distributed to provide three circuits at each end of the two connection points for 8-gauge zone boxes.


Surface Materials

Zone box is concealed when it is properly installed.

Actual Dimensions

Depth	11"
Width	10½"
Height	17⁄8"

Hardwired Zone Boxes



► Specifying, page 317

Product Details

Hardwired zone box is designed to be hardwired to power source by the electrician in the field.

Boxes that will be wired up to 150 feet have three output connection points (maximum of 12 circuits). Boxes that will be wired 150 feet up to a maximum of 200 feet have two output connection points (maximum of 8 circuits). All connectors are pre-wired to terminal base inside the box.

Connections

Connection from terminal bars to the circuit-breaker box should be done by a qualified electrician using 10-gauge wire for 12-circuit boxes and 8-gauge wire for 8-circuit boxes.

Boxes that have three output connectors can be 3+1, 2+2, or 3 circuits with separate neutrals. The 3+1 and 2+2 systems have a total of 12 circuits—four circuits at each connector. The 3 circuits with separate neutrals system has a total of nine circuits—three at each connector.

Boxes that have two output connectors can be 3+1, 2+2, or 3 circuits with separate neutrals. The 3+1 and 2+2 systems have a total of 8 circuits—four circuits at each connector. The 3 circuits with separate neutrals system has a total of six circuits—three at each connector.


Surface Materials

Hardwired zone box is concealed when it is properly installed.

Actual Dimensions

Depth	11"
Width	10½"
Height	17⁄8"

Three-Way Branching Connectors



► Specifying, page 318

Product Details

Three-way branching connector has one power-infeed and three modular connection points for power distribution.

Connections

Three-way branching connector can route power to daisy chain power components such as floor boxes.


Surface Materials

Three-way branching connector is concealed beneath Architectural Solutions Low-Profile Floor when it is properly installed.

Actual Dimensions

Depth	2 ⁵ / ₈ "
Width	1 ¹ / ₂ "
Height	1 ³ / ₄ "

Harness-to-Harness Connectors



► Specifying, page 318

Product Details

Harness-to-harness connector has one power-infeed and one modular connection point for power distribution.

Connections

Harness-to-harness connectors join modular harnesses together to lengthen the overall harness distance.


Surface Materials

Harness-to-harness connector is concealed beneath the floor when it is properly installed.

Actual Dimensions

Depth	2 ⁵ / ₈ "
Width	1 ¹ / ₂ "
Height	1"

Transition Harnesses for Floor Power-Infeed or Base Power-In



► Specifying, page 320

Product Details

Transition harness modularly connects the Modular Power system to Internode power kits. It also connects to Answer, Avenir, and Montage in place of a standard base power-in.

Connections

Modular connector to connect to compatible system is included on one end of the transition harness.

Surface Materials

Transition harness is concealed beneath the floor when it is properly installed.


Power transition cover
• Black plastic

Actual Dimensions

Power harness length	6'
Infeed harness length	3'


Modular Power, continued

Shallow Floor
Access Boxes



Shallow floor
access box

► Specifying, page 324



Shallow floor access
box for hardwire
connection

► Specifying, page 325

Product Details

Shallow floor access box includes a modular power block accepting two receptacles. Modular power block is available in three keying options, 3+1, and 3-circuit, separate neutrals. Receptacle is specified separately for different lines and accommodates two modular furniture faceplates for communication outlets. A modular extension harness, ordered separately, of any length will connect to the shallow floor access box.

Shallow floor access box for hardwire connection includes two duplex receptacle openings. Decora-style receptacles must be supplied in the field.

Shallow floor access boxes should be used with Low-Profile Floor and raised floors 2½"H or higher.

Connections

Shallow access box for hardwire connection can be used with a hardwire extension harness.

Surface Materials


Shallow floor access
box lid

- Black zinc

Actual Dimensions

Depth	11½"
Width	11½"
Height	2½"

Floor Access Boxes



Floor access box

► Specifying, page 324

Product Details

Floor access box includes a modular power block accepting four receptacles—two on each side of the block. Modular power block is available in three keying options, 3+1, 2+2, and 3-circuit separate neutrals. Receptacle is specified separately for different lines and accommodates two NEMA single-gang outlet faceplates. A modular extension harness, ordered separately, of any length will connect to the shallow floor access box.

Floor access boxes should be used with raised floors 5"H or higher.

Surface Materials


Floor access box lid

- Black zinc

Actual Dimensions

Depth	11½"
Width	11½"
Height	4½"


Modular Receptacles



► Specifying, page 326

Product Details

15-amp and 20-amp duplex receptacles, ordered separately, are field installed inside floor access boxes. System ground and isolated ground receptacles are available to connect to 15-amp and 20-amp systems.



Controlled receptacle must be indicated when tying into the building management system. Duplex receptacles have an option for a factory permanent, pad stamp power icon symbol with the word controlled per compliance with the Energy Code.

Connections

Modular receptacles snap into the power block in floor access boxes.

Surface Materials

Modular receptacles

- Black plastic

Actual Dimensions

Depth	3/4"	3/8"
Width	37/16"	13/4"
Height	37/16"	13/4"


Specifying Modular Power

Specifying

Modular-to-Hardwire Harnesses	314
Modular Extension Harnesses	315
Modular Connector Faceplates	316
Zone Boxes	317
Three-Way Branching Connectors	318
Harness-to-Harness Connectors	318
Dust Caps for Modular Connector	319
Floor Power-Infeeds or Base Power-In Transition Harnesses	320
Shallow Floor Access Boxes	324
Floor Access Boxes	324
Shallow Floor Access Box for Hardwire Connection	325
Receptacles for Use with Floor Access Boxes	326

Modular Power

Modular-to-Hardwire Harnesses




Standard Includes	Required to Specify
<div><div>► Need help? Product details, page 307</div><div><ul style="list-style-type: none">• Harness• Male modular connector• Pigtail for hardwire connection to electrical panel</div></div>	Style number

Specification Information		
Harness Length	Style Number	U.S. Price
4-Circuit, 3+1		
5'	GAPHHM5X	\$231
10'	GAPHHM10X	\$240
30'	GAPHHM30X	\$502
50'	GAPHHM50X	\$763
⋮	⋮	⋮
4-Circuit, 2+2		
5'	GAPHHM5Y	\$231
10'	GAPHHM10Y	\$240
30'	GAPHHM30Y	\$502
50'	GAPHHM50Y	\$763
⋮	⋮	⋮
3-Circuit, Separate Neutrals		
5'	GAPHHM5Z	\$231
10'	GAPHHM10Z	\$240
30'	GAPHHM30Z	\$502
50'	GAPHHM50Z	\$763
⋮	⋮	⋮

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Modular Extension Harnesses



Tip: Connect multiple harnesses together for longer runs.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 307</p> <ul style="list-style-type: none"> • Harness • Male modular connectors 	Style number

Specification Information

Harness Length	Style Number	U.S. Price
4-Circuit, 3+1		
5'	GAPHM5X	\$219
10'	GAPHM10X	\$273
15'	GAPHM15X	\$366
20'	GAPHM20X	\$462
30'	GAPHM30X	\$623
40'	GAPHM40X	\$776
50'	GAPHM50X	\$906
:	:	:
4-Circuit, 2+2		
5'	GAPHM5Y	\$219
10'	GAPHM10Y	\$273
15'	GAPHM15Y	\$366
20'	GAPHM20Y	\$462
30'	GAPHM30Y	\$623
40'	GAPHM40Y	\$776
50'	GAPHM50Y	\$906
:	:	:
3-Circuit, Separate Neutrals		
5'	GAPHM5Z	\$219
10'	GAPHM10Z	\$273
15'	GAPHM15Z	\$366
20'	GAPHM20Z	\$462
30'	GAPHM30Z	\$623
40'	GAPHM40Z	\$776
50'	GAPHM50Z	\$906
:	:	:




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Modular Connector Faceplates




Standard Includes	Required to Specify
<div><div>► Need help? Product details, page 307</div><div><ul style="list-style-type: none">• Faceplate with flush connection: galvanized steel• Faceplate with 90° connection: black paint• Female modular connector• Pigtail for hardwire connection</div></div>	Style number

Specification Information		
• Connection	• Style Number	• U.S. Price
4-Circuit, 3+1		
Flush	GAPFCMX	\$ 84
90°	GAPFCM90X	\$155
:	:	:
4-Circuit, 2+2		
Flush	GAPFCMY	\$ 84
90°	GAPFCM90Y	\$155
:	:	:
3-Circuit, Separate Neutrals		
Flush	GAPFCMZ	\$ 84
90°	GAPFCM90Z	\$155
:	:	:

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Zone Boxes



Tip: Zone boxes accommodating 150' and 200' infeed harnesses are 8 gauge.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 308</p> <ul style="list-style-type: none"> • Zone box: black zinc • Lengths of 50 to 125 feet are 10 gauge home run conductors with 3 harness ports and strain reliefs • Lengths of 150 and 200 feet are 8 gauge home run conductors with 2 harness ports and strain reliefs • One power infeed • Built-in anchoring tabs 	Style number

Specification Information

Harness Length	Style Number	U.S. Price
----------------	--------------	------------

4-Circuit, 3+1

Hardwired, 8 gauge	GAPZBHW8X	\$ 889
Hardwired, 10 gauge	GAPZBHW10X	\$ 889
50'	GAPZBM50X	\$2288
75'	GAPZBM75X	\$3182
100'	GAPZBM100X	\$4068
125'	GAPZBM125X	\$4821
150'	GAPZBM150X	\$5592
200'	GAPZBM200X	\$7356
:	:	:

4-Circuit, 2+2

Hardwired, 8 gauge	GAPZBHW8Y	\$ 889
Hardwired, 10 gauge	GAPZBHW10Y	\$ 889
50'	GAPZBM50Y	\$2288
75'	GAPZBM75Y	\$3182
100'	GAPZBM100Y	\$4068
125'	GAPZBM125Y	\$4821
150'	GAPZBM150Y	\$5592
200'	GAPZBM200Y	\$7356
:	:	:


3-Circuit, Separate Neutrals

Hardwired, 8 gauge	GAPZBHW8Z	\$ 889
Hardwired, 10 gauge	GAPZBHW10Z	\$ 889
50'	GAPZBM50Z	\$2288
75'	GAPZBM75Z	\$3182
100'	GAPZBM100Z	\$4068
125'	GAPZBM125Z	\$4821
150'	GAPZBM150Z	\$5592
200'	GAPZBM200Z	\$7356
:	:	:



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Three-Way Branching Connectors




Tip: Branching connector distributes all circuits to each connection point.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes		Required to Specify
<div><div>▶ Need help? Product details, page 309</div><div><ul style="list-style-type: none">• Branching connector: Ultramid nylon• Three modular connection attachment points• One power infeed harness connection point</div></div>		Style number
Specification Information		
• Style Number	• U.S. Price	
4-Circuit, 3+1		
GAP3HCX	\$36	
4-Circuit, 2+2		
GAP3HCY	\$36	
3-Circuit, Separate Neutrals		
GAP3HCZ	\$36	

Harness-to-Harness Connectors



Standard Includes		Required to Specify
<div><div>▶ Need help? Product details, page 309</div><div><ul style="list-style-type: none">• Branching connector: Ultramid nylon• One modular connection attachment point• One power infeed harness connection point</div></div>		Style number
Specification Information		
• Style Number	• U.S. Price	
4-Circuit, 3+1		
GAPHHCX	\$36	
4-Circuit, 2+2		
GAPHHCY	\$36	
3-Circuit, Separate Neutrals		
GAPHHCZ	\$36	



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Dust Caps for Modular Connector



Standard Includes	Required to Specify
<ul style="list-style-type: none">Dust caps for modular connector: Ultramid nylonPackage of 20 caps	Style number

Specification Information	
Style Number	U.S. Price
GAPDC20	\$133


 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Floor Power-Infeeds or Base Power-In Transition Harnesses

Tip: Transition harnesses require a 3" diameter hole in floor tile.

Tip: Length of conduit between connection point wall or panel and transition point into floor is 3'.

Tip: A transition harness is not required for Answer and Montage where the power can be directly fed into the panel.



Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 309 Power transition harness Male modular connector to Modular Power system Modular connector to connect to compatible system Power transition cover: black plastic only 	Style number

Specification Information

Length	Style Number	U.S. Price
:	:	:
:	:	:

Floor Power-Infeeds Connecting to Powerkit Blocks

4-Circuit, 3+1

6'	GAPTHFLX	\$583
----	-----------------	-------

4-Circuit, 3+1 for New York

6'	GAPTHFNYX	\$541
----	------------------	-------

4-Circuit, 3+1 for San Francisco

6'	GAPTHFLSFX	\$583
----	-------------------	-------

4-Circuit, 2+2

6'	GAPTHFLY	\$583
----	-----------------	-------

4-Circuit, 2+2 for New York

6'	GAPTHFNYY	\$541
----	------------------	-------

4-Circuit, 2+2 for San Francisco

6'	GAPTHFLSFY	\$583
----	-------------------	-------

3-Circuit, Separate Neutrals

6'	GAPTHFLZ	\$583
----	-----------------	-------

3-Circuit, Separate Neutrals for New York

6'	GAPTHFNYZ	\$541
----	------------------	-------

3-Circuit, Separate Neutrals for San Francisco

6'	GAPTHFLSFZ	\$583
----	-------------------	-------

► Specification Information, continued on next page



For Canadian Pricing


Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


► Specification Information, continued from previous page

Specification Information		
Length	Style Number	U.S. Price
For Internode Floor Power-Infeeds		
4-Circuit, 3+1		
6'	GAPTHINTX	\$583
4-Circuit, 3+1 for New York		
6'	GAPTHINNYX	\$541
4-Circuit, 3+1 for San Francisco		
6'	GAPTHINTSFX	\$583
4-Circuit, 2+2		
6'	GAPTHINTY	\$583
4-Circuit, 2+2 for New York		
6'	GAPTHINNY	\$541
4-Circuit, 2+2 for San Francisco		
6'	GAPTHINTSFY	\$583
3-Circuit, Separate Neutrals		
6'	GAPTHINTZ	\$583
3-Circuit, Separate Neutrals for New York		
6'	GAPTHINNYZ	\$541
3-Circuit, Separate Neutrals San Francisco		
6'	GAPTHINTSFZ	\$583

► Specification Information, continued on next page




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.



► Specification Information, continued from previous page

Specification Information		
Length	Style Number	U.S. Price
For Answer and Montage Base Power-Ins at a Powerkit Receptacle Location		
4-Circuit, 3+1		
6'	GAPTHFBPX	\$583
4-Circuit, 3+1 for New York		
6'	GAPTHFBPNYX	\$541
4-Circuit, 3+1 for San Francisco		
6'	GAPTHFBPSFX	\$583
4-Circuit, 2+2		
6'	GAPTHFBPY	\$583
4-Circuit, 2+2 for New York		
6'	GAPTHFBPNYY	\$541
4-Circuit, 2+2 for San Francisco		
6'	GAPTHFBPSFY	\$583
3-Circuit, Separate Neutrals		
6'	GAPTHFBPZ	\$583
3-Circuit, Separate Neutrals for New York		
6'	GAPTHFBPNYZ	\$541
3-Circuit, Separate Neutrals for San Francisco		
6'	GAPTHFBPSFZ	\$583

► Specification Information, continued on next page

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

► Specification Information, continued from previous page

Specification Information

Length	Style Number	U.S. Price
--------	-----------------	---------------

For Kick and Avenir Base Power-Ins at a Powerkit Receptacle Location

4-Circuit, 3+1

6'	GAPTHBPBX	\$583
----	-----------	-------

4-Circuit, 3+1 for New York

6'	GAPTHBPNYX	\$541
----	------------	-------

4-Circuit, 3+1 for San Francisco

6'	GAPTHBPSTFX	\$583
----	-------------	-------

4-Circuit, 2+2 for New York

6'	GAPTHBPNNYY	\$541
----	-------------	-------

4-Circuit, 2+2 for San Francisco

6'	GAPTHBPSTFY	\$583
----	-------------	-------

3-Circuit, Separate Neutrals

6'	GAPTHBPBZ	\$583
----	-----------	-------


3-Circuit, Separate Neutrals for New York

6'	GAPTHBPNNYZ	\$541
----	-------------	-------

3-Circuit, Separate Neutrals for San Francisco

6'	GAPTHBPSTFZ	\$583
----	-------------	-------

:	:	:
---	---	---




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Modular Power, continued

Shallow Floor Access Boxes



Tip: Access box requires a low-profile floor box access tile or a 10½" square cut-out in floor.

Tip: Remember to order receptacles for field installation.

► Page 326

Standard Includes			Required to Specify	
► Need help? Product details, page 310			Style number	
<ul style="list-style-type: none">• Lid with frame and carpet insert space: black zinc• Low-profile floor access box: black zinc• Modular power block kit for two duplex receptacles• Furniture faceplate-size opening for communications faceplates• Furniture voice/data mounting adapter kit				


Specification Information				
• Dimensions			• Style	• U.S.
D	W	H	Number	Price

4-Circuit, 3+1				
11½"	11½"	2½"	GAPFBSX	\$529

4-Circuit, 2+2				
11½"	11½"	2½"	GAPFBSY	\$529

3-Circuit, Separate Neutrals				
11½"	11½"	2½"	GAPFBSZ	\$529

Floor Access Boxes



Tip: Access box requires a 10½" square cut-out in floor.

Tip: Remember to order receptacles for field installation.

► Page 326

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Standard Includes			Required to Specify	
<div>► Need help?</div> <div>Product details, page 310</div>			Style number	
<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>				

Shallow Floor Access Box for Hardwire Connection



Tip: Decora-style receptacles must be supplied in the field.

Tip: Access box requires a low-profile floor box access tile or 10½" square cut-out in floor.

Standard Includes Required to Specify

- Need help?
Product details,
page 310


 - Lid with frame and carpet insert space: black zinc
 - Low-profile floor access box: black zinc
 - Two duplex receptacle openings
 - Furniture faceplate-size opening for communications faceplates
 - Furniture voice/data mounting adapter kit

Style number


Specification Information				
• Dimensions			• Style	• U.S.
D	W	H	Number	Price
11½"	11½"	2½"	GAPFBSHW	\$292

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Receptacles for Use with Floor Access Boxes



3/4"



3/8"

Tip: All receptacle faces are 3/4" nominal height except 15-amp receptacles in the 3+1 and 2+2 wiring schematic.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes	Required to Specify
<ul style="list-style-type: none"> Need help? Product details, page 310 Receptacle: black plastic 	1 Style number 2 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Controlled Stamp <ul style="list-style-type: none"> No stamp Controlled stamp 	No cost +\$5	Specify <i>with no stamp</i> . Specify <i>with controlled stamp</i> .

Specification Information

15-Amp Receptacles

Line	Style Number	U.S. Base Price	Style Number	U.S. Base Price

4-Circuit, 3+1 Wiring Schematic

	System Ground		Isolated Ground	
Line 1	GAPR15L1SGX	\$36	GAPR15L1IGX	\$36
Line 2	GAPR15L2SGX	\$36	GAPR15L2IGX	\$36
Line 3	GAPR15L3SGX	\$36	GAPR15L3IGX	\$36
Line 4	GAPR15L4SGX	\$36	GAPR15L4IGX	\$36

4-Circuit, 2+2 Wiring Schematic

	System Ground		Isolated Ground	
Line 1	GAPR15L1SGY	\$36	GAPR15L1IGY	\$36
Line 2	GAPR15L2SGY	\$36	GAPR15L2IGY	\$36
Line 3	GAPR15L3SGY	\$36	GAPR15L3IGY	\$36
Line 4	GAPR15L4SGY	\$36	GAPR15L4IGY	\$36

3-Circuit, Separate Neutrals (3SN) Wiring Schematic

	System Ground		Isolated Ground	
Line 1	GAPR15L1SGZ	\$36	GAPR15L1IGZ	\$36
Line 2	GAPR15L2SGZ	\$36	GAPR15L2IGZ	\$36
Line 3	GAPR15L3SGZ	\$36	GAPR15L3IGZ	\$36

► Specification Information, continued on next page



For Canadian Pricing


Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Specification Information, continued from previous page

Specification Information

20-Amp Receptacles



Line	Style Number	U.S. Base Price	Style Number	U.S. Base Price
------	--------------	-----------------	--------------	-----------------

4-Circuit, 3+1 Wiring Schematic

System Ground			Isolated Ground	
Line 1	GP1R1SGHX	\$72	GP1R1IGHX	\$72
Line 2	GP1R2SGHX	\$72	GP1R2IGHX	\$72
Line 3	GP1R3SGHX	\$72	GP1R3IGHX	\$72
Line 4	GP1R4SGHX	\$72	GP1R4IGHX	\$72
:	:	:	:	:

4-Circuit, 2+2 Wiring Schematic

System Ground			Isolated Ground	
Line 1	GP2R1SGHY	\$72	GP2R1IGHY	\$72
Line 2	GP2R2SGHY	\$72	GP2R2IGHY	\$72
Line 3	GP2R3SGHY	\$72	GP2R3IGHY	\$72
Line 4	GP2R4SGHY	\$72	GP2R4IGHY	\$72
:	:	:	:	:

3-Circuit, Separate Neutrals Wiring Schematic

System Ground			Isolated Ground	
Line 1	GP3R1SGHZ	\$72	GP3R1IGHZ	\$72
Line 2	GP3R2SGHZ	\$72	GP3R2IGHZ	\$72
Line 3	GP3R3SGHZ	\$72	GP3R3IGHZ	\$72
:	:	:	:	:





For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


Understanding QtPro Soundmasking

	
Statement of Line	330
	
Product Details	
QtPro Soundmasking	332
Sonet Individual Soundmasking	340
QtPro Room Control	342

Statement of Line


QtPro Soundmasking

Control Modules

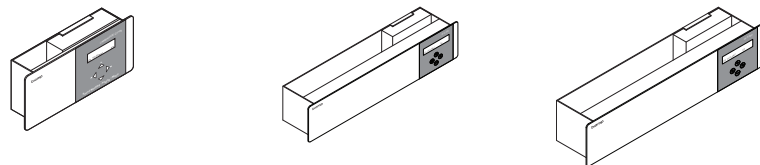


Understanding
 ▶ Pages 334–335
 Specifying
 ▶ Page 344

QtPro Emitters



Emitters, Four Pack

Understanding
 ▶ Page 336
 Specifying
 ▶ Page 348



Active Emitters, Four Pack


Understanding
 ▶ Page 336
 Specifying
 ▶ Page 353

QtPro Room Control




Understanding
 ▶ Page 342
 Specifying
 ▶ Page 349


Cabling and Components




Understanding
 ▶ Page 338
 Specifying
 ▶ Page 354

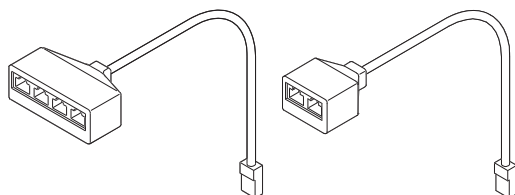


Understanding
 ▶ Page 338
 Specifying
 ▶ Page 355



Understanding
 ▶ Page 338
 Specifying
 ▶ Page 356




Understanding
 ▶ Page 336
 Specifying
 ▶ Page 351




Understanding
 ▶ Page 336
 Specifying
 ▶ Page 352

Mounting Components




External Mounting Bracket

Understanding
▶ Page 337
Specifying
▶ Page 357




External Mounting Clamp

Understanding
▶ Page 337
Specifying
▶ Page 357



Pendant Mount (Must be ordered in multiples of Four)


Understanding
▶ Page 337
Specifying
▶ Page 358



Drywall Mounting Bracket


Understanding
▶ Page 337
Specifying
▶ Page 359

Sonet Individual Soundmasking



Soundmasking System with Two Speakers

Understanding
▶ Page 341
Specifying
▶ Page 360



Two Speaker Extension Kit

Understanding
▶ Page 341
Specifying
▶ Page 360


QtPro Soundmasking

Soundmasking is the adding of background sound to an environment in order to make existing sounds less intelligible and less distracting. This added background sound is designed to cover up or mask unwanted conversation because it contains the same frequencies as human speech.

Qt quiet technology is a patented, low-voltage, direct field, distributed audio system designed for soundmasking, paging, and music distribution. Qt quiet technology overcomes significant design and installation issues with previous generations of soundmasking systems. Qt quiet technology is a technology that is flexible, uncomplicated, and cost effectively installed.

Separate zones are required for the following situations:






- Spaces with ceiling height differences greater than 6"H.
- Areas where different QtPro functions are used (music, paging, sound masking, etc.).
- Applications that have different space types (open plan, private offices, reception, cafés, or hallways).
- When larger width hallways extend from an open office area, multiple emitters can be placed on the same zone. However, if the hallway width is less than emitter spacing, a separate zone is required.

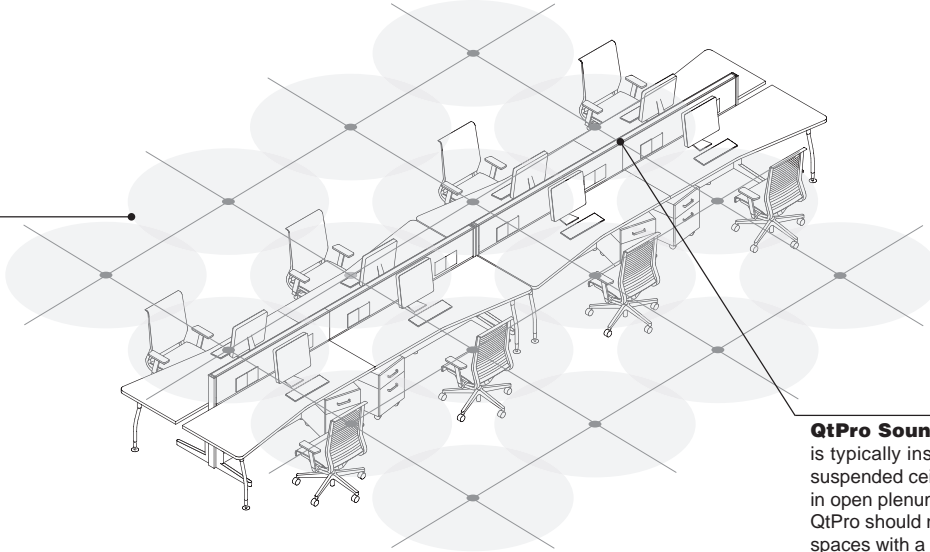

QtPro Soundmasking is typically installed in suspended ceiling tiles or in open plenum spaces. QtPro should not be used in spaces with a ceiling height that is below 8'. A network of emitters is interconnected with low-voltage cable. The entire system is operated via centrally located control modules.

Emitter Placement for Private Offices

Number of Emitters in a Small Enclosed Area


• Enclosed Area (Sq. Ft.)	• Number of Emitters	• Recommended Layout
Up to 180 sq. ft.	2	
180 to 260 sq. ft.	3	
261 to 340 sq. ft.	4	
341 to 420 sq. ft.	5	
421 to 500 sq. ft.	6	
Greater than 500 sq. ft.	Use large area/open office guidelines	

Acceptable Use of a Single Emitter for Coverage

• Ceiling Height	• Maximum Room Size	• Sound Masking Exposure Duration	• Use of Single Emitter
8—9 ft.	< 64 sq. ft.	Less than one hour	Allowed
9—11 ft.	< 100 sq. ft.	Less than one hour	Allowed
11—14 ft.	> 11 sq. ft.	Less than one hour	Allowed

Tip: A single emitter can only be used in a small room that is occupied for less than an hour (i.e. phone booths).

QtPro Layout—Avoiding Channel Conflict

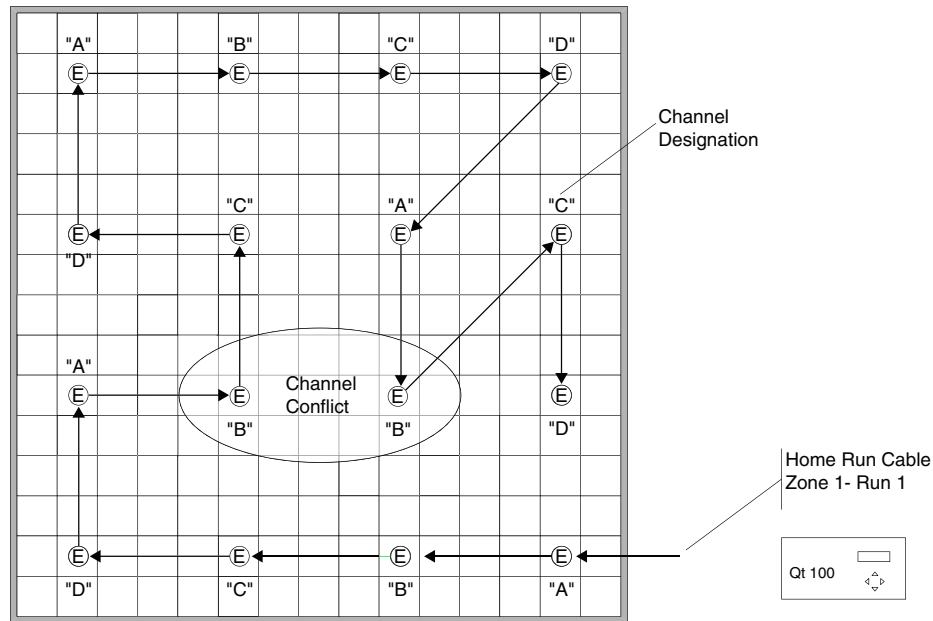


Emitter conflict can occur when emitters on the same channel are adjacent to each other.

On the diagram to the left, a channel conflict is occurring because adjacent emitters are both on the "B" channel.

QtPro needs to be laid out in a serpentine pattern throughout the entire space. This will help avoid channel conflicts with adjacent emitters.

ⓔ Emitter

QtPro Qt 100 Configuration

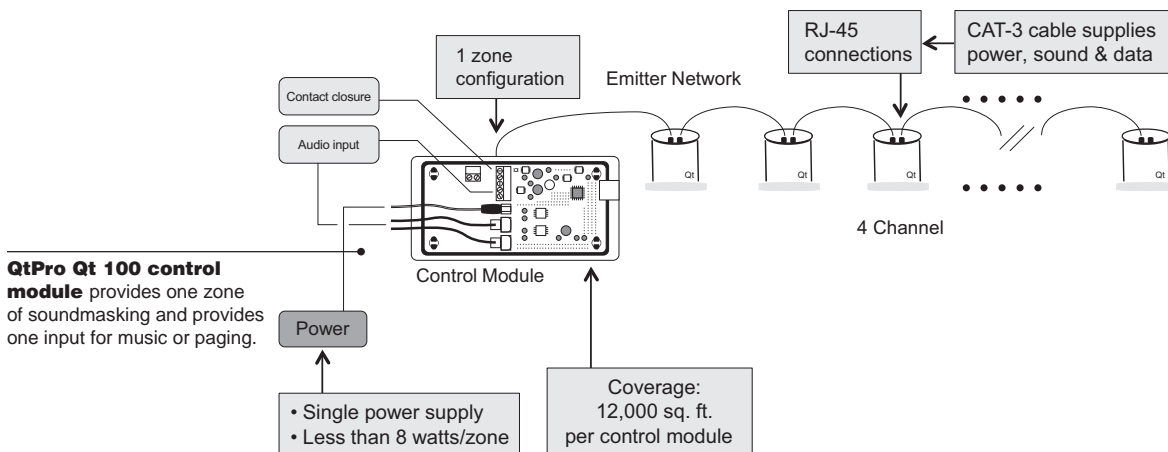


QtPro Qt 100 control module provides one zone of soundmasking and provides one input for music or paging.

QtPro Qt X 300 Configuration


Emitters are direct-field miniature ceiling-mounted speakers. The emitters are driven directly from the control modules and require no external power. To compensate for different acoustic conditions within a zone, the emitters are adjustable. The soundmasking input can be reduced by up to 9dB in 3dB decrements.

QtPro Qt X 300 control module provides three zones of soundmasking and provides two inputs for music or paging. Qt X 300 and Qt X 600 include pre-installed software for control and monitoring accessed via direct-PL connection or via Local Area Network.

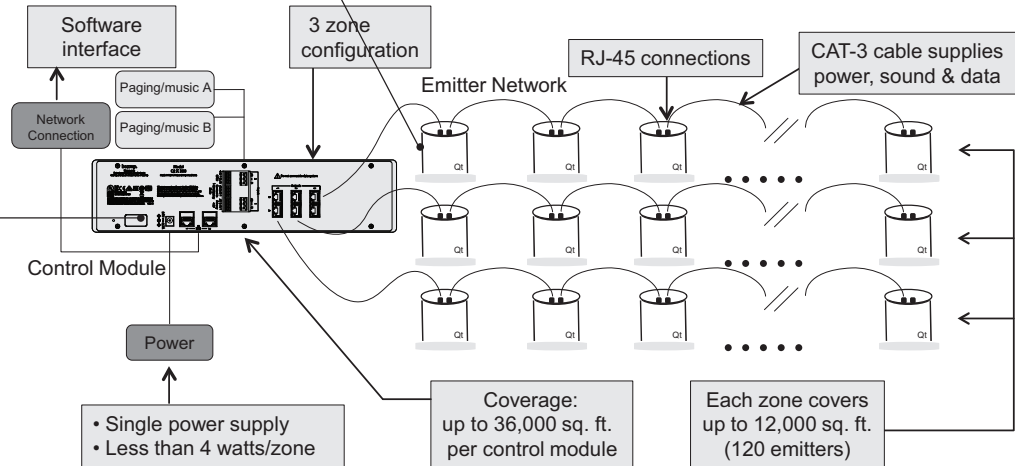

Qt X 600 Configuration

QtPro Qt X 600 control module provides six zones of soundmasking and provides two inputs for music or paging. Qt X 600 includes pre-installed software for control and monitoring accessed via direct-PL connection or via Local Area Network.

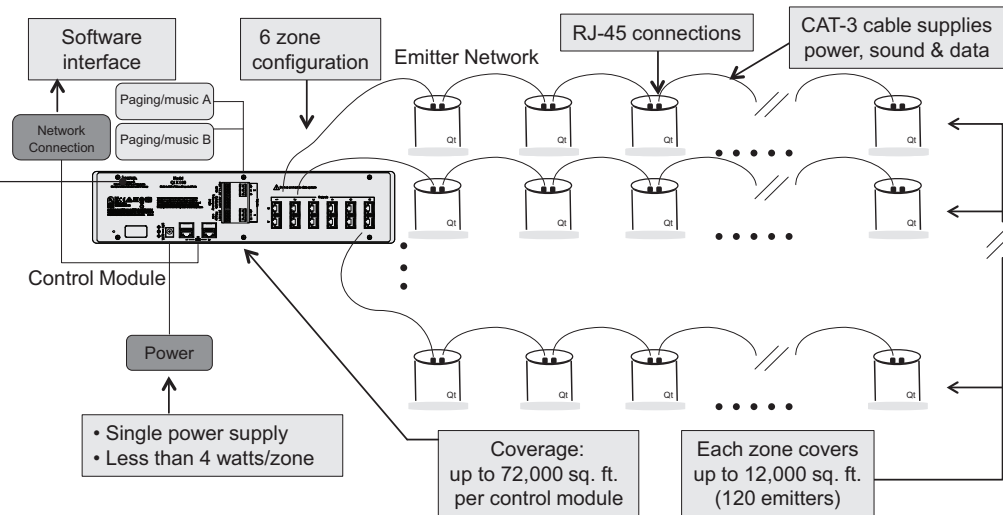

Actual Dimensions


	Qt 100	Qt X 300	Qt X 600
Length	7"	11"	13 1/2"
Width	3 1/2"	3 1/2"	3 1/2"
Depth	7/8"	3 1/2"	3 1/2"

QtPro 100 supports up to 120 emitters on one zone, covering up to 12,000 square feet.

QtPro X 300 supports up to 360 emitters on three zones, covering up to 36,000 square feet.


QtPro X 600 supports up to 720 emitters on six zones, covering up to 72,000 square feet.

QtPro Active Emitter Configuration

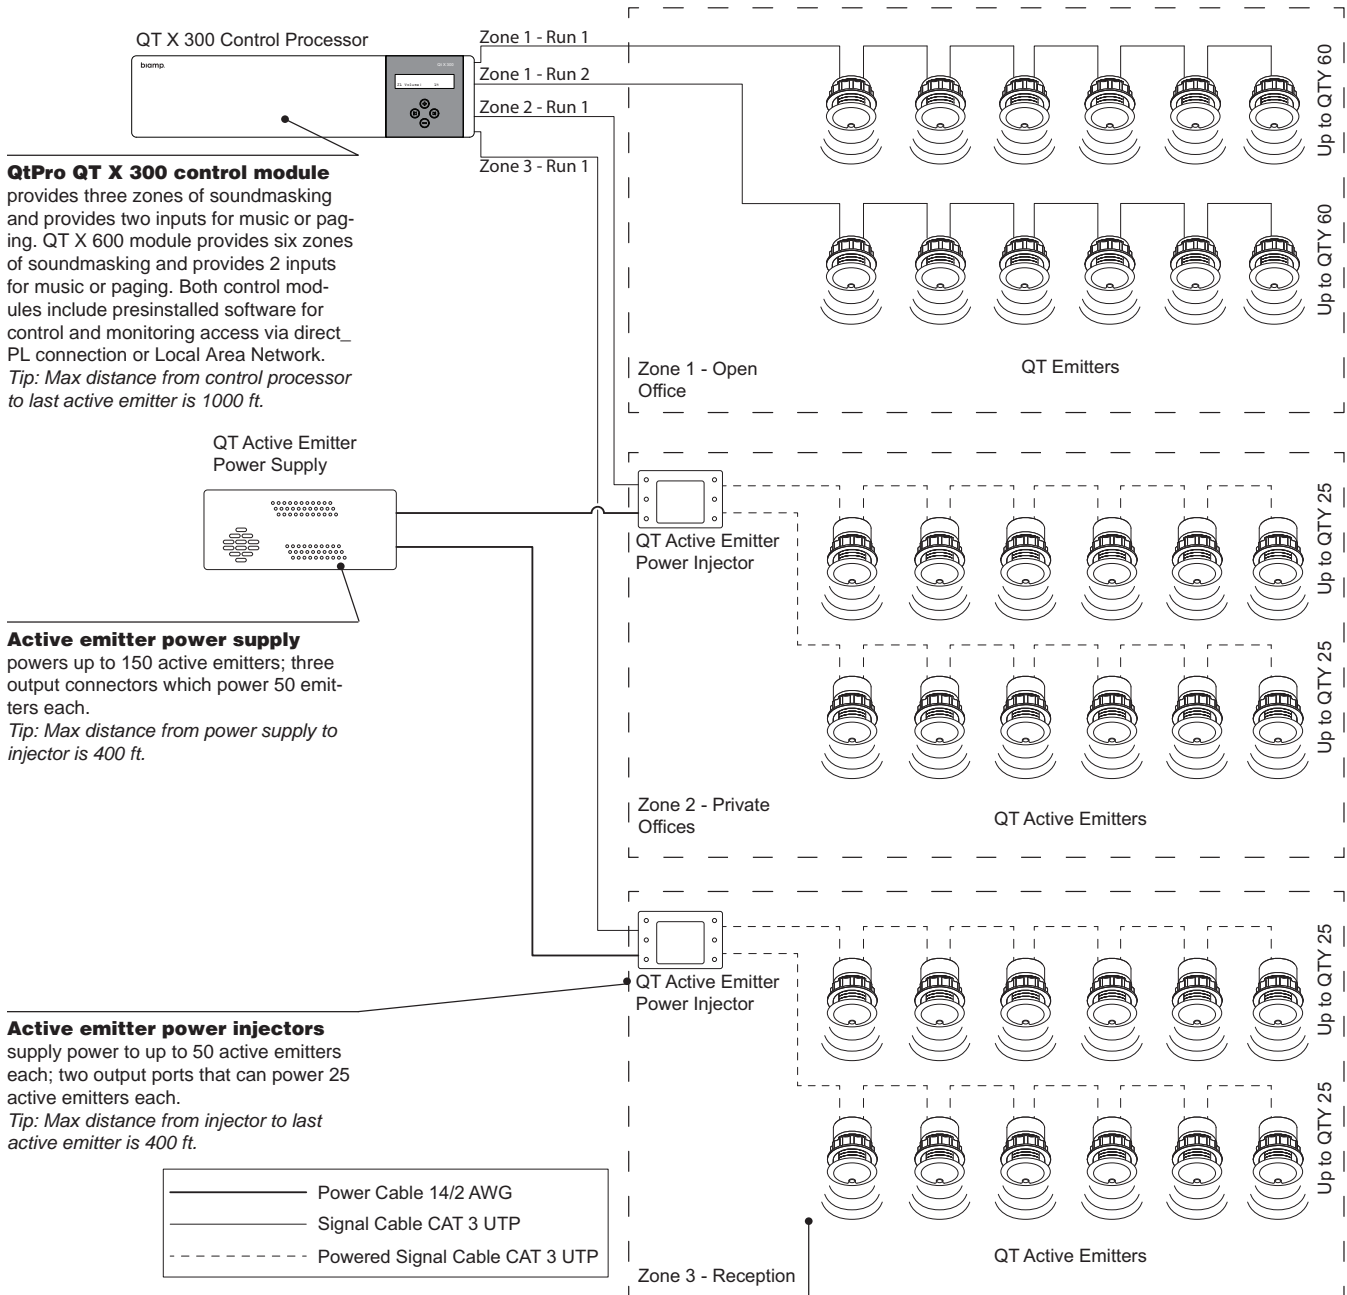

Active emitters are direct-field miniature ceiling-mounted speakers. The active emitters are driven directly from the control modules and require no external power. To compensate for different acoustic conditions within a zone, the active emitters are adjustable. The soundmasking input can be reduced by up to 4.5dB in 1.5dB decrements.

Product Details

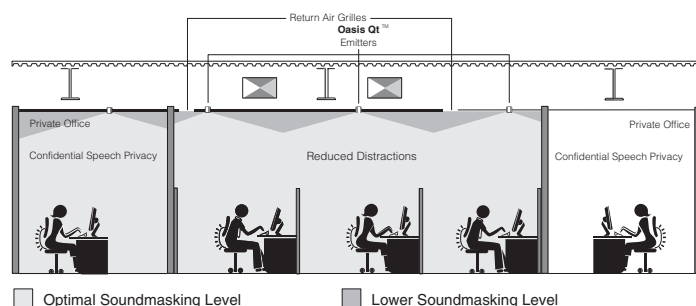


Qt quiet technology systems project sound directly into the workspace. The emitters disperse a uniform, pre-programmed sound that requires no tuning.

QtPro soundmasking system can be controlled both at the control module and also by a connected computer by using the pre-installed software. The software allows remote control of time-of-date ramping, equalizer functions for acoustic professional, email notifications of problems, and day/night customization.

QtPro soundmasking can be applied in many environments, including open plan workstations, private offices, reception and lobby areas, cafes and break rooms, banks, waiting areas, doctors', dentists' and other practitioners' offices, and in libraries.

QtPro soundmasking is designed to cover normal human voice, light office sounds such as keyboard and paper shuffling, some echoes in reverberant space, and light traffic noise.


QtPro active emitter applications include spaces where lower frequencies, paging, or music with sound masking is desired. The Qt active emitter provides a simple solution to delivering enhanced music and paging capabilities with superior intelligibility and clarity.




Emitters have an adjustable sleeve that captures the emitter in the ceiling tile from 1/2" to 1 1/2". Additional components are available for mounting emitters external to the ceiling, to rafters, or into drywall.

Connections



QtPro control modules typically mount onto walls or inside utility closets. Screws and drywall sleeves included. The Qt X 300 and Qt X 600 control modules can mount in equipment racks with the use of the rack mount bracket.




Emitters generally are mounted in acoustical ceiling tiles. A 68 mm holesaw (provided with each control module) is used to create the opening for the emitters.



Emitters can also be mounted in drywall ceilings by using the drywall mounting bracket.



For ceilings with beams or open plenum spaces, external mounting brackets or external mounting clamps can be used.




The pendant mount suspends both active and standard emitters in an open space at the optimum height for best coverage.

The pendant mount must be ordered in a quantity that is a multiple of four. *Tip: Pricing reflects a quantity of one, however, pendants must be ordered in multiples of four. Must multiply the price by four to get the total 4-pack price.*

If local codes require conduit installation, there is a mount solution available through the Steelcase Specials team (found through eSpecials as quote AW023810).

Wiring & Cabling



QtPro emitters are plug and play ready with pre-terminated, industry standard RJ 45 connectors. *Tip: Not recommended for paging or music.*


Active emitters are 17dB louder than standard emitters and are ideal for paging and music.

Emitters are adjustable. With standard emitters, soundmasking input can be reduced up to 9dB in 3dB decrements and with active emitters soundmasking input can be reduced up to 4.5dB in 1.5dB decrements lower than what the volume is set from the control module.




Emitters are available with 16' or 30' cables. 30' cables are typically used for open-plenum installations.

Emitters are daisy-chained together using input and output jacks and Cat 3 cables. The chains of emitters then route back to zone panels within the control module.

QtPro Soundmasking, continued



Standard cables are available in lengths of 10, 16, 25, 50, 75, and 100 feet. Active emitter home run cable is available in a length of 400 feet. Custom lengths can be created onsite with cable couplers, two way splitters, and four way splitters.



Couplers and splitters are used to create custom cable lengths and also join together different sections of soundmasking zones.

Surface Materials

Emitters
Cables
Room control
Patient privacy system
Splitters
Couplers
External mounting bracket
External mounting clamp
Pendant mount
Drywall mounting bracket

- White/off-white

Control modules

- Grey and black front
- Black power supply cord

Rack mount bracket
Conference room privacy package
Active emitter power supply
 • Black

Active emitter power injector

- Grey

Sonet Qt

- Beige

Application Topics

QtPro control modules should be placed in a location with access to standard AC outlets and routing for zone cabling.

A Qt 100 control module has a capacity of 120 emitters.

Tip: The Qt 100 control module cannot be used with active emitters.

A Qt X 300 control module has a capacity of 360 emitters.

A Qt X 600 control module has a capacity of 720 emitters.

Emitters are planned generally one emitter per each 10' x 10' space. In private offices, balanced soundmasking is achieved with two emitters placed per 120 square feet.

For non-acoustical tile ceilings, additional mounting components may be required.

Technical Specifications

QtPro Qt 100 power consumption: 7 watts per unit.

QtPro Qt X 300 power consumption: 15 watts per unit.

QtPro Qt X 600 power consumption: 27 watts per unit.

QtPro Qt 100 is a modular 100-240 VAC 50/60Hz - 0.6A input, 24.0 VDC 1.0A output CE/ETL/UL/GS/FCC/TUV - rated unit (included).

QtPro Qt X 300 and Qt X 600 power supply is a modular 100-240 VAC 50/60Hz - 0.9A input, 24.0 VDC 1.5A output CE/UL/CUL - rated unit (included).

QtPro page input impedance: 10K ohms, differential input.


QtPro music input impedance: 10K ohms, single ended. Two inputs mixed to mono.

QtPro digital compression and limiting: performed via DSP.


QtPro frequency response (paging and music): band pass limited from 315 Hz to 25k Hz (+/- 1.5 dB).

Sonet Individual Soundmasking

Soundmasking is the adding of background sound to an environment in order to make existing sounds less intelligible and less distracting. This added background sound is designed to cover up or mask unwanted conversation because it contains the same frequencies as human speech.

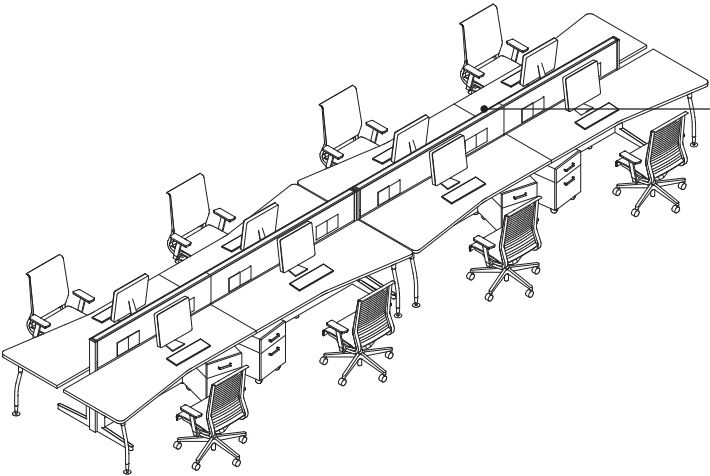

Sonet individual soundmasking is an individual speech privacy system based on Qt quiet technology, consisting of two emitters (can be expanded to four) and a volume control that is plugged into any wall outlet.



Sonet individual soundmasking system

Actual Dimensions


	Emitters	Volume Control
Length	5"	3 ² / ₃ "
Width	3"	6 ¹ / ₃ "
Depth	1 ¹ / ₂ "	1 ¹ / ₂ "

Product Details

Sonet is a cost-effective solution for spot treatment of situations where one individual is being distracted by voices or other noise around them.

Sonet installs in an individual workstation and gives the user control over the placement and level of their soundmasking.

Connections



Soft wall mount




Hard wall mount

The Sonet emitters and volume control mount to the walls or panels in a workstation. A mounting plate is included for soft walls and Velcro pulls are included for hard walls.

The Sonet volume control should be placed wherever there is access to an electrical outlet.

Wiring and Cabling



The Sonet emitters are connected to the volume control with pre-terminated modular telephone cords (included).

Surface Materials

The Sonet emitters and volume control are light gray plastic.

Application Topics

Sonet is designed for individual use and is meant for applications no larger than 400 square feet. The two speakers that come standard will provide coverage for 200 square feet. To cover 400 square feet, the two speaker extension kit must be ordered. For larger spaces, QtPro is recommended.

Technical Specifications


Sonet power consumption: 4 watts

Sonet radiated acoustic power: 0.001 acoustic watts.

Sonet power supply is 110v 50-60Hz. AC.

QtPro Room Control

Product Details

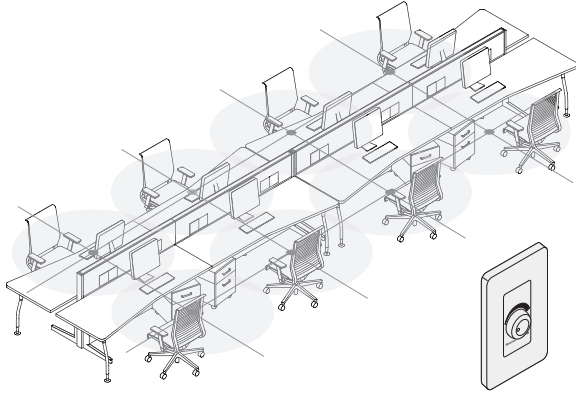

Room control allows users to adjust the sound masking level for an individual room or a space with up to eight emitters or 14 active emitters.

Connections

Room control unit is wall mounted. It fits in most standard electrical boxes and includes open back low voltage brackets. The unit supports 1-gang low voltage class two backless brackets or standard 1-gang electrical boxes. Install using RJ-45 connectors. There are no requirements for grounding since it is done over the CAT cables.

Wiring and Cabling

Room control can be its own run from the controller or part of a run to other areas.

Wiring: CAT 3, 5, 6 cables.

When using the room control, the controller needs to supply enough power over the cable run for the emitters and the room control(s). From the control modules, a single cable run can support 60 emitters and up to 50 active emitters; however, an added room control reduces the number of emitters that can be supported, because each room control counts as an emitter in the total for the run. The cable run can support up to a combination of 60 emitters and room control(s) or up to 50 active emitters and room control(s).

Surface Materials

Room control units are white.

Application Topics

Room control can be used to adjust the sound masking level for an individual room or a space with up to eight emitters or 14 active emitters. Since the Qt room control is designed for a room of up to eight emitters, and 14 active emitters a separate zone should be used in larger areas. The room control controlled room can be its own run from the controller or part of a run to other areas.

QtPro room control is available in two separate style numbers. **GSMQTRC** is designed to work with the Qt 100 control module, and **GSMQTAERC** is designed to work with the Qt X 300 and Qt X 600 control modules. **GSMQTAERC** can be used with either standard or active emitters.

The unit features a six position switch that adjusts the sound masking volume nominally in 2.5 dBA decrements.

Specifying QtPro Soundmasking

Specifying

QtPro Qt 100, Qt X 300, and Qt X 600 Control Modules	344
Rack Mount Bracket	345
Hole Saw Blade	346
Power Supply	347
Emitters	348
QtPro Room Control	349
Privacy Package	350
Active Emitter Power Supply	351
Active Emitter Power Injector	352
Active Emitter	353
Cables	354
Splitters	355
Couplers	356
Mounting Components	357
Sonet Qt Individual Soundmasking	360

QtPro Qt 100, Qt X 300, and Qt X 600 Control Modules

	Standard Includes	Required to Specify
▶ Need help? Product details, page 337	<ul style="list-style-type: none">• One, three, or six soundmasking zones• Music or paging for Qt 100 only recommended with up to 10 emitters• Music and paging input jacks for Qt X 300 and Qt X 600• Installation and operations guide• 6' power cord• Attachment hardware• Holesaw driver bit	Style number

Related Products
<ul style="list-style-type: none">• Emitters ▶ Page 348• Cables ▶ Page 354• Couplers ▶ Page 356• Mounting components ▶ Page 357

Specification Information				
Dimensions			Quantity in	Style
D	W	H	Package	Number
				U.S. Price

QtPro Qt 100, Qt X 300, and Qt X 600 Control Modules

Qt 100 - One Zone Control Module




7/8"	7"	3 1/2"	1	GSMQT100	\$1734
------	----	--------	---	----------	--------

Qt X 300 - Three Zone Control Module

3 1/2"	11"	3 1/2"	1	GSMQT300	\$4759
--------	-----	--------	---	----------	--------

Qt X 600 - Six Zone Control Module

3 1/2"	13 1/2"	3 1/2"	1	GSMQT600	\$6222
--------	---------	--------	---	----------	--------



Tip: The Qt X 300 and Qt X 600 can be mounted in an equipment rack using the rack mount bracket.


Tip: Active emitters cannot be used with the Qt 100 control module.

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Rack Mount Bracket

For Qt X 300 and Qt X 600

Rack Mount Bracket



Tip: The rack mount bracket is required to mount the QtPro Qt X 300 and Qt X 600 control modules in an equipment rack.

Tip: If the QtPro Qt X 300 and Qt X 600 are to be mounted on the wall, the rack mount bracket is not required.

Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|--|
| ▶ Need help?
Product details,
page 337 | • Rack mount bracket


Style number |
|--|--|

Specification Information		
---------------------------	--	--

•Style •Number •	•Quantity in •Package •	•U.S. •Price •
GSM600RM	1	\$85
•	•	•

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Hole Saw Blade



Tip: One holesaw blade is included with every control module. Order GSMHS1 for replacement or extra hole-saw blades.

Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|--------------|
| <ul style="list-style-type: none">Hole saw blade: 68 mm diameter | Style number |
|--|--------------|

Specification Information		
---------------------------	--	--


• Style Number	• Quantity in Package	• U.S. Price
GSMHS1	1	\$81
.	.	.
.	.	.

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Power Supply

For QtPro Control Modules

Power Supply



Tip: Power supply is included with control modules. Order GSMPS3 to replace lost or damaged power supply for Qt X 300 and Qt X 600 control modules.

Standard Includes	Required to Specify
<div>▶ Need help? Product details, page 338</div> <div>• 100-240V AC power supply</div>	Style number


Specification Information		
• Style Number	• Quantity in Package	• U.S. Price

QtPro Qt X 300 and Qt X 600 Power Supply

GSMPS3	1	\$423

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Emitters



Tip: Emitters are used to project soundmasking and are not recommended for paging and music. Specify active emitters, if paging and/or music are required.

Tip: Each emitter includes a 16' or 30' cable used to daisy chain to adjacent emitters.

Tip: Emitters with 16' cables will be used for most standard installations.

Tip: Emitters with 30' cables will be used for open-plenum installations to allow for appropriate visual management of cables.

Tip: If local codes require conduit installation, there is a mounting solution available through the Steelcase Specials team (found through eSpecials as quote AW023810).



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Standard Includes	Required to Specify
<div>▶ Need help? Product details, page 337</div> <div><ul style="list-style-type: none">• Miniature direct field speaker with adjustable attachment sleeve• 16' or 30' CAT-3 or equivalent plenum-rated cable with RJ45 plugs attached to ends• 3 dip switches that adjust volume down on each emitter 3dB, 6dB, or 9dB lower increments than the overall system volume level</div>	<div>Style number</div>

Related Products
<div><ul style="list-style-type: none">• QtPro control modules• QtPro cables• QtPro couplers• QtPro mounting components</div> <div><div>▶ Page 344</div><div>▶ Page 354</div><div>▶ Page 356</div><div>▶ Page 357</div></div>

Specification Information				
Dimensions		Quantity in	Style	U.S.
W	H	Package	Number	Price
Four Pack Emitters with 16' Cables				
3½"	2½"	4	GSMEMIT4	\$ 846
Four Pack Emitters with 30' Cables				
3½"	2½"	4	GSM30EMIT4	\$1002



Tip: **GSMQTRC** room control can be used to adjust the sound masking level for an individual room or a space with two to eight emitters. **GSMQTAERC** can be used with up to 14 active emitters. A separate zone should be used in larger areas.

Tip: The length of the power cord on the Qt 100, Qt X 300, and Qt X 600 is 6'.

Tip: **GSMQTRC** is for use with the Qt 100 control module and **GSMQTAERC** is for use with Qt X 300 and Qt X 600 control modules.

Standard Includes Required to Specify

- ▶ Need help? Product details, page 342

- Room control

Style number

Related Products

- Qt 100
 - Qt X 300
 - Qt X 600
- ▶ Page 344

▶ Page 344

▶ Page 344

Specification Information

Dimensions			Style	U.S.
D	W	H	Number	Price
:	:	:	:	:
:	:	:	:	:

Room Control for Qt 100

3"	1 ⁹ / ₁₀ "	4 ¹ / ₁₀ "	GSMQTRC	\$420
:	:	:	:	:


Room Control for Qt X 300 and Qt X 600

3"	1 ⁹ / ₁₀ "	4 ¹ / ₁₀ "	GSMQTAERC	\$420
:	:	:	:	:



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Privacy Package



Tip: Privacy signs can be mounted on glass, surface-mounted with self-adhesive tape, or mounted using 1-gang electrical box.

Tip: Control module can be mounted to wall or flush-mounted with supplied box on suitable 4-gang electrical box.

Tip: Privacy package comes standard with one control module and two lighted privacy signs.

Standard Includes	Required to Specify
<ul style="list-style-type: none">• One wall mounted control module• One 4-gang adaptor plate for control module• Two automatically lighted privacy signs• Two privacy sign adaptor plates• Two 50' plenum rated cables for privacy sign• One power supply• Eight QT emitters• Seven 16' audio cables• One 50' home run audio cable• One hole saw	Style number

Related Products
<ul style="list-style-type: none">• Emitters• Cables• Mounting components

▶ Page 348
▶ Page 354
▶ Page 357

Specification Information	
• Style Number	• U.S. Price
•	•
•	•

Patient Privacy Package


GSMPPS	\$5523
•	•

Conference Room Privacy Package

GSMCRPS	\$5523
•	•

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Active Emitter Power Supply



Tip: Active emitter power supply provides power to QT active emitters through active emitter power injectors.
▶ Page 336

Tip: Active emitter power supply powers up to 150 active emitters; three output connectors which power 50 emitters each.

Tip: Active emitter power supply is rack or wall mountable.

Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|------------------------------------|
| ▶ Need help?
Product details,
page 336 | • Power supply

Style number |
|--|------------------------------------|

Related Products


- | | |
|--|--|
| • QtPro 300 X/600 X control module
• Active emitters
• Mounting components
• Power injector
• Cables | ▶ Page 344
▶ Page 353
▶ Page 357
▶ Page 352
▶ Page 354 |
|--|--|

Specification Information

Dimensions			Style	U.S.
D	W	H	Number	Price
12½"	5"	2½"	GSMAEPS	\$1087


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Active Emitter Power Injector



Tip: Active emitter power injectors supply power to up to 50 active emitters each; two output ports that can power 25 active emitters each.

Tip: Active emitter power injectors fit inside a standard 4x4 electrical enclosure, supplied by installer, and can be plenum or headend mounted.

Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|--|
| <ul style="list-style-type: none">▶ Need help? Product details, page 336 | <ul style="list-style-type: none">• Power injector <p>Style number</p> |
|--|--|

Related Products

- | | |
|--|---|
| <ul style="list-style-type: none">• QtPro 300 X/600 X control module• Active emitters• Active emitters power supply• Cables | <ul style="list-style-type: none">▶ Page 344▶ Page 353▶ Page 351▶ Page 354 |
|--|---|


Specification Information

• Dimensions			• Style	• U.S.
D	W	H	Number	Price
3¾"	2¾"	1¼"	GSMAEINJ	\$278
•	•	•	•	•



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Active Emitter



Tip: Active emitters are used to project soundmasking, paging, and music.

Tip: Each active emitter includes a 16' or 30' cable used to daisy chain to adjacent emitters.

Tip: Active emitters with 16' cables will be used for most standard installations.

Tip: Active emitters with 30' cables will be used for open-plenum installations to allow for appropriate visual management of cables.

Tip: Active emitters are compatible with the QT X 300 and QT X 600 control modules.

Tip: Active emitters require proper quantities of injectors and power supplies compliant with the application and specification instructions.

Tip: Active emitters' volume can be adjusted by 4.5 dB on 1.5 dB decrements from the overall system volume level.

Tip: Active emitters' are 17 dB louder than standard emitters.

Tip: If local codes require conduit installation, there is a mounting solution available through the Steelcase Specials team (found through eSpecials as quote AW023810).

Tip: Qt 100 control module cannot be used with active emitters.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Standard Includes

- Need help? Product details, page 336
- Four active emitters
- 16' or 30' CAT 3 or equivalent plenum-rated cable with RJ45 plugs attached to ends
- Three dip switches that adjust volume down on each emitter by 4.5dB on 1.5dB decrements lower than the overall system volume level

Required to Specify

Style number

Related Products

- QtPro 300 X/600 X control module
 - Cables
 - Couplers
 - Active emitter power injector
 - Active emitters power supply
 - Active emitters mount brackets
 - 400' home run cable
- Page 344
 - Page 354
 - Page 356
 - Page 352
 - Page 351
 - Page 358
 - Page 354

Specification Information

Dimensions		Style	U.S.
D	W	Number	Price
:	:	:	:

Four Pack Active Emitters with 16' Cables

3½"	3¼"	GSM4EMIT4	\$ 947
:	:	:	:

Four Pack Active Emitters with 30' Cables

3½"	3¼"	GSM30AEMIT4	\$1090
:	:	:	:

Cables

Standard Includes		Required to Specify
▶ Need help? Product details, page 338	• CAT-3 or equivalent plenum-rated cables with RJ45 plugs attached to ends	Style number

Related Products		
• QtPro control modules		▶ Page 344
• Emitters		▶ Page 348
• Couplers		▶ Page 356
• Mounting components		▶ Page 357



Specification Information			
Length	Quantity in Package	Style Number	U.S. Price

CAT-3 Cables

10'	1	GSMCABLE10	\$ 63
25'	1	GSMCABLE25	\$ 102
50'	1	GSMCABLE50	\$ 182
75'	1	GSMCABLE75	\$ 348
100'	1	GSMCABLE100	\$ 456
16' Cables, Package of 4	4	GSMCPAK4	\$ 162
:	:	:	:

14 Gauge 2 Conductor Cable

400'	1	GSMAEHRC	\$1553
:	:	:	:



Tip: The 400' cable is used as the home run cable for active emitters.

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Splitters


Standard Includes	Required to Specify
<div><div>▶ Need help? Product details, page 338</div><div><ul style="list-style-type: none">• Two way or four way splitter with 10" male cable, if selected: grey• Two or four female RJ 45 jacks, if selected</div></div>	Style number

Related Products
<div><div><ul style="list-style-type: none">• QtPro control modules• Emitters• Couplers• Mounting components</div><div><ul style="list-style-type: none">▶ Page 344▶ Page 348▶ Page 356▶ Page 357</div></div>

Specification Information		
Quantity in Package	Style Number	U.S. Price


Two-Way Splitter		
1	GSM2WSPLIT	\$108

Four-Way Splitter		
1	GSM4WSPLIT	\$106

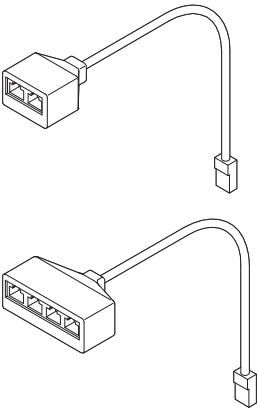

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Couplers



Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|--|
| <ul style="list-style-type: none">▶ Need help? Product details, page 338 | <ul style="list-style-type: none">• Two female RJ 45 jacks: grey <p>Style number</p> |
|--|--|

Related Products

- | | |
|---|---|
| <ul style="list-style-type: none">• QtPro control modules• Emitters• Couplers• Mounting components | <ul style="list-style-type: none">▶ Page 344▶ Page 348▶ Page 356▶ Page 357 |
|---|---|

Specification Information


Quantity in Package	Style Number	U.S. Price
1	GSMFFCOUP	\$38



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Mounting Components

External Mounting Bracket



Tip: For traditional drop down ceiling tiles, emitters are installed in the tiles and no additional mounting components are needed. The mounting components are used in open plenum or special ceiling conditions.

Tip: In open plenum or in special ceiling conditions, additional components may be required.


Tip: Emitters are not included with mounting components.

Standard Includes	Required to Specify
<ul style="list-style-type: none">Need help? Product details, page 337Enclosure with ceiling and wall mount	Style number

Related Products
<ul style="list-style-type: none">QtPro control modulesEmittersCouplers

Specification Information		
Quantity in Package	Style Number	U.S. Price
1	GSMEEM1	\$81
.	.	.

External Mounting Clamp



Tip: External mounting clamp is used to mount emitters to a beam. It is important to verify beam dimensions, the clamp requires a minimum beam thickness of 1/4" and no more than a maximum thickness of 3/4" for proper installation.

Tip: Emitters are not included with mounting components.

Standard Includes	Required to Specify
<ul style="list-style-type: none">Need help? Product details, page 337Emitter sleeveBeam C clamp, fits beams 1/4" to 3/4" in thickness	Style number


Related Products
<ul style="list-style-type: none">QtPro control modulesEmittersCouplers

Specification Information		
Quantity in Package	Style Number	U.S. Price
1	GSMEEM2	\$83
.	.	.


For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Mounting Components, continued

Pendant Mount



Tip: Pendant mount is compatible with both standard and active emitters.

Tip: Round up the number of pendant mounts needed to the nearest multiples of four to meet the quantity requirement.


Tip: Pricing shown reflects a quantity of one, however, pendants must be ordered in multiples of four. The pricing for each multiples of four that is ordered is \$1368.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 337</p> <ul style="list-style-type: none"> Pendant mount top Cylinder, cable, and cable box cover assembly Quantity: ships in multiples of four only Price: below is for one pendant only, multiply by four for 4-pack list pricing 	Style number

Related Products
<ul style="list-style-type: none"> QtPro control modules Emitters Couplers Mounting components
<p>► Page 344</p> <p>► Pages 348 and 353</p> <p>► Page 356</p> <p>► Page 357</p>

Specification Information			
Dimensions		Style	U.S. Price
D	W	Number	Each Pendant
3 1/8"	7"	GSMPNDT	\$342

Active Emitter External Mounting Bracket



Tip: For traditional drop down ceiling tiles, active emitters are installed in the tiles and no additional mounting components are needed. The mounting components are used in open plenum or special ceiling conditions.

Tip: In open plenum or in special ceiling conditions, additional components may be required.


Tip: Active emitters are not included with mounting components.

Standard Includes	Required to Specify
<p>► Need help? Product details, page 337</p> <ul style="list-style-type: none"> Enclosure with ceiling and wall mount 	Style number

Related Products
<ul style="list-style-type: none"> QtPro control modules Active emitters Couplers
<p>► Page 344</p> <p>► Page 353</p> <p>► Page 356</p>

Specification Information		
Quantity in Package	Style Number	U.S. Price
1	GSMAEEM1	\$82

Active Emitter External Mounting Clamp



Tip: External mounting clamp is used to mount active emitters to a beam. It is important to verify beam dimensions, the clamp requires a minimum beam thickness of 1/4" and no more than a maximum thickness of 3/4" for proper installation.


Tip: Active emitters are not included with mounting components.

Standard Includes	Required to Specify
<p>▶ Need help? Product details, page 337</p> <ul style="list-style-type: none"> • Active emitter sleeve • Beam C clamp, fits beams 1/4" to 3/4" in thickness 	Style number

Related Products
<ul style="list-style-type: none"> • QtPro control modules ▶ Page 344 • Active emitters ▶ Page 353 • Couplers ▶ Page 356

Specification Information		
Quantity in Package	Style Number	U.S. Price
1	GSMAEEM2	\$85
.	.	.

Drywall Mounting Bracket



Tip: For traditional drop down ceiling tiles, emitters are installed in the tiles and no additional mounting components are needed. The mounting components are used in open plenum or special ceiling conditions.

Tip: Emitters are not included with mounting components.

Standard Includes	Required to Specify
<p>▶ Need help? Product details, page 337</p> <ul style="list-style-type: none"> • Enclosure • Two clips • Installation key 	Style number

Related Products
<ul style="list-style-type: none"> • QtPro control modules ▶ Page 344 • Emitters ▶ Page 348 • Couplers ▶ Page 356 • Mounting components ▶ Page 357


Specification Information		
Quantity in Package	Style Number	U.S. Price
1	GSMDEM3	\$46
.	.	.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Sonet Qt Individual Soundmasking

Sonet Qt Individual Soundmasking System with Two Speakers




Tip: Sonet Qt provides coverage for up to 200 square feet. To reach the maximum coverage of 400 square feet, also specify the extension kit, GSMSONETXT.

Standard Includes	Required to Specify
<div><div>▶ Need help? Product details, page 340</div><div><ul style="list-style-type: none">• Sonet Qt controller• Two Sonet emitters• All required wiring• Mounting hardware, wall and fabric mount applications• Power supply</div></div>	Style number

Specification Information		
Quantity in Package	Style Number	U.S. Price
1	GSMSONET	\$592
.	.	.
.	.	.

Sonet Two Speaker Extension Kit



Tip: The Sonet extension kit can be specified to add two speakers to Sonet Qt, extending the coverage for up to 400 square feet.

Standard Includes	Required to Specify
<div><div>▶ Need help? Product details, page 340</div><div><ul style="list-style-type: none">• Two Sonet emitters• Wiring and mounting hardware</div></div>	Style number

Specification Information		
Quantity in Package	Style Number	U.S. Price
1	GSMSONETXT	\$220
.	.	.
.	.	.


For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Surface Materials

Surface Materials	362
Availability Matrices	366

Surface Materials

This listing includes all the surface material choices that are available for the products in this specification guide.

Tip: See Availability Matrices on page 366 for exact surface material availability on each Privacy Wall component.

Resources

For more information about surface materials, refer to the following resources:

Additional surface materials specification tools are available to assist you in the specification process—the Surface Materials Binders.

The global surface materials palette is a core collection of finishes that is available across multiple geographies (Americas/EMEA – Europe, Middle East, and Africa/APAC – Asia Pacific) and on global product lines, where applicable. For a list of finishes included in the offering, see the *Surface Materials Reference Manual*. Additional details, like product approvals by geography and finish number conversions, can also be found in the *Surface Materials Reference Manual* or see steelcase.com/surface-materials.

Surface Materials Binders

- Surface Materials Reference Manual
- A complete set of swatch cards for hard surfaces, vertical surface fabrics, and seating upholstery

Architectural Solutions Binder

- Brochures
- Swatch cards

Paint

Steelcase Surfaces

Applies to:

- Privacy Wall solid swing door

Price Group 1

Architectural Paint

- 4843 Linen
- 4844 Glacier
- 4849 Vapor

Smooth Paint

- 4238 Mocha
- 4239 Clay
- 4240 Chalk
- 4242 Milk
- 4858 Seagull

Applies to:

- Privacy Wall panel surface
- Privacy Wall panel frame
- Privacy Wall glass swing door
- Privacy Wall glass door frame
- Privacy Wall slider door
- Privacy Wall door frame
- Privacy Wall ceiling track
- Privacy Wall base trim
- Privacy Wall post, wall channel, adapter, and mini end
- Privacy Wall feature strips
- Privacy Wall furniture reveal strips
- Clerestory panel surface

Price Group 1

Architectural Paint

- 4843 Linen
- 4844 Glacier
- 4849 Vapor

Smooth Paint

- 4238 Mocha
- 4239 Clay
- 4240 Chalk
- 4242 Milk
- 4858 Seagull

Textured Paint

- 7207 Black
- 7225 Sand
- 7237 Slate 
- 7238 Fieldstone
- 7239 Midnight
- 7241 Arctic White
- 7243 Seagull
- 7360 Merle

Price Group 2

Smooth Metallic Paint

- 4743 Mineral Metallic
- 4750 Champagne Metallic
- 4798 Sterling Metallic
- 4799 Platinum Metallic
- 4803 Near Black Metallic

Textured Metallic Paint

- 7245 Carbon Metallic
- 7246 Midnight Metallic

Tip: Metallic paint is not available on solid and Clerestory panels larger than 36"W.

Tip: Textured and metallic paint is difficult to field repair and replicate original finish on large solid and Clerestory panel surfaces.

Applies to:

- Hardware
- Pulls

Price Group 1

- 4710 Low Gloss Black

Price Group 3

Coatings

- 1ATT Cast Shadow

Custom Surfaces

Price Group 3

PerfectMatch

PerfectMatch is a service that allows you to create your own paint color. Refer to the *Surface Materials Reference Manual* for more information about this program.

Accent Paint

- 1ATG Rose Quartz
- 4AV4 Baltic
- 4CL1 Dark Olivine
- 4CL2 Ice Blue
- 4CL3 Aura
- 4CL4 Sea Glass
- 4CL5 Light Matcha
- 4CL6 Terra
- 4CL7 Sandstone
- 4CL8 Smokey Plum
- 4CZ6 Lagoon

Lux Coatings

- 4B22 Matte Brass
- 4B23 Burnished Bronze
- 4B24 Night Bronze
- 4B25 Matte Copper
- 4B26 Smoked Mica
- 4B29 Cast Iron

Accent Paint and Lux Coatings will be added to products that receive the metal and accessories paint finishes.

Wood

Applies to:

- Privacy Wall door

Steelcase carefully selects veneer and solid wood for consistent color and grain structure. Wood is a natural material and variations will occur in color, grain and texture. These variations are part of the inherent natural beauty of wood and are not considered defects.

All wood products will darken with age and exposure to ultraviolet light. This is especially apparent with cherry and maple veneer. We recommend that desk accessories be rearranged periodically to ensure even aging of wood surfaces.

When storing your wood furniture, please follow the following guidelines:

- Do not store products in trailers
- Store products in areas that simulate office temperatures (60°F to 90°F)
- Store products in areas that maintain constant, office-like humidity levels
- Keep product away from light. Cover products to make sure they are not exposed to light.

Steelcase Surfaces

Veneers are matched for proper balance and consistency. Veneers are available flat cut or quarter cut, except for Oak, which is rift cut. Refer to the *Surface Materials Reference Manual* for descriptions of each cut.

Open-pore finish is a medium gloss finish that leaves the wood grain texture visible to the eye and distinguishable to the touch.

 = Established

Veneer

Wood Group 1

Flat-Cut Open-Pore

3062	FC/OP Graphite Walnut
3402	FC/OP Clear Cherry (Aged)
3412	FC/OP Natural Cherry E
3422	FC/OP Medium Cherry
3522	FC/OP Clear Maple
3592	FC/OP Blonde on Maple E
3702	FC/OP Clear Walnut
3712	FC/OP Natural Walnut
3752	FC/OP Medium Walnut E
3762	FC/OP Dark Walnut
3772	FC/OP Medium Mahogany on Walnut

Flat-Cut Open-Pore, Natural Veneer

3342	FC/OP Black Walnut
35A2	FC/OP Blanch Maple
37A2	FC/OP Thunder Walnut

Quarter-Cut Open-Pore

3042	QC/OP Ash E
3222	QC/OP Clear Maple
3292	QC/OP Blonde on Maple E
3302	QC/OP Clear Walnut
3312	QC/OP Natural Walnut
3352	QC/OP Medium Walnut E
3362	QC/OP Dark Walnut
3372	QC/OP Medium Mahogany on Walnut
3382	QC/OP Graphite Walnut

Quarter-Cut Open-Pore, Natural Veneer

32A2	QC/OP Blanch Maple
33A2	QC/OP Thunder Walnut
3392	QC/OP Black Walnut

Rift-Cut Open-Pore

3602	RC/OP Desert Oak
------	------------------

Rift-Cut Full-Fill, Natural Veneer

36A2	RC/OP Volcanic Oak
------	--------------------

Wood Group 3

Flat-Cut Open-Pore, Natural Veneer

3082	FC/OP Washed Walnut
------	---------------------

Wood Group 1

Open-Pore Planked Veneer

3P41	OP Planked Cherry
3P51	OP Planked Maple
3P61	OP Planked Oak
3P71	OP Planked Walnut
3VFX	OP Unmarked Oak

Tip: Known for its uniqueness, planked veneer has intentional and natural variations that include, but are not limited to: character marks, grain pattern, color, and natural color aging.

E = Established

Custom Surfaces

Customiz stain is a service that allows you to create your own stain colors and finishes on standard veneer. Customiz stain color is available on all product lines that offer wood veneer.

A \$500 stain-matching fee applies on CUSTOMIZ requests (Exception: The \$500 fee does not apply on matches to Coalesse standard finishes or for a low-gloss finish request on a standard color). The \$500 fee covers the cost of formulating the Customiz color finish and applies regardless of whether or not an order for product is placed.

In addition, an approval form must be signed to indicate customer acceptance of Customiz match. A \$1,500 initiation fee will be charged prior to first order entry. This initiation fee activates the finish for unlimited use on any Steelcase product for an 18 month time period. After the 18 month time period has lapsed, the Customiz finish may be reactivated for another 18 months for a \$1,000 fee at any point within five years after the \$1,500 initiation fee was paid. If the finish is not reactivated within five years after the \$1,500 initiation fee was paid, the finish will be culled and the customer will need to pay the \$1,500 initiation fee again. All style number related Customiz charges products are no cost as of April 2014. The matching and initiation fees are not discountable.

Customiz stain takes 10 days to formulate. Consult the *Surface Materials Reference Manual* for more information. Custom veneers are also available and must be quoted by Steelcase specials group. Customiz stain on custom veneers takes 2 to 4 weeks to formulate.

Requirements and information on ordering a Customiz stain color are found in the *Surface Materials Reference Manual*.

Plastic

Steelcase Surfaces

Applies to:

- Privacy Wall receptacle and cover plate
 - Privacy Wall power and communication filler
- | | |
|------|----------------|
| 6000 | Black |
| 6009 | Arctic White |
| 6249 | Platinum Solid |
| 6618 | White |
| 6654 | Sand |
| 6655 | Warm White |
| 6695 | Midnight |
| 6697 | Fog |

Metal

Steelcase Surfaces

Applies to:

- Privacy Wall door hardware

Price Group 1

9200	Satin Chrome
------	--------------

Price Group 2

9201	Polished Chrome
------	-----------------

Applies to:

- Glass Selections panel frames
- Glass Selections door frames
- Glass Selections transitions
- Glass Selections pivot door leaf
- Glass Selections slider door pull
- Glass Selections feature strips

8043	Clear Anodized Aluminum
------	-------------------------

Glass

Steelcase Surfaces

Tip: See Privacy Wall Glass Availability Matrix for glass exceptions on specific products.

► Page 370

Price Group 1

6500	Clear
------	-------

Price Group 2

6540	Clear Laminated
6541	White Laminated

Price Group 3

6501	Low Iron Clear
6542	Satin

Price Group 7

6504	Low Iron Clear Laminated
------	--------------------------

Customer-specified glass is available.

Vertical Surface Fabric

Applies to:

- Privacy Wall panel surface
- Privacy Wall post, adapter, wall channel, and mini end
- Glass Selections Clerestory panel

Steelcase Surfaces

Price Group 1

Abacus **E**

P123	Portico
P124	Opus
P125	Cusp
P126	Artifact

Boccie

P200	New Rice
P201	New Almond
P203	New Camel
P204	New Opal
P205	New Mist
P206	New Plum
P208	New Spearmint
P209	New Sky

Buzz2

5F03 Tomato
 5F04 Red **E**
 5F05 Burgundy
 5F06 Sky **E**
 5F07 Blue
 5F08 Navy
 5F15 Stone
 5F16 Grey
 5F17 Black
 5G50 Dunegrass
 5G51 Sable
 5G55 Pumpkin
 5G56 Timber
 5G57 Rouge
 5G59 Meadow
 5G61 Cyan
 5G62 Atlantic
 5G63 Crocus
 5G64 Alpine
 5G65 Tornado

Charm

P505 Shell
 P506 Mimosas
 P507 Birch
 P508 Sparkle
 P510 Debut
 P511 Clover
 P513 Twilight

Optic

P540 Hazel
 P541 Twinkle
 P542 Orion
 P543 Seaglass
 P546 Whiskey
 P547 Bath
 P548 Whisper
 P549 Breezy
 P551 Glimmer

Rhythm

P555 Allegro
 P556 Tempo
 P557 Refrain
 P558 Pitch
 P560 Melody
 P562 Opus

Price Group 2

Bariolage

G200 New Etude
 G201 New Andante **E**
 G202 New Cantata **E**
 G203 New Adagio
 G204 New Melody
 G205 New Ballata

Code

5FA1 Fossil
 5FA2 Gabbro
 5FA3 Reed
 5FA4 Bluff
 5FA5 Sea Salt
 5FA6 Cannon
 5FA7 Tussah
 5FA8 Mica
 5FA9 Ecu
 5FB1 Bamboo

Fresco

G001 Sandrift
 G002 Mistiblu
 G003 Faon
 G006 Chamoline

Intersection

P211 Summit
 P212 Chalk
 P213 Lace

Latch

P600 Seashell
 P601 Clam
 P602 Eggshell
 P603 Zen
 P604 Cool Gray
 P605 Armor
 P606 Sentinel
 P607 Rye
 P608 Billow
 P609 Nimbus

Stencil

P455 Midnight
 P456 Mulberry
 P457 Cracked Pepper
 P458 Denim
 P459 Chartreuse
 P460 Bittersweet
 P461 Mauvelous
 P462 Bermuda
 P463 Concrete
 P464 Orchid
 P465 Parchment
 P466 Silk
 P467 Sea Salt
 P468 Honeydew
 P469 Sepia

Select Surfaces

For information on products within Select Surfaces, including accent paints and fabrics from Designtex, Gabriel, Kvadrat, and Pollack, please refer to the *Surface Materials Reference Manual* or visit steelcase.com/surface-materials under the Select Surfaces section.

Custom Surfaces

Price Group COM (Customer's Own Material)

Fabric Approval and Yardage

To confirm whether a particular COM material has already been tested for use on a specific Steelcase product or to determine actual yardage requirements:

- Visit www.steelcase.com

For additional information regarding Customer's Own Material, call 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com.

E = Established

Availability Matrices

Privacy Wall Paint Availability Matrix

		Archi- tectural Paint			Textured Paint							Smooth Paint					
	Price Group 1	4843 Linen	4844 Glacier	4849 Vapor	7207 Black	7225 Sand	7237 Slate ^E	7238 Fieldstone	7239 Midnight	7241 Arctic White	7243 Seagull	7360 Merle	4238 Mocha	4239 Clay	4240 Chalk	4242 Milk	4858 Seagull
Privacy Wall solid panel		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall glass panel frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall Clerestory panel—solid panel		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall Clerestory panel—glass panel frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall door frame with transom		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall full-height door frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall solid swing door		■	■	■	•	•	•	•	•	•	•	•	■	■	■	■	
Privacy Wall glass swing door		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall ceiling channel		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall base trim		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall post, wall channel, mini end, and adapter		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall feature strips		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall furniture reveal strips		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	

Tip: Metallic paint is not available on solid and Clerestory panels larger than 36"W.

Tip: Textured and metallic paint is difficult to field repair and replicate original finish on large solid and Clerestory panel surfaces.

Legend

- = Not available
- = Available
- = Available with exceptions
- ^E = Established
- ▶ See specification pages for details.

Legend

- = Not available
- = Available
- = Available with exceptions
- E = Established
- ▶ See specification pages for details.

Glass Selections Availability Matrix

		Architectural Paint			Textured Paint						Smooth Paint						
	Price Group 1	4843 Linen	4844 Glacier	4849 Vapor	7207 Black	7225 Sand	7237 Slate E	7238 Fieldstone	7239 Midnight	7241 Arctic White	7243 Seagull	7360 Merle	4238 Mocha	4239 Clay	4240 Chalk	4242 Milk	4858 Seagull
Glass Selections glass frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Glass Selections Clerestory panel—solid panel		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Glass Selections Clerestory panel—glass panel frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Glass Selections door frames		■	■	■	■	■	■	■	■	■	■	■	■	■		■	
Glass Selections glass swing door		■	■	■	■	■	■	■	■	■	■	■	■		■	■	
Glass Selections Post, mini-end and adapter		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Glass Selections feature strips		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	

Legend

- = Not available
- = Available
- = Available with exceptions
- ^E = Established
- ▶ See specification pages for details.

Legend

- = Not available
- = Available
- = Available with exceptions
- Ⓔ = Established
- ▶ See specification pages for details.

Privacy Wall Glass Availability Matrix

	Price Group 1 6500 Clear	Price Group 2 6540 Clear Laminated 6541 White Laminated	Price Group 3 6501 Low Iron Clear 6542 Satin	Price Group 7 6504 Low Iron Clear Laminated
Privacy Wall all-glass wall panels	■	■	■	■
Privacy Wall glass wall panels with three equal divided lites	■	■	■	■
Privacy Wall glass wall panels with four equal divided lites	■	■	■	■
Privacy Wall glass wall panels with four divided lites (transom-aligned top lite)	■	■	■	■
Privacy Wall glass wall panels with two divided lites (transom-aligned top lite)	■	■	■	■
Privacy Wall Clerestory wall panels	■	■	■	■
Privacy Wall door frames with transom	■	■	■	■
Privacy Wall full-height door leaves	■	■	■	■
Privacy Wall all-glass slider doors	■	■	■	■
Privacy Wall three and four equal divided lite slider doors	■	■	■	■
Privacy Wall two and four equal divided lite slider doors	■	■	■	■
Privacy Wall two and four transom-aligned lite slider doors	■	■	■	■

► See page 98 to ensure that etched and pattern glass types are properly oriented during the planning process.

Legend

- = Not available
- = Available
- See specification pages for details.

Tip: COM glass for frame and glass kits must be 3/8" thick for structural integrity.

Tip: For information regarding vertical directional glass, see page 25.

Privacy Wall Glass Selections Availability Matrix

	Price Group 1	Price Group 2	Price Group 3	Price Group 7
	6500 Clear	6540 Clear Laminated	6541 White Laminated	6501 Low Iron Clear
				6542 Satin
				6504 Low Iron Clear Laminated
Glass Selections all-glass wall panels	■	■	■	■
Glass Selections all-glass frame and glass kits	■	•	•	•
Glass Selections wall panels with two divided lites (transom-aligned top lite)	■	■	■	■
Glass Selections two divided lite frame and glass kits	■	■	■	■
Glass Selections Clerestory wall panels	■	■	■	■
Glass Selections door frames with transom	■	■	■	■
Glass Selections full-height door leaves	■	■	■	■
Glass Selections transom-height door leaves	■	■	■	■
Glass Selections polished edge full-height and transom-height slider doors	•	•	•	•
Glass Selections polished edge slider door all-glass side panel	■	■	■	■
Glass Selections polished edge slider door transom and transom-height side panel	■	■	■	■
Glass Selections all-glass L-corner units	■	■	■	■
Glass Selections transom-height L-corner units	■	■	■	■
Glass Selections all-glass T-corner unit frame and glass kits	■	■	■	■
Glass Selections transom-height T-corner unit frame and glass kits	■	■	■	■
Shelf side support bracket	■	■	■	■

► See page 98 to ensure that etched and pattern glass types are properly oriented during the planning process.

Legend

- = Not available
- = Available
- See specification pages for details.

Tip: COM glass for frame and glass kits must be $\frac{3}{8}$ " thick for structural integrity.

Tip: For information regarding vertical directional glass, see page 25.

Resources

Wiring Schematics	374
Locations with Special Requirements	375
How to Calculate Power Needs	376
Style Number Index	378

Wiring Schematics

Details for the Electrician

Modular power components are offered in three different wiring schematics to allow you to match your specific wiring strategy to any typical building wiring plan.

Tip: All the components in an electrical system must use the same wiring schematic. The components are color coded and keyed to make it impossible to connect mismatched parts.

Black = Four-circuit, 3+1

Brown = Four-circuit, 2+2

Rust = Three-circuit, separate neutrals

Shared neutral conductors = 10 gauge


Separate neutral conductors = 10 gauge

Hot conductors = 10 gauge


Grounding conductors = 10 gauge

Four-Circuit, 3+1

Circuit Panel 1

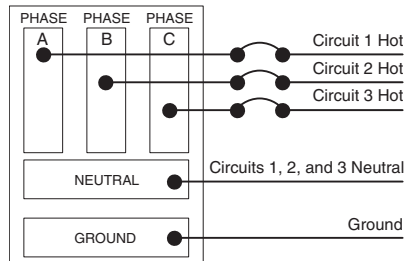


Circuit Panel 2

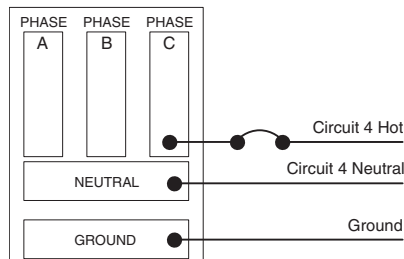

In the four-circuit 3+1 schematic, circuits 1, 2, and 3 are distributed from the first circuit panel and are supported with one shared neutral and one shared ground. Circuit 4 is distributed from a second circuit panel and is supported with a separate neutral and ground.


Single 3-Phase
Circuit Panel

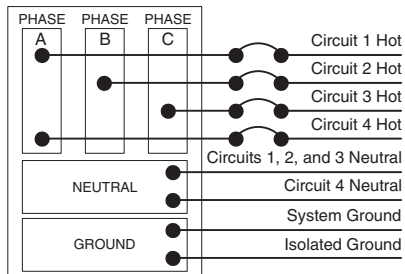


On a single 3-phase circuit panel, all four circuits are distributed as shown.

Four-Circuit, 2+2

Circuit Panel 1

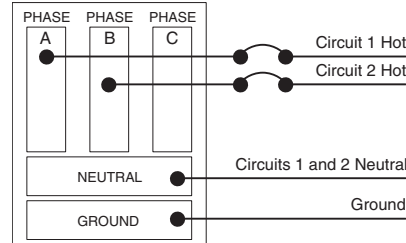


Circuit Panel 2

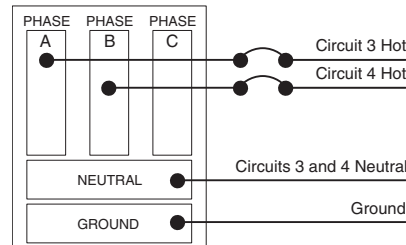


In the four-circuit 2+2 schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel and are supported with one shared neutral and one shared ground. Circuits 3 and 4 are distributed from a second circuit panel and are supported by their own shared neutral and ground.

Single 3-Phase
Circuit Panel

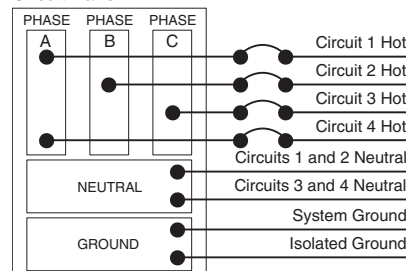

On a single 3-phase circuit panel, all four circuits are distributed as shown.


Split-Phase
Circuit Panel

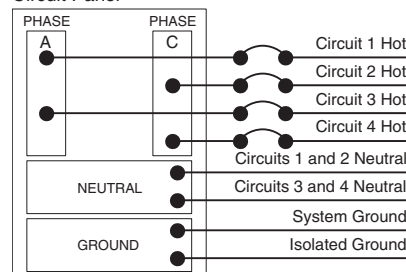


On a split-phase circuit panel, all four circuits are distributed as shown.

Three-Circuit, Separate Neutrals

Circuit Panel 1

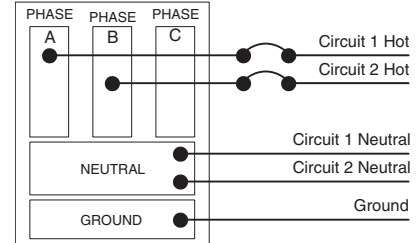


Circuit Panel 2

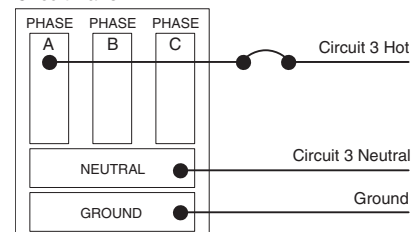


In the three-circuit, separate neutral schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel. Each circuit is supported with its own neutral and a common ground. Circuit 3 is distributed from the second circuit panel and is supported by its own neutral and ground.

Single 3-Phase
Circuit Panel

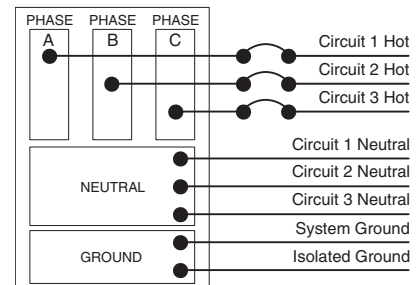

On a single 3-phase circuit panel, three circuits are distributed as shown.

Split-Phase
Circuit Panel

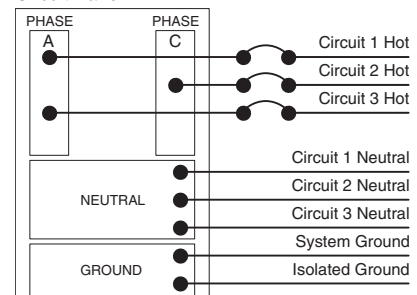

On a split-phase circuit panel, three circuits are distributed as shown.

Locations with Special Requirements

Locations with
Special Requirements

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of all electrical components. Here are the special conditions for the cities of Chicago, New York, Los Angeles, and San Francisco.

Chicago	Chicago electrical code requires the power distribution network to be hardwired on site. There are no hardwired versions of Internode or Modular Power.	Architectural Solutions Low-Profile Floor can accommodate hardwiring using the standard conduit, wires, junction boxes, and receptacles that electrician's routinely use.
New York City	Privacy Wall modular power components, Architectural Solutions modular power, and Internode modular components are not approved for use in NYC.	
Los Angeles	All modular power components are acceptable for use in Los Angeles. Cord-connected power connections are not acceptable. Wire and cable managers are not approved for use in Los Angeles.	
San Francisco	Internode components are not approved for use in the city of San Francisco.	Architectural Solutions Low-Profile Floor can accommodate hardwiring using the standard conduit, wires, junction boxes, and receptacles that electrician's routinely use.

How to Calculate Power Needs

Use This to Determine How Many Power-Ins You'll Need

When planning a power network, you must calculate the amperage requirements of all your electrical components so you can provide sufficient electricity to power them.

If your usage is not known in advance:

The National Electrical Code (NEC) allows a maximum of 13 receptacles on each 20-amp circuit. This provides up to 30 receptacles for each 3-circuit power-in.

If your usage is known in advance:

Add up the amperage used by each piece of equipment in the workstation. Whenever you reach 60 amps (20 amps times 3 circuits) from items that are likely to be used at the same time, you have reached the limit for a single power-in. Specify another power-in and continue until all equipment is powered.

If the circuits will normally be subject to a continuous load (three or more hours of continuous use, such as lights or computers), the NEC requires that circuit capacity be "de-rated" by 20 percent. Therefore, treat circuits used for continuous loads as if they were rated at 16 amps instead of the regular 20 amps.

Try to anticipate future increases in power requirements and build some excess capacity into your plan.

► See table at right for typical and actual amperage usages for components.

To calculate amperage when the wattage of a device is known, divide watts by 120.

Some appliances, such as large copiers, coffee makers, or space heaters require most of the current available on a 20-amp circuit. It is recommended that such devices be supplied with their own receptacle/circuit, directly from the building. This leaves the capacity of the furniture circuits available for the more dynamic requirements of the office equipment.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper planning of electrical circuits in your locale.

Approximate power consumption for common devices

• Device	• Wattage	• Amperage	• Voltage	• Number of Devices Supported on Single 20 Amp Circuit*
Laptop	90	0.8	110	20
CPU/Desktop Computer	120	1.1	110	15
Monitor	60	0.5	110	29
Phone	5	0.0	110	352
High Power Tablet (e.g. Surface Pro)	40	0.4	110	44
Low Power Tablet (e.g. iPad Air)	15	0.1	110	117
Desktop Printer	40	0.4	110	44
42" LCD Screen	210	1.9	110	8
DVD Player	25	0.2	110	70
Projector	175	1.6	110	10
Desktop Lamp	19	0.2	110	93
Large Printer/Copier (high)	1900	17.3	110	1
Large Printer/Copier (low)	850	7.7	110	2
Paper Shredder	360	3.3	110	5
Desktop Fan	20	0.2	110	88
Standing Fan	180	1.6	110	10
Coffee Maker (high)	1200	10.9	110	1
Coffee Maker (low)	600	5.5	110	3
Microwave (high)	400	13.6	110	1
Microwave (low)	150	5.5	110	3
Refrigerator (high)	1500	3.6	110	4
Refrigerator (low)	200	1.4	110	12
Vacuum (high)	1500	13.6	110	1
Vacuum (low)	200	1.8	110	9
Space Heater (high)	1500	13.6	110	1
Space Heater (low)	750	6.8	110	2

Tip: These calculations are estimations and are meant solely for informational purposes. It is important to conduct proper power planning for each installation to prevent overloading a circuit.

Style Number Index

Style Number	Page	Description
GAP3HCX	318	Mod Pwr Branch Connector
GAP3HCY	318	Mod Pwr Branch Connector
GAP3HCZ	318	Mod Pwr Branch Connector
GAPDC20	319	Mod Pwr Dust Cap
GAPFBDX	324	Mod Pwr Floor Access Box
GAPFBDZ	324	Mod Pwr Floor Access Box
GAPFBSHW	325	Mod Pwr Shallow Floor Access Box
GAPFBSX	324	Mod Pwr Shallow Floor Access Box
GAPFBSY	324	Mod Pwr Shallow Floor Access Box
GAPFBSZ	324	Mod Pwr Shallow Floor Access Box
GAPFCM90X	316	Modular Connector Faceplate
GAPFCM90Y	316	Modular Connector Faceplate
GAPFCM90Z	316	Modular Connector Faceplate
GAPFCMX	316	Mod Pwr Mod Conn Faceplate
GAPFCMY	316	Mod Pwr Mod Conn Faceplate
GAPFCMZ	316	Mod Pwr Mod Conn Faceplate
GAPHHCX	318	Mod Pwr Branch Connector
GAPHHCY	318	Mod Pwr Branch Connector
GAPHHCZ	318	Mod Pwr Branch Connector
GAPHM10X	315	Mod Pwr Mdlr Ext Harness
GAPHM10Y	315	Mod Pwr Mdlr Ext Harness
GAPHM10Z	315	Mod Pwr Mdlr Ext Harness
GAPHM15X	315	Mod Pwr Mdlr Ext Harness
GAPHM15Y	315	Mod Pwr Mdlr Ext Harness
GAPHM15Z	315	Mod Pwr Mdlr Ext Harness
GAPHM20X	315	Mod Pwr Mdlr Ext Harness
GAPHM20Y	315	Mod Pwr Mdlr Ext Harness
GAPHM20Z	315	Mod Pwr Mdlr Ext Harness
GAPHM30X	315	Mod Pwr Mdlr Ext Harness
GAPHM30Y	315	Mod Pwr Mdlr Ext Harness
GAPHM30Z	315	Mod Pwr Mdlr Ext Harness
GAPHM40X	315	Mod Pwr Mdlr Ext Harness
GAPHM40Y	315	Mod Pwr Mdlr Ext Harness
GAPHM40Z	315	Mod Pwr Mdlr Ext Harness
GAPHM50X	315	Mod Pwr Mdlr Ext Harness
GAPHM50Y	315	Mod Pwr Mdlr Ext Harness
GAPHM50Z	315	Mod Pwr Mdlr Ext Harness
GAPHM5X	315	Mod Pwr Mdlr Ext Harness
GAPHM5Y	315	Mod Pwr Mdlr Ext Harness
GAPHM5Z	315	Mod Pwr Mdlr Ext Harness
GAPMH10X	314	Mod Pwr Mod to Hardwire Harness
GAPMH10Y	314	Mod Pwr Mod to Hardwire Harness
GAPMH10Z	314	Mod Pwr Mod to Hardwire Harness
GAPMH30X	314	Mod Pwr Mod to Hardwire Harness
GAPMH30Y	314	Mod Pwr Mod to Hardwire Harness
GAPMH30Z	314	Mod Pwr Mod to Hardwire Harness
GAPMH50X	314	Mod Pwr Mod to Hardwire Harness
GAPMH50Y	314	Mod Pwr Mod to Hardwire Harness
GAPMH50Z	314	Mod Pwr Mod to Hardwire Harness
GAPMH5X	314	Mod Pwr Mod to Hardwire Harness
GAPMH5Y	314	Mod Pwr Mod to Hardwire Harness
GAPMH5Z	314	Mod Pwr Mod to Hardwire Harness
GAPR15L1IGX	326	Mod Pwr Receptacle
GAPR15L1IGY	326	Mod Pwr Receptacle
GAPR15L1IGZ	326	Mod Pwr Receptacle

Style Number	Page	Description
GAPR15L1SGX	326	Mod Pwr Receptacle
GAPR15L1SGY	326	Mod Pwr Receptacle
GAPR15L1SGZ	326	Mod Pwr Receptacle
GAPR15L2IGX	326	Mod Pwr Receptacle
GAPR15L2IGY	326	Mod Pwr Receptacle
GAPR15L2IGZ	326	Mod Pwr Receptacle
GAPR15L2SGX	326	Mod Pwr Receptacle
GAPR15L2SGY	326	Mod Pwr Receptacle
GAPR15L2SGZ	326	Mod Pwr Receptacle
GAPR15L3IGX	326	Mod Pwr Receptacle
GAPR15L3IGY	326	Mod Pwr Receptacle
GAPR15L3IGZ	326	Mod Pwr Receptacle
GAPR15L3SGX	326	Mod Pwr Receptacle
GAPR15L3SGY	326	Mod Pwr Receptacle
GAPR15L3SGZ	326	Mod Pwr Receptacle
GAPR15L4IGX	326	Mod Pwr Receptacle
GAPR15L4IGY	326	Mod Pwr Receptacle
GAPR15L4SGX	326	Mod Pwr Receptacle
GAPR15L4SGY	326	Mod Pwr Receptacle
GAPTHFBPNYX	322	Mod Pwr Base Power-In
GAPTHFBPNYY	322	Mod Pwr Base Power-In
GAPTHFBPNYZ	322	Mod Pwr Base Power-In
GAPTHFBPSFX	322	Modular Pwr Transition Harness
GAPTHFBPSFY	322	Modular Pwr Transition Harness
GAPTHFBPSFZ	322	Modular Pwr Transition Harness
GAPTHFBPX	322	Mod Pwr Base Power-In
GAPTHFBPY	322	Mod Pwr Base Power-In
GAPTHFBPZ	322	Mod Pwr Base Power-In
GAPTHFLSFX	320	Modular Pwr Transition Harness
GAPTHFLSFY	320	Modular Pwr Transition Harness
GAPTHFLSFZ	320	Modular Pwr Transition Harness
GAPTHFLX	320	Mod Pwr Floor Power-Infeed
GAPTHFLY	320	Mod Pwr Floor Power-Infeed
GAPTHFLZ	320	Mod Pwr Floor Power-Infeed
GAPTHFNXX	320	Mod Pwr Floor Power-Infeed
GAPTHFNYY	320	Mod Pwr Floor Power-Infeed
GAPTHFNZZ	320	Mod Pwr Floor Power-Infeed
GAPTHINNYX	321	Mod Pwr Floor Power-Infeed
GAPTHINNYY	321	Mod Pwr Floor Power-Infeed
GAPTHINNNZ	321	Mod Pwr Floor Power-Infeed
GAPTHINTSFX	321	Modular Pwr Transition Harness
GAPTHINTSFY	321	Modular Pwr Transition Harness
GAPTHINTSFZ	321	Modular Pwr Transition Harness
GAPTHINTX	321	Mod Pwr Floor Power-Infeed
GAPTHINTY	321	Mod Pwr Floor Power-Infeed
GAPTHINTZ	321	Mod Pwr Floor Power-Infeed
GAPTHBPBNYX	323	Mod Pwr Base Power-In
GAPTHBPBNYY	323	Mod Pwr Base Power-In
GAPTHBPBNYZ	323	Mod Pwr Base Power-In
GAPTHBPBSFX	323	Modular Pwr Transition Harness
GAPTHBPBSFY	323	Modular Pwr Transition Harness
GAPTHBPBSFZ	323	Modular Pwr Transition Harness
GAPTHBPBX	323	Mod Pwr Base Power-In
GAPTHBPBZ	323	Mod Pwr Base Power-In
GAPZBHW10X	317	Mod Pwr Zone Box

Style Number	Page	Description
GAPZBHW10Y	317	Mod Pwr Zone Box
GAPZBHW10Z	317	Mod Pwr Zone Box
GAPZBHW8X	317	Mod Pwr Zone Box
GAPZBHW8Y	317	Mod Pwr Zone Box
GAPZBHW8Z	317	Mod Pwr Zone Box
GAPZBM100X	317	Mod Pwr Zone Box
GAPZBM100Y	317	Mod Pwr Zone Box
GAPZBM100Z	317	Mod Pwr Zone Box
GAPZBM125X	317	Mod Pwr Zone Box
GAPZBM125Y	317	Mod Pwr Zone Box
GAPZBM125Z	317	Mod Pwr Zone Box
GAPZBM150X	317	Mod Pwr Zone Box
GAPZBM150Y	317	Mod Pwr Zone Box
GAPZBM150Z	317	Mod Pwr Zone Box
GAPZBM200X	317	Mod Pwr Zone Box
GAPZBM200Y	317	Mod Pwr Zone Box
GAPZBM200Z	317	Mod Pwr Zone Box
GAPZBM50X	317	Mod Pwr Zone Box
GAPZBM50Y	317	Mod Pwr Zone Box
GAPZBM50Z	317	Mod Pwr Zone Box
GAPZBM75X	317	Mod Pwr Zone Box
GAPZBM75Y	317	Mod Pwr Zone Box
GAPZBM75Z	317	Mod Pwr Zone Box
GP1BHX	263	PW Harness-to-Harness Connector
GP1BPI12X	261	PW Base Power Infeed
GP1BPISF12X	261	PW Base Power Infeed
GP1HHX	263	PW Harness-to-Harness Connector
GP1MHAX	262	PW Modular Harness
GP1PIH24X	260	PW Multipurpose Power Infeed
GP1PIM24X	260	PW Multipurpose Power Infeed
GP1PKBX	264	PW Base Powerkit
GP1PKPSX	264	PW ADA-Desk Single Powerkit
GP1PKPX	264	PW ADA-Desk Double Powerkit
GP1R1IGHX	257, 327	PW Receptacle
GP1R1IGX	257	PW Receptacle
GP1R1SGHX	257, 327	PW Receptacle
GP1R1SGX	257	PW Receptacle
GP1R2IGHX	257, 327	PW Receptacle
GP1R2IGX	257	PW Receptacle
GP1R2SGHX	257, 327	PW Receptacle
GP1R2SGX	257	PW Receptacle
GP1R3IGHX	257, 327	PW Receptacle
GP1R3IGX	257	PW Receptacle
GP1R3SGHX	257, 327	PW Receptacle
GP1R3SGX	257	PW Receptacle
GP1R4IGHX	257, 327	PW Receptacle
GP1R4IGX	257	PW Receptacle
GP1R4SGHX	257, 327	PW Receptacle
GP1R4SGX	257	PW Receptacle
GP2BHY	263	PW Harness-to-Harness Connector
GP2BPI12Y	261	PW Base Power Infeed
GP2BPISF12Y	261	PW Base Power Infeed
GP2HHY	263	PW Harness-to-Harness Connector
GP2MHAY	262	PW Modular Harness
GP2PIH24Y	260	PW Multipurpose Power Infeed

Style Number	Page	Description
GP2PIM24Y	260	PW Multipurpose Power Infeed
GP2PKBY	264	PW Base Powerkit
GP2PKPSY	264	PW ADA-Desk Single Powerkit
GP2PKPY	264	PW Base Powerkit
GP2R1IGHY	257, 327	PW Receptacle
GP2R1IGY	257	PW Receptacle
GP2R1SGHY	257, 327	PW Receptacle
GP2R1SGY	257	PW Receptacle
GP2R2IGHY	257, 327	PW Receptacle
GP2R2IGY	257	PW Receptacle
GP2R2SGHY	257, 327	PW Receptacle
GP2R2SGY	257	PW Receptacle
GP2R3IGHY	257, 327	PW Receptacle
GP2R3IGY	257	PW Receptacle
GP2R3SGHY	257, 327	PW Receptacle
GP2R3SGY	257	PW Receptacle
GP2R4IGHY	257, 327	PW Receptacle
GP2R4IGY	257	PW Receptacle
GP2R4SGHY	257, 327	PW Receptacle
GP2R4SGY	257	PW Receptacle
GP3BHZ	263	PW Harness-to-Harness Connector
GP3BPI12Z	261	PW Base Power Infeed
GP3BPISF12Z	261	PW Base Power Infeed
GP3HHZ	263	PW Harness-to-Harness Connector
GP3MHAZ	262	PW Modular Harness
GP3PIH24Z	260	PW Multipurpose Power Infeed
GP3PIM24Z	260	PW Multipurpose Power Infeed
GP3PKBZ	264	PW Base Powerkit
GP3PKPSZ	264	PW ADA-Desk Single Powerkit
GP3PKPZ	264	PW ADA-Desk Double Powerkit
GP3R1IGHZ	257, 327	PW Receptacle
GP3R1IGZ	257	PW Receptacle
GP3R1SGHZ	257, 327	PW Receptacle
GP3R1SGZ	257	PW Receptacle
GP3R2IGHZ	257, 327	PW Receptacle
GP3R2IGZ	257	PW Receptacle
GP3R2SGHZ	257, 327	PW Receptacle
GP3R2SGZ	257	PW Receptacle
GP3R3IGHZ	257, 327	PW Receptacle
GP3R3IGZ	257	PW Receptacle
GP3R3SGHZ	257, 327	PW Receptacle
GP3R3SGZ	257	PW Receptacle
GPACoust	254	PW Acoustic Packing
GPAFEB	187	Finished-End Adapter with Base
GPAL	187	PW L-Adapter
GPAS	254	PW Acoustic Seal
GPAT	187	PW T-Adapter
GPAX	187	PW X-Adapter
GPBTC	246	PW Continuous Base Trim
GPBTCC	248	PW Power and Comm Base Trim
GPBTCHIP	248	PW Power and Comm Base Trim
GPBTCHIPC	248	PW Power and Comm Base Trim
GPBTP	248	PW Power and Comm Base Trim
GPBTPC	248	PW Power and Comm Base Trim
GPCFKA	242	PW Ceiling Track Clip Kit

Style Number Index, continued

Style Number	Page	Description
GPCFKM	242	Ceiling Track Clip Kit
GPCFKQ	243	PW Ceiling Track Clip Kit
GPCFKR	243	PW Ceiling Track Clip Kit
GPCFKT	242	PW Ceiling Track Clip Kit
GPCFKT5	243	PW Ceiling Track Clip Kit
GPCFKU	242	PW Ceiling Track Clip Kit
GPCFKX	242	PW Ceiling Track Clip Kit
GPCFKX5	243	PW Ceiling Track Clip Kit
GPCFKZ	242	PW Ceiling Track Clip Kit
GPCNRBT120	247	PW Corner Base Trim
GPCNRBT135	247	PW Corner Base Trim
GPCNRBT90	247	PW Corner Base Trim
GPCT120V	241	PW Corner V Ceiling Track
GPCT135V	241	PW Corner V Ceiling Track
GPCTB	244	PW Ceiling Track Bypass Cover
GPCTFE	240	PW Finished-End Ceiling Track
GPCTLS	240	PW Corner L Ceiling Track
GPCTS	240	PW Straight Ceiling Track
GPCTT	244	PW Ceiling Track T-Clip
GPDBH3	162	PW Butt Hinged Kit
GPDBH3P	162	PW Butt Hinged Kit
GPDBH4	162	PW Butt Hinged Kit
GPDBH4P	162	PW Butt Hinged Kit
GPDBHPE	163	Butt Hinge Kit
GPDCLA	160	PW Cylindrical Passage Set
GPDCLO	160	PW Cylindrical Lockset
GPDDFS	166	PW Door Floor Stop
GPDDS	164	Drop Seal
GPDMLA	161	PW Mortise Passage Set
GPDMLO	161	PW Mortise Lockset
GPDMWS	165	PW Magnetic Wall Stop
GPDPBF	143	PW Butt-Hinged Door Frame
GPDPBT	143	PW Butt-Hinged Door Frame
GPDPHS	165	PW Pivot Hinge Kit
GPDPHSP	165	PW Pivot Hinge Kit
GPDPFF	145	PW Pivot-Hinged Door Frame
GPDPPT	145	PW Pivot-Hinged Door Frame
GPDRL	164	Roller Latch
GPDS120	167	PW Low-Voltage Switch w/120V Transformer
GPDS277	167	PW Low-Voltage Switch w/277V Transformer
GPDS347	167	PW Low-Voltage Switch w/347V Transformer
GPDSBF	143	PW Butt-Hinged Door Frame
GPDSBS	166	PW Screw-In Base Stop
GPDSBT	143	PW Butt-Hinged Door Frame
GPDSCB	179	PW Back-to-Back Cover
GPDSD1	167	PW High-Voltage Switch
GPDSHPE	163	Slim Line Hinge Kit
GPDSPF	145	PW Pivot-Hinged Door Frame
GPDSPFS	147	PW Pivot-Hinged Door Frame
GPDSPT	145	PW Pivot-Hinged Door Frame
GPDSPTS	147	PW Pivot-Hinged Door Frame
GPDS51	167	PW High-Voltage Switch
GPDSST2L80	171	PW Slider Door with Tubular Pull
GPDSST2L96	171	PW Slider Door with Tubular Pull
GPDSST3E80	173	PW Slider Door with Tubular Pull

Style Number	Page	Description
GPDSST3E96	173	PW Slider Door with Tubular Pull
GPDSST4E80	175	PW Slider Door with Tubular Pull
GPDSST4E96	175	PW Slider Door with Tubular Pull
GPDSST4L80	178	PW Slider Door with Tubular Pull
GPDSST4L96	178	PW Slider Door with Tubular Pull
GPDSSTF80	169	PW Slider Door with Tubular Pull
GPDSSTF96	169	PW Slider Door with Tubular Pull
GPFRS	253	PW Furniture Reveal Strips
GPFRS4	253	PW Furniture Reveal Strips
GPFS	251	PW Feature Strip
GPFS1	251	PW Feature Strip
GPFS1A	252	PW Anodized Feature Strip
GPFSA	252	PW Anodized Feature Strip
GPFSH	251	PW Feature Strip
GPFSH1	251	PW Feature Strip
GPFSH1A	252	PW Anodized Feature Strip
GPFSHA	252	PW Anodized Feature Strip
GPGLGSPF40B	215	PW GS Pivot-Hinged Door Leaf
GPGLGSPF42B	219	PW GS Pivot-Hinged Door Leaf
GPGLGSPT40B	217	PW GS Pivot-Hinged Door Leaf
GPGLGSPT42B	221	PW GS Pivot-Hinged Door Leaf
GPGM08	118	PW All-Glass Wall Panel
GPGM18	118	PW All-Glass Wall Panel
GPGM20	118	PW All-Glass Wall Panel
GPGM24	118	PW All-Glass Wall Panel
GPGM2L08	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L18	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L20	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L24	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L30	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L36	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L40	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L42	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L48	135	PW Glass Wall Panel w/ 2 Lites
GPGM2L60	135	PW Glass Wall Panel w/ 2 Lites
GPGM30	118	PW All-Glass Wall Panel
GPGM36	118	PW All-Glass Wall Panel
GPGM3E08	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E18	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E20	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E24	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E30	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E36	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E40	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E42	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E48	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E60	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGM40	118	PW All-Glass Wall Panel
GPGM42	118	PW All-Glass Wall Panel
GPGM48	118	PW All-Glass Wall Panel
GPGM4E08	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E18	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E20	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E24	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E30	126	PW Glass Wall Panel w/ 4 Equal Lites

Style Number	Page	Description
GPGM4E36	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E40	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E42	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E48	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E60	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L08	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L18	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L20	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L24	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L30	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L36	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L40	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L42	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L48	131	PW Glass Wall Panel w/ 4 Lites
GPGM4L60	131	PW Glass Wall Panel w/ 4 Lites
GPGM60	118	PW All-Glass Wall Panel
GPGMC18	139	PW Clerestory Wall Panel
GPGMC20	139	PW Clerestory Wall Panel
GPGMC24	139	PW Clerestory Wall Panel
GPGMC30	139	PW Clerestory Wall Panel
GPGMC36	139	PW Clerestory Wall Panel
GPGMC40	139	PW Clerestory Wall Panel
GPGMC42	139	PW Clerestory Wall Panel
GPGMC48	139	PW Clerestory Wall Panel
GPGMC60	139	PW Clerestory Wall Panel
GPGS06	118	PW All-Glass Wall Panel
GPGS08	118	PW All-Glass Wall Panel
GPGS18	118	PW All-Glass Wall Panel
GPGS20	118	PW All-Glass Wall Panel
GPGS24	118	PW All-Glass Wall Panel
GPGS2L06	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L08	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L18	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L20	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L24	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L30	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L36	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L40	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L42	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L48	135	PW Glass Wall Panel w/ 2 Lites
GPGS2L60	135	PW Glass Wall Panel w/ 2 Lites
GPGS30	118	PW All-Glass Wall Panel
GPGS36	118	PW All-Glass Wall Panel
GPGS3E06	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E08	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E18	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E20	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E24	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E30	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E36	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E40	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E42	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E48	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS3E60	122	PW Glass Wall Panel w/ 3 Equal Lites
GPGS40	118	PW All-Glass Wall Panel

Style Number	Page	Description
GPGS42	118	PW All-Glass Wall Panel
GPGS48	118	PW All-Glass Wall Panel
GPGS4E06	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E08	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E18	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E20	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E24	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E30	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E36	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E40	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E42	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E48	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4E60	126	PW Glass Wall Panel w/ 4 Equal Lites
GPGS4L06	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L08	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L18	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L20	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L24	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L30	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L36	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L40	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L42	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L48	131	PW Glass Wall Panel w/ 4 Lites
GPGS4L60	131	PW Glass Wall Panel w/ 4 Lites
GPGS60	118	PW All-Glass Wall Panel
GPGSC18	139	PW Clerestory Wall Panel
GPGSC20	139	PW Clerestory Wall Panel
GPGSC24	139	PW Clerestory Wall Panel
GPGSC30	139	PW Clerestory Wall Panel
GPGSC36	139	PW Clerestory Wall Panel
GPGSC40	139	PW Clerestory Wall Panel
GPGSC42	139	PW Clerestory Wall Panel
GPGSC48	139	PW Clerestory Wall Panel
GPGSC60	139	PW Clerestory Wall Panel
GPGSDFFSC80	226	PW GS Pol Edge Slider Dr w/Close Assist
GPGSDFFSC84	226	PW GS Pol Edge Slider Dr w/Close Assist
GPGSDFFSC96	226	PW GS Pol Edge Slider Dr w/Close Assist
GPGSDFSVS	231	PW GS Slider Door Vertical Seal
GPGSDFTSC80	230	PW GS Pol Edge Slider Dr w/Close Assist
GPGSDFTSC84	230	PW GS Pol Edge Slider Dr w/Close Assist
GPGSDFTSC96	230	PW GS Pol Edge Slider Dr w/Close Assist
GPGSDPPF	211	PW GS Pivot-Hinged Door Frame
GPGSDPPT	211	PW GS Pivot-Hinged Door Frame
GPGSDSBF	213	PW GS Butt-Hinged Door Frame
GPGSDSPF	211	PW GS Pivot-Hinged Door Frame
GPGSDSPFS	211	PW Pivot-Hinged Door Frame
GPGSDSPT	211	PW GS Pivot-Hinged Door Frame
GPGSDSPTS	211	PW Pivot-Hinged Door Frame
GPGSLGSPF40	215	PW GS Pivot-Hinged Door Leaf
GPGSLGSPF42	219	PW GS Pivot-Hinged Door Leaf
GPGSLGSPT40	217	PW GS Pivot-Hinged Door Leaf
GPGSLGSPT42	221	PW GS Pivot-Hinged Door Leaf
GPGSLSPPF80	215	PW GS Pivot-Hinged Door Leaf
GPGSLSPPT80	217	PW GS Pivot-Hinged Door Leaf
GPGSLSSPF40	215	PW GS Pivot-Hinged Door Leaf

Style Number Index, continued

Style Number	Page	Description
--------------	------	-------------

GPGLSSPF42	219	PW GS Pivot-Hinged Door Leaf
GPGLSSPT40	217	PW GS Pivot-Hinged Door Leaf
GPGLSSPT42	221	PW GS Pivot-Hinged Door Leaf
GP GSM2FK108	203	PW GS Two Divided Lite Frame Kit
GP GSM2FK120	203	PW GS Two Divided Lite Frame Kit
GP GSM2FK144	203	PW GS Two Divided Lite Frame Kit
GP GSM2FK72	203	PW GS Two Divided Lite Frame Kit
GP GSM2FK80	203	PW GS Two Divided Lite Frame Kit
GP GSM2FK84	203	PW GS Two Divided Lite Frame Kit
GP GSM2FK96	203	PW GS Two Divided Lite Frame Kit
GP GSM2FKT	238	PW GS All-Glass Frame Kit
GP GSM2GK108	205	PW GS Two Divided Lite Glass Kit
GP GSM2GK120	205	PW GS Two Divided Lite Glass Kit
GP GSM2GK144	205	PW GS Two Divided Lite Glass Kit
GP GSM2GK72	205	PW GS Two Divided Lite Glass Kit
GP GSM2GK80	205	PW GS Two Divided Lite Glass Kit
GP GSM2GK84	205	PW GS Two Divided Lite Glass Kit
GP GSM2GK96	205	PW GS Two Divided Lite Glass Kit
GP GSM2GKT	239	PW GS All-Glass Frame Kit
GP GSM2L08	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L18	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L20	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L24	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L30	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L36	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L40	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L42	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L48	200	PW GS Wall Panel w/ 2 Lites
GP GSM2L60	200	PW GS Wall Panel w/ 2 Lites
GP GSM2LL	235	PW GS Corner Unit
GP GSMC18	209	PW GS Clerestory Wall Panel
GP GSMC20	209	PW GS Clerestory Wall Panel
GP GSMC24	209	PW GS Clerestory Wall Panel
GP GSMC30	209	PW GS Clerestory Wall Panel
GP GSMC36	209	PW GS Clerestory Wall Panel
GP GSMC40	209	PW GS Clerestory Wall Panel
GP GSMC42	209	PW GS Clerestory Wall Panel
GP GSMC48	209	PW GS Clerestory Wall Panel
GP GSMC60	209	PW GS Clerestory Wall Panel
GP GSMEL	233	PW GS Mini End
GP GSMELF	232	PW GS Mini End
GP GSMEM	233	PW GS Mini End
GP GSMEMF	232	PW GS Mini End
GP GSMES	233	PW GS Mini End
GP GSMESF	232	PW GS Mini End
GP GSMG08	193	PW GS All-Glass Wall Panel
GP GSMG18	193	PW GS All-Glass Wall Panel
GP GSMG20	193	PW GS All-Glass Wall Panel
GP GSMG24	193	PW GS All-Glass Wall Panel
GP GSMG30	193	PW GS All-Glass Wall Panel
GP GSMG36	193	PW GS All-Glass Wall Panel
GP GSMG40	193	PW GS All-Glass Wall Panel
GP GSMG42	193	PW GS All-Glass Wall Panel
GP GSMG48	193	PW GS All-Glass Wall Panel
GP GSMG60	193	PW GS All-Glass Wall Panel

Style Number	Page	Description
--------------	------	-------------

GP GSMGFK108	195	PW GS All-Glass Frame Kit
GP GSMGFK120	195	PW GS All-Glass Frame Kit
GP GSMGFK144	195	PW GS All-Glass Frame Kit
GP GSMGFK72	195	PW GS All-Glass Frame Kit
GP GSMGFK80	195	PW GS All-Glass Frame Kit
GP GSMGFK84	195	PW GS All-Glass Frame Kit
GP GSMGFK96	195	PW GS All-Glass Frame Kit
GP GSMGFKT	236	PW GS All-Glass Frame Kit
GP GSMGGK108	197	PW GS All-Glass Glass Kit
GP GSMGGK120	197	PW GS All-Glass Glass Kit
GP GSMGGK144	197	PW GS All-Glass Glass Kit
GP GSMGGK72	197	PW GS All-Glass Glass Kit
GP GSMGGK80	197	PW GS All-Glass Glass Kit
GP GSMGGK84	197	PW GS All-Glass Glass Kit
GP GSMGGK96	197	PW GS All-Glass Glass Kit
GP GSMGGKT	237	PW GS All-Glass Frame Kit
GP GSMGL	235	PW GS Corner Unit
GP GSS2FK108	203	PW GS Two Divided Lite Frame Kit
GP GSS2FK120	203	PW GS Two Divided Lite Frame Kit
GP GSS2FK144	203	PW GS Two Divided Lite Frame Kit
GP GSS2FK72	203	PW GS Two Divided Lite Frame Kit
GP GSS2FK80	203	PW GS Two Divided Lite Frame Kit
GP GSS2FK84	203	PW GS Two Divided Lite Frame Kit
GP GSS2FK96	203	PW GS Two Divided Lite Frame Kit
GP GSS2FKT	238	PW GS All-Glass Frame Kit
GP GSS2GK108	205	PW GS Two Divided Lite Glass Kit
GP GSS2GK120	205	PW GS Two Divided Lite Glass Kit
GP GSS2GK144	205	PW GS Two Divided Lite Glass Kit
GP GSS2GK72	205	PW GS Two Divided Lite Glass Kit
GP GSS2GK80	205	PW GS Two Divided Lite Glass Kit
GP GSS2GK84	205	PW GS Two Divided Lite Glass Kit
GP GSS2GK96	205	PW GS Two Divided Lite Glass Kit
GP GSS2GKT	239	PW GS All-Glass Frame Kit
GP GSS2L06	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L08	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L18	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L20	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L24	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L30	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L36	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L40	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L42	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L48	200	PW GS Wall Panel w/ 2 Lites
GP GSS2L60	200	PW GS Wall Panel w/ 2 Lites
GP GSS2LL	235	PW GS Corner Unit
GP GSSC18	209	PW GS Clerestory Wall Panel
GP GSSC20	209	PW GS Clerestory Wall Panel
GP GSSC24	209	PW GS Clerestory Wall Panel
GP GSSC30	209	PW GS Clerestory Wall Panel
GP GSSC36	209	PW GS Clerestory Wall Panel
GP GSSC40	209	PW GS Clerestory Wall Panel
GP GSSC42	209	PW GS Clerestory Wall Panel
GP GSSC48	209	PW GS Clerestory Wall Panel
GP GSSC60	209	PW GS Clerestory Wall Panel
GP GSSG06	193	PW GS All-Glass Wall Panel

Style Number	Page	Description
GPSSSG08	193	PW GS All-Glass Wall Panel
GPSSSG18	193	PW GS All-Glass Wall Panel
GPSSSG20	193	PW GS All-Glass Wall Panel
GPSSSG24	193	PW GS All-Glass Wall Panel
GPSSSG30	193	PW GS All-Glass Wall Panel
GPSSSG36	193	PW GS All-Glass Wall Panel
GPSSSG40	193	PW GS All-Glass Wall Panel
GPSSSG42	193	PW GS All-Glass Wall Panel
GPSSSG48	193	PW GS All-Glass Wall Panel
GPSSSG60	193	PW GS All-Glass Wall Panel
GPSSSGFK108	195	PW GS All-Glass Frame Kit
GPSSSGFK120	195	PW GS All-Glass Frame Kit
GPSSSGFK144	195	PW GS All-Glass Frame Kit
GPSSSGFK72	195	PW GS All-Glass Frame Kit
GPSSSGFK80	195	PW GS All-Glass Frame Kit
GPSSSGFK84	195	PW GS All-Glass Frame Kit
GPSSSGFK96	195	PW GS All-Glass Frame Kit
GPSSSGFKT	236	PW GS All-Glass Frame Kit
GPSSSGGK108	197	PW GS All-Glass Glass Kit
GPSSSGGK120	197	PW GS All-Glass Glass Kit
GPSSSGGK144	197	PW GS All-Glass Glass Kit
GPSSSGGK72	197	PW GS All-Glass Glass Kit
GPSSSGGK80	197	PW GS All-Glass Glass Kit
GPSSSGGK84	197	PW GS All-Glass Glass Kit
GPSSSGGK96	197	PW GS All-Glass Glass Kit
GPSSSGGKT	237	PW GS All-Glass Frame Kit
GPSSSGL	235	PW GS Corner Unit
GPIA	190	PW ILINE Interface Post
GPJCH	265	PW Chicago & NYC Junction Box
GPLB	255	PW Load Bar
GPLGSBF40	149	PW Butt-Hinged Door Leaf
GPLGSBF40B	149	PW Butt-Hinged Door Leaf
GPLGSBT40	151	PW Butt-Hinged Door Leaf
GPLGSBT40B	151	PW Butt-Hinged Door Leaf
GPLGSPF40	153	PW Pivot-Hinged Door Leaf
GPLGSPF40B	153	PW Pivot-Hinged Door Leaf
GPLGSPF42	157	PW Pivot-Hinged Door Leaf for Cutout
GPLGSPF42B	157	PW Pivot-Hinged Door Leaf for Cutout
GPLGSPT40	155	PW Pivot-Hinged Door Leaf
GPLGSPT40B	155	PW Pivot-Hinged Door Leaf
GPLGSPT42	159	PW Pivot-Hinged Door Leaf for Cutout
GPLGSPT42B	159	PW Pivot-Hinged Door Leaf for Cutout
GPLPESBF	222	PW GS Butt-Hinged Door Leaf Lite
GPLSPBF76	149	PW Butt-Hinged Door Leaf
GPLSPBT76	151	PW Butt-Hinged Door Leaf
GPLSPPF80	153	PW Pivot-Hinged Door Leaf
GPLSPPT80	155	PW Pivot-Hinged Door Leaf
GPLSSBF40	149	PW Butt-Hinged Door Leaf
GPLSSBT40	151	PW Butt-Hinged Door Leaf
GPLSSPF40	153	PW Pivot-Hinged Door Leaf
GPLSSPF42	157	PW Pivot-Hinged Door Leaf for Cutout
GPLSSPT40	155	PW Pivot-Hinged Door Leaf
GPLSSPT42	159	PW Pivot-Hinged Door Leaf for Cutout
GPMEI	180	PW Mini End
GPMEIF	181	PW Mini End

Style Number	Page	Description
GPMEM	180	PW Mini End
GPMEMF	181	PW Mini End
GPMEI	180	PW Mini End
GPMEIF	181	PW Mini End
GPP120V	189	PW V-Post
GPP135V	189	PW V-Post
GPP135Y	189	PW Y-Post
GPPC	259	PW Cover Plate
GPPDC	259	PW Cover Plate
GPPI	189	PW In-Line Post
GPPL	189	PW L-Post
GPPT	189	PW T-Post
GPPX	189	PW X-Post
GPR1USBX	258	USB Receptacle
GPR1USBY	258	USB Receptacle
GPR1USBZ	258	USB Receptacle
GPR2USBX	258	USB Receptacle
GPR2USBY	258	USB Receptacle
GPR2USBZ	258	USB Receptacle
GPR3USBX	258	USB Receptacle
GPR3USBY	258	USB Receptacle
GPR3USBZ	258	USB Receptacle
GPR4USBX	258	USB Receptacle
GPR4USBY	258	USB Receptacle
GPRCE	259	PW Power/Communication Fillers
GPRTL	245	Cornice Track
GPRTS	245	Cornice Track
GPRTT	245	Cornice Track
GPRTX	245	Cornice Track
GPSAM08	115	Mod Solid Wall Panels with Enhanced Core
GPSAM18	115	Mod Solid Wall Panels with Enhanced Core
GPSAM20	115	Mod Solid Wall Panels with Enhanced Core
GPSAM24	115	Mod Solid Wall Panels with Enhanced Core
GPSAM30	115	Mod Solid Wall Panels with Enhanced Core
GPSAM36	115	Mod Solid Wall Panels with Enhanced Core
GPSAM40	115	Mod Solid Wall Panels with Enhanced Core
GPSAM42	115	Mod Solid Wall Panels with Enhanced Core
GPSAM48	115	Mod Solid Wall Panels with Enhanced Core
GPSAS06	115	Mod Solid Wall Panels with Enhanced Core
GPSAS08	115	Mod Solid Wall Panels with Enhanced Core
GPSAS18	115	Solid Wall Panels with Enhanced Core
GPSAS20	115	Solid Wall Panels with Enhanced Core
GPSAS24	115	Solid Wall Panels with Enhanced Core
GPSAS30	115	Solid Wall Panels with Enhanced Core
GPSAS36	115	Solid Wall Panels with Enhanced Core
GPSAS40	115	Solid Wall Panels with Enhanced Core
GPSAS42	115	Solid Wall Panels with Enhanced Core
GPSAS48	115	Solid Wall Panels with Enhanced Core
GPSM08	112	PW Solid Wall Panel
GPSM18	112	PW Solid Wall Panel
GPSM20	112	PW Solid Wall Panel
GPSM24	112	PW Solid Wall Panel
GPSM30	112	PW Solid Wall Panel
GPSM36	112	PW Solid Wall Panel
GPSM40	112	PW Solid Wall Panel

Style Number Index, continued

Style Number	Page	Description
GPSSM42	112	PW Solid Wall Panel
GPSSM48	112	PW Solid Wall Panel
GPSSM60	112	PW Solid Wall Panel
GPSS06	112	PW Solid Wall Panel
GPSS08	112	PW Solid Wall Panel
GPSS18	112	PW Solid Wall Panel
GPSS20	112	PW Solid Wall Panel
GPSS24	112	PW Solid Wall Panel
GPSS30	112	PW Solid Wall Panel
GPSS36	112	PW Solid Wall Panel
GPSS40	112	PW Solid Wall Panel
GPSS42	112	PW Solid Wall Panel
GPSS48	112	PW Solid Wall Panel
GPSS60	112	PW Solid Wall Panel
GPUFG	256	PW Universal Floor Gripper
GPWC1	182	PW Wall Channel
GPWC2	182	PW Wall Channel
GPWC4	182	PW Wall Channel
GPWCCP	183	PW Panel End Cut Kit
GPWCCPSK	184	PW End Filler Cut Kit
GPWT	256	PW Wall-Lifting Tools
GSM2WSPLIT	355	Splitter
GSM30AEMIT4	353	Emitters
GSM30EMIT4	348	Emitters
GSM4WSPLIT	355	Splitter
GSM600RM	345	Rack Mount Brkt
GSMAEEM1	358	Active Emitters Ext Mounting Brkt
GSMAEEM2	359	Active Emitters Ext Mounting Clamp
GSMAEHRC	354	Cable
GSMAEINJ	352	Active Emitters Power Injector
GSMAEEMIT4	353	Active Emitters with 16" Cable
GSMAEPS	351	Active Emitters Power Supply
GSMCABLE10	354	Cable
GSMCABLE100	354	Cable
GSMCABLE25	354	Cable
GSMCABLE50	354	Cable
GSMCABLE75	354	Cable
GSMCPAK4	354	Cables
GSMCRPS	350	Conference Room Privacy Package
GSMDEM3	359	Drywall Mount Brkt
GSMMEEM1	357	External Mounting Bracket
GSMMEEM2	357	External Mounting Clamp
GSMEMIT4	348	Emitters
GSMFFCOUP	356	Coupler
GSMHS1	346	Hole Saw Blade
GSMPNDT	358	Pendant Mount
GSMPPS	350	Patient Privacy Package
GSMPS3	347	Power Supply
GSMQT100	344	QtPro Qt 100 Ctrl Mod
GSMQT300	344	QtPro Qt 300 Ctrl Mod
GSMQT600	344	QtPro Qt 600 Ctrl Mod
GSMQTAERC	349	QtPro Active Emitter Room Control
GSMQTRC	349	QtPro Standard Emitter Room Control
GSMSONET	360	Sonet Qt Ind Soundmasking
GSMSONETXT	360	Sonet Qt Ind Soundmasking

Style Number	Page	Description
GUNCR3232	302	Low-Profile Corner Ramp Kit
GUNCT224	301	Low-Profile Corner Edge Trim
GUNCT424	301	Low-Profile Corner Edge Trim
GUNDS16161	300	Low-Profile Distribution Tile
GUNDS16164	300	Low-Profile Distribution Tile
GUNET248	300	Low-Profile Edge Trim
GUNET448	300	Low-Profile Edge Trim
GUNFBT1616	300	Low-Profile Floor Box Access Tile
GUNFS726	303	Low-Profile Fire Stop
GUNGR10	298	Low-Profile Grom Triangle Tile
GUNGR2	298	Low-Profile Grom Triangle Tile
GUNRA363211	302	Low-Profile Ramp Kit
GUNRA36328	302	Low-Profile Ramp Kit
GUNRA483211	302	Low-Profile Ramp Kit
GUNRA48328	302	Low-Profile Ramp Kit
GUNRC8161	299	Low-Profile Rectangle Tile
GUNRC8164	299	Low-Profile Rectangle Tile
GUNSQ16161	299	Low-Profile Square Tile
GUNSQ16164	299	Low-Profile Square Tile
GUNST8	299	Low-Profile Seismic Triangle Tile
GUNSU100	298	Low-Profile Supports
GUNTR450	298	Low-Profile Triangle Tile
GUNTR48	298	Low-Profile Triangle Tile
GUNWT10486	301	Low-Profile Wall Scribe Trim
PFLADPTR	276	Thread Plug Adapter
PFLCNCTR	284	Thread Connector
PFLHUB	277	Thread Power Hub
PFLINFFL	280	Thread Pow Track Fl Infeed w Ramps
PFLINFFLV	281	Thread Power Track Floor Infeed with Infills
PFLPWRST	285	Thread Power Strip
PFLTRK	282	Thread Power Track
PFLTRKINF	278	Thread Power Track Infeed
PFLTRKINFV	279	Thread Power Track Wall Infeed with Infills
PFLTRKV	283	Track with Infills

Trademark List

- ® The following are registered trademarks for products of Steelcase Inc. or one of its related corporate entities: 4 o'clock, 900 Series, à la carte, Airtouch, Ally, Amia, Answer, Archipelago, Avenir, Ballet, Bix, Brayton International, Cachet, Canopy, Canto, Chancellor, Coalesse, Confidante, Context, Convene, CopyCam, Criterion, Crushed Can, Currency, dash, Designtex, Details, Detour, Drive, Elective Elements, Ellipse, Ember Chrome, Emerge, E-Table 2, FYI, Garland, Gentry, Ginkgo Biloba, Groupwork, Ideo, Jacket, Jenny, Jersey, Kart, Kick, LaCosta, Leap, LessThanFive, Let's B, LiveBack, Max-Stacker, media:scape, Metro, Migrations, Mitra, Montage, Nurture, Oriana, Parade, Pathways, PCT, Permiso, Player, Portal, Power Pincher, Progeny, Protégé, R2, Rally, Relevant, Reply, Rizzi Arc, Sensor, Series 9000, Siento, Sieste, Sine, Softcare, Springboard, Steelcase, Steelcase Design Partnership, Stella, Stow Davis, Swathmore, Sylvi, TeamWork, Technique, Texpress, Think, Thunder, Topo, Train, turnstone, Underline, Unison, Vecta, Viridian, Walden, Wernld, and X-Stack.
- ® The following registered trademarks are under license from AWI Licensing Company, Dover, DE: SoundScapes, DuraBrite, BioBlock, and Armstrong.
- ® The following registered trademarks are under license from Byrne Electrical, Rockford, MI: Interport, Mini-Port, Axil Z, and Ellora.
- ® The following is a registered trademark of DuPont, Wilmington, DE: Corian.
- ® The following is a registered trademark of Genlyte Thomas Company, Louisville, KY: Lightolier.
- ® The following is a registered trademark of Hilti Corporation, FL-9494 Schaan, Principality of Liechtenstein: Hilti.
- ® The following is a registered trademark of Leviton Manufacturing Company, Little Neck, NY: Decora.
- ® The following is a registered trademark of Mechanical Plastics Corp, Elmsford, NY: Toggler.
- ® The following is a registered trademark of Microsoft Corporation, Redmond, WA: Microsoft.
- ® The following are registered trademarks of Orangebox Ltd., Cardiff, UK: Orangebox.
- ® The following is a registered trademark of Panduit Corporation, Lockport, IL: Panduit.
- ® The following is a registered trademark of Trav (Press), Cuneo, Italy: Assisa.
- ® The following is a registered trademark of Virtual Ink, Boston, MA: mimioActive.
- ® The following registered trademarks are under license from Wilkhahn Furniture Products: Avera, Senzo, Versal, and Wilkhahn FS.
- ® The following are registered trademarks of Polyvision Corp: Flow, Motif, Polyvision, Sans, and Serif.
- ® The following is a registered trademark of Wilsonart International, Temple, TX: Chemsurf.

- ® The following is a registered trademark of Wiremold, West Hartford, CT: Wiremold.
- ® The following is a registered trademark of EMU Group S.P.A., Perugia, Italy: EMU.
- ® The following is a registered trademark of Security People, Inc.: Digilock.
- ® The following are registered trademarks of Natural Capital Partners Europe Limited: CarbonNeutral and the CarbonNeutral Certified logo.
- ™ The following are trademarks for products of Steelcase Inc. or one of its related corporate entities: Access, Active/Passive Shelf, Agree, Ainsley, Akira, Alcove, Alerion, Alight, Amaris, American Elect, American Tradition, ap40, Arbor, Arriva, Asana, Ascot, Aspekt, Astor, Await, Bassline, B-Free, Bira, Bivi, Bixby, Bottomline, Brody, Brook, Buoy, Burton, c:scape, Calla, Calm, Camber, Campfire, Capa, Cappuccino, Cesar, Chester, Chord, Circa, Clarendon, Classic Rectangular, Clipper, cobi, Collaboration, Community, Company, Convey, Cortex, Coupe, Crea, Crew, Cura, Cypress, Davenport, Dearborn, Deck, Déjà, Denizen, Denska, Derby, DeskWizard, Divisio, Donovan, Dune, Duo, Echo, Edge, Elbrook, Elsna, Empath, Empress, Enea, ñno, EnSync, Enviro, Escapade, Everwall, Exchange, Exponents, Field, Flat Top, FlexFrame, Flip Top, Flute, Folio, FrameOne, FreeFlow, Frontier, Galilei, Gesture, Ginger, Ginkgo, Go Wall, Grip, Groove, Hatchback, Hawthorne, Hitch, Host Collection, Hosu, Huddleboard, i2i, Impact, Indy, InfoLink, IOS, I-Solve, Jack, Jarrah, Jetty, Juice, Kami, Kast, Kathryn, Lagunitas, Lark, L'Attitude, LearnLab, Leela, Lincoln, Linden, LiveSeat, Loria, Lyric, Malibu, Malibu Too, Mansfield, Marathon, Marien152, Martini, Mason, Masque, Migration, Millbrae, Mineral, Mingle, Mystic, Mystic Metal, Mystic Wood, Montara650, Montreal, MoreThanFive, Move, Nadia, Neighbor, nesso, Nickel, Nikko, Nod, Node, Norfolk, Ocular, Ology, Ontrak, Oom, Opus, Orchid, Outlook Collection, Ovation, Paloma, Paperflo, Parliament, Pasio, Passerelle, Patriarch, Payback, Peek, Pile File, Pisa, Pool, Potrero415, PUCK, QiVi, Quba, Radia, Rave, Reed, Regard, Relay, Reunion, Ripple, Riser, Roam, Rocco, Rocky, RoomWizard, Runner, Satellite, Sawyer, ScapeSeries, Senti, Sentinel, Senza, Sequoia, Session, ShareLink, Shield, Shortcut, Sidewalk, SILQ, Skylar, Slumber, Smoke, Snug, Soft Leaf, Sonata, Sorrel, SOTO, Southside, Stationkits, Steelcase Karman, Steelcase Series, Stiletto, Surprise!, Surround, Switch, Symphony, Sync, TagWizard, Tava, TeamStudio, TeamTheater, Tenaro, Tenor, Terrazzo, Theorem, Thread, Topaz, Touchdown, Tour, Tower Too, Trees, Trillium, Trolly, tX2, U-Free, Umami, Underscore, Uno, V.I.A., Verb, Verge, Verlay, Victor2, Visalia, Waldorf, Woodruff, Workspring, WorkValet, and X-tenz.
- ™ The following is a trademark of Microsoft Corporation, Redmond, WA: Windows.
- ™ The following is a trademark of Rodman Industries, Inc., Oconomowoc, WI: ResinCore1.
- ™ The following is a trademark of Ultrafabrics, LLC, Elmsford, NY: Ultraleather.

- ™ The following trademarks are under license from Wilkhahn Furniture products: Cana, Linus, Logon, Picto, Range, Stitz, Thema, Timetable, and Tubis.
- ™ The following is a trademark of Cradle to Cradle Products Innovation Institute, Oakland, CA: Cradle to Cradle Certified.
- ™ The following trademarks are under license from Walter Knoll: Andoo, Bob, Lazlo, Lox, Ribbon, and Together.
- ™ The following trademarks are under license from PP Møbler: Bar and Flag Halyard.
- ™ The following trademarks are under license from Carl Hansen: Elbow, Paddle, Shell, Wing, and Wishbone.
- ™ The following trademarks are under license from Cambridge Sound Management, LLC, Cambridge, MA: QtPro Soundmasking, Qt Quiet Technology, and Sonet Qt.
- ™ The following is a trademark of Electri-Cable Assemblies, Shelton, CT: Interact.
- ™ The following is a trademark of Clestra Hauserman: IRYS.
- ™ The following is a trademark of Wiesner-Hager Möbel GmbH: Nooi.
- ™ The following are trademarks of Polyvision: Accord, a³, e³, Boundri, and Nota.
- ™ The following is a trademark of Bostock Company, Inc: SnapCab.
- ™ The following is a trademark of Williams-Sonoma, Inc: West Elm.
- ™ The following is a trademark of Elena Marquina Testor: nanimarquina.
- ™ The following is a trademark of Forbo International SA: Forbo.
- ™ The following are trademarks of Orangebox Ltd., Cardiff, UK: Air³, Aspect, Avi, Away from the Desk, Border, Campers & Dens, Coppice, Cubb, Kirn, On the QT, Ramsey, Skomer, Sully, Track-B, and Vale.
- ™® The following are trademarks or registered trademarks of AMQ Solutions, LLC: AMQ, AMQ logo, KINEX, ILINE, ACTIV, AMOBI, CONCUR, 3F, REVI, S-SERIES, JAKU, SIYA, ZILO, BODI, FL-X, TIZU, EMBANK, TEKTIS, and BIXBY.
- ™® The following are trademarks or registered trademarks of Viccarbe Habitat, S.L.: Holy Day, Last Minute, Wrapp, Foro, Kelly, Noha, Viable, Solar, Sistema, Savina, Designed In The Sun, Cambio, Aleta, Viccarbe (logo), Viccarbe.

Trademarks used here in are the property of Steelcase Inc. or of their respective owners.