
Inumbra

Medium Large Permanent fixation Parasol foot for floor fastening © design by Dirk Wynants


Concrete (wheel) base In combination with Gargantua & Pantagruel



Inumbra




| Dimensions (inch) | ø | Н | $h_{_{I}}$ |
|-------------------|--------|-------|------------|
| Inumbra medium | 137,80 | 79,69 | 47,87 |
| Inumbra large | 157,48 | 85,98 | 51,93 |




| Dimensions (mm) | Ø | Н | $h_{_{I}}$ | h_2 | h_3 |
|---|--------|--------|------------|-------|-------|
| Inumbra medium with base for permanent fixation | 137,80 | 108,15 | 75,79 | 34,65 | 30,94 |
| Inumbra large with base for permanent fixation | 157.48 | 114.57 | 79.92 | 31.10 | 30,94 |

You can always demount the parasol from the permanent fixation base.




| Dimensions (inch) | Ø | Н | $h_{_{I}}$ | $h_{_2}$ |
|--|--------|--------|------------|----------|
| Inumbra medium with floor fastening 60 | 137,80 | 103,43 | 71,61 | 23,62 |
| Inumbra large with floor fastening 60 | 157,48 | 109,69 | 75,67 | 23,62 |
| Inumbra medium with floor fastening 70 | 157,48 | 107,36 | 75,55 | 27,56 |
| Inumbra large with floor fastening 70 | 157,48 | 113,62 | 79,61 | 27,56 |

See next page for floor fastening dimensions.



| Dimensions (inch) | Ø | Н | $h_{_{1}}$ | h_2 | $h_{_3}$ | $w_{_I}$ |
|---------------------------------------|--------|--------|------------|-------|----------|----------|
| Inumbra medium on concrete base 71 cm | 137,80 | 107,80 | 75,98 | 28,03 | 4,41 | 29,92 |
| Inumbra large on concrete base 71 cm | 157,48 | 114,09 | 80,08 | 28,03 | 4,41 | 29,92 |
| Inumbra medium on concrete base 81 cm | 137,80 | 111,73 | 79,92 | 31,97 | 4,41 | 29,92 |
| Inumbra large on concrete base 81 cm | 157,48 | 118,03 | 84,02 | 31,97 | 4,41 | 29,92 |




| Dimensions (inch) | Ø | Н | $h_{_{1}}$ | h_2 | h_3 | $w_{_{I}}$ |
|---------------------------------------|--------|--------|------------|-------|-------|------------|
| Inumbra medium on concrete wheel base | 137,80 | 110,91 | 79,09 | 31,10 | 7,48 | 32,48 |
| Inumbra large on concrete wheel base | 157,48 | 117,20 | 85,39 | 31,10 | 7,48 | 32,48 |

extremis[®]

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in inch, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.





| Dimensions (inch) | Ø | Н | $h_{_{I}}$ | h_2 |
|-----------------------------|--------|--------|------------|-------|
| Inumbra medium on Gargantua | 137,80 | 107,87 | 76,06 | 35,04 |
| Inumbra large on Gargantua | 157,48 | 114,17 | 80,16 | 31,50 |



| Dimensions (inch) | Ø | Н | $h_{_{I}}$ | h_2 |
|------------------------------|--------|--------|------------|-------|
| Inumbra medium on Pantagruel | 137,80 | 109,06 | 77,24 | 36,22 |
| Inumbra large on Pantagruel | 157,48 | 115,35 | 81,34 | 32,68 |



BOX 2: 1 CONCRETE BLOCK



BOX 3: FRAME FOR CONCRETE BASE




BOX 4: FRAME FOR CONCRETE WHEEL BASE




BOX 5: PARASOL BASE POLE



| Box dimensions (inch) | | L | W | Н | Qty (#) | Volume (ft³) | Gross weight (њ) | Net weight (њ) | Packaging weight (Ib) |
|-----------------------|-------|-------|-------|-------|---------|--------------|---------------------|-------------------|-----------------------|
| Inumbra medium | Box 1 | 88,98 | 10,24 | 10,24 | 1 | 5,30 | 74,52 | 66,58 | 7,94 |
| Inumbra large | Box 1 | 88,98 | 10,24 | 10,24 | 1 | 5,30 | 83,78 | 77,60 | 6,17 |
| Floor fastening 60 cm | Box 5 | 30,71 | 15,35 | 12,99 | 1 | 3,53 | 16,31 | 11,02 | 5,29 |
| Floor fastening 70 cm | Box 5 | 30,71 | 15,35 | 12,99 | 1 | 3,53 | 13,23 | 11,46 | 1,76 |
| Concrete base 71 cm | Box 2 | 14,80 | 14,80 | 3,94 | 4 | 2,12 | 66,14 | 62,83 | 3,31 |
| | Box 3 | 28,35 | 12,20 | 5,12 | 1 | 1,06 | 15,87 | 14,33 | 1,54 |
| | Box 5 | 30,71 | 15,35 | 12,99 | 1 | 3,53 | 16,31 | 11,02 | 5,29 |
| | | | | | total | 6,71 | 98,33 | 88,18 | 10,14 |
| Concrete base 81 cm | Box 2 | 14,80 | 14,80 | 3,94 | 4 | 2,12 | 264,55 | 251,33 | 13,23 |
| | Box 3 | 28,35 | 12,20 | 5,12 | 1 | 1,06 | 15,87 | 14,33 | 1,54 |
| | Box 5 | 30,71 | 15,35 | 12,99 | 1 | 3,53 | 16,76 | 11,46 | 5,29 |
| | | | | | total | 6,71 | 297,18 | 277,12 | 20,06 |
| Concrete wheel base | Box 2 | 14,80 | 14,80 | 3,94 | 4 | 2,12 | 264,55 | 251,33 | 13,23 |
| | Box 4 | 33,46 | 33,46 | 5,91 | 1 | 3,88 | 49,38 | 46,30 | 3,09 |
| | Box 5 | 30,71 | 15,35 | 12,99 | 1 | 3,53 | 16,31 | 11,02 | 5,29 |
| | | | | | total | 9,53 | 330,25 | 308,65 | 21,61 |



| Dimensions (inch) | Ø | Н | \emptyset_1 | $l_{\scriptscriptstyle I}$ | l_2 |
|--------------------|------|-------|---------------|----------------------------|-------|
| Floor fastening 60 | 9,84 | 23,62 | 0,43 | 4,17 | 4,17 |
| Floor fastening 70 | 9,84 | 27,56 | 0,43 | 4,17 | 4,17 |

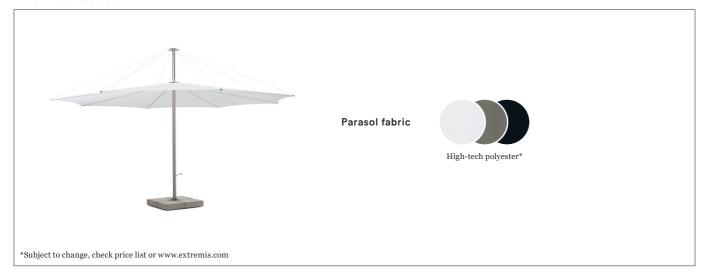

| Materials | Key facts | Thickness | Layer thickness | Density | In/outdoor | Water | UV color fastness | Flame retarding |
|---|--|-------------|--------------------|---|------------|--|--|---------------------------|
| | | inch | micron | | | | | |
| High-tech polyester fabric | High UV resistance and ultra strong Low weight / high tear strength Long-term appearance | 0,01 | n.a. | 8,81 oz/ft³ | Outdoor | The fabric has a water column of 350 mm (EN 20811) | 7/8 (ISO 105- B02) | 1 |
| Stainless steel parsol foot | High rust resistance Periodical maintenance required | 0,07 - 0,19 | n.a. | 0,50 10 ³ lb/ft ³ | Outdoor | n.a. | Very good | NEN- EN13501-1 A1 * |
| Concrete base | Made under high pressure Matt and porous | 3,93 | n.a. | 0,13 10 ³ lb/ft ³ | Outdoor | n.a. | Very good | NEN- EN13501-1 A1 * |
| Hot dip galvanized steel base for con- crete (wheel) base | Most durable method for protecting metal from rusting Protective layer Very long life span 100% recyclable Cradle to Cradle Certified™ | 0,07 - 0,39 | 50 - 100 | 0,47 10°1b/ft° | Outdoor | n.a. | Very good, gal- vanization will however become less shiny when used outdoors | NEN- EN13501-1 A1 * |
| Cover | 100% polyesterPolyuréthane coatingBreathable, so not 100% waterproof | 0,01 | n.a. | 8,46 oz/ft² | Outdoor | Water repellent & breathable | 6-8/8 (ISO 105- B02) | / |

^{*} NEN-EN13501-1 A1

Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

Warnings A

General

- Do not use any sharp tools to open the packaging.
 We strongly advise against using power tools.
- Tripping hazard, mind your step.
- Do not put out cigarettes on the parasol.
- Not grafitti proof.
- · To avoid danger of suffocation, keep plastic bags away from babies and children.
- · Colors can differ over years and from batch to batch.

- Do not leave the parasol unattended when opened.
- Anchoring the product has to be done by qualified people.
- For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.
- There is a 5mm gap between the parasol tube and the tube installed on the concrete base in order to ensure proper fixation. As a result, the parasol will not be able to loosen by movement.
- If you hear the cables whistling due to heavy wind or if you are not using the parasol, close it and use the cover to avoid the parasol from opening or getting dirty.

- For ventilation purposes, the cover is not 100% waterproof.
- · Ask for assistance when closing the parasol in strong winds. Opposite the wind's direction, at least one person needs to guide the parasol's spines downwards in order to avoid the parasol from blowing open fiercely halfway down.
- Store the parasol when not used for a long time as follows: vertically, completely dry and in a dry environment.
- Do not leave closed if not completely dry. Do not leave the parasol closed for a long time when the parasol fabric is still damp or wet.
- The fabric can be removed for washing but we do not advise this. In the first place, you should close the parasol when you do not use it and protect it with its cover. This protects the parasol from getting dirty.
- Tests in a wind tunnel have shown that the parasol withstands wind speeds up to 8 on the Beaufort scale (when anchored to the floor). Still, it is best to close it sooner (from wind speed 6 is the rule of thumb).

High-tech polyester

· Shake or brush off loose dirt immediately.

- Do not use any aggressive detergents as they will remove the protective coating of the fabric.
- · We strongly advise you not to use a high-pressure hose for cleaning.

Stainless steel

- Very good UV color fastness.
- Flame retarding: NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.
- Watch out, stainless steel isn't entirely rustproof! Be sure to avoid contact with iron objects. If it does show signs of rust, clean with rust remover as quickly as possible.

Concrete

- Matt and porous.
- Very good UV color fastness
- Flame retarding: NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

Applications

Residential: In combination with Gargantua or Pantagruel picnic, or as a freestanding version. In your garden or on your terrace, Inumbra provides shade all day.

Project: hotel and catering industry, company terraces, public spaces, squares, event venues, schools, ...

Good to know

- The diameter of the pole is ø 139,99 inch.
- The parasol cover is included.
- Inumbra combines perfectly with the Gargantua & Pantagruel.



Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

PARASOL FABRIC

- Shake or brush off loose dirt immediately.
- Spray Extremis Multi Cleaner.
- Use a soft brush and make circular movements.
- Let the suds soak in for a moment.
- Rinse thoroughly to remove all soap residue.
- · Simply allow to dry.

STAINLESS STEEL

· Clean regularly with a dry cloth and some stainless steel cleaner.

Website

www.extremis.com/inumbra

Floor fastening

Inumbra comes with an optional floor anchoring set and an assembly for permanent fixation into a concrete foundation.

Awards









F.a.q.

Q: Is the fabric 100% waterproof?

A: With light rain you stay easily seated under the parasol. The fabric is slightly slanted in opened position. With heavy rain, the canvas lets through only a little bit of water. This is typical for the fabric and necessary, because the fabric should be able to ventilate.

Q: Can you remove the fabric for washing?

A: We do not advise this but it is possible. In the first place, you should close the parasol when you do not use it and protect it with its cover. This protects the parasol from getting dirty.

Q: How resistant is the parasol?

A: Tests in a wind tunnel have shown that the parasol withstands wind speeds up to 8 on the Beaufort scale. Still, it is best to close it sooner (from wind speed 6 is the rule of thumb).

Q: Do you need to use a parasol cover?

A: The cover is needed to protect and fix the parasol when not in use. Protect your parasol from polluted rain, bird droppings, dust and heavy winds to avoid marks or stains on the parasol fabric.