
# Pantagruel picnic

© design by Dirk Wynants

Galvanized version Powder coated version Backrest Cushion Floor fastening Protection felt



### Pantagruel picnic

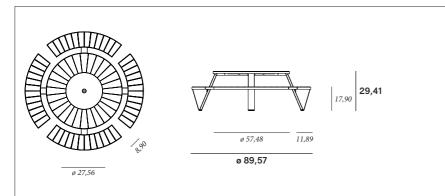



BOX 3: SUPPORTS



BOX 2: 2 BENCHES



BOX 4: LEGS + MOUNTING KIT




Box dimensions (inch)		L	W	н	Qty (#)	Volume (ft³)	Gross weight (lb)	Net weight (Ib)	Packaging weight (Ib)
Pantagruel galvanized	Box 1	60,24	59,06	3,94	1	8,12	150,80	136,69	14,11
	Box 2	58,27	21,26	3,94	2	5,65	140,21	130,51	9,70
	Box 3	18,50	6,30	5,71	1	0,35	26,90	26,46	0,44
	Box 4	39,37	13,39	11,42	1	0,35	54,23	48,50	5,73
					total:	14,48	372,14	342,16	29,98
Pantagruel powder coated	Box 1	60,24	59,06	3,94	1	8,12	151,24	137,57	13,67
	Box 2	58,27	21,26	3,94	2	5,65	138,45	126,99	11,46
	Box 3	18,50	6,30	5,71	1	0,35	26,46	26,01	0,44
	Box 4	39,37	13,39	11,42	1	0,35	53,79	44,97	8,82
					total:	14,48	369,05	335,54	34,39


## extremis<sup>®</sup>

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in inch, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.


### Backrest

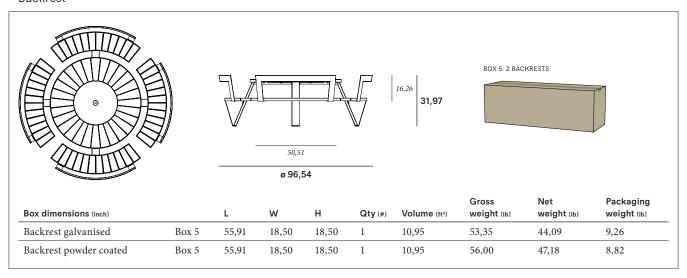


### Cushions

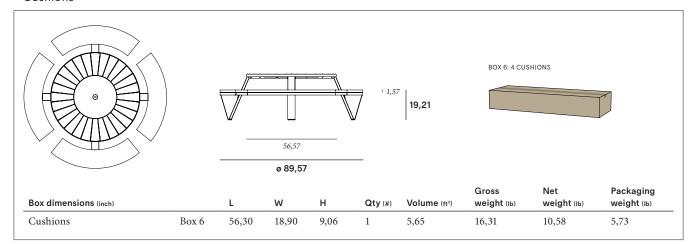

### Floor fastening

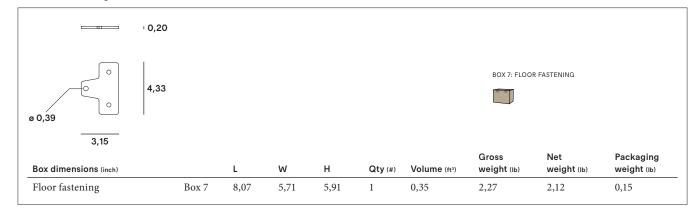

### Protection felt

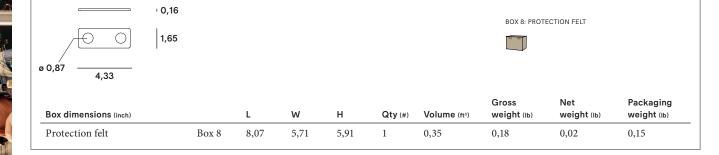



# Tabletop & benches





Iroko hardwood\*

Hellwood\*

Frame, legs & backrest





Galvanized steel

Structured powder coating\*

# Lazy Susan rotating tabletop







Sunbrella\*

\*Subject to change, check price list or www.extremis.com

Materials	Key facts	Thickness	Layer thickness	Density	In/ outdoor	Water	UV color fastness	Flame retarding
		inches	micron					
Iroko tabletop & benches	<ul> <li>Durability CLASS 1</li> <li>Feels comfortable in all weather conditions</li> <li>Advisable to oil the wood</li> </ul>	0,78	n.a.	37 à 43 <sub>lb/ft³</sub>	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Hellwood tabletop & benches  www.pefc.org Promoting sustainable forest management  PEFC PEFC/07-31-47/83	Durability CLASS 1     Carries the PEFC™ label for durable forestry     Feels comfortable in all weather conditions     Advisable to oil the wood	0,78	n.a.	+/- 37 lb/ft³	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Hot dip galvanized steel legs, frame and backrests	<ul> <li>Most durable method for protecting metal from rusting</li> <li>Protective layer</li> <li>Very long life span</li> <li>100% recyclable</li> <li>Cradle to Cradle Certified™</li> </ul>	0,07-0,23	50 - 100	0,47 10³lb/ft³	Outdoor & indoor	n.a.	Very good, gal- vanisation will however become less shiny when used outdoors	NEN- EN13501- 1 A1 *
Structured powder coated electro gal- vanised steel frame, bench supports & backrest	<ul> <li>Easy to clean</li> <li>Electro galvanised (for protection against rust), then powder coated</li> <li>More scratch-resistant than non structured powder coating</li> </ul>	0,15-0,23	+/- 100	$0,\!47\ 10^3 lb/ft^3$	Outdoor & indoor	n.a.	Very good: color can fade to some extent when exposed to UV	NEN- EN13501- 1 A1 *
Structured powder coated stainless steel legs	<ul> <li>Easy to clean</li> <li>Stainless steel (for protection against rust), then powder coated</li> <li>More scratch-resistant than non structured powder coating</li> </ul>	0,07	+/- 80	0,50 10 <sup>3</sup> lb/ft <sup>3</sup>	Outdoor & indoor	n.a.	Very good: color can fade to some extent when exposed to UV	NEN- EN13501- 1 A1 *
High pressure laminate Lazy Susan	<ul> <li>Manufactured under high pressure</li> <li>Reinforced with wood fibres</li> <li>Flat panel</li> <li>High impact resistance</li> <li>Easy to clean</li> </ul>	0,51	n.a.	0,08 10 <sup>3</sup> lb/ft <sup>3</sup>	Outdoor & indoor	n.a.	>6 (EN438- 2:27) en (ASTM G53-91)	1
Sunbrella cushions	<ul> <li>100% Sunbrella Acrylic</li> <li>Best outdoor fabric available for making cushions</li> <li>Dirt repellent</li> <li>Not waterproof, store inside!</li> <li>Machine washable at max. 30°C. Ironing restores the protective layer</li> </ul>	0,01	n.a.	9,52 oz/ft²	Outdoor & indoor	The fabric has a water column of 350 mm (EN 20811)	7/8 (ISO 105-B02)	/

<sup>\*</sup> NEN-EN13501-1 A1

Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

### Warnings A

### General

- Do not use any sharp tools to open the packaging.
  We strongly advise against using power tools.
- Tripping hazard, mind your step.
- · Do not put out cigarettes on the table.
- Not grafitti proof.
- · Do not leave children unattended whilst playing on the table.
- To avoid danger of suffocation, keep plastic bags away from babies and children.
- · Colors can differ over years and from batch to batch.

### Product

- Do not stand or jump on the table.
- Do not drag the table, but carry it with minimum 2 people.
- Anchoring the product has to be done by qualified people.
- For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.
- There is protection felt for delicate floors or indoor use.
- · Do not stand on the Lazy Susan or on the benches.
- The white Lazy Susan relfects in the sunlight.
- Mind your fingers whilst assembling the Lazy Susan.
- Max. 3 people or 529,11 lb per bench.

- · When delivered, the wood is untreated.
- · Wood is a natural material and its look is different for every slat, plank and tree.
- · Wood will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. We recommend oiling the wood at regular intervals depending from location and general weather conditions.
- · Clean regularly with mild detergent. Never use a high pressure cleaner as this will roughen the wood's smooth surface and irreparably damage the wood's fiber.
- Thorough cleaning with Extremis Wood Cleaner.
- We strongly recommend that you treat your wood with wood protector to protect it from stains - small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector.

### Galvanized steel

- · Galvanization will become less shiny when used outdoors.
- Flame retarding NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.
- · Possible impurities in the immersion tank can cause

- black marks during galvanization, which are intrinsic to  $% \left( 1\right) =\left( 1\right) \left( 1\right) \left($ this industrial finishing technique.
- White marks on this zinc layer are also intrinsic to this procedure and will disappear when the furniture is put
- This industrial finishing technique may result in a rougher surface. This is intrinsic to the process.

### Powder coating

- White powder coating requires more maintenance.
- Do not use abrasive scouring powders or scourers as they will scratch the surface.
- Color can fade to some extent when exposed to UV.
   Flame retarding NEN-EN13501-1 A2-sl Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will nog significantly contribute to the fire load and fire growth
- · Dark colors can get very hot in sunny weather.

• UV colour fastness: >6 (EN438-2:27) en (ASTM G53-91)

### Sunbrella

- Not waterproof, store inside!
- · Shake or brush off loose dirt immediately.
- UV color fasteness: 7/8 (ISO 105-B02).

### **Applications**

Residential: the perfect family picnic table for your terrace, patio or courtyard.

Project: hotel and catering industry, company terraces, public spaces, squares, event venues, schools, ...

### Floor fastening

Pantagruel comes with an optional floor anchoring set: four steel plates to be fixed with



### Good to know

- PEFC<sup>™</sup> certified wood originates from sustainably managed forests.
- The hole in the tabletop to place a parasol in is Ø 2,56 inch.
- Pantagruel picnic combines perfectly with Inumbra ø350, ø400 & Inumbrina ø380. For both combinations, a connection piece is required



· Pantagruel picnic is fitted with a Lazy Susan, a central rotating tray, to easily pass things through. The Lazy Susan can be fixed for use in public spaces



**Awards** 



### Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

### POWDER COATED PARTS

- · White powder coating obviously requires more maintenance.
- Clean stains with a magic eraser.

### GALVANIZED PARTS

How to repair a damaged zinc layer.

- · Clean regularly with mild detergent.
- Thorough cleaning with Extremis Wood Cleaner.
- · Oil the wood with Extremis Wood Protector. We recommend oiling the wood at regular intervals depending from location and general weather
- · In order to smoothen the surface again after a thorough cleaning, lightly sand your wood with 80 grit sanding paper or a sanding pad.

### RECOMMENDED USE

• For Extremis Wood Protector:



### Website

www.extremis.com/pantagruelpicnic

### F.a.q.

### Q: Do you need to oil the wood?

A: Just like other types of wood, Iroko will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. Small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector. This 100% natural oil controls the moisture level within the wood, which makes the planks stay stable for longer, and the layer of oil also helps to prevent spilled liquids from being absorbed, so that stains tend to stay superficial. It is best to repeat this treatment at regular intervals.