
# SOTO II Functional Screen

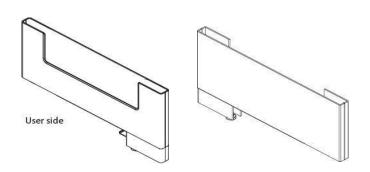

#### **Style Number**

Functional Screen	DSFS

#### **Features**

Combines organization, boundary and privacy

Integrated opening provides area to keep frequently used documents, books or other materials

Installs easily without tools on any standard worksurface with thumb screw

Personal Pocket (DSPP) can be hung on cut-out side to store paper materials

Felt pad inside bottom of opening dampens noise when materials are dropped in

Field changeable from right to left facing (Phillips screwdriver required)

Can be mounted anywhere along worksurface including the very edge

Provides 11" of privacy above the worksurface

Worksurface installed depth 211/2

Pocket opening is 1%"

#### **Dimensions/Weight**

DSFS	W1¾" x H14" x D28½"	5.1 lbs.


#### **Technical Specifications**

Application:	Universal
Construction:	ABS Plastic
	Arctic White 6009, Grey felt pad Merle 6527, Grey felt pad
Warranty:	12 years

#### **Spec Tips**

Not applicable on glass, bull nose, knife edge or other non-standard table edge
Clamp requires 2.5" of space under the worksurface for proper installation
May be clamped on any standard worksurface edge with thickness of 3/4" to 11/2"
Height AdjusTable controllers must be planned to be mounted clear of Functional Screen

## **Functional Screen**

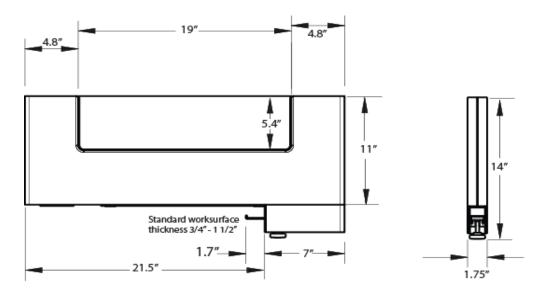

#### Certifications

Designed to meet C2C Silver Certification

Designed to meet BIFMA Level 1 Certification

### Sustainability

6% Recycled Content, 5% Post Consumer, 1% Pre Consumer, 98% Recyclable