

Architectural Solutions Specification Guide

Availability

Electronic price list updated with release 182.A (U.S.) and 147.A (Canada), dated April 20, 2015.

Spec News is available on village.steelcase.com. Search AdStock and download the current release's Spec News.

View or download Steelcase Specification Guides at <http://www.steelcase.com/en/resources/design/spec-guides/pages/specguides.aspx>.

Transitional products in this specification guide are **maintained for existing customers only** and are likely to be phased out over time. These products are indicated with a . Products that are scheduled to be culled are indicated with an , followed by the last order entry date.

► For a list of all trademarks, refer to the last page of this specification guide.
© 2015 Steelcase Inc.



For Canadian Pricing

Canadian factor can be found at steelcase.com/CADpricing.

Calculate in the following order to avoid rounding errors:

- Multiply the base price and each option by the Canadian factor.
- Round each to the nearest dollar.
- Add base and options for total list price.

Working With This Specification Guide

Ten Tips: How to Get the Most Out of This Book	2
Additional Resources	4

Understanding

Privacy Wall	5
Thread	255
Low-Profile Floor	269
Modular Power	287
QtPro Soundmasking	311

Specifying

Privacy Wall	107
Thread	263
Low-Profile Floor	279
Modular Power	295
QtPro Soundmasking	321

Surface Materials

333


Resources

343

Wiring Schematics	344
Locations with Special Requirements	345
How to Calculate Power Needs	346
Style Number Index	348


Ten Tips: How to Get the Most Out of This Book

Tip 1



Watch the tabs on the right-hand edges of the pages. They'll always indicate which chapter you are in.

Tip 2



Use the Statement of Line pages for an overview of the available components, their sizes, and page references for additional information. Each *Understanding* chapter includes a statement of line after the table of contents.

Tip 3



Find cross references by looking for page numbers flagged with an arrow.

Tip 4

Study the product detail pages in the *Understanding* section to learn everything an expert knows about specific products. Each product detail page in this section contains the following features, where applicable:


- Product Drawing
- Actual Dimensions
- Product Details
- Connections
- Wiring and Cabling
- Surface Materials
- Application Topics

Application Topics provides useful advice on how to apply the product.

Product Drawing shows you what the product looks like and points out important features.

Product Details gives specific information on the product and how it is used.

Wiring and Cabling details the cable management and cable routing capabilities of the product.

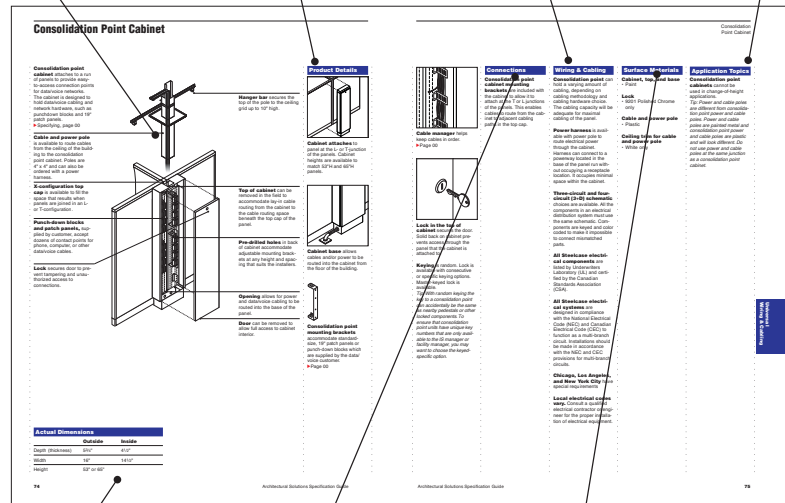

Actual Dimensions table lists the dimensions of the product.

Connections describes how the product is assembled or how it attaches to another product.

Surface Materials lists what material is used for each part of the product.

Tip 5

Refer to the specifying pages for all the information needed to order a product.

Each product specifying page contains six elements to help you complete a specification:

- Product Drawing
- Standard Includes
- Required to Specify
- Options
- Related Products
- Specification Information
 - Dimensions
 - Style Number
 - Price

Standard Includes

(under the dark grey band) provides a list of what comes standard with the product.

Required to Specify

Required to Specify
(under the dark grey band)
itemizes the information
that you must provide to
order the standard product
and the preferred sequence
for specification.

Specification Information

(under the light grey band) provides product dimensions, style numbers, and prices for the standard product and any surface material choices that are available.

Product Drawing

shows you what the product looks like.

[illegible]

Options

(under the black band) lists all the options that apply to the product, their price, and what is required to specify.

Related Products

provides specification information for products that are directly related.

Tip 6

Required to Specify

Specify with separate neutrals.

Specify with 2+2 wiring.
Specify with 3+1 wiring.

Italic typeface on specifying pages usually identifies wording that you should use in your order.


Tip 7

Keying is random. Lock is available with consecutive or specific keying options. Master-keyed lock is available

Tip: With random keying the key to a consolidation point can accidentally be the same as nearby pedestals or other locked components. To insure that consolidation point units have unique key

Watch for tips throughout the text that give you explanations and helpful instructions.

Tip 8



Learn what you cannot do by looking for drawings crossed out with an “X.”

Tip 9

Use the surface materials listings in the Surface Materials section of this book to find surface material color numbers.

▶ Page 334

Tip 10

Style Number	Page
32WCP	94
88PS	94
88PSLC	94
98683WS	86
98765	91
98766	91
98767	93

Refer to the style number index when you know a style number and you need to find the page that has more details about the product.

▶ Page 348

Additional Resources

Architectural Solutions

are supported with informational materials, tools, and software to help you plan, specify, and order an installation efficiently.

Product brochures and planning tools can be ordered through your Steelcase area office by calling 1.800.784.0358 or through the AdStock web site at village.steelcase.com.

Printed Materials

Surface Materials Reference Manual

This publication provides:

- An explanation of the surface materials
- “Available on” matrices
- Vertical surface fabric and seating upholstery selection listing
- Technical data for surface materials
- Surface material care and cleaning instructions

Computer Tools

Electronic Catalog

Accurate sales quotations and purchase orders for Steelcase products are created with specification software that uses Steelcase Electronic Catalog data. Use the data to specify and price style numbers and options for every Steelcase product. The data is updated bimonthly by Steelcase and provided to software programs including: the Hedberg Business System, SmartTools—Steelcase’s design and specification software (for more information on SmartTools, please email SmartTools@steelcase.com), the ProjectMatrix ProjectSymbols libraries, as well as 20-20 CAP Studio.

Furniture Symbol Graphic Data

Steelcase creates 2D and 3D furniture symbols (with attributes) for planning and initially specifying Steelcase products. This data is incorporated into several add-on software packages that work in either a Microstation or an AutoCAD drafting environment.

For more information about these and other software tools to help you plan effective work environments, please email fsl@steelcase.com.



Digital Publications

If your device has a bar code reader App, scan this QR code for a direct link to the online digital publications. Utilizing this QR code allows you to search across multiple specification guides, share across social media, or print out pages. You can also access these digital publications at www.steelcase.com or village.steelcase.com.

Architectural Solutions Product Training

Basic training for the products included in the Architectural Solutions product portfolio is available as part of the Building Product Muscle (BPM) curriculum on the Steelcase University Web site at village.steelcase.com.

The four BPM modules are Web-based, interactive courses filled with pictures, detailed positioning, statement of line, and feature benefit information, as well as practice exercises designed to build salespeople’s knowledge of the products. The BPMs also provide printable job aids of all content covered in the courses to serve as ongoing performance support. The available courses are:

- Privacy Wall—SAL271
- Architectural Solutions Low-Profile Floor—SAL243
- Architectural Solutions Modular Power—SAL245

Additionally, there are two courses available to help improve your understanding of how to position the advantages of an Architectural Solution with potential clients: Architectural Solutions—SAL242 and The AS Value Proposition—SAL258.

Support

Steelcase Capabilities

Steelcase products are distributed, installed, and serviced through a network of more than 600 dealers worldwide. Steelcase is also represented with offices and corporate showrooms in 26 U.S. cities, 4 Canadian cities, and in France, Germany, Great Britain, and Japan. Every Steelcase product meets our exceptionally high standards of quality and durability and comes with the Steelcase assurance of excellence in service.

For assistance, please call your local dealer, the Steelcase Solutions Resource Team, or the Steelcase Solutions Fulfillment Team at 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com.

Call the Steelcase Solutions Resource Team prior to placing an order, when working on a bid, or when you need information about product applications and specifications.

Call the Steelcase Solutions Fulfillment Team if you have submitted an order to Steelcase and you need to speak to your Solutions Fulfillment Team Representative about the order. Also call if you have any post-shipment quality or warranty concerns or service parts questions.

Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call 1.616.247.2500.

For information about Steelcase, the name of your nearest Steelcase dealer, or for product literature, call 1.800.333.9939, or visit our Web site: www.steelcase.com.

Understanding Privacy Wall

	
Statement of Line	6

Product Details

Solid Wall Panels	18
Glass Wall Panels	24
Butt-Hinged Frames and Door Leaves	34
Pivot-Hinged Frames and Door Leaves	40
Door Swing Orientation Choices	46
Privacy Wall Slider Doors	48
Glass Selections Polished Edge Slider Doors	54
Ceiling Tracks	60
Cornice Track	64
Ceiling Clip Application	66
Mini Ends	68
Wall Channels	72
Wall Channel Flexibility	75
Cut Panels	76
Adapters	78
Posts	82
Feature Strip Application	86

Application Topics

Centerline Versus Interior Dimension Planning	88
Base Trim Details	90
How to Connect Privacy Wall to I-Line Moveable Walls	94
Etched and Pattern Glass Planning	96

Wiring and Cabling

How to Power a Panel	98
Overview of Powered Panels	102
Wiring Schematics	104
How to Calculate Power Needs	105
Field-Installed Modular Harness Length Guidelines	106

Statement of Line

Privacy Wall



Solid Wall Panels

Heights 8'0" to 10'0"
in one-inch increments

6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

- ▶ Understanding, page 18
- ▶ Specifying, page 108


All-Glass Wall Panels

Heights 8'0" to 10'0"
in one-inch increments

6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

- ▶ Understanding, page 24
- ▶ Specifying, page 114

M = Available in modular widths




Glass Wall Panels with Three Equal Divided Lites

Heights 8'0" to 10'0"
in one-inch increments

6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

- Understanding, page 24
- Specifying, page 118



Glass Wall Panels with Four Equal Divided Lites


Heights 8'0" to 10'0"
in one-inch increments

6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

- Understanding, page 24
- Specifying, page 122

M = Available in modular widths

Statement of Line Privacy Wall, continued



Glass Wall Panels with Four Divided Lites*

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
▶ Understanding, page 24
▶ Specifying, page 126



Glass Wall Panels with Two Divided Lites*

Heights 8'0" to 10'0" in one-inch increments	
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
▶ Understanding, page 24
▶ Specifying, page 130

M = Available in modular widths




Clerestory Wall Panels*

Heights 8'0" to 10'0"
in one-inch increments

18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
 ▶ Understanding, page 24
 ▶ Specifying, page 134



Glass Selections All-Glass Frame Kits

Heights 8'0" to 10'0"
in one-inch increments

72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M

▶ Understanding, page 24
 ▶ Specifying, page 190
 M = Available in modular widths




Glass Selections All-Glass Wall Panels

Heights 8'0" to 10'0"
in one-inch increments

6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

▶ Understanding, page 24
 ▶ Specifying, page 188




Glass Selections All-Glass Glass Kits

Heights 8'0" to 10'0"
in one-inch increments

72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M

▶ Understanding, page 24
 ▶ Specifying, page 192


Statement of Line Privacy Wall, continued



Glass Selections Wall Panels with Two Divided Lites*

	Heights 8'0" to 10'0" in one-inch increments
6"W	●
8"W	● M
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
 ▶ Understanding, page 24
 ▶ Specifying, page 194



Glass Selections Two Divided Lite Glass Kits*

	Heights 8'0" to 10'0" in one-inch increments
72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M

*Transom-aligned top lite
 ▶ Understanding, page 24
 ▶ Specifying, page 200

M = Available in modular widths

10

Glass Selections Two Divided Lite Frame Kits*

	Heights 8'0" to 10'0" in one-inch increments
72"W	● M
80"W	● M
84"W	● M
96"W	● M
108"W	● M
120"W	● M
144"W	● M


*Transom-aligned top lite
 ▶ Understanding, page 24
 ▶ Specifying, page 198



Glass Selections Clerestory Wall Panels*

	Heights 8'0" to 10'0" in one-inch increments
18"W	● M
20"W	● M
24"W	● M
30"W	● M
36"W	● M
40"W	● M
42"W	● M
48"W	● M
60"W	● M

*Transom-aligned top lite
 ▶ Understanding, page 24
 ▶ Specifying, page 202

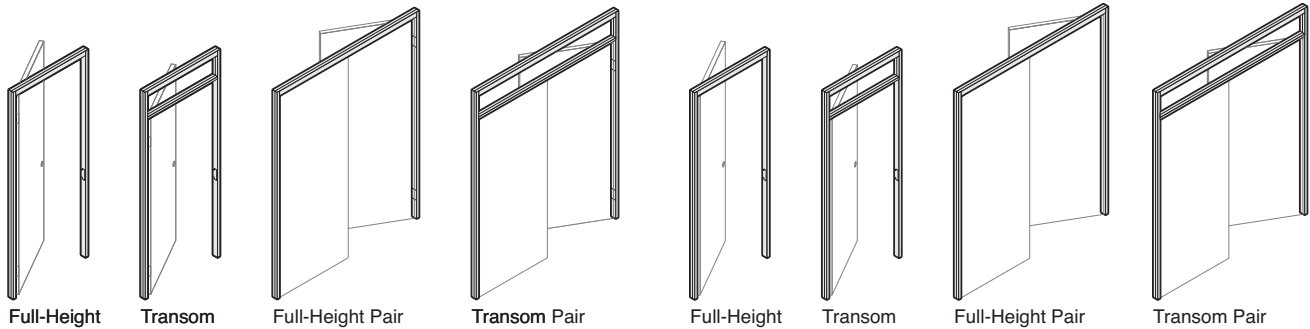

Butt-Hinged Door Frames

Heights 8'0" to 10'0"
in one-inch increments

40"W single ●

76"W pair ●

► Understanding, page 34

► Specifying, page 140

Tip: Butt-hinged door frames are not available in anodized aluminum and are not recommended for use with Glass Selections panels.

Pivot-Hinged Door Frames

Heights 8'0" to 10'0"
in one-inch increments


40"W without
switch cutout ●

42"W with
switch cutout ●

80"W without
switch cutout ●

► Understanding, page 40

► Specifying, page 142

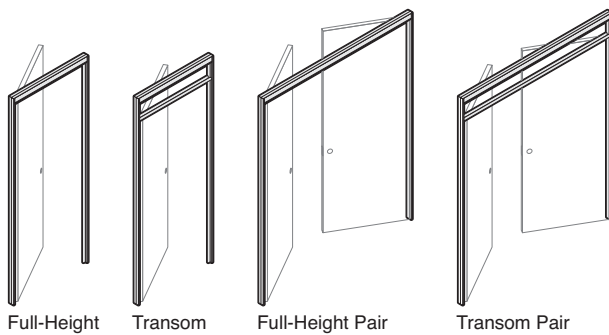

Glass Selections Pivot-Hinged Door Frames

Heights 8'0" to 10'0"
in one-inch increments

40"W without
switch cutout ●

42"W with
switch cutout ●



80"W without
switch cutout ●

► Understanding, page 40

► Specifying, page 206

Tip: Glass Selections door leaves must be used in conjunction with Glass Selections door frames.

Statement of Line Privacy Wall, continued

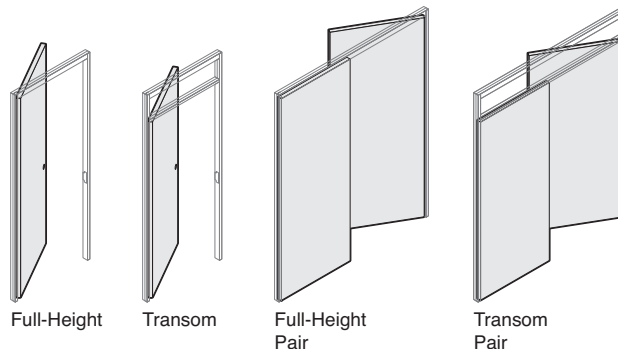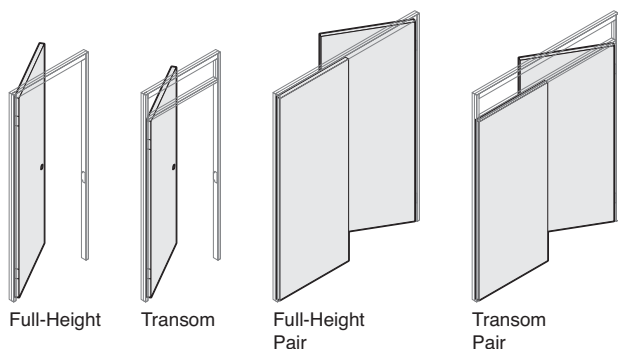

Butt-Hinged Door Leaves

	Height
40"W (35 ¹³ / ₁₆ " actual) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
40"W (35 ¹³ / ₁₆ " actual) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
76"W (71 ⁵ / ₈ " actual) solid pair	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame

► Understanding, page 34

► Specifying, page 148

Tip: Butt-hinged door leaves are not available in anodized aluminum and are not recommended for use with Glass Selections panels.

Pivot-Hinged Door Leaves


	Height
40"W (37 ³ / ₁₆ " actual*) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
40"W (37 ³ / ₁₆ " actual*) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
80"W (77 ¹ / ₂ " actual) solid pair	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame

Tip: For pivot-hinged pair of doors, the active leaf will always be 37³/₁₆"W. Width of inactive door leaf will be 39¹³/₁₆".

*36³/₈" with switch in frame

► Understanding, page 40

► Specifying, page 152

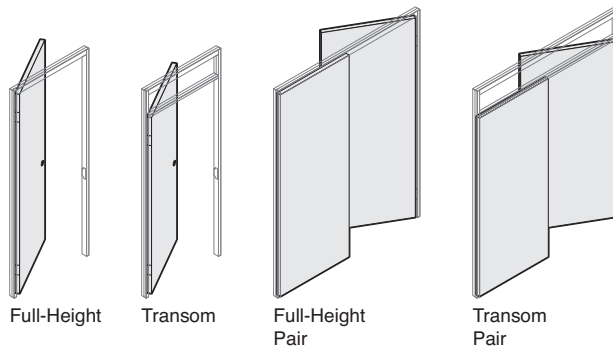

Glass Selections Pivot-Hinged Door Leaves

	Height
40"W (37 ³ / ₁₆ " actual*) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
40"W (37 ³ / ₁₆ " actual*) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) solid single	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame
42"W (36 ³ / ₈ " actual) glass single	8'0" to 9'0" in one-inch increments for full-height door frame 7'0" for transom door frame
80"W (77 ¹ / ₂ " actual) solid pair	8'0" to 10'0" in one-inch increments for full-height door frame 7'0" for transom door frame

Tip: For pivot-hinged pair of doors, the active leaf will always be 37³/₁₆"W. Width of inactive door leaf will be 39¹³/₁₆".


Tip: Glass Selections door leaves must be used in conjunction with Glass Selections door frames.

*36³/₈" with switch in frame


► Understanding, page 40

► Specifying, page 208


Statement of Line Privacy Wall, continued




Full Glass




Two transom-aligned lites



Three equal divided lites



Four equal divided lites




Four transom-aligned lites

Slider Doors


Heights 8'0" to 10'0"
in one-inch increments

	Full Glass	Two Transom-Aligned Lites	Three Equal Divided Lites	Four Equal Divided Lites	Four Transom-Aligned Lites
80"W	●	●	●	●	●
96"W	●	●	●	●	●


- ▶ Understanding, page 48
- ▶ Specifying, page 166



Full-height



Transom-height

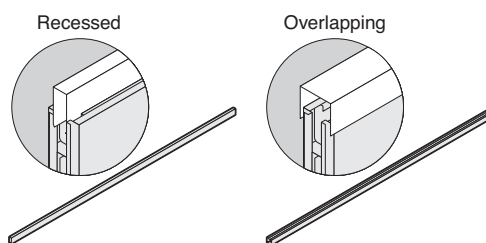

Glass Selections Polished Edge Slider Doors

Heights 8'0" to 10'0"
in one-inch increments

	Full-Height	Transom-Height
80"W single	●	●
84"W single	●	●
96"W single	●	●

- ▶ Understanding, page 54
- ▶ Specifying, page 216


Ceiling Tracks*

Length

120" to cut on site

*Finished end, L, and V ceiling tracks are also available.

- ▶ Understanding, page 60
- ▶ Specifying, page 230



Continuous Base Trim

Length	5"H
120" to cut on site	•

- Understanding, page 19
- Specifying, page 236



90° corner



120° corner



135° corner

Corner Base Trim

	5"H
--	-----

90°

•




120°

•

135°

•

- Understanding, page 82
- Specifying, page 237

Power-only
receptaclesPower and
communication
receptaclesCommunication-
only receptacles

Power and Communication Base Trim

	24"W
Power only	•
Power and communication	•
Communication only	•

Tip: Chicago base trim is also available.

- Understanding, page 21
- Specifying, page 238



Feature Strips

	Heights 8'0" to 10'0" in one-inch increments
In-line	•
Half	•

- Understanding, page 19
- Specifying, page 240

Statement of Line Privacy Wall, continued



Furniture Reveal Strips

Length

34" to cut on site

- Understanding, page 19
- Specifying, page 243



Mini Ends

Heights 8'0" to 10'0"
in one-inch increments

1½"W to 2½"W •

2½"W to 3½"W •

3½"W to 6"W •

- Understanding, page 68
- Specifying, pages 177 and 221



Wall Channels

120"


1" •

2¼" •


4" •

- Understanding, page 72
- Specifying, page 179


Tip: Wall channels are not available in anodized aluminum and are not recommended for use with Glass Selections panels.




Finished-end



Two-way L



Three-way T



Four-way X

Adapters

Heights 8'0" to 10'0"
in one-inch increments


L •

T •

X •

Finished-end 120"

- Understanding, page 78
- Specifying, pages 182 and 222

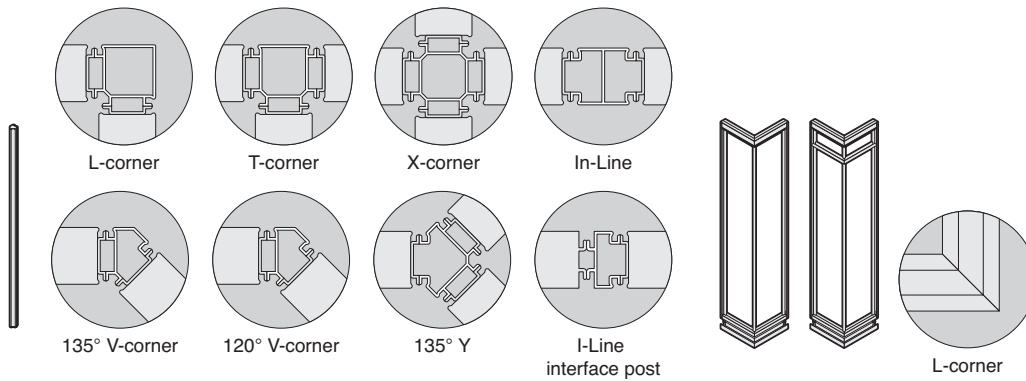


Posts

	Heights 8'0" to 10'0" in one-inch increments
L	•
T	•
X	•
In-line	•
120° V	•
135° V	•
135° Y	•
I-Line interface post	120"

Tip: I-Line Interface post is cut to length in the field.

- Understanding, pages 20 and 82
- Specifying, pages 184 and 223



T-corner


Glass Selections T-Corner Unit All-Glass Frame Kits

	Heights 8'0" to 10'0" in one-inch increments
18"W x 18"W x 18"W	• M
► Understanding, page 26	
► Specifying, page 226	

M = Available in modular widths

Glass Selections L-Corner Units

	Heights 8'0" to 10'0" in one-inch increments
18"W x 18"W	• M
► Understanding, page 26	
► Specifying, page 224	



Glass Selections T-Corner Unit All-Glass Kits

	Heights 8'0" to 10'0" in one-inch increments
18"W x 18"W x 18"W	• M
► Understanding, page 26	
► Specifying, page 227	

Solid Wall Panels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall solid wall panels create floor-to-ceiling walls, prefabricated to the height and width dimensions you specify. These panels, which offer power and communication capability, can be relocated to respond to changing needs.
► Specifying, page 108

Hollow core panel enables wiring and cabling to be routed within the panel.

Enhanced core panel has an insulated core to afford greatest acoustical performance. Use with overlapping ceiling track to realize maximum results.

Integral slotted verticals allow for panel-supported furniture. Integral slotted verticals start above the base and run to a height of 84". Slotting will support components that are designed to hang on Answer and Kick, including Universal Storage and Worksurfaces.

Adjustable levelers allow panels to be installed on uneven floors.

Recessed or overlapping ceiling track is available.

Post extensions are available in two versions to accommodate both types of ceiling tracks.

Feature strip joins panels to posts, adapters, and other adjacent components.

Surface is steel, available in paint, fabric, or vertical surface vinyl.

Tip: Vertical surface vinyl is available only on panels 48"W or smaller.


Tip: Vertical surface is not Greenguard and Indoor Advantage certified.

Power and communication outlets can be located in the panel face at desk and/or ADA height and/or in the panel base. Receptacles and cover plates are ordered separately.


Continuous base trim, ordered separately, is added in the field.

Floor track anchors base of panel to carpeted floor, without fasteners.
Tip: For information about hard surface floors and Low-Profile Floor, see page 272.


Product Details

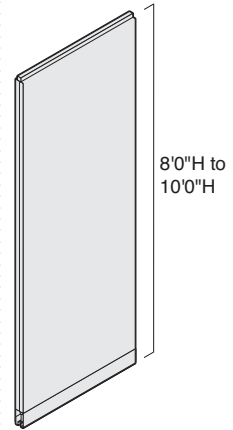


Panel height can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Ceiling track allows $1/2"$ of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows $3/4"$ of vertical adjustment to accommodate variations at base.

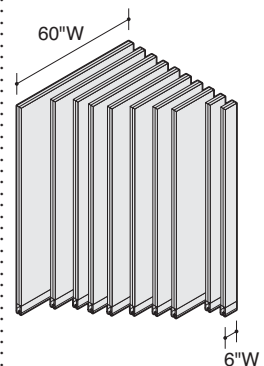


Panel widths range from 6"W to 60"W.




Width of panel is measured to center of joint between two panels.

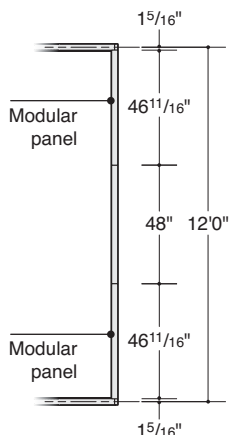

Modular panels used with adapters allow centerline planning. In the example above, two modular panels allow the distance between the centerline of the two parallel walls to remain at 12'0".




Standard panels




Modular panels

Modular panel widths are slightly smaller ($1\frac{5}{16}$ " less) than regular panel widths so that when a corner condition is created, the overall dimension remains unchanged. All other features of modular panels are the same as standard panels.




Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.



Finished-end adapter is available to finish the exposed end of a run of panels. Adapter adds approximately $1\frac{3}{16}$ " to the length of the wall.


Panel-end trim piece

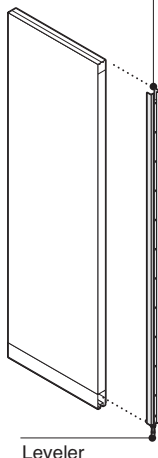

Panel end cut kit connects a cut panel to another panel in line. It restores leveler and housing that is removed when panel is cut on site. Kit includes trim piece to finish the cut side of the panel and to enable feature strip connection to an adjacent panel.

Tip: Hang-on components are not allowed on cut panels.


► Page 180

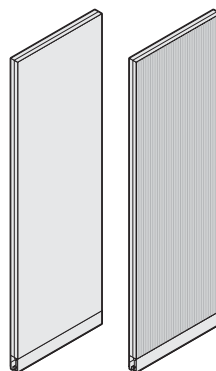

Side 1 Side 2

Different surface materials can be applied to opposite sides of the panel. For example, you can have vinyl applied to side 1 and fabric applied to side 2.

Vinyl is available on panels that are 48"W or smaller.




Ceiling track bypass cover is available to conceal cable or conduit routed next to a recessed ceiling track as the conduit travels from the ceiling into a wall panel.

► Page 234

Acoustic packing is available to improve the acoustical performance at mini ends and wall channels. Each 120" length of acoustic packing provides enough material for three mini ends at 10' ceiling height.


► Page 244

Connections



Feature strips, ordered separately, join panels together. Strip prevents light and sound leaks and can be cut to allow access to the integral slotted verticals. To rearrange panels, feature strips can be removed and reused.


► Page 240




Furniture reveal strips, ordered separately, are positioned between two sections of in-line feature strip to allow access to one set of panel slots when a single component is mounted on a Privacy Wall panel. When components are mounted side-by-side, both sets of slots are left exposed, and there is no need for a furniture reveal strip. Furniture reveal strips are painted to match the adjacent wall panel or to match the component bracket.

Tip: Use of hang-on components with enhanced core panels may reduce acoustic effectiveness.

► Page 243



Recessed




Overlapping

Ceiling track, ordered separately, joins the top of wall panels to the ceiling. Ceiling track is available recessed or overlapping.


Tip: Use overlapping ceiling track with enhanced core panels to maximize acoustical performance.

► Page 60


Solid Wall Panels, continued




Base trim fits into position at the bottom of panel surface above the floor track.




Integral slotted verticals accommodate any hang-on component that will hang on Answer or Kick panels, at any height in 1" increments up to 84".
 ▶ See page 86 for more information about hanging components.
 ▶ See *Storage and Freestanding Furniture Specification Guide*.




Posts join panels in in-line, L-, T-, X-, V-, and Y-configurations without blocking access to integral slotted verticals.
 ▶ Page 82




Adapters connect panels in L-, T-, and X-configurations without adding extra creep to panel dimension.
Tip: Adapter blocks slotted verticals in panel edge of some panels.
 ▶ Page 78



Mini end connects a panel or panel run to a perpendicular building wall. Elements of the mini end telescope allow a limited range of dimensional adjustability.
 ▶ Page 68




Wall channel connects an uncut panel to a perpendicular building wall.
 ▶ Page 72




Solid panels can be cut on site to conform to building walls and ceiling details including sills and bulkheads.

Specify an end filler cut kit when cutting a panel into a wall channel. The end filler cut kit includes a wall channel and a spreader.

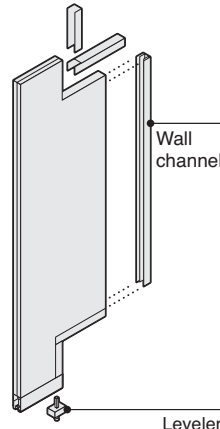

Cut edges of cut panel can be finished with field-cut wall channel.


End filler cut kit combines a wall channel and spreader into one assembly. Kit is used when cutting a panel at a perpendicular building wall.
 ▶ Page 181

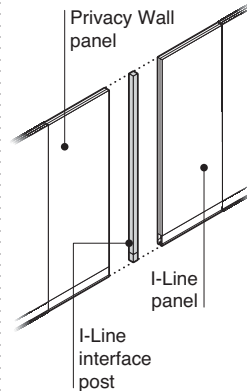


I-Line interface post allows a Privacy Wall panel to connect to an existing I-Line panel in line.
 ▶ Page 186

Tip: Two I-Line feature strips are needed for the I-Line side of the connection. Two Privacy Wall feature strips are needed for the Privacy Wall side of the connection.

▶ See *How to Connect Privacy Wall to I-Line Moveable Walls*, page 94.



Post and Beam attachment kit is available to connect Privacy Wall panels to Post and Beam at a feature strip. The Post and Beam kit cannot be used off-module. It is designed for use in overhead applications only. It should not be used in fence application.
 ▶ Page 245




Universal floor grippers are designed for use with Privacy Wall panels that are placed on top of Low-Profile Floor. The universal floor gripper fits underneath the panel floor channel and glides to evenly distribute weight on the floor. When used with double-sided adhesive tape, the universal floor gripper will also prevent movement on hard surface floors like tile, wood, or terrazzo.
Tip: Universal floor grippers must be specified when installing in accordance with ICC Compliance Report.

Panels which are configured for low profile base trim are not compatible with the universal floor gripper. Panels that are required to be secured to the floor must be directly anchored to the floor with conventional fasteners.

Edge, Access, and Session, Premium Markerboard and Tackboard products, can be surface mounted to Privacy Wall by clipping into panel slots. All mounting brackets and hardware are included with each board. In addition to bracket mounted boards, Senti markerboards can be magnetically mounted to painted panel surfaces. The maximum size markerboard for magnetic mounting is 48"x48". Application rules, magnetic mounting guidelines, and specification information can be found in the *Meeting Spaces Specification Guide*.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. For more information regarding seismic applications, visit the Architectural Solutions Web site at village.steelcase.com/SalesGuides and more.


Wiring & Cabling



Hollow core in panel enables both vertical and horizontal cable routing within panel.


Panels with enhanced core do not allow for vertical cable routing. Cable can be routed laterally at the base.

Solid hollow core Privacy Wall panels can be specified with factory-installed powerkits. Powerkits include a power block and an installation cage. Field-installed powerkits are also available.



Desk- and ADA-height power blocks will be factory installed in center of panel to accommodate either power receptacles only or power and communication receptacles. A single power block can be specified to allow receptacles on one side or both sides of the panel.


Power receptacles




Power and communication receptacles

Cover plates, ordered separately, accommodate power receptacles and communication faceplates. Cover plates are used in panel face only.

► Page 249



Base-height power block will be factory installed in center of panel. A single power block can be specified to allow receptacles in one side or both sides of panel. Base-height power is available in both hollow core and enhanced core panels.

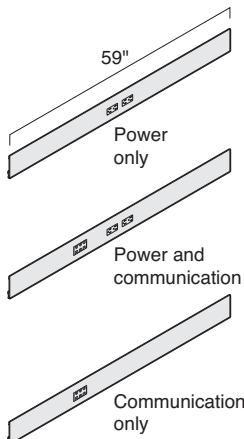


Base trim, ordered separately, is 59"W and available in three versions—power only, power and communication, and communication only.

Width of panel must be adequate to accommodate cutouts. See table below for minimum widths.


Power and Communication

- 30"W–60"W Standard panel
- 30"W–60"W Modular panel




Power receptacles are ordered separately and installed on site. They are coded to indicate which circuit and type of ground they engage.

► Page 247




USB receptacles are ordered separately and installed on site. They are available in three wiring schematics with multiple line options. USB receptacles offer easy access to two charging ports. Each port provides 1 ampere of output. USB receptacles conveniently charge a wide range of electronic devices. Some devices may not be compatible.

Communication receptacles are provided by others and installed on site. They can accommodate single-gang NEMA-style faceplate, snap-in modular furniture-style faceplate, or Decora mounting strap style.




Base height Desk height ADA height




Desk Base ADA Base Desk ADA Base

Receptacles in hollow core panels can be specified in any combination of base height, desk height, or ADA height, or on Clere-story panels.

Utilities can be specified on either side of the panel or on both sides. Receptacles can be installed on either side of the panel or on both sides. Fillers can be installed in any unused cutouts.



Infedds can connect power blocks to building power in the ceiling or floor. Factory-installed infedds extend a minimum of 12' from the panel.



Modular harnesses and harness-to-harness connectors can be used to extend power to a power block from another power block in an adjacent panel.

Solid Wall Panels, continued

Wiring schematics are available to accommodate a wide range of building types and power needs. 15-amp and 20-amp systems are available in 4-circuit, 3+1; 4-circuit, 2+2; and 3-circuit with separate neutrals. All of these choices are supported with a system ground and isolated ground.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical components.

Chicago and New York City require that all power be hardwired in the field. Modular power systems are not permitted. All Privacy Wall panels can be hardwired on site using conventional electrical components.

New York City/Chicago power prep option can be selected to provide panel cutouts and internal hardware to receive hardwired components.

New York City/Chicago power prep option requires use of Privacy Wall cover plate, ordered separately.
▶ Page 249

Surface Materials

Panels

- Paint
- Fabric
- Vertical surface vinyl

Tip: Different surface materials can be applied to opposite sides of the panel.

Tip: Remember to designate side 1 and side 2 as appropriate to correspond to power and communication locations.

Ceiling track

- Paint

Base trim

- Paint

Feature strip

- Paint
- Fabric
- Vinyl

Cover plate

- Plastic

Receptacle

- Plastic

Application Topics

Feature Strip Application

▶ Page 86

Centerline Versus Interior Dimension Planning

▶ Page 88

How to Power a Panel

▶ Page 98

Overview of Powered Panels

▶ Page 102

Power Options


▶ Page 139

Solid Wall Panels — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options


SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

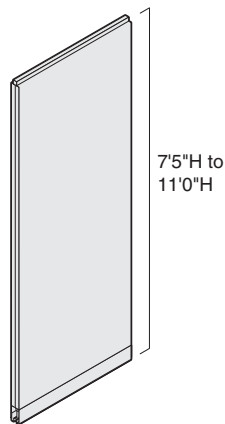

Panel height can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

Tip: Panels that are greater than 10'0"H cannot exceed 48" in width.

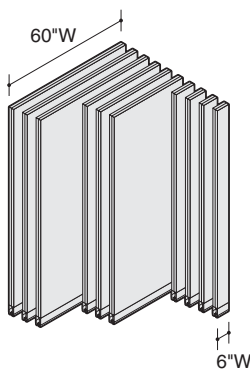


Solid panel widths range from 6"W to 60"W in even 1" increments.

Tip: Panels with enhanced core do not exceed 48" in width.

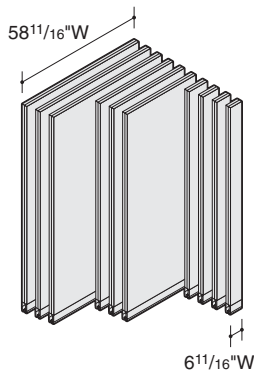

Modular solid panel widths range from 61 1/16"W to 58 11/16"W in 1" increments.

Tip: Panels with enhanced core do not exceed 46 1/16" in width.



4" high continuous base trim, ordered separately, can also be specified and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using 4"H base, panels and other vertical components must be specified with a modified height to accept 4"H base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Other modified components that must be specified to accept 4"H base:

Panels

Posts and adapters

Feature strips


Door frames

Slider doors





Mini ends

Wall channels and cut kits

Tip: 4" high base cannot be used with base-located power.

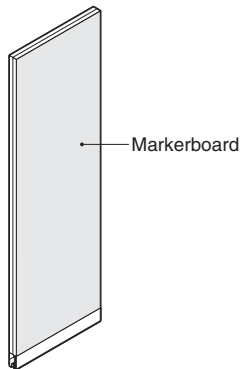

Panel surfaces can be specified with a markerboard surface for use with dry erase markers.
Tip: When using adjacent markerboard panels, specify the shared feature strip in a black painted or anodized finish. Black painted strips will conceal marks on surface. Anodized surface will allow markers to be cleaned from surface.
Tip: Markerboard surface is available in a maximum ceiling height of 120" and a maximum width of 48".



Wood veneer surfaces

are available on 5" high base trim, including straight, corners, and cutouts.

Glass Wall Panels

Including Glass Selections Wall Panels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall glass wall panels and Glass Selections wall panels

create floor-to-ceiling walls, prefabricated to the height and width dimensions you specify. These panels, which offer power and communication capability, can be relocated to respond to changing needs.

► Specifying, pages 114–134, 188–202, 224–228

Feature strip joins panels.

Factory-installed lites can be specified in a variety of glass types.

Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.

Muntins divide glass into separate lites.

Adjustable levelers allow panels to be installed on uneven floors.

Recessed or overlapping ceiling track is available.


Post extensions are available in two versions to accommodate both types of ceiling tracks.

Integral slotted verticals above the base run to a height of 84".
Tip: Integral slotted verticals are available only on Clerestory and solid panels.

Surface of Clerestory panels is steel, available in paint, fabric, or vertical surface vinyl.
Tip: Vertical surface vinyl is available only on panels 48"W or smaller.
Tip: Vertical surface vinyl is not Greenguard and Indoor Advantage certified.

Power and communication outlets can be located in the panel face at desk and/or ADA height and/or in the base of a Clerestory panel. Outlets can be located in the base of full-glass panel or divided lite panel. Receptacles and cover plates are ordered separately.


Continuous base trim, ordered separately, is added in the field.

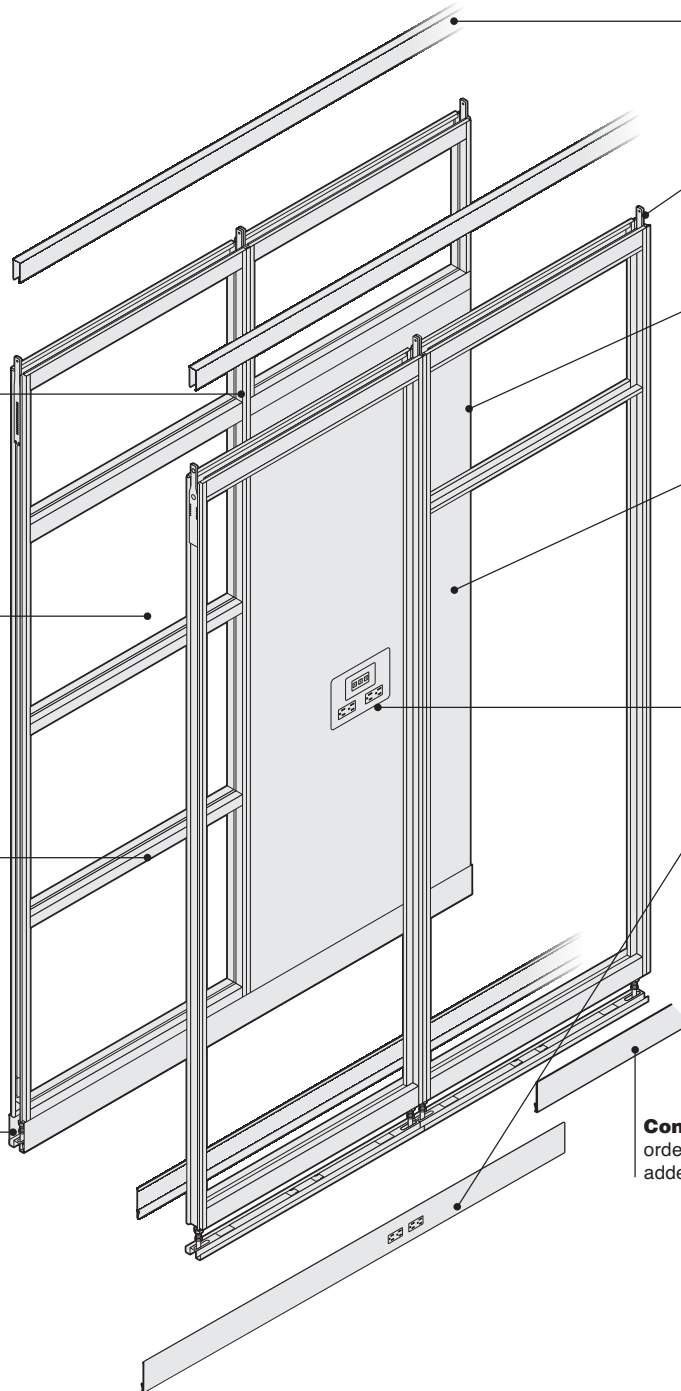

Product Details




Glass wall panel




Three equal divided lites




Four equal divided lites



Two divided lites, transom-aligned top lite




Four divided lites, transom-aligned top lite




Clerestory


Glass wall panels are available in the following types: one lite, three equal divided lites, four equal divided lites, two divided lites with transom-aligned top lite, four divided lites with transom-aligned top lite, and solid with glass Clerestory.




Some pattern glass types have a linear pattern. These linear patterns are oriented vertically as shown. See page 96 to identify vertical pattern glass.




Glass Selections frame and glass kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant. Tip: COM glass for frame and glass kits must be $\frac{3}{8}$ " thick for structural integrity. Tip: Standard glass thickness must be between 0.312" and 0.417" thick.




Ceiling track allows $\frac{1}{2}$ " of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows $\frac{3}{4}$ " of vertical adjustment to accommodate variations at base.

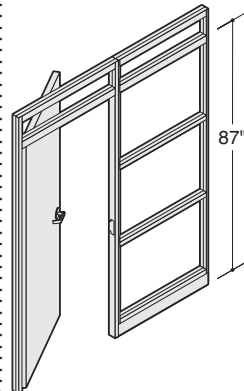


Glass wall panels with transom-aligned top lite correspond to transom-height doors. Tip: Top muntin is $\frac{2}{4}$ "H; other muntins are $\frac{1}{2}$ "H. Glass Selections muntins are $\frac{2}{2}$ "H.

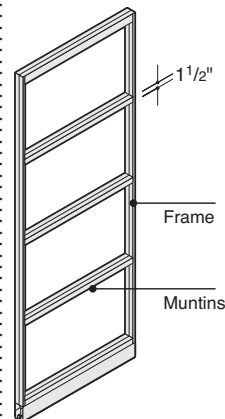


Muntins are factory-installed horizontal framing elements that physically divide glass lites. Muntins match frame color specified. Glass Selections is available in clear anodized aluminum only. Tip: All muntins in glass wall panels with four equal divided lites are $\frac{1}{2}$ "H. Glass Selections muntins are $\frac{2}{2}$ "H.

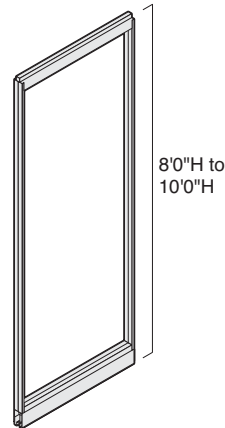


Panel height can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights. Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

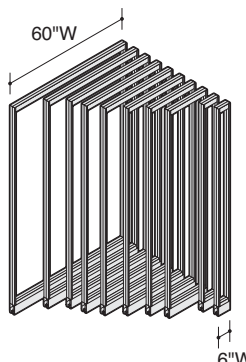



Panel widths range from 6"W to 60"W. Exception: Clerestory and Glass Selections Clerestory wall panels range from 18"W to 60"W.




Width of panel is measured to center of joint between two panels.

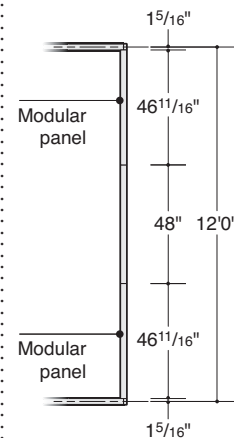

Modular panels used with adapters allow centerline planning. In the example above, two modular panels allow the distance between the centerline of the two parallel walls to remain at 12'0".




Modular panel widths are slightly smaller ($\frac{1}{16}$ " less) than regular panel widths so that when a corner condition is created, the overall dimension remains unchanged.




Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.

Glass Wall Panels, continued




Finished-end adapter is available to finish the exposed end of a run of panels. Adapter adds approximately 13/16" to the length of the wall.

Vinyl is available on Clerestory panels that are 48"W or smaller.




Glass Selections L-corner units, ordered separately, join Glass Selections panels in L-configuration. Butt joints are silicone-glazed on site during installation. ▶ Page 224

Full-size panel for interior dimension planning




Glass Selections L-corner units plan dimensionally in the same manner as individual panels that are joined by a post.


Full-size panel for interior dimension planning

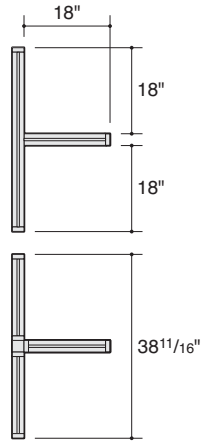

Modular-size panel for centerline planning

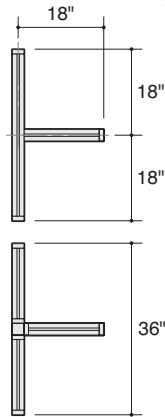

Glass Selections T-corner frame kits join Glass Selection panels in a T-configuration. Frame kits are assembled in the field. Glass kits include three pieces of glass. Butt joints must be sealed with silicone sealant to be code-compliant.

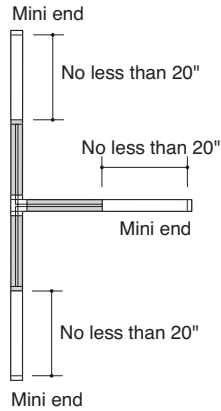


Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini-end or wall channel.

Acoustic packing is available to improve the acoustical performance of solid and glass panels by filling the space behind continuous base trim. Each 120" length of acoustic packing provides enough material to pack 30 linear feet of panels.


▶ Page 244

Connections




Feature strips, ordered separately, join panels together. Strip prevents light and sound leaks and can be cut to allow access to the integral slotted verticals in the Clerestory panels. To rearrange panels, feature strips can be removed and reused.


▶ Page 240





For Clerestory panels, you can specify two different feature strips when the solid-panel finish is different from the upper-glass frame finish.




Half feature strips are used in combination with in-line feature strips for inside corner applications.




Furniture reveal strips, ordered separately, are positioned between two sections of in-line feature strip to allow access to one set of panel slots when a single component is mounted on a Privacy Wall panel. When components are mounted side-by-side, both sets of slots are left exposed, and there is no need for a furniture reveal strip. Furniture reveal strips are painted to match the adjacent wall panel or to match the component bracket. ▶ Page 243




Ceiling track, ordered separately, joins the top of wall panels to the ceiling. Ceiling track is available recessed or overlapping. ▶ Page 60



Base trim fits into position at the bottom of panel surface above the floor track.




Panel-supported storage and worksurface components cannot be attached to glass wall panels. Use solid wall or Clerestory panels instead. ▶ See page 86 for more information about hanging components.




Posts join panels in in-line, L-, T-, X-, V-, and Y-configurations without blocking access to integral slotted verticals.

► Page 82




Adaptors connect panels in L-, T-, and X-configurations without adding extra creep to panel dimension.

► Page 78



Mini end connects a panel or panel run to a perpendicular building wall.

► Page 68

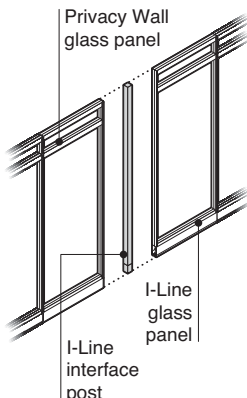


I-Line interface post allows a Privacy Wall panel to connect to an existing I-Line panel in line.

► Page 186


Tip: Two I-Line feature strips are needed for the I-Line side of the connection. Two Privacy Wall feature strips are needed for the Privacy Wall side of the connection.

► See *How to Connect Privacy Wall to I-Line Moveable Walls*, page 94.



Post and Beam attachment kit is available to connect Privacy Wall panels to Post and Beam at a feature strip. The Post and Beam kit cannot be used off-module. It is designed for use in overhead applications only. It should not be used in fence application.

► Page 245




Universal floor grippers are designed for use with Privacy Wall panels that are placed on top of Low-Profile Floor. The universal floor gripper fits underneath the panel floor channel and glides to evenly distribute weight on the floor. When used with double-sided adhesive tape, the universal floor gripper will also prevent movement on hard surface floors like tile, wood, or terrazzo.

Panels which are configured for low profile base trim are not compatible with the universal floor gripper. Panels that are required to be secured to the floor must be directly anchored to the floor with conventional fasteners.


Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. For more information regarding seismic applications, visit the Architectural Solutions Web site at village.steelcase.com/SalesGuides and more.

Wiring & Cabling




Hollow core in Clerestory panel enables both vertical and horizontal cable routing within panel.

Glass Privacy Wall panels can be specified with factory-installed powerkits. Powerkits include a power block. Field-installed powerkits are also available.




Desk- and ADA-height power blocks or Clerestory panel will be factory installed in center of panel to accommodate either power receptacles only or power and communication receptacles. A single power block can be specified to allow receptacles on one side or both sides of the panel. Both sides must be specified with the same configuration (power receptacles only or power and communications receptacles). Both sides must be specified with the same configuration (power receptacles only or power and communication receptacles).



Power is located in the center of a panel except in Glass Selections frame kits, where the center of the power is located 12" from the panel edge.


Power receptacles



Power and communication receptacles


Cover plates, ordered separately, accommodate power receptacles and communication faceplates. Cover plates are used in panel face only.

► Page 249



Base-height power block will be factory installed in center of panel. A single power block can accommodate receptacles in one side or both sides of panel.

Glass Wall Panels, continued

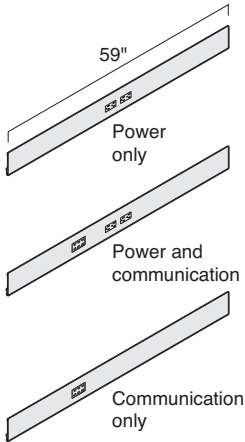


Base trim, ordered separately, is 59"W and available in three versions—power only, power and communication, and communication only.

Width of panel must be adequate to accommodate cutouts. See table below for minimum widths.


Power and Communication

- 30"W standard panel
- 30"W (nominal) modular panel




Power receptacles are ordered separately and installed on site. They are coded to indicate which circuit and type of ground they engage.

► Page 247




USB receptacles are ordered separately and installed on site. They are available in three wiring schematics with multiple line options. USB receptacles offer easy access to two charging ports. Each port provides 1 ampere of output. USB receptacles conveniently charge a wide range of electronic devices. Some devices may not be compatible.

Communication receptacles are provided by others and installed on site. They can accommodate single-gang NEMA-style faceplate, snap-in modular furniture-style faceplate, or Decora mounting strap style.




Base height Desk height ADA height




Desk Base ADA Base Desk ADA Base

Receptacles can be specified in any combination of base height, desk height, or ADA height, on Clerestory panels.

Utilities can be specified on either side of the panel or on both sides. Receptacles can be installed on either side of the panel or on both sides. Fillers can be installed in any unused cutouts.



Infedds can connect power blocks to building power in the ceiling or floor. Because glass panels cannot accommodate vertical routing of harnesses through the glass portion of the panel, use adjacent solid panels, mini ends, or door frames to bring power from the ceiling to a power block in a glass panel. Clerestory can route in panel from bottom.



Modular harnesses and harness-to-harness connectors can be used to extend power to a power block from another power block in an adjacent panel.

Wiring schematics are available to accommodate a wide range of building types and power needs. 15-amp and 20-amp systems are available in 4-circuit, 3+1; 4-circuit, 2+2; and 3-circuit with separate neutrals. All of these choices are supported with a system ground and isolated ground.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical components.

Chicago and New York City require that all power be hardwired in the field. Modular power systems are not permitted. All Privacy Wall panels can be hardwired on site using conventional electrical components.

New York City/Chicago power prep option can be selected to provide panel cutouts and internal hardware to receive hardwired components.

New York City/Chicago power prep option requires use of Privacy Wall cover plate, ordered separately.
► Page 249

Surface Materials

Panel frame and muntins

- Paint

Glass Selections panel frame and muntins

- Clear anodized aluminum

Clerestory panel

- Paint
- Fabric
- Vertical surface vinyl

Lite

- Glass
- Customer-specified glass also available

Ceiling track

- Paint

Base trim

- Paint

Feature strip

- Paint
- Fabric
- Vinyl
- Anodized aluminum

Cover plate

- Plastic

Receptacle

- Plastic

Application Topics

Feature Strip Application

► Page 86

Centerline Versus Interior Dimension Planning

► Page 88

How to Power a Panel

► Page 98

Overview of Powered Panels

► Page 102

Power Options


► Page 139

Glass Wall Panels — SmartTools Options


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options


SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

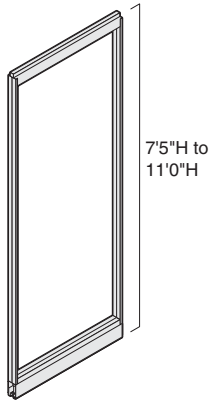


Panel height can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.
Tip: Panels that are greater than 10'0"H cannot exceed 48" in width.
Exception: Clerestory panels can be specified with a minimum ceiling height of 7'11".

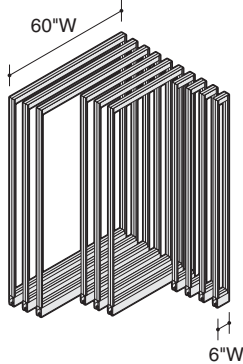


Glass panel widths range from 6"W to 60"W in even 1" increments.
Exception: Clerestory wall panels have a minimum width of 18"W, and maximum width of 60"W.

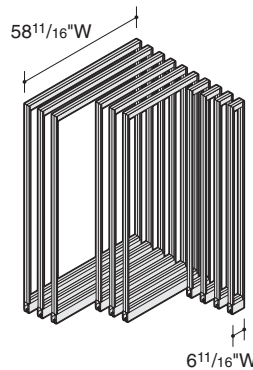


Modular glass panel widths range from 6 11/16"W to 58 11/16"W in 1" increments.
Exception: Clerestory wall panels have a minimum width of 16 11/16"W, and maximum of 58 11/16"W.





4" high continuous base trim, ordered separately, can also be specified and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using 4" high base, panels and other vertical components must be specified with modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.
Tip: Other special components that must be specified to accept 4"H base:
 Panels
 Posts and adapters
 Feature strips
 Door frames
 Slider doors
 Mini ends
 Wall channels and cut kits
Tip: 4" high base cannot be used with base-located power.




Clerestory panel surfaces can be specified with a markerboard surface for use with dry erase markers.
Tip: When using adjacent markerboard panels, specify the shared feature strip in a black painted or anodized finish. Black painted strips will conceal marks on surface. Anodized surface will allow markers to be cleaned from surface.
Tip: Markerboard surface is available in a minimum of 18"W and a maximum of 48"W.



For Clerestory panels, you can specify two different feature strips when the solid panel finish is markerboard.




Glass wall panels can be specified with wood veneer surfaces. This includes the glass frame on Clerestory panels as well as muntins.

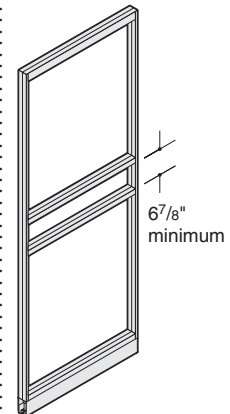


Any or all of the standard muntin positions can be moved. Muntins and glass horizontals can be no closer than 6 7/8".


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.





Muntin size can be specified as 1 1/2" or 2 1/4".

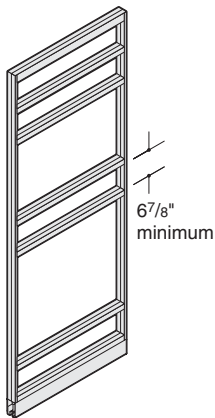

Additional muntins can be added to a four divided lite panel to make up to six lites. Muntins and glass horizontals can be no closer than 6 7/8".




A single muntin can be added to a Clerestory panel to create two lites. Muntins and glass horizontals can be no closer than 6 7/8".



Power only



Power and communication



Communication only

Wood veneer surfaces are available on 5" high base trim, including straight, corners, and cutouts.

Surface Materials

The following components can be specified with wood veneer surfaces:


- Glass frames
- Base trim
- Ceiling track
- Feature strips

Glass Selections — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

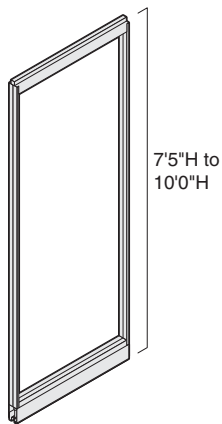


The height for wall panels, frame kits, glass kits, L- and T-corners can be specified from 7'5"H to 10'H in one-inch increments to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.
Exception: Clerestory panels can be specified with a minimum ceiling height of 7'11".

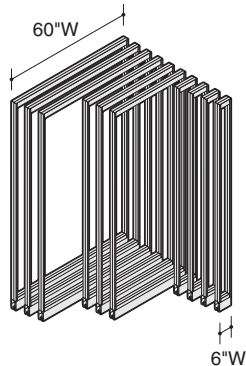


Panel widths range from 6"W to 60"W in even 1" increments.

Exception: Clerestory wall panels have a minimum width of 18"W and maximum of 60"W.

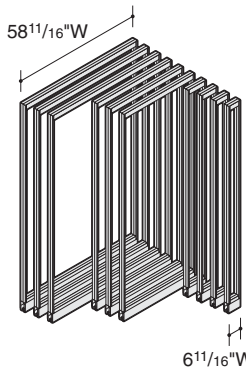


Modular glass panel widths range from 61¹/₁₆"W to 58¹¹/₁₆"W in 1" increments.


Exception: Clerestory wall panels have a minimum width of 16¹¹/₁₆"W, and maximum of 58¹¹/₁₆"W.



Frame kits and glass kits can range in widths from 61"W to 144"W in even 1" increments.




For modular frame kits and glass kits, sizes can range from 59¹¹/₁₆" to 142¹¹/₁₆".




Glass Selections wall panels and frame kits

can be specified with painted surfaces as an alternative to anodized aluminum.

Tip: For painted posts, mini ends, and feature strips, use Privacy Wall components.



Glass Selections Clerestory panel surfaces can be specified with a markerboard surface for use with dry erase markers.
Tip: When using adjacent markerboard panels, specify the shared feature strip in a black painted or anodized finish. Black painted strips will conceal marks on surface. Anodized surface will allow markers to be cleaned from surface.
Tip: Markerboard surface is available in a minimum width of 18"W and a maximum of 48"W.




4" high continuous base trim, ordered separately, can also be

specified and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using 4" high base, panels and other vertical components must be specified with modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Other components that must be specified with 4" base:

- Panels
- Frame kits and glass kits
- Posts and adapters
- Feature strips
- Door frames
- Slider doors
- Mini ends
- Wall channels and cut kits

Tip: 4" high base cannot be used with base-located power.



Low profile base trim, ordered separately, can be specified on Glass Selections panels (including Clerestory) and frame kits. The base height is 2 1/2"H and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using low profile base, specify panels with base trim height to match. Components must be specified with a modified height to ensure that correct overall ceiling height is achieved. Other components must also be specified with a modified height to ensure that correct overall ceiling height is achieved.

Tip: Other special components that must be specified with low profile base:

*Panels
Frame kits and glass kits
L- and T-corner units
Feature strips
Posts
Door frames
Slider doors
Mini ends*

Panels with low profile base have reduced vertical adjustment at the floor (plus/minus 3/8").

Base trim for low profile base is provided with a clear anodized finish.

Panels which are configured for low profile base trim are not compatible with the universal floor gripper. Panels that are required to be secured to the floor must be directly anchored to the floor with conventional fasteners.

Butt-Hinged Frames and Door Leaves

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall doors can be used with Privacy Wall panels. Door frames and leaves must be ordered separately.

► Specifying, pages 140 and 148

Tip: Glass Selections panels are compatible with pivot-hinged frames and leaves only.

Recessed or overlapping ceiling track is available.

Pair leaves can be painted or specified with wood veneer.

Inactive door leaf is secured with flush bolts that are included with hinge kit for pair doors (ordered separately).

Door frame is factory prepped for butt hinges. Door hardware is ordered separately.

► Page 160


Tip: Butt-hinged door frames are not available for Glass Selections panels.

Active door leaf accommodates latch.


Post extensions are available in two versions to accommodate both types of ceiling track.

Feature strip joins door frames to panels, posts, or adapters.


Single door leaves are solid or glass. Solid leaves can be painted or specified with wood veneer.

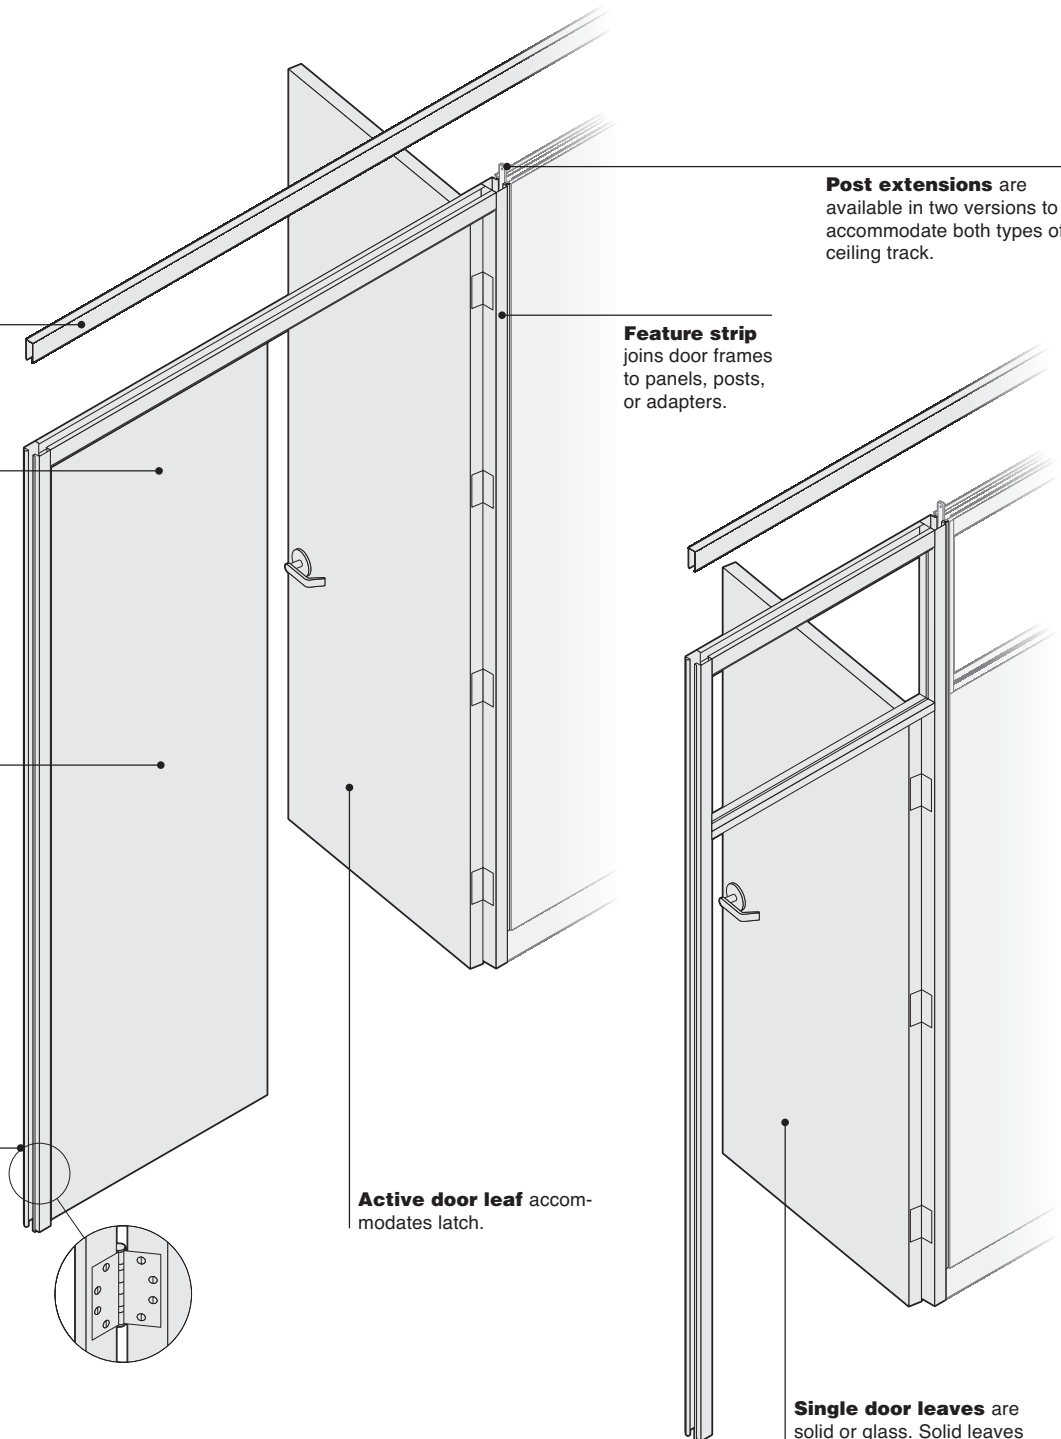


Product Details




Single and pair versions of doors and door frames are available.




Glass doors can be ordered with a bottom rail height dimension of 5"H or 12"H. The 5" rail height will align closely with the bottom horizontal of a glass panel. In some areas of the country (such as California), a 12"H minimum bottom rail is required for code compliance in some applications.




Door frames can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights. *Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.*




Ceiling track allows 1/2" of vertical adjustment to accommodate variations in field conditions. Floor track allows 3/4" of vertical adjustment.




Plinths are included to finish the bottom of both sides of a door frame.




Full-height doors increase in height as the door frame increases. *Tip: Maximum ceiling height of glass doors is 9'0"H.*




Transom-height door leaves are 7'0"H. Transom increases in height as the door frame increases.

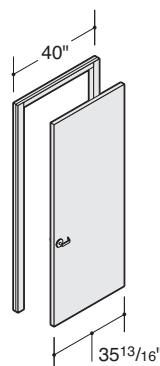

Width of single door frame is 40"W and accommodates a 35 13/16"W door.

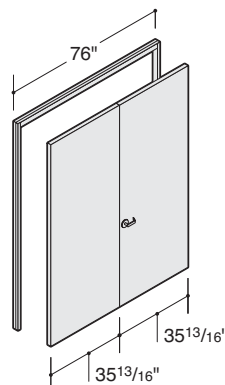


Width of pair frame is 76"W and accommodates two 35 13/16"W door leaves.




Transom-height doors correspond to Clerestory or glass wall panels with transom-aligned top lite.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.




Transom-height frames for pair of doors with vertical directional, patterned glass will have a vertical muntin installed in the center of the transom.


▶ See *Glass Availability Matrix* for directional glass options, page 340.



Left- and right-hand versions of butt-hinged doors and door frames are available. Swing orientation cannot be altered.




To determine whether a door is left or right hand, imagine yourself standing in the door's frame with your back against the side of the frame where the door's hinges will be attached. If the door will swing to your left, it is a left-hand door (and frame). If it will swing to your right, it is a right-hand door (and frame).



Ceiling track bypass cover is available to conceal switch conduit routed next to a recessed ceiling track as the conduit travels from the ceiling into a door frame.
▶ Page 234

Butt-Hinged Frames and Door Leaves, continued



Cutout for cylindrical passage set or lockset is standard in butt-hinged door leaves. Cutout for mortise passage set or lockset is available as an option. Order passage sets and locksets separately.

► Page 160

Tip: Cutout and hardware must be the same for door and door frames.

Tip: Locksets and passage sets ordered from another manufacturer must have a 1 3/8" curved strike plate.

Tip: Doors that are specified with hardware prep for mortise locks will not have faces drilled for levers, cylinders, etc. All necessary holes in the face of the door must be drilled by the installer.




Door stops can be ordered for use with doors. Magnetic wall stop, dome-style floor stop, and screw-in base stop are available. Magnetic wall stop is for use with painted solid or Clerestory panels only.

► Page 162



All door openings meet ADA requirements.

Connections



Feature strips, ordered separately, join door frames to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.


► Page 240



Ceiling track, ordered separately, joins the top of door frames to the ceiling. Ceiling track is available recessed or overlapping.


► Page 60

Panel-supported storage and workspace components cannot be attached to door frames. Use solid wall or Clerestory panels instead.




Posts join a door frame to a panel in an L-, T-, X-, V-, or Y-configuration. A T-, X-, or in-line post can also be used between two in-line door frames.

► Page 82




Adapters connect a door frame to a panel in an L-, T-, or X-configuration. A T-adapter can also be used between two in-line door frames.

► Page 78




Mini end connects a door frame to a perpendicular building wall.

► Page 68



When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.





Do not use a wall channel to connect a door frame to a perpendicular wall.


► See *Wall Channel Flexibility*, page 75.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. For more information regarding seismic applications, visit the Architectural Solutions Web site at village.steelcase.com/SalesGuides and more.


Wiring & Cabling

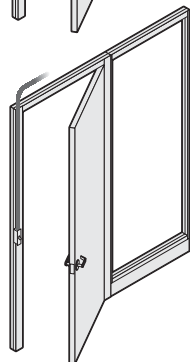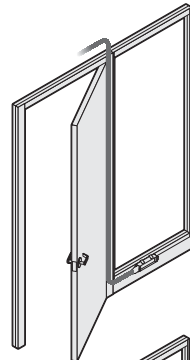

Installation of a switch in a door frame will limit the ability to route a power infeed through the frame. If the door frame has no switch, you can route power to the base of an adjacent glass panel.




Left-hand door

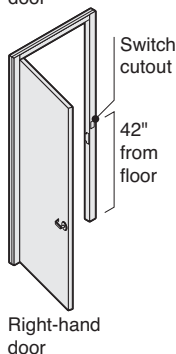


Right-hand door

Switch cutout, available as an option on single door frames, will be factory-cut in the strike jamb of the frame, on the side that matches the direction in which the door swings. Switch cutout is located 42" from floor.

Wiring is routed from the ceiling or floor through the door jamb.



Low-voltage switches are available on all door frame types except pairs of doors.



Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.

Low-voltage switch kits include:

- Switch device
- Cover trim
- Transformer
- Low-voltage (18-gauge) wire x 30'



High-voltage switches are rated for 120V and 277V applications, and are available on all door frame types except Privacy Wall slider doors, Glass Selections slider doors, and pairs of doors. You must specify door frame for use with switch cutout.

High-voltage switch kits include:


- Electrical box and strap
- Switch device
- Cover plate

Wiring and conduit are not included.

Surface Materials

Door frame

- Paint



Aluminum rails and stiles on glass door leaf

- Paint

Solid door leaf

- Paint
- Wood veneer

Transom, glass door leaf

- Glass

Strike plate, door stops, and butt hinges

- 9200 Satin Chrome
- 9201 Polished Chrome

Switch plate

- Paint

Feature strip

- Paint
- Fabric
- Vinyl

Application Topics

Door Swing Orientation Choices

▶ Page 46

Feature Strip Application


▶ Page 86

Butt-Hinged Frames and Door Leaves — SmartTools Options


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options


SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.




Door frames can be specified with wood veneer surfaces.

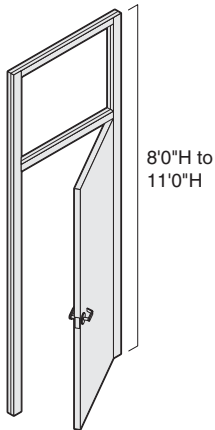


Door frames with transom can be specified from 8'H to 11'H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



A single muntin can be added to a transom height door frame to create two lites. Muntins and glass horizontals can be no closer than 6⁷/₈".



When planning with 4" high base, specify door frames to accept 4"H base and to receive special height plinths to match base trim.



Muntin size can be specified as 1¹/₂" or 2¹/₄".

Pivot-Hinged Frames and Door Leaves

Including Glass Selections Pivot-Hinged Frames and Door Leaves

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall doors can be used with Privacy Wall panels. Door frames and leaves must be ordered separately.

► Specifying, pages 142–146, 152–159, and 206–215

Tip: Glass Selections panels are compatible with pivot-hinged frames and leaves only.

Recessed or overlapping ceiling track is available.

Pair leaves can be painted or specified with wood veneer.

Frame has a narrow (1¼"W) profile. Expanded frame to accommodate switch has a 2½"W profile.

Inactive door leaf

Door frame is factory prepped for pivot hinges. Door hardware is ordered separately.

► Page 160

Tip: Hardware is mostly hidden.

Post extensions are available in two versions to accommodate both types of ceiling track.


Feature strip joins door frames to panels, posts, or adapters.

Active door leaf accommodates latch.


Glass Selections door frames are available in anodized aluminum to match Glass Selections panels.
Tip: Glass Selections transom profile is slightly smaller than Privacy Wall. Therefore, only Glass Selections door leaves must be used with Glass Selections door frames.

Single door leaves are solid or glass. Solid leaves can be painted or specified with wood veneer.


Product Details




Single and pair versions of doors and door frames are available.




Glass doors can be ordered with a bottom rail height dimension of 5"H or 12"H. The 5" rail height will align closely with the bottom horizontal of a glass panel. In some areas of the country (such as California), a 12"H minimum bottom rail is required for code compliance in some applications.




Door frames can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Ceiling track allows 1/2" of vertical adjustment to accommodate variations in field conditions. Floor track allows 3/4" of vertical adjustment.




Plinths are included to finish the bottom of both sides of a door frame.




Full-height doors increase in height as the door frame increases.
Tip: Maximum ceiling height of glass doors is 9'0"H.




Transom-height door leaves are 7'0"H. Transom increases in height as the door frame increases.
Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

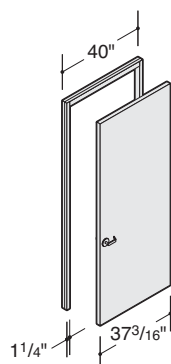


Width of single door frame without switch cutout is 40"W and accommodates a 37³/₁₆"W door.

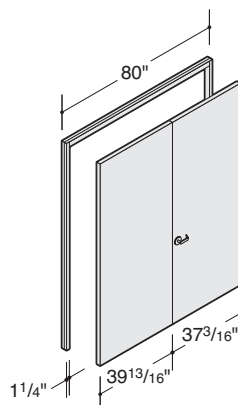


Width of pair frame is 80"W.

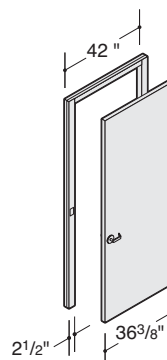


Width of single door frame with switch cutout is 42"W and accommodates a 36³/₈"W door.




Maximum swing of door is 115°.




Transom-height frames for pair of doors with vertical directional, patterned glass will have a vertical muntin installed in the center of the transom.
▶ See *Glass Availability Matrix* for directional glass options, page 340.



Transom-height doors correspond to Clerestory or glass wall panels with transom-aligned top lite.
Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.




Left-hand pivot door




Right-hand pivot door

Solid pivot-hinged doors and door frames are non-handed. By removing and reinstalling the strike plate, you can convert a left-hand pivot door into a right-hand pivot door.
Tip: Glass pivot doors are handed to ensure that glass is properly oriented.
▶ Page 96


Pivot-Hinged Frames and Door Leaves, including Glass Selections Pivot-Hinged Frames and Door Leaves, continued




Pivot-hinged door frames with switch cutout are handed. The switch cutout is on the side of the frame opposite the pivots. You cannot change the swing orientation of the door frame in the field, although you can change the swing of the door.



To determine whether a door is left or right hand, imagine yourself standing in the door's frame with your back against the side of the frame where the door's hinges will be attached. If the door will swing to your left, it is a left-hand door (and frame). If it will swing to your right, it is a right-hand door (and frame).



Ceiling track bypass cover is available to conceal switch conduit routed next to a recessed ceiling track as the conduit travels from the ceiling into a door frame.
▶ Page 234



Cutout for cylindrical passage set or lockset is standard in pivot-hinged door leaves. Cutout and strike plate for mortise passage set or lockset is available as an option. Order passage sets and locksets separately.
▶ Page 160


Tip: Cutout and hardware must be the same for door and door frames.
Tip: Mortise locksets and passage sets ordered from another manufacturer must have a 1 1/8" flat strike plate.
Tip: Doors that are specified with hardware prep for mortise locks will not have faces drilled for levers, cylinders, etc. All necessary holes in the face of the door must be drilled by the installer.



Magnetic wall stop



Dome-style floor stop




Screw-in base stop


Door stops can be ordered for use with doors. Magnetic wall stop, dome-style floor stop, and screw-in base stop are available. Magnetic wall stop is for use with painted solid or Clerestory panels only.
▶ Page 162

All door openings meet ADA requirements.


Connections



Feature strips, ordered separately, join door frames to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.
▶ Page 240




Recessed




Overlapping

Ceiling track, ordered separately, joins the top of door frames to the ceiling. Ceiling track is available recessed or overlapping.
▶ Page 60


Panel-supported storage and worksurface components cannot be attached to door frames. Use solid wall or Clerestory panels instead.




Posts join a door frame to a panel in an L-, T-, X-, V-, or Y-configuration. A T-, X-, or in-line post can also be used between two in-line door frames.
▶ Page 82



Adapters connect a door frame to a panel in an L-, T- or X-configuration. A T-adapter can also be used between two in-line door frames.
▶ Page 78




When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.




Do not use a wall channel to connect a door frame to a perpendicular wall.
▶ See *Wall Channel Flexibility*, page 75.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. For more information regarding seismic applications, visit the Architectural Solutions Web site at village.steelcase.com/SalesGuides and more.




Mini end connects a door frame to a perpendicular building wall.
▶ Page 68

Wiring & Cabling

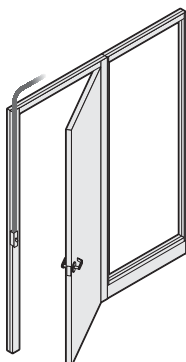


Pivot door
with switch


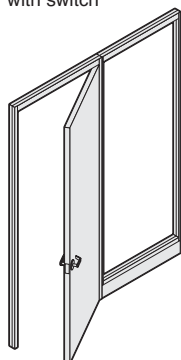


Pivot door
without switch


Installation of a switch
in a door frame will limit
the ability to route a power
infeed through the frame.
If the door frame has no
switch, you can route power
to the base of an adjacent
glass panel.




**In door frame with
glass transom,** switch
wiring must run down
through the floor. Wiring
cannot be run up to the
ceiling.



**Switch cutout in pivot-
hinged door frames** is
always on the strike jamb
of the frame. Cutout is
standard on the side that
matches the direction in
which the door swings.
Switch cutout is located 42"
from floor.




Low-voltage switches
are available on all door
frame types except pairs of
doors.



Low-voltage switches
can be positioned on an
in-line feature strip between
two panels (solid or glass)
or between a panel and a
door frame. The feature
strip is cut and notched
during installation to accom-
modate the switch.

**Pivot-hinged door
frames** can remain
non-handed by installing
low-voltage switches in the
feature strip rather than
positioning them in the
door frame.




High-voltage switches
are available on all door
frame types except Privacy
Wall slider doors, Glass
Selections slider doors, and
pairs of doors. You must
specify door frame for use
with switch cutout.

Surface Materials

Door frame
• Paint

**Glass Selections
door frame**
• Clear anodized aluminum



**Aluminum rails and
stiles on glass door
leaf**

• Paint
• Clear anodized aluminum
(Glass Selections only)

Solid door leaf

• Paint
• Wood veneer

**Transom, glass door
leaf**

• Glass

**Strike plate and
door stops**

• 9200 Satin Chrome
• 9201 Polished Chrome

Pivot hinges

• 9200 Satin Chrome

Switch plate

• Paint

Feature strip

• Paint
• Fabric
• Vinyl
• Anodized aluminum

Application Topics

**Door Swing Orientation
Choices**

▶ Page 46

**Feature Strip
Application**


▶ Page 86

Pivot-Hinged Frames and Door Leaves — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

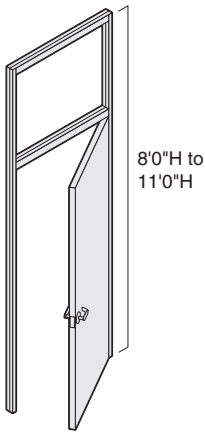


Privacy Wall door frames with transom



can be specified from 8' 0"H to 11' 0"H, in one-inch increments, to accommodate different ceiling heights.

Exception: Glass Selections door frames are available in a maximum of 10'0".


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




When planning with 4" high base, or low profile base, specify door frames to accept 4"H or 2 1/2"H base and receive special height plinths to match base trim.




Privacy Wall door frames can be specified with wood veneer surfaces. Glass Selections frames are not available with veneer.



A single muntin can be added to a Privacy Wall transom height door frame to create two lites. Muntins and glass horizontals can be no closer than 6 7/8".



Muntin size can be specified as 1 1/2" or 2 1/4".




Glass Selections door frames can be specified with painted surfaces as an alternative to anodized aluminum.


Door Swing Orientation Choices

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Butt-Hinged Door Frames




Left-hand swing orientation



Right-hand swing orientation




Left-hand active swing orientation on active leaf




Right-hand active swing orientation on active leaf

Butt-Hinged Door Frames with Switch Cutout




Left-hand swing orientation plus switch cutout




Right-hand swing orientation plus switch cutout

Tip: Transom-height door frames are also available.


Pivot-Hinged Door Frames




Left-hand swing orientation



Reverse swing orientation on site at the time of installation




Left-hand active swing orientation on active leaf




Reverse swing orientation on site at the time on installation

Tip: Glass pivot doors are handed to ensure that glass is properly oriented.
 ▶ Page 96

Pivot-Hinged Door Frames with Switch Cutout



Left-hand swing orientation on door frame with switch cutout



Right hand swing orientation on door frame with switch cutout

Tip: Transom-height door frames are also available.

Privacy Wall Slider Doors

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Privacy Wall slider doors include door frame, slider door, fixed panel, and hardware.
 ▶ Specifying, page 166

Post extensions are available in two versions to accommodate both types of ceiling track.


Feature strip joins slider door to panels, posts, or adapters.

Recessed or overlapping ceiling track is available.

Fascia conceals track and ceiling mechanism and projects beyond the face of the wall.

Knockout for low-voltage switch is located on fixed panel 42" from floor.

Fixed panel does not move. It provides space for the overlapping door when it is in the open position.

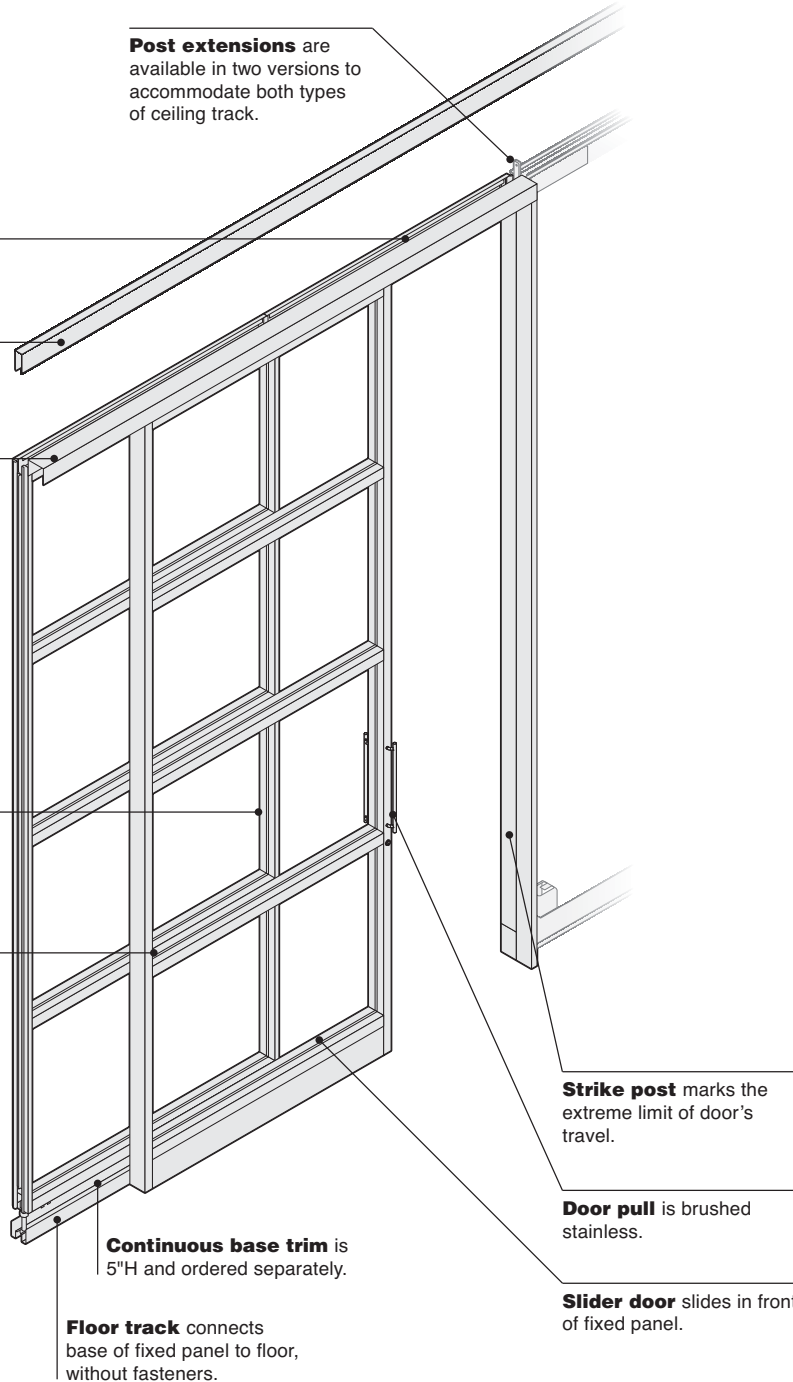


Strike post marks the extreme limit of door's travel.

Door pull is brushed stainless.


Slider door slides in front of fixed panel.

Product Details




Slider doors can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




Full glass




Two transom-aligned lites



Three equal divided lites




Four equal divided lites




Four transom-aligned lites


Slider door units are available with five different glass configurations.




Ceiling track allows 1/2" of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows 3/4" of vertical adjustment to accommodate variations at base.

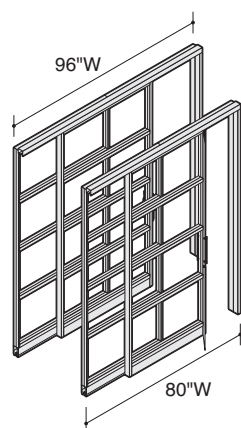

Width of slider door is 80"W or 96"W. Full opening is slightly less than half of the total width of sliding door assembly.




Left-hand Slider door




Right-hand Slider door

Slider door is available left hand and right hand when viewed from slider door side.

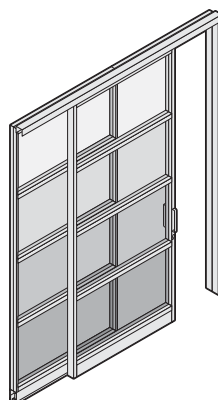


Glass lite types can be specified individually per row.

► See *Surface Materials*, page 334.
Tip: For information regarding Etched and Pattern Glass Planning.
► Page 96.




Some pattern glass types have a linear pattern. These linear patterns are oriented vertically as shown.

► See page 96 to identify vertical pattern glass.

Frame
Muntin


Muntins are factory-installed horizontal framing elements that physically divide glass lites. Muntins match frame color specified.

Tip: All muntins in slider doors with four equal divided lites are 1 1/2"H.




Low voltage switch cutout is located in the side face of the finished opening frame.

Tip: If slider door is oriented to the outside of the room, the switch cutout will be positioned on the inside of the room. If slider door is oriented to the inside of the room, the switch cutout will be positioned on the outside of the room.




Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.




Door lock with interior thumb latch is available as an option. Locks are keyed randomly.

If using an alternate pull, sliders can be specified to be provided without a pull and without mounting holes in the door. Care should be taken to use an offset pull, and to avoid interference with the lock mechanism.




Plinths are included to finish the bottom of both sides of a door frame.



Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels and slider doors to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.

Privacy Wall Slider Doors, continued




Back-to-back slider cover is available to trim the gap produced when two slider doors are installed side by side.

► Page 176


Tip: Back-to-back slider cover is used in a strike-to-strike centerline planning application only.

Connections




Feature strips, ordered separately, join slider doors to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.

► Page 240



Recessed




Overlapping

Ceiling track, ordered separately, joins the top of doors to the ceiling. Ceiling track is available recessed or overlapping.


► Page 60

Panel-supported storage and worksurface components cannot be attached to slider doors. Use solid wall or Clerestory panels instead.

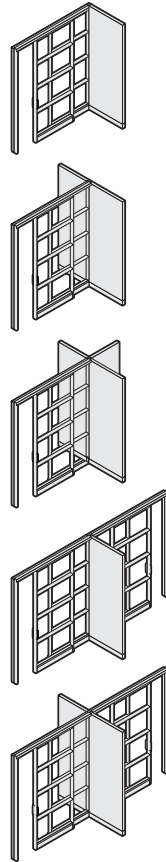


Posts join a slider door to a panel in an L-, T-, X-, or in-line configuration. A T-, X-, or in-line post can also be used between two slider doors.

► Page 82

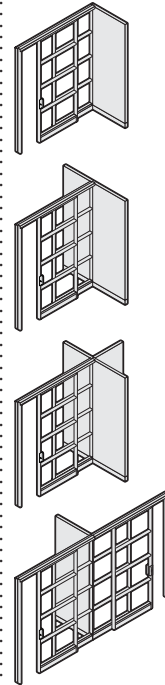


Adapters connect a slider door to a panel in an L-, T-, or X-configuration. A T-adapter can also be used with two slider door strikes back to back.


► Page 78



Back-to-back slider doors will work at all adapters and posts when slider doors are on the outside of an office.

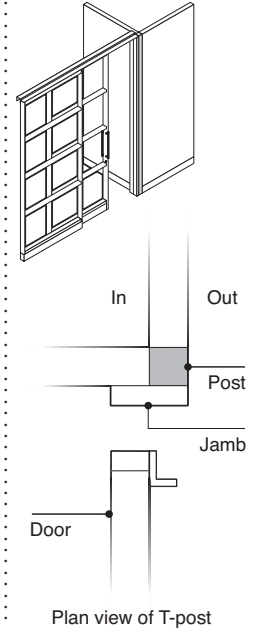


Plan view of T-post

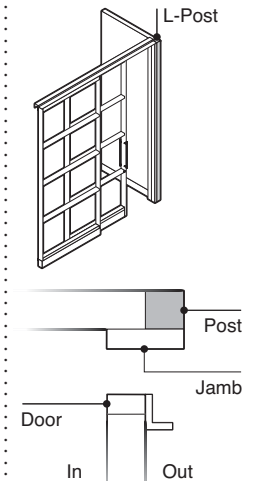

Plan view of L-post


Slider doors will not work with an L- or T-adapter when slider doors are on the inside of an office. Use a post when positioning slide doors to the inside of an office.

Tip: Slider door handing is oriented to the door side of the unit. Be sure to consider door position when determining handing.




Mini end connects a slider door unit to a perpendicular building wall.

► Page 68



When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. For more information regarding seismic applications, visit the Architectural Solutions Web site at village.steelcase.com/SalesGuides and more.



Slider doors are compliant with ADA guidelines for door openings, door hardware, and pull force.

Clear opening width when door is open is as follows:

Dimensions	
A	B
80"	34 ¹ / ₄ "
96"	42 ¹ / ₄ "

Wiring & Cabling

Slider door does not accommodate vertical wire and cable routing.

Knockout is available on Privacy Wall slider doors for low-voltage switches.

Surface Materials

Door frame and muntins

- Paint

Lite

- Glass

Floor track

- Paint

Base trim

- Paint

Feature strip

- Plastic
- Fabric
- Vinyl

Door pull

- Satin Chrome

Application Topics

Feature Strip Application


► Page 86

Privacy Wall Slider Doors — SmartTools Options


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.





Slider doors can be specified from 7' 5"H to 10' 0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



Variable widths – side panel only:

variable slider door assembly widths can be achieved by varying the width of the side panel while the door and frame remain unchanged.


80"W: 80" min – 103" max
96"W: 96" min – 111" max



Variable widths – door and side panel:

variable slider door assembly widths can be achieved by varying the size of both the side panel and the door, keeping both symmetrical in width.

80"W: 76" min – 95" max
96"W: 96" min – 113" max




4" high continuous base trim,

ordered separately, can also be specified and is available in 10' lengths. When using 4" high base, panels and other vertical components must be specified with a modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.


Tip: Other modified components that must be specified to accept 4" H base:

*Panels
Posts and adapters
Feature strips
Door frame
Mini end
Wall channels and cut kits
Base trim
Tip: 4" high base cannot be used with base-located power.*




Any or all of the standard muntin positions can be moved. Muntins and glass horizontals can be no closer than 6 7/8".

Muntin locations apply to both the slider door and side panel.



Muntin sizes can be specified as 1 1/2" or 2 1/4".



Additional muntins can be added to a four divided lite slider to make up to six lites. Muntins and glass horizontals can be no closer than 6 7/8".

Glass Selections Polished Edge Slider Doors

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Glass Selections slider doors include door frame, slider door, fixed panel, and hardware.

► Specifying, page 216

Recessed or overlapping ceiling track is available.

Feature strip joins slider door to panels, posts, or adapters.

Door pull is satin chrome.

Fixed panel does not move. It provides space for the overlapping door when it is in the open position.

Continuous base trim is 5"H and ordered separately.

Floor track connects base of slider door to floor, without fasteners.


Post extensions are available in two versions to accommodate both types of ceiling track.

Door can be full-height or transom-height.

Strike post limits travel of slider door.


Slider door slides in front of fixed panel and is oriented to the outside of the panel.

Product Details




Full-height slider doors can be specified from 8'0"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

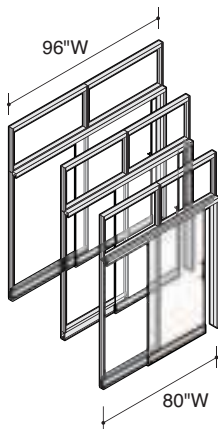


Width of slider door is 80"W, 84"W, or 96"W. Full opening is slightly less than half of the total width of sliding door assembly.




Transom-height slider doors can be specified from 8'0"H to 10'0"H, in one-inch increments. Door height is always 7'.


Transom-height varies depending on ceiling height.



Ceiling track allows 1/2" of vertical adjustment at ceiling to accommodate variations in field conditions. Floor track allows 3/4" of vertical adjustment to accommodate variations at base.

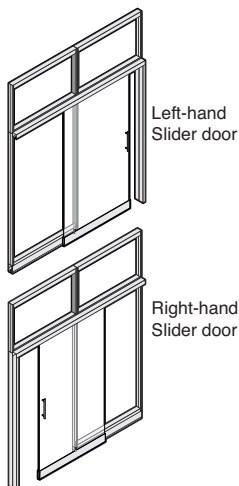

Slider door is available left-hand and right-hand. *Tip: Slider door handing is oriented to the door side of the unit. Be sure to consider door position when determining handing.*




Glass lite types can be specified individually per section.

► See *Surface Materials*, page 334.


Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.




Some pattern glass types have a linear pattern. These linear patterns are oriented vertically as shown.


► See page 96 to identify vertical pattern glass.



Muntins are factory-installed horizontal framing elements that physically divide glass lites. Muntins are anodized aluminum. *Tip: Glass Selections muntins are 2 1/2"H.*




Low-voltage switch cutout is located in the side face of the finished opening frame.




Low-voltage switches


can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.




Door lock with interior thumb latch is available as an option. Locks are keyed randomly on single slider door only.

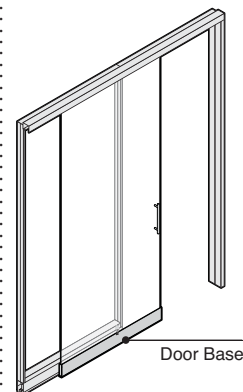

Door base is painted to match adjacent base trim. Base trim for the adjacent fixed panel is ordered separately.




Plinths are included to finish the bottom of both sides of a door frame.




Continuous base trim, ordered separately, is 5"H and available in 10' lengths. It runs along multiple panels and slider doors to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other.

Glass Selections Polished Edge Slider Doors, continued





A **vertical seal** can be specified and installed between the door frame and side panel to engage the trailing edge of the door when closed.

Connections



Feature strips, ordered separately, join slider doors to panels, posts, adapters, and other components while preventing light and sound leaks. To rearrange doors, feature strips can be removed and reused.






► Page 240



Ceiling track, ordered separately, joins the top of doors to the ceiling. Ceiling track is available recessed or overlapping.





► Page 60

Panel-supported storage and workspace components cannot be attached to slider doors. Use solid wall or Clerestory panels instead.




Posts join a slider door to a panel in an L-, T-, X-, or in-line configuration. A T-, X-, or in-line post can also be used between two slider doors.

► Page 82





Adapters connect a slider door to a panel in an L-, T-, or X-configuration. A T-adapter can also be used with two slider door strikes back to back.



► Page 78



Back-to-back slider doors will work with all adapters and posts when slider doors are on the outside of an office.




Plan view of T-post



Plan view of L-post


Slider doors will not work with an L- or T-adapter when slider doors are on the inside of an office. Use a post when positioning slide doors to the inside of an office.

Tip: Slider door handing is oriented to the door side of the unit. Be sure to consider door position when determining handing.




Mini end connects a slider door unit to a perpendicular building wall.

► Page 68



When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. For more information regarding seismic applications, visit the Architectural Solutions Web site at village.steelcase.com/SalesGuides and more.



Slider doors are compliant with ADA guidelines for door openings, door hardware, and pull force.

Clear opening width when door is open is as follows:

Dimensions	
A	B
80"	33 ⁵ / ₁₆ "
84"	35 ⁵ / ₁₆ "
96"	41 ⁵ / ₁₆ "

Wiring & Cabling

Slider door does not accommodate vertical wire and cable routing.

Low-voltage switches are available for Glass Selections slider doors.

Surface Materials

Door frame and muntins

- Clear anodized aluminum

Lite

- Glass

Door base

- Paint

Base trim

- Paint

Feature strip

- Plastic
- Fabric
- Vinyl
- Anodized aluminum

Application Topics

Feature Strip Application


► Page 86

Glass Selections Polished Edge Slider Doors — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.



Full-height slider doors can be specified from 7'5"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.



Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



Special widths – side panel only:

special slider door assembly widths can be achieved by varying the width of the side panel while the door and frame remain unchanged.



80"W: 80" min – 100" max
84"W: 84" min – 102" max
96"W: 96" min – 108" max

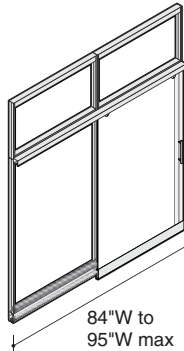

Special widths – door and side panel:

special slider door assembly widths can be achieved by varying the size of both the side panel and the door, keeping both symmetrical in width.

80"W: 78" min – 83" max
84"W: 84" min – 95" max
96"W: 96" is maximum width

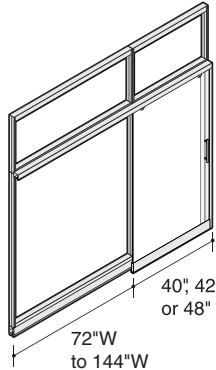

Slider doors with frame kit as side panel:


slider door frames and doors can be combined with frame kits and glass kits in variable widths.

40" door frame: 112" min – 184" max
42" door frame: 114" min – 186" max
48" door frame: 120" min – 192" max

Glass Selections wall panels and frame kits

can be specified with painted surfaces as an alternative to anodized aluminum.


Glass kit must be ordered separately for slider with frame kit as a side panel.



4" high continuous base trim, ordered separately, can also be specified and is available in 10' lengths. When using 4"H base, slider door units and other vertical components must be specified with a modified height to accept 4"H base trim and to ensure that the correct overall ceiling height is achieved.

Other modified components that must be specified to accept 4"H base:

Panels
Posts and adapters
Feature strips
Door frame
Mini end
Wall channels and cut kits
Base trim
Tip: 4" high base cannot be used with base-located power.



Low profile base trim, ordered separately, can be specified on Glass Selections slider units. The base height is 2 1/2"H and is available in 10' lengths. It runs along multiple panels to create a uniform look. For longer runs, multiple base trim segments can be used adjacent to each other. When using low profile base, slider door units and other vertical components must be specified with a modified height to accept 2 1/2" base trim and to ensure that the correct overall ceiling height is achieved.

Other modified components that must be specified to accept profile base:

Panels
Frame kits and glass kits
Feature strips
Posts
Door frame
Mini end
Tip: Low profile base cannot be used with power.

Glass Selections slider doors, when used with low profile base trim, have no bottom trim.

Panels with low profile base have reduced vertical adjustment at the floor (plus/minus 3/8").

Ceiling Tracks

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Ceiling track attaches the top of Privacy Wall panels, door frames, and other components to the ceiling. Ceiling track is available in recessed or overlapping versions.

► Specifying, page 230

Recessed ceiling track is set back from the surface of the panel on both sides.

Flexible seal ensures tight fit to ceiling to block light and sound leaks.


Factory-formed corner pieces are available to form L- and V-configurations.

Tip: Use overlapping ceiling track with enhanced core panel to achieve greatest acoustical performance.



Overlapping ceiling track covers the top of panel face.

Finished end


Product Details




Straight ceiling track is available in 120" lengths. It can be cut on site to accommodate any condition. Multiple straight lengths can be joined in line.




Finished-end ceiling track is available to finish the exposed end of a straight run of overlapping or recessed ceiling track.




L corner pieces are available recessed or overlapping to form 90° corners.




V corner pieces are available recessed or overlapping to form 120° or 135° corners.




To join panels in a Y-configuration, use straight ceiling track with an L corner piece.



For panels joined in a T-configuration, use two straight lengths of ceiling track, placed perpendicular to each other.



For panels joined in an X-configuration, use multiple straight lengths of ceiling track placed perpendicular to each other.




T-clip can be used for panels joined in a T-configuration to improve track alignment. Use two T-clips for panels joined in an X-configuration.

► Page 234

Connections

Ceiling track can be removed and repositioned using optional hardware, without damaging ceiling grid or tile.



Attachment hardware is available in a variety of types to accommodate most standard ceiling types and other field conditions. To discuss unusual field conditions, call the Steelcase Solutions Resource Team at 1.888.STEELCASE (1.888.783.3522) or send an e-mail to lineone@steelcase.com.


► Page 230

Ceiling clip attachment hardware is included with ceiling track. Additional ceiling clips can be ordered separately for inventory or changes.


► Page 232

Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. When required by the local seismic design criteria, additional ceiling fasteners and/or structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

Wiring & Cabling



Overlapping ceiling track conceals power harnesses and cables routed vertically from the ceiling into a run of panels.



Bypass cover is available to conceal power harnesses and cables routed next to a recessed ceiling track as the conduit travels from the ceiling into a run of panels or a door frame.

Tip: Bypass cover must be used to conceal a ceiling infeed when the ceiling track is directly under a T-runner and when a modular infeed is being used.

► Page 234

Surface Materials

Ceiling track



- Paint

Ceiling Tracks — SmartTools Options


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.



Recessed and overlapping ceiling track can be specified with wood veneer surfaces.




V corner ceiling track sections, 24" x 24" are available recessed or overlapping, in 5° increments, from 70° minimum to 175° maximum.

Cornice Track


Privacy Wall is designed and intended for use with ceiling track that is connected to a suspended ceiling grid. In some cases, it may be desirable to install Privacy Wall in an application where there is no ceiling. In these cases, in order to provide an acceptable level of stability, it is necessary to follow the panel stability guidelines for cornice application. Also, cornice track is inserted into the top of the walls and fastened in place. Ceiling track is not used.

► Specifying, page 235


Glass Selections is not approved for applications with cornice track.

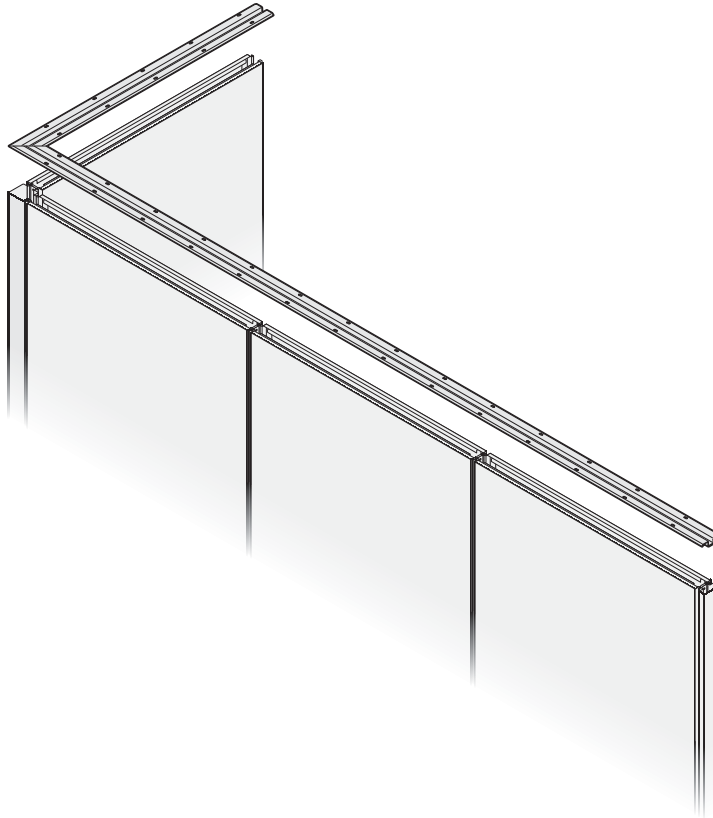


Connections



For panels joined in an L-configuration, use two straight lengths of ceiling track, placed perpendicular to each other using a cornice track L bracket.




For panels joined in a T-configuration, use two straight lengths of ceiling track, placed perpendicular to each other using a cornice track T bracket.



For panels joined in a X-configuration, use three straight lengths of ceiling track, placed perpendicular to each other using a cornice track X bracket.

Product Details




Cornice track is available in 120" lengths. It can be cut on site to accommodate any condition. Multiple straight lengths can be joined in line.

When ordering panels and door frames, specify the recessed option for ceiling track.

Glass Selections is not approved for applications with cornice track.

Cornice-supported walls cannot support panel-hung furniture components.




When installing on hard surface floors, it is recommended to use the universal floor grippers (GPUFG) at each in-line panel joint.


Termination at wall channels or mini ends requires a mechanical fastening to the foreign wall. Either plastic anchors or toggle bolts at drywall, or tapcons at concrete or masonry.

When ordering panels and door frames, specify recessed option for ceiling track.

Glass Selections is not approved for applications with cornice track.




Cornice supported walls cannot support panel hung furniture components.




Permanent wall

Maximum runs for solid panels are 20 feet or 5 panels and both ends must terminate at an intersection or properly anchored termination. An intersecting wall must be at least 48" long.




Permanent wall


Maximum runs for solid panels including a door unit is 16 feet, and both ends must terminate at an intersection or properly anchored termination.




Permanent wall




Permanent wall



A maximum run for all glass fronts or all glass with a door unit is 12 feet and both ends must terminate at an intersection or properly anchored termination.




Permanent wall




Permanent wall

Permanent wall




Permanent wall




Permanent wall

Post and Beam, with a minimum beam length of 60", can be used for support in place of an intersection or termination, but only at one end of the wall. One end of the beam must be anchored to the floor or some permanent part of the structure. Only overhead beams should be used with Privacy Wall.



Permanent wall



Permanent wall


When a single wall exceeds the maximum length as defined above, an intermediate intersecting panel or Post and Beam can be inserted to stabilize the wall. If both ends of the wall intersect with either a fixed wall or a connecting wall that is 72" in length, then the intermediate panel can be as small as 24" wide.

When required by the local seismic design criteria, structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

Ceiling Clip Application


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Exposed Tee Grids – Privacy Wall Fastener Kits

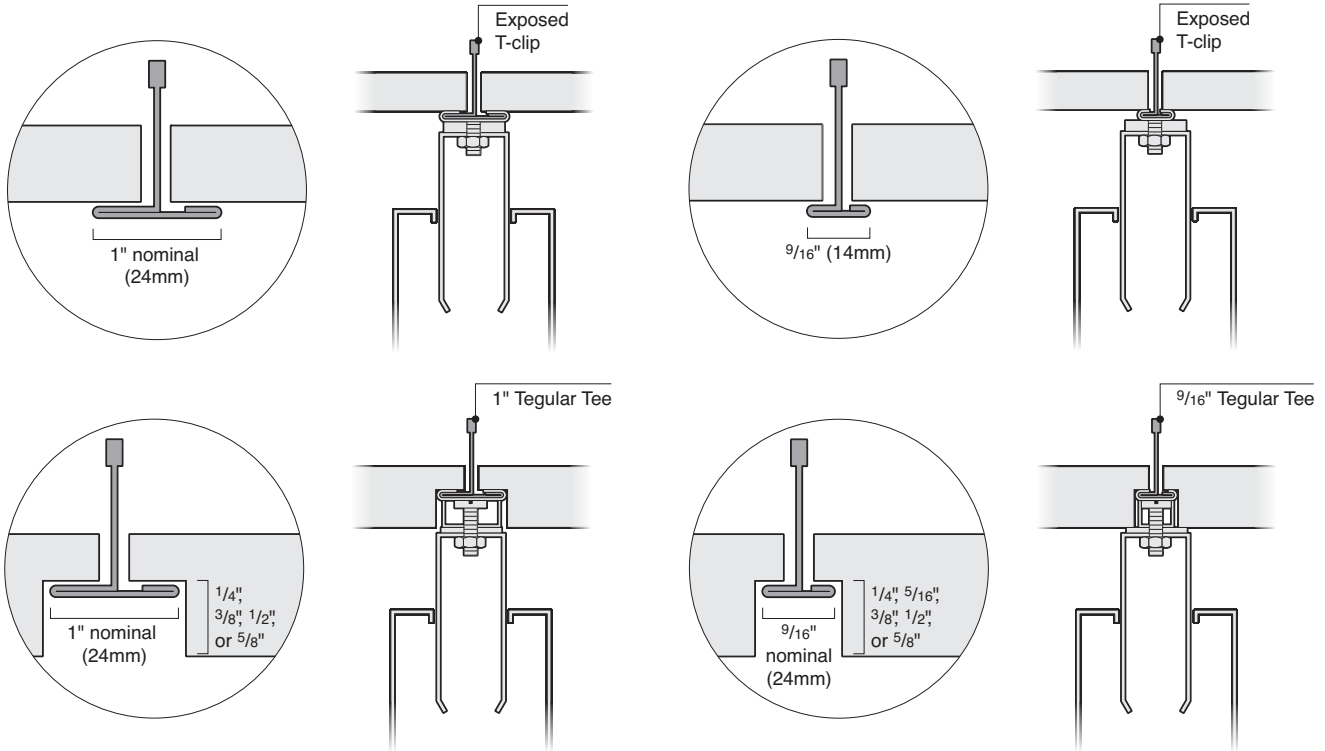


Ceiling clips support the most common types of ceiling systems.

Bolt and Screw Grids – Privacy Wall Fastener Kits

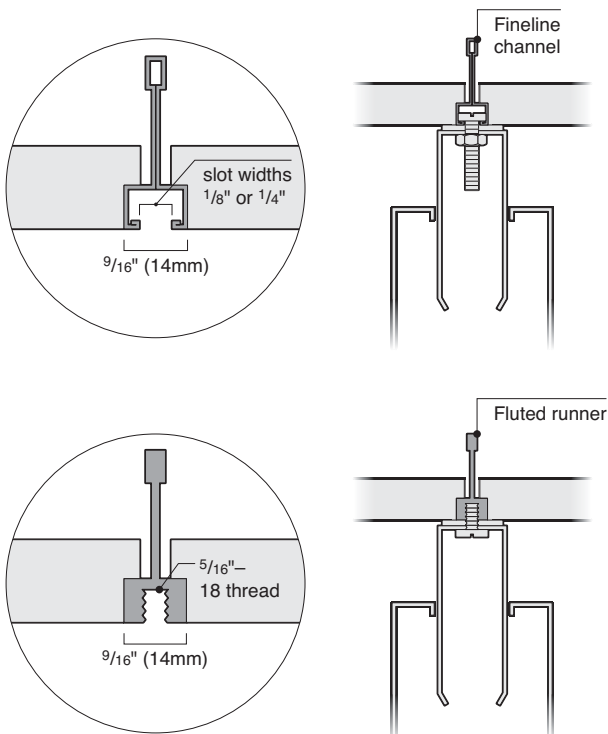

Concealed Grids – Field-Purchased Generic Fasteners

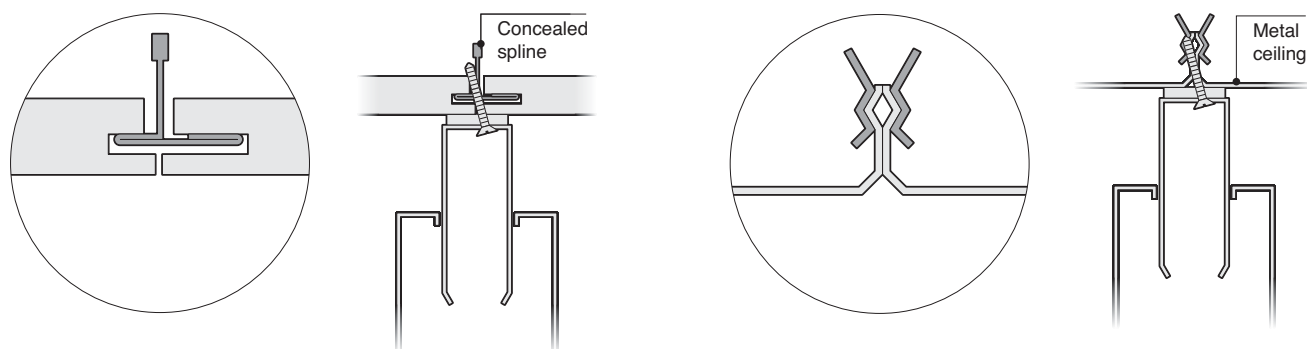

For these and other types of ceilings, the following fasteners can be sourced locally by the installer:

Concealed spline	#7 – 17 x 1 5/8" Bugle Head Self-Drilling Screws
Drywall	#14 – 1" Phillips Head SMS with plastic anchor
Plaster	1/4 – 20 Toggle Bolt
Concrete	Tapcon Anchor x 2"
Metal pan	#7 – 17 x 1" Bugle Head Self-Drilling Screws

Mini Ends


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Mini ends connect a panel to another panel or to a perpendicular building wall or column.

► Specifying, pages 177 and 221

Verticals on inner channel allows the mini end to connect to adjacent panel using feature strips. Panel slots remain accessible to support panel-supported furniture. The mini end has no slots and cannot support components.

Neoprene seals provide light and sound seal between the mini end and the building wall.

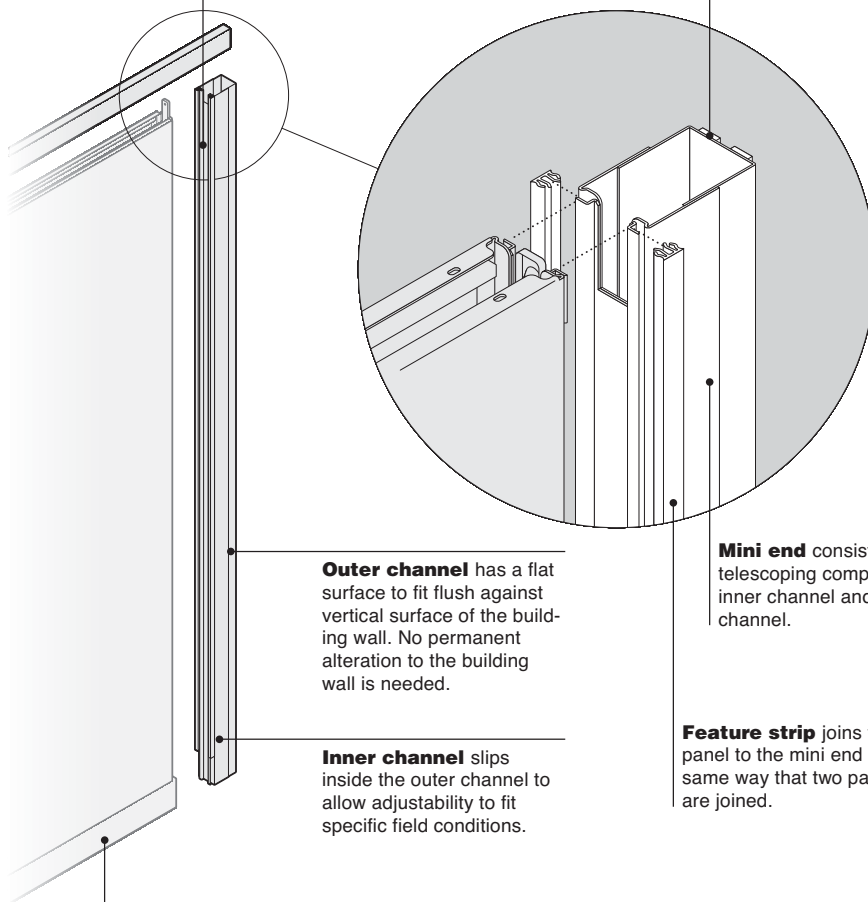

Outer channel has a flat surface to fit flush against vertical surface of the building wall. No permanent alteration to the building wall is needed.

Inner channel slips inside the outer channel to allow adjustability to fit specific field conditions.


Mini end consists of two telescoping components—inner channel and outer channel.

Feature strip joins the panel to the mini end in the same way that two panels are joined.

Continuous base trim, ordered separately, is added in the field. Mini end extends into the base cavity and is covered by base trim.

Product Details

Height of mini end must be the same as the adjacent panel. Mini ends are available in all the same heights as panels. Indicate height when you order by specifying the ceiling height of the installation.


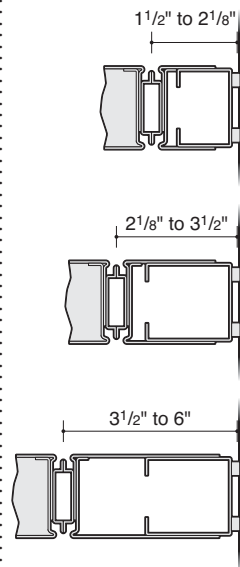


Three sizes of mini ends are available. Each telescopes to accommodate a different range of dimensions. For installations that require a dimension smaller than 1 1/2", use a wall channel.


► Page 72

For installations that require a dimension larger than 6", consider using a larger panel somewhere in the run or use a panel end cut kit.


► Page 76



Both recessed and overlapping ceiling tracks can be used with mini ends.




Base of mini end is finished with continuous base trim, ordered separately, like any panel.




When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.

Connections

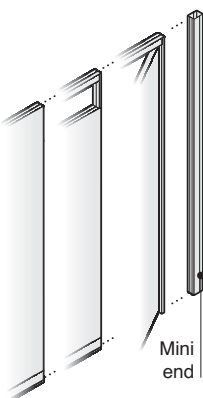

All panel types and door frames can connect to a mini end.




Adjacent panels connect to a mini end in the same way all panels connect. Feature strip on both sides of the panel form a continuous link to the mini end by engaging the verticals of the mini end and the adjacent panel.

Acoustic packing, when used with mini ends, may help to improve acoustical performance.


Physical connection to the building is not needed. Mini end fits tightly against the building wall, and the contact points are sealed with continuous neoprene strips to form a light and sound seal.

Panel-supported components cannot be attached to a mini end. Use the adjacent panel to support storage and worksurface components.

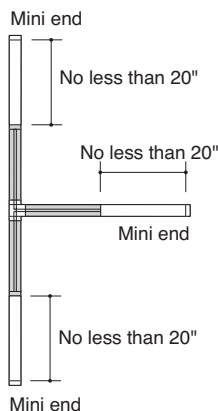

Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini-end or wall channel.

Wiring & Cabling



Wire and cable routing vertically through a mini end is possible. Mini ends are often used to route power to a run of glass panels which don't have sufficient space to accommodate vertical power and cable routing.

Surface Materials

Surfaces of mini ends can be paint, fabric, vinyl, or anodized aluminum for Glass Selections. Both sides must be the same material and color.

Mini end


- Paint
- Fabric
- Vinyl
- Anodized aluminum (Glass Selections only)

Mini Ends — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

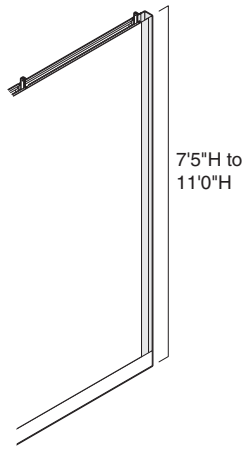



Privacy Wall mini ends can be specified from 7' 5"H to 11' 0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.

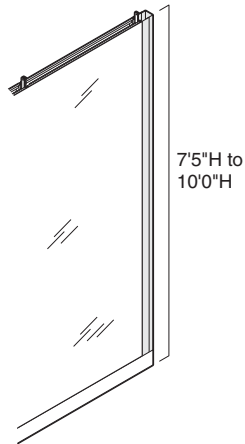


Glass Selections mini ends can be specified from 7' 5"H to 10' 0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




When planning with 4" high base, or low profile base, specify mini ends with modified height to accept 4" base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Mini ends to the floor do not need to be modified for use with 4" base or low profile base.



Privacy Wall mini ends can be specified with wood veneer surfaces.

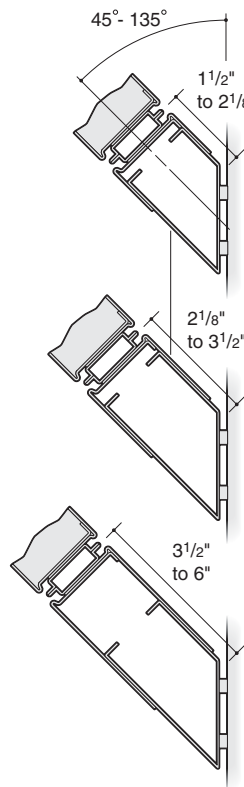

Mini ends can be specified with an angled interface for end conditions that are not perpendicular to fixed surfaces. Angles are available in 5° increments ranging from 45° to 135°.


Tip: Mini ends can be adjusted during installation by as much as 3°.

Wall Channels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Wall channels connect panels with uncut edges to a perpendicular building wall or column.

► Specifying, page 179

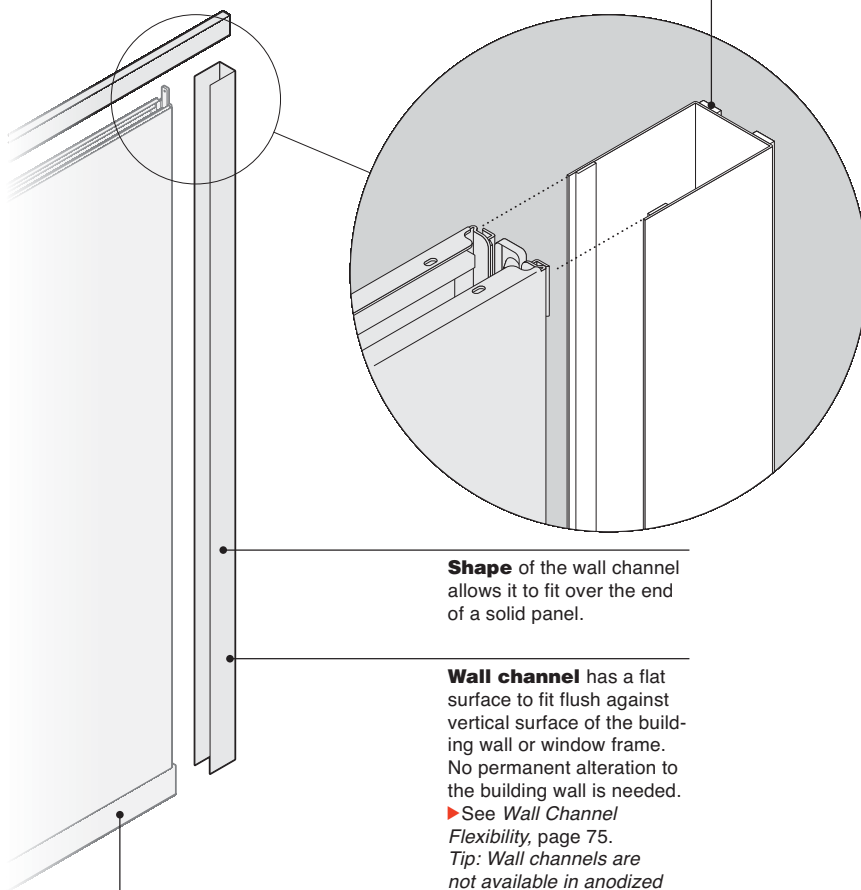

Neoprene seals provide light and sound seal between the wall channel and the building wall.

Shape of the wall channel allows it to fit over the end of a solid panel.




Wall channel has a flat surface to fit flush against vertical surface of the building wall or window frame. No permanent alteration to the building wall is needed.

► See *Wall Channel Flexibility*, page 75.
Tip: Wall channels are not available in anodized aluminum. Dimensions of wall channel do not allow for use with Glass Selections panels.

Continuous base trim, ordered separately, is added in the field. Wall channel extends into the base cavity and is covered by base trim.



Product Details

Height of wall channel must be the same as the adjacent panel. Wall channels are available in all the same heights as panels. Wall channel ships in 10' lengths and is cut to size in the field.




Three sizes of wall channels are available. Each accommodates a range of different dimensions.

► For the dimensions of glass panels and doors, see *Wall Channel Flexibility*, page 75.




Both recessed and overlapping ceiling tracks can be used with wall channels.




Wall channel is cut to the top of the base trim and covered by the base trim.

Solid panels can be inserted to make use of full dimension of the wall channel.

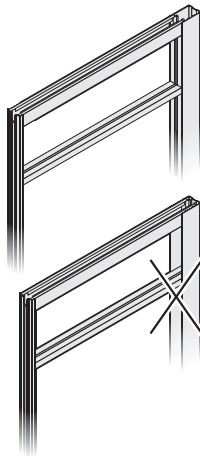


Glass panels should not be inserted too deeply into the wall channel because the wall channel will overlap the glass.

► See *Wall Channel Flexibility*, page 75.

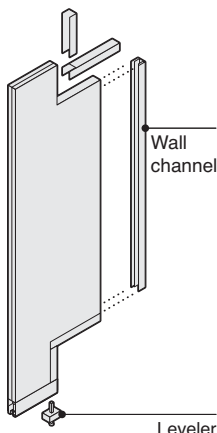

Specify an end filler cut kit when cutting a panel into a wall channel. The end filler cut kit includes a wall channel and spreader.

Connections



All panel types can be used with a wall channel. Adjacent panel is inserted inside the wall channel.


Acoustic packing, when used with wall channels, may help improve acoustic performance.

Physical connection to the building is not needed. Wall channel fits tightly against the building wall, and the contact points are sealed with continuous neoprene strips to form a light and sound seal.

Slotted edges of the adjacent panel are blocked by wall channel. Use mini ends if planning with panel-supported furniture.

► For installations with cut panels, see *Cut Panels*, page 76.

Wiring & Cabling



Wire and cable routing vertically through a wall channel is possible. Wall channels can be used to route power to a run of glass panels which don't have sufficient space to accommodate vertical power and cable routing.


Surface Materials

Surfaces of wall channels can be paint, fabric, or vinyl. Both sides must be the same material and color.

Wall channel

- Paint
- Fabric
- Vinyl

Application Topics

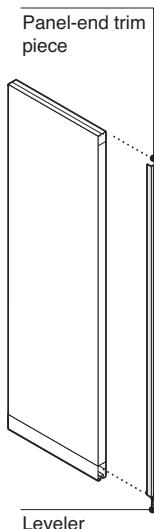

Panel end cut kit connects a cut panel to another panel in line. It restores leveler and housing that is removed when panel is cut on site. Kit includes trim piece to finish the cut side of the panel and to enable feature strip connection to an adjacent panel.

► Page 180


Tip: Hang-on components are not allowed on cut panels.

Wall Channels — SmartTools Options


Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

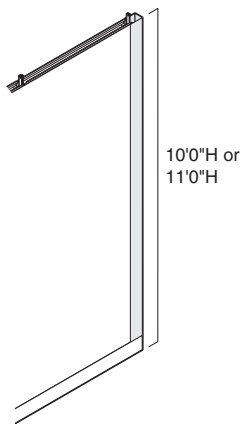

Wall channels can be specified as 10'0"H or 11'0"H.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



Wall channels can be specified with wood veneer surfaces.

Wall Channel Flexibility

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Wall channels allow panels to telescope inside. The amount of flexibility varies depending on the size of the wall channel and what type of panel it is or whether it is a door frame.

Tip: Wall channels are not recommended for use with Glass Selections.


Tip: Order an end filler cut kit when positioning a cut panel at a wall channel.

Tip: 1" wall channel is recommended for use with glass panels. The 2 1/4" and 4" wall channels may overlap a portion of the glass area.


Solid Panels

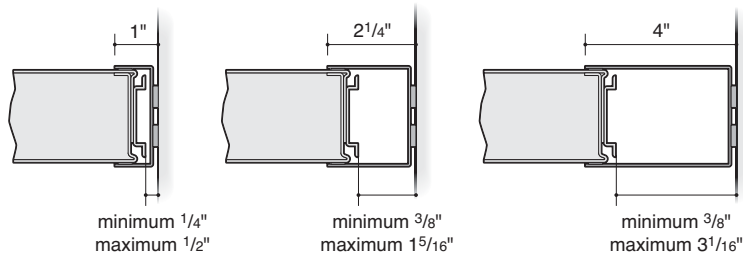

Glass Panels

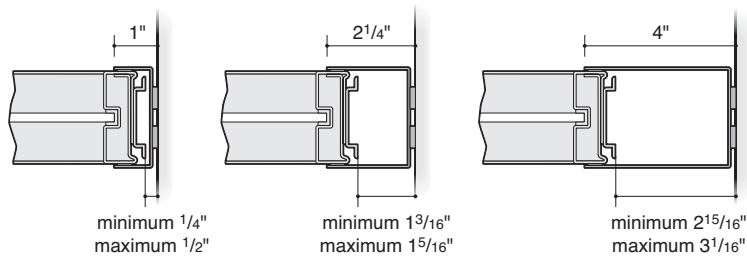

Door Frames

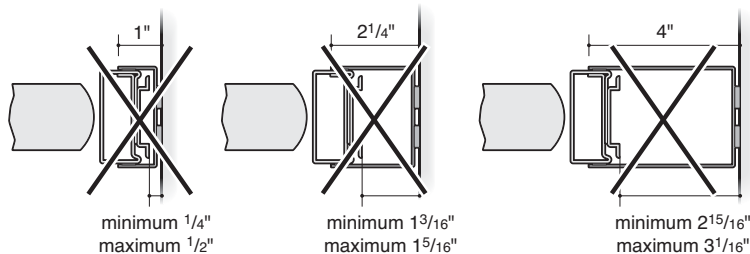

Door frames must be joined to a perpendicular building wall with a mini end, not a wall channel.


Cut Panels

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Cut panels are typically positioned at the end of a run, adjacent to a wall channel. Cut panels can also be positioned in the middle of a run. All cut panels require an end filler cut kit.


► Page 181

Solid panels can be cut on site to allow walls to fit with existing building conditions. Glass panels cannot be cut.

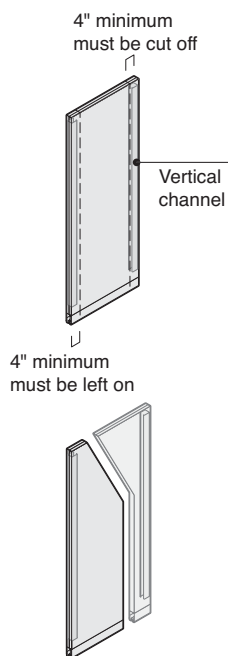


Plan your cuts so that at least 4" of panel width is removed and at least 4" of panel remains. Angled cuts are possible if they conform to these guidelines.

Tip: When you need multiple cut panels, you may be able to specify a larger panel and cut it to produce two smaller cut panels.



Cut section of panel must have at least one vertical edge intact to be functional.

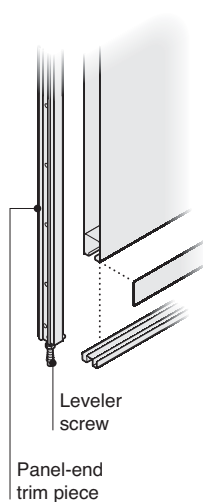


Panel end cut kit is available to restore leveler and housing that is removed when panel is cut on site. Kit includes trim piece to finish the cut side of the panel and to enable feature strip connection to an adjacent panel.

► Page 180


Tip: Hang-on components are not allowed on cut panels.

An end filler cut kit is used when a cut panel is positioned adjacent to a fixed wall.

A panel end cut kit is used when a cut panel is positioned in the middle of a run or adjacent to a corner.

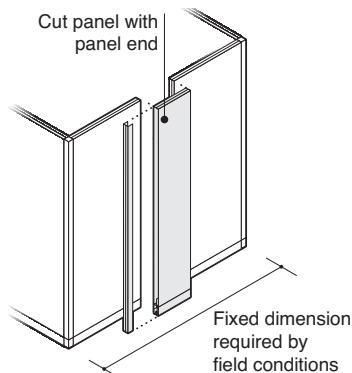


Panel end finishes the edge of a cut panel installed in line with other panels to produce a wall of a specific length. A panel end is typically used to achieve a specific length in a wall that has no wall channel. Panel end trim piece is included in the panel end cut kit.

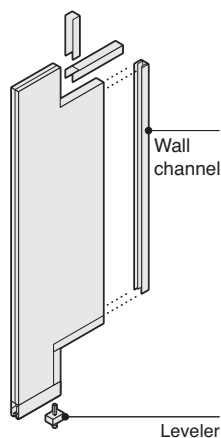

End filler cut kits can be used to finish the edge of a panel that has been cut to conform to the specific shape of a perpendicular building wall, or when a panel is next to an architectural element such as a drywall partition. In this case, you will need to apply an end filler cut kit, which includes a wall channel, spreaders, and a leveler.

► Page 181

Surface materials don't affect cutting. Painted, fabric, and vinyl surfaces can all be cut on site.




Plan your cuts with installation in mind to make sure that it will be possible to fit behind any soffits. Aligning cuts with boundaries may simplify installation.


Adapters

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Adapters engage the verticals on the edge of a panel to allow perpendicular panels to connect.
 ▶ Specifying, pages 182 and 222

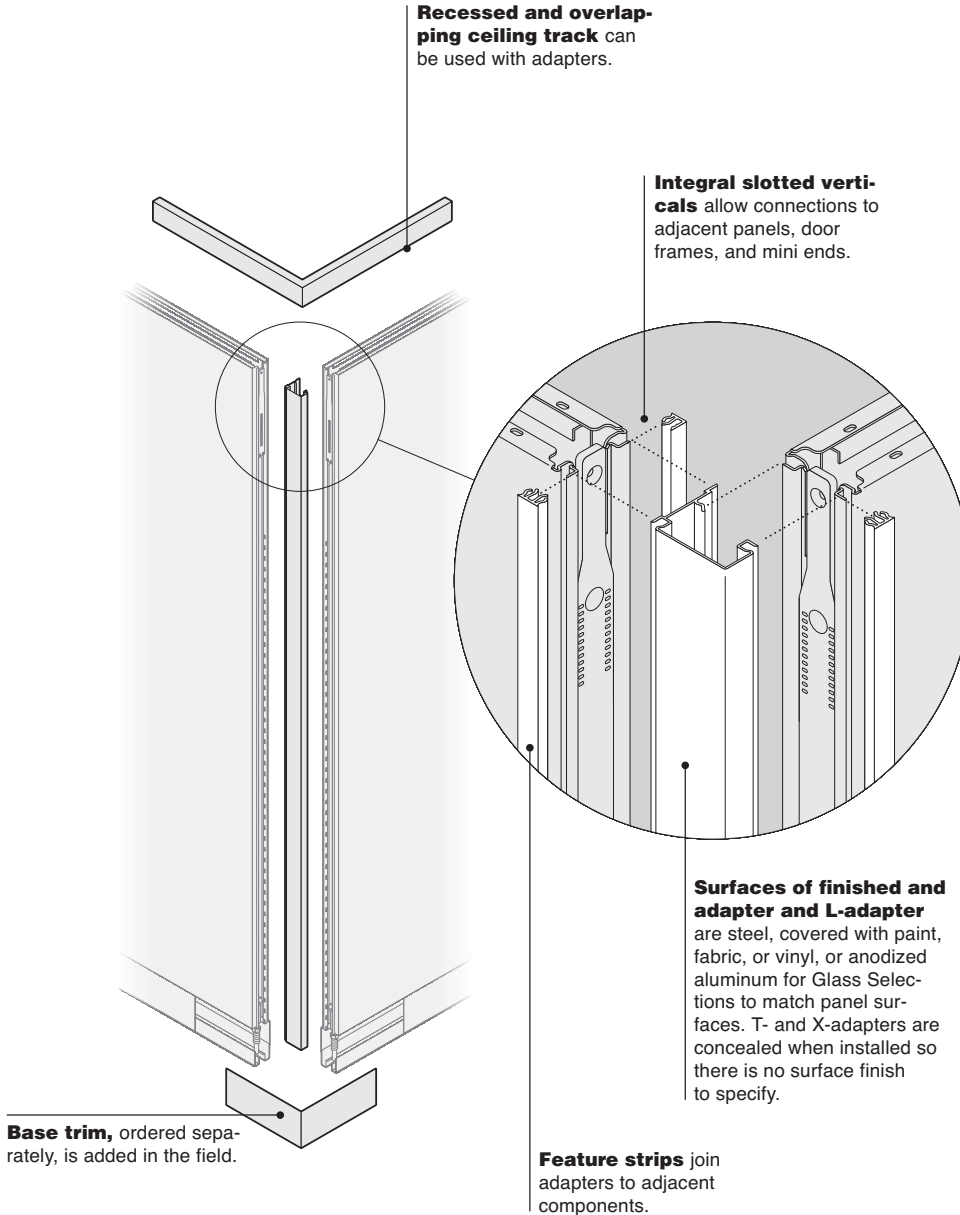


Product Details




Height can be specified from 8'0" to 10'0", in one-inch increments, to accommodate different ceiling heights.



Ceiling track allows $1/2"$ of vertical adjustment to accommodate variations in field conditions. Floor track allows $3/4"$ of vertical adjustment to accommodate variations at base.




Finished-end adapter caps the exposed vertical edge of the last panel in a run. Surface of the adapter is steel, covered in paint, fabric, or vinyl, or anodized aluminum for Glass Selections. The plinth, which is included in the finished end assembly, is painted to match the adjacent base trim. Finished-end adapter adds approximately $1\frac{3}{16}"$ to the length of the wall.
 ▶ See *Feature Strip Application*, page 86.




L-adapter allows a perpendicular panel to attach at the end of a panel. Surface of the adapter is steel, covered in paint, fabric, or vinyl, or anodized aluminum for Glass Selections.

► See *Feature Strip Application*, page 86.



T-adapter allows a perpendicular panel to attach on the centerline between two panels joined in line.


► See *Feature Strip Application*, page 86.



X-adapter allows two perpendicular panels to attach on opposite sides of the centerline between two panels joined in line.

Tip: Base trim projects 1/16" from the face of the panel.

► See *Feature Strip Application*, page 86.




Panel end cut kit can be used to finish the end of a cut panel so that it functions like a conventional panel and can make connections to an adjacent panel, door frame, or mini end. Surface of the adapter is painted steel.

► Page 180

Tip: Panel end is included in panel end cut kit.

Connections



Any panel, door frame, or mini end can be connected to an adapter.



Feature strips, ordered separately, join panels and other components to adapters and prevent light and sound leaks. Feature strip can be cut on site to provide access to the integral slotted verticals so that panel-supported components can be attached. To rearrange panels, feature strips can be removed and reused.


► Page 240

Tip: Anodized feature strips are designed for use with Glass Selection anodized door and glass frames. They are not compatible with upholstered panels.





Overlapping or recessed finished-end ceiling track is available for use with finished end adapter. This ceiling track component finishes the end of the ceiling track in the same way that the finished end adapter completes the exposed vertical edge of the last panel.

► Page 230




Blocked slots occur on the edges of some panels in configurations with adapters. This makes it impractical to attach panel-supported components at these points.

► For an overview of the planning choices, see *Centerline Versus Interior Dimension Planning*, page 88.

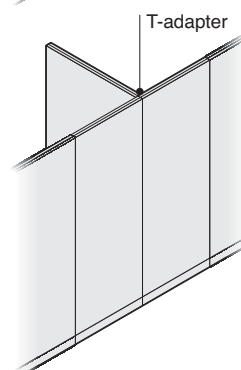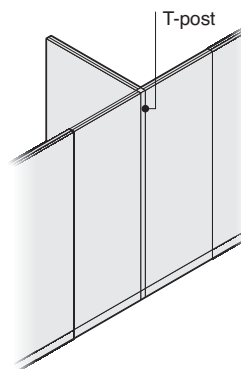

T-adapters, unlike T-posts, produce a simpler, cleaner visual by presenting one joint instead of two.



Exact fit between fixed elements, such as building columns, is possible by using a panel end cut kit. The cut panel behaves exactly like a conventional panel but its width dimension can be modified on site to match field conditions.

Tip: You cannot hang furniture on a cut panel.

► See *Cut Panels*, page 76.

Wiring & Cabling

Adapters do not accommodate vertical wire and cable routing.

Surface Materials

Finished-end adapter and L-adapter

- Paint
- Fabric
- Vinyl
- Anodized aluminum (Glass Selections only)

Application Topics

Feature Strip Application

► Page 86

Centerline Versus Interior Dimension Planning

► Page 88

Base Trim Details

► Page 90

Adapters — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.




7'5"H to
11'0"H

Privacy Wall adapters

can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights.

Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




7'5"H to
10'0"H

Glass Selections

adapters can be specified from 7'5"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.


Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



2 1/2"H
or 4"H

When planning with 4" high base or low profile base, specify adapters with modified height to accept 4"H or 2 1/2"H base trim and to ensure that the correct overall ceiling height is achieved.

Tip: Base trim is ordered separately.




Privacy Wall L-adapters and finished ends can be specified with wood veneer surfaces.


Posts

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.


Posts join panels in a variety of configurations.
 ▶ Specifying, pages 184 and 223

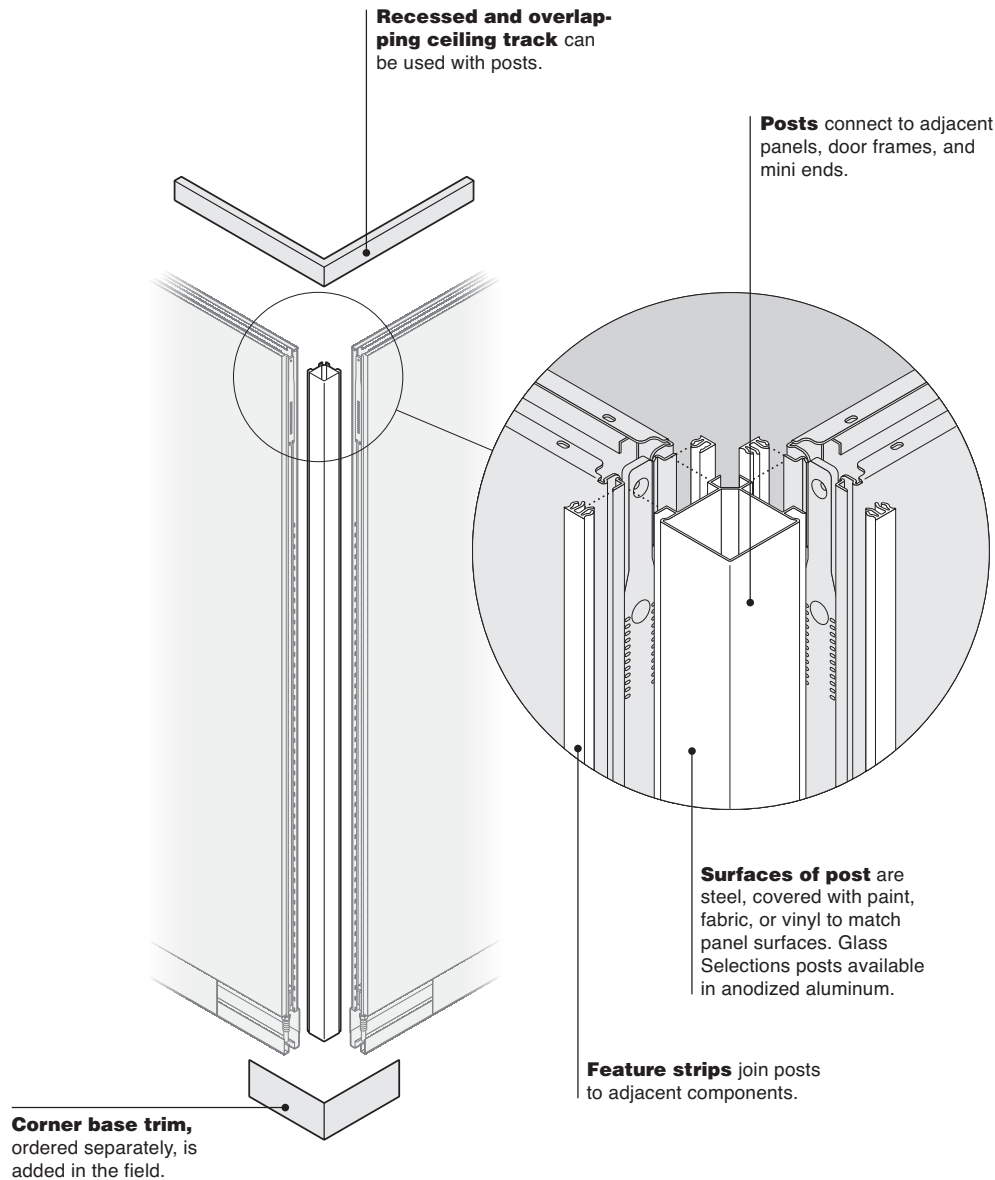







Product Details



Height can be specified from 8'0" to 10'0", in one-inch increments, to accommodate different ceiling heights.




Ceiling track allows $1/2"$ of vertical adjustment to accommodate variations in field conditions. Floor track allows $3/4"$ of vertical adjustment to accommodate variations at base.

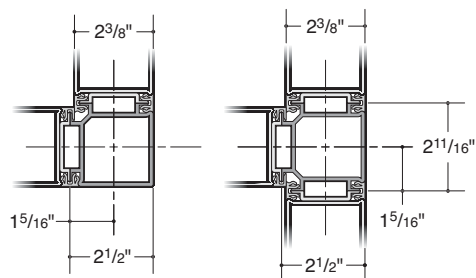

Configurations for posts


include in-line, L, T, X, V, Y, and I-Line interface.

Tip: Base trim projects 1/16" from the face of the panel of the panel.





L-post

L-post has a square profile.




Y-post is made up of a 90° corner and two 135° angles.



V-post is available either 120° or 135°.

Connections

Any panel, door frame, or mini end can be connected to a post.




Feature strips, ordered separately, join panels and other components to posts and prevent light and sound leaks. Feature strip can be cut on site to provide access to the integral slotted verticals so that panel-supported components can be attached. To rearrange panels, feature strips can be removed and reused.

► Page 240

Posts are often more appropriate when planning with interior room dimensions.

Tip: Remember to allow for post dimensions when calculating the overall length of a wall.

► See *Centerline Versus Interior Dimension Planning*, page 88.



Slotted verticals are available when using posts.

► For an overview of the planning choices, see *Centerline Versus Interior Dimension Planning*, page 88.

Wiring & Cabling

Posts can be used to vertically route power and cable infeeds down from the ceiling or up from the floor.

Post

- Paint
- Fabric
- Vinyl
- Anodized aluminum (Glass Selections only)

Base trim

- Paint

Feature strip

- Paint
- Fabric
- Vinyl
- Anodized aluminum

Application Topics

Feature Strip Application

► Page 86

Centerline Versus Interior Dimension Planning

► Page 88

Posts — SmartTools Options

Note: All planning and application guidelines contained in this section of the specification guide are based on the requirement that ceiling track is connected to a ceiling in order to properly support the wall components as shown.

Product Details for SmartTools Options

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.




7'5"H to
11'0"H

Privacy Wall posts can be specified from 7'5"H to 11'0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.




7'5"H to
10'0"H


Glass Selections posts can be specified from 7'5"H to 10'0"H, in one-inch increments, to accommodate different ceiling heights.
Tip: Specify ceiling height of your installation and component will be fabricated to allow for ceiling track.



When planning with 4" high base or low profile base, specify adapters with modified height to accept 4"H or 2 1/2"H base trim and to ensure that the correct overall ceiling height is achieved.
Tip: Base trim is ordered separately.



Privacy Wall L-adapters and finished ends can be specified with wood veneer surfaces.



V-post can be specified at different angles in 5° increments, from 70° minimum to 175° maximum.

Tip: Base trim and ceiling track can also be ordered in corresponding angled configurations.


Tip: Each angled post has different dimensions. Exact dimensions should be requested through the quote process.

Feature Strip Application


Use the table at right to determine the quantity of individual feature strips you need in specific applications.

Tip: For correct fit of feature strips, you must specify type of components that will be used in conjunction with feature strips. Example: One painted component and one upholstered component.


► See page 240 to order feature strips.




Two kinds of feature strips are available. They are available individually (style numbers GPFS1, GPFSH1, GPFS1A, or GPFSH1A available in 10' only) or in packages of 25 (style numbers GPFS, GPFSH, GPFS1A, or GPFSH1A ordered by 1" increments).



When positioned next to a door frame, the mini end should be specified "to floor," and will be field-cut by the installer to final length.



In-line feature strips are used when joining two surfaces on the same plane. They can be specified to correspond to the installation height, or 120"-long feature strips are available to be field-cut.




Half feature strips are used in combination with in-line feature strips for inside corner applications.

Tip: To ensure best fit for feature strips, specify a wall application option.


► Page 240

Specify both a painted and fabric half feature strip for Clerestory panels with one painted and one upholstered component.


When ordering painted feature strips, specify the type of wall application for the adjoining components.




For use with two painted components.




For use with one painted and one upholstered component.



For use with two upholstered components.




For Clerestory panels, you can specify two different feature strips when the solid-panel finish is different from the upper-glass frame finish.



Furniture reveal strips, ordered separately, are positioned between two sections of in-line feature strip to allow access to one set of panel slots when a single component is mounted on a Privacy Wall panel. When components are mounted side by side, both sets of slots are left exposed, and there is no need for a furniture reveal strip. Furniture reveal strips are painted to match the adjacent wall panel or to match the component bracket.

Tip: Use of hang-on components with enhanced core panels may reduce acoustic effectiveness.

► Page 243




Furniture reveal strips are used when hanging components on Privacy Wall panels. The furniture reveal strip finishes off one half of an in-line panel joint, while allowing access to panel slots. They are cut to size from a 34" length as part of the installation process. Typically, one 34" strip is adequate to trim out both edges of a work surface or storage cabinet.


► Page 243

Privacy Wall uses the same furniture interface as Answer. When specifying overhead storage and work surfaces to be mounted on Privacy Wall, select the Answer bracket option.

Product	Number of in-line feature strips GPFS, GPFS1, GPFS1A, or GPFS1A	Number of half feature strips GPFSH, GPFSH1, GPFSHA, or GPFSH1A
Panel	2	0
Hinged door frame	2	0
Slider door unit	4	0
Mini end	2	0
Panel end cut kit	2	0
Finished-end adapter	2	0
L-adapter	1	1
T-adapter	0	2
X-adapter	0	4
L-post	1	1
T-post	2	2
X-post	0	4
In-line post	2	0
V-post	0	2
Y-post	1	1
I-Line interface post	2	0



When hanging furniture on panels, optional acoustic seals can be field-applied to the cantilever or shelf brackets to minimize sound transmission through the wall.




Low-voltage switches can be positioned on an in-line feature strip between two panels (solid or glass) or between a panel and a door frame. The feature strip is cut and notched during installation to accommodate the switch.

Centerline Versus Interior Dimension Planning


Planning Choices

Architects and designers typically use either centerline planning or inside-dimension planning when laying out walls. Privacy Wall supports either approach or a combination. Your decision about which strategy to use will depend on your building and integration and interface issues. Each approach offers its own advantages and disadvantages.




Centerline planning

concerns the distance between the centerline of walls; the thickness of the walls is a secondary consideration. For example, two parallel walls that are $2\frac{3}{8}$ " thick and with centerlines that are 96" apart will produce an interior space that is $93\frac{5}{8}$ "W.



Interior planning concerns the physical dimensions of the room created by walls. For example, to create an interior space that is 96"W, two parallel walls that are $2\frac{3}{8}$ " thick would have a centerline dimension of $98\frac{5}{16}$ ".

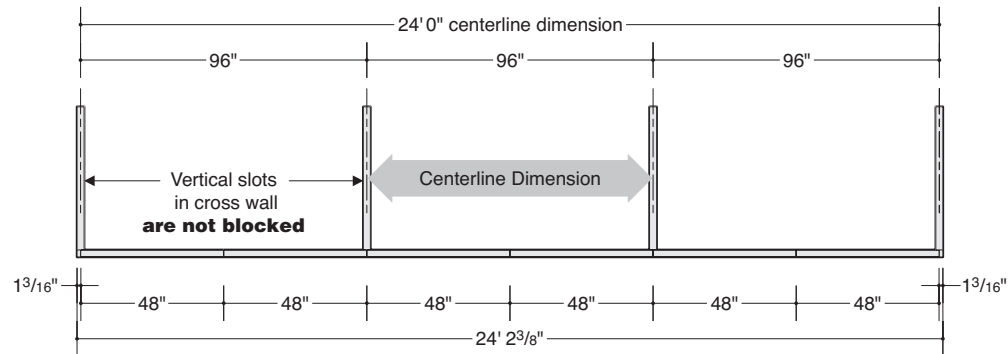


Using Adapters

Advantages

- Allows centerline planning.
- No creep added to the dimensions of the run of panels in one axis.
- Lower cost than using posts at T- and X-corners.
- Clean visuals. No double feature strips visible when the back side of the wall doesn't have perpendicular panels.

Disadvantages

- Vertical slots in some panels will be blocked by overlapping panels and therefore cannot accommodate panel-supported storage or worksurface components.

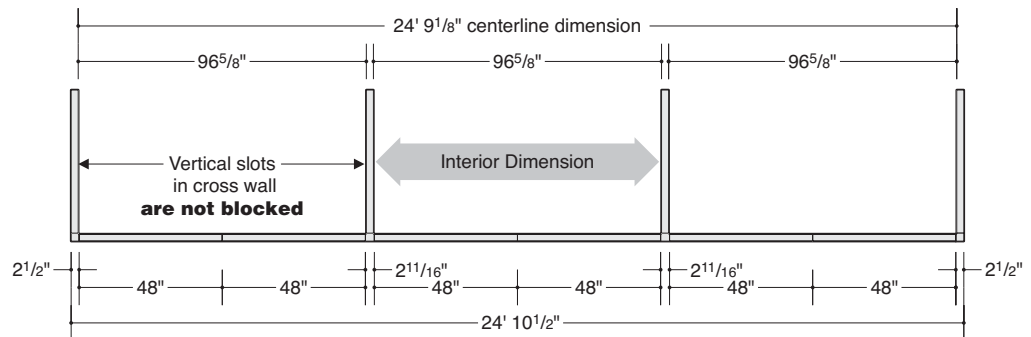


Using Posts

Advantages

- Ideal for interior dimension planning because the inside dimensions of the room will always match the dimensions of the panels that make up the wall.
- Vertical slots will never be blocked, so adding panel-supported storage or worksurfaces is never a problem.

Disadvantages



- Must allow the $2\frac{1}{16}$ " increment that each L-post adds and $2\frac{1}{16}$ " increment that each T-post adds to the length of the run of panels.



- Posts and two feature strips will be visible on the opposite side of the wall if no panels are joined at those points.
- More expensive than using adapters at T- and X-corners.

Combining Techniques

In some applications it is desirable to combine centerline planning with inside-dimension planning. For example, you might want a front wall that produces alignment in a building that has columns or window elements on centerlines that are spaced 96" apart. But along the cross walls, you may want to use inside-dimension planning to ensure that standard-sized furniture components, such as workspaces and bins, will match panel dimensions.

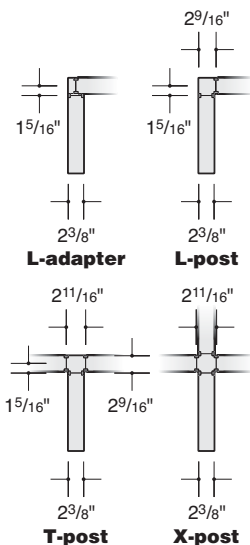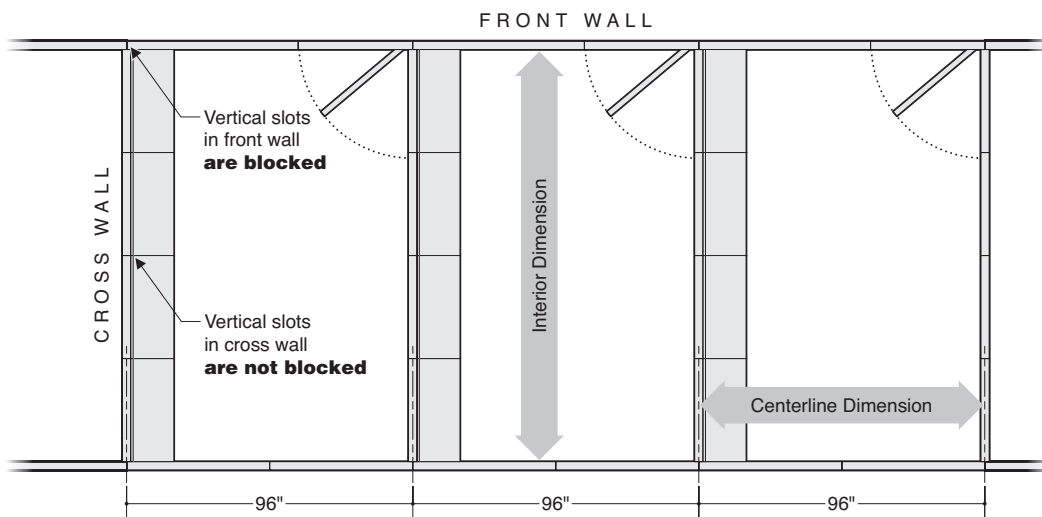

Adapters and posts add different dimensions to a run of panel depending on the configuration.


Interior dimension planning along cross walls means that vertical slots will be available to attach storage components and workspaces to cross wall panels.

Centerline planning along front wall allows fin walls to match centerlines of building elements such as columns, window frames, and ceiling grid.

Base Trim Details




Panels

In-line

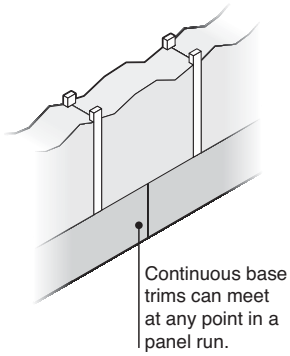




Inside corner

Continuous base trim meet at an inside corner regardless of angle.

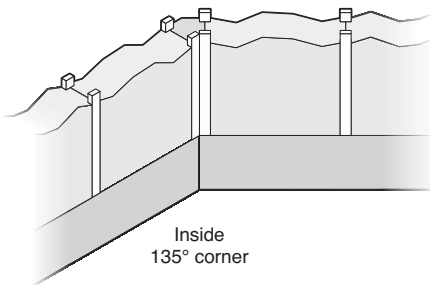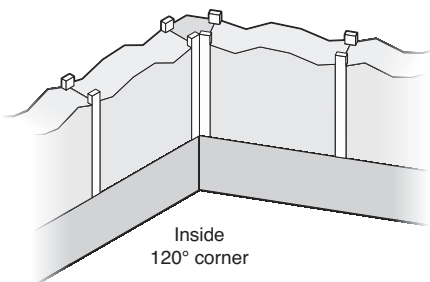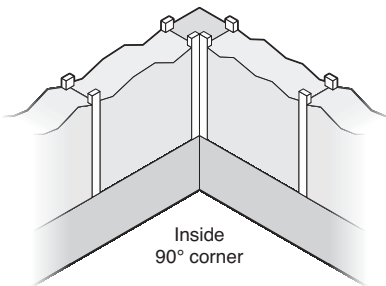


Outside corner

One-piece outside corner base trim must be specified to trim outside panel corners regardless of angle.

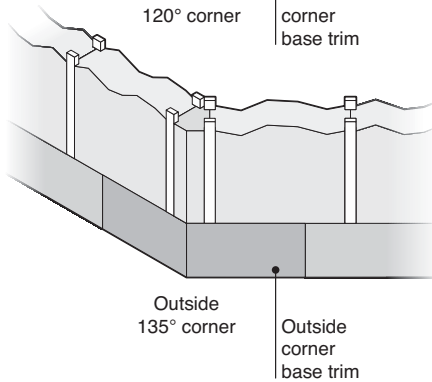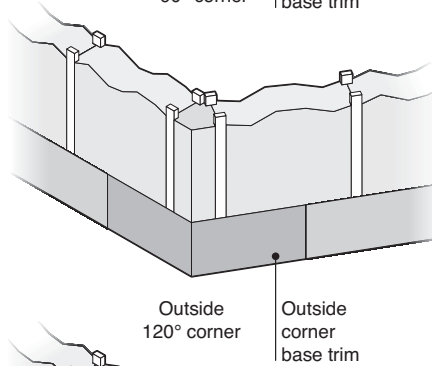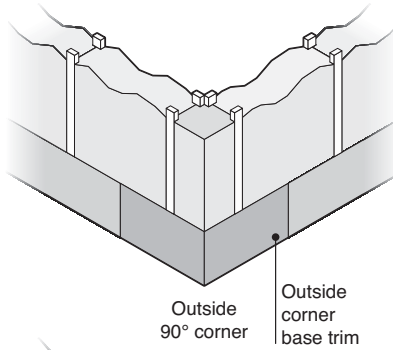


Doors


Inside corner

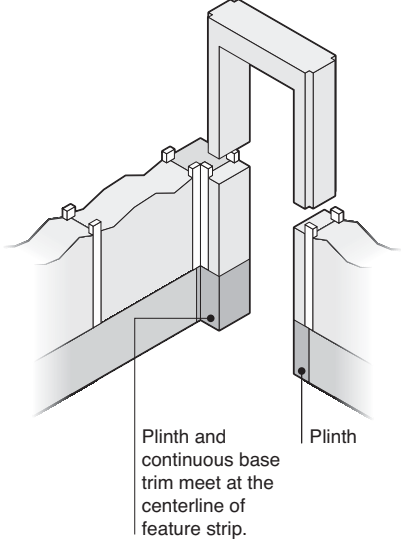


Outside corner

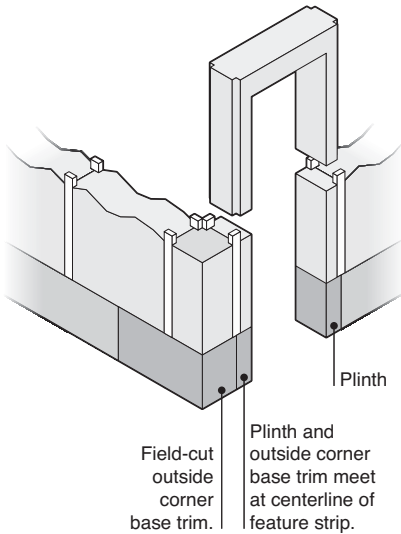


Back-to-back

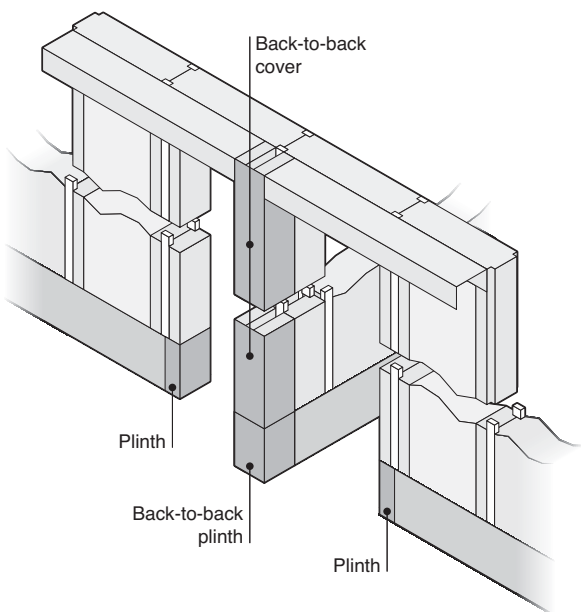


Two doors separated by a post

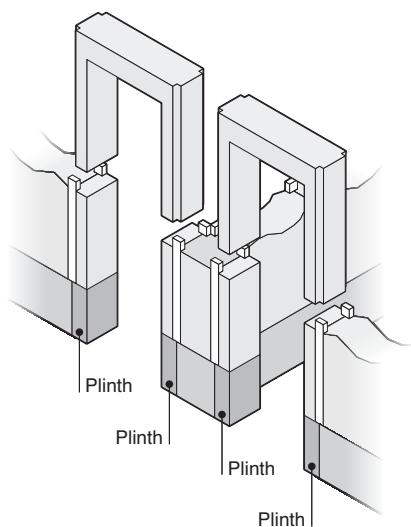

Inside slider door

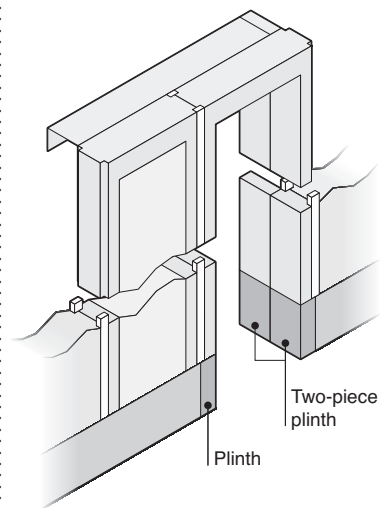


Outside slider door

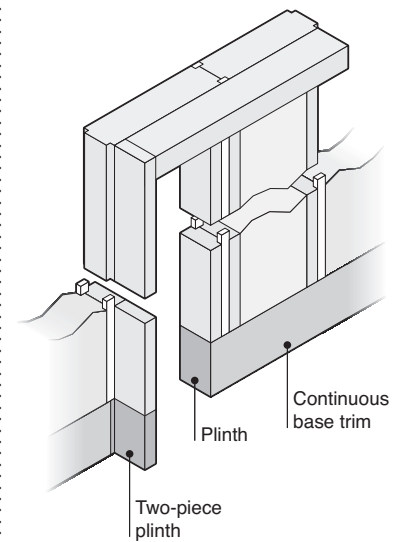

Base Trim Details, continued

**Product Details for
SmartTools Options**

SmartTools Options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request for Quote) process.

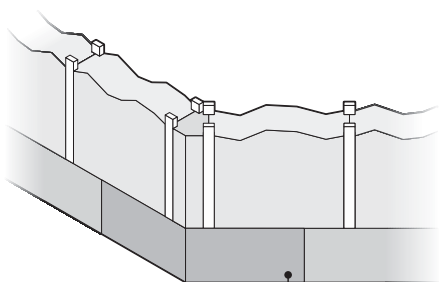

Outside corner
base-variable
angle in five
degree increments

Outside
corner
base trim



How to Connect Privacy Wall to I-Line Moveable Walls

I-Line interface posts connect Privacy Wall to its predecessor, I-Line Moveable Walls.


Two I-Line feature strips are required for the I-Line side of the connection.

Two Privacy Wall feature strips are required for the Privacy Wall side of the connection.

I-Line interface post can be cut in the field.

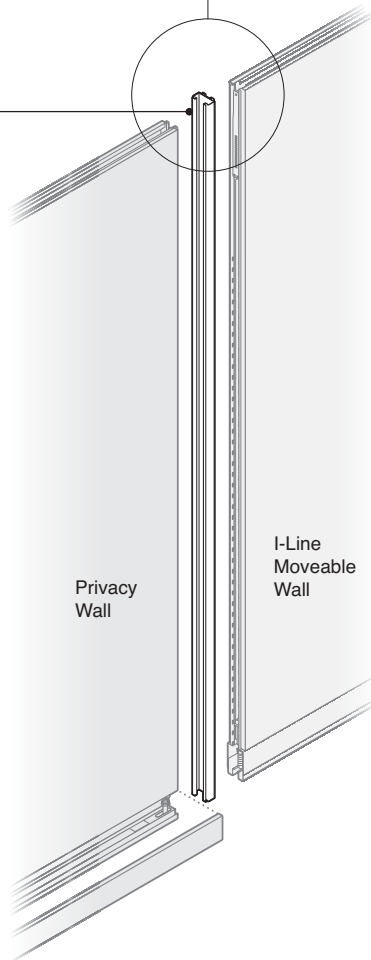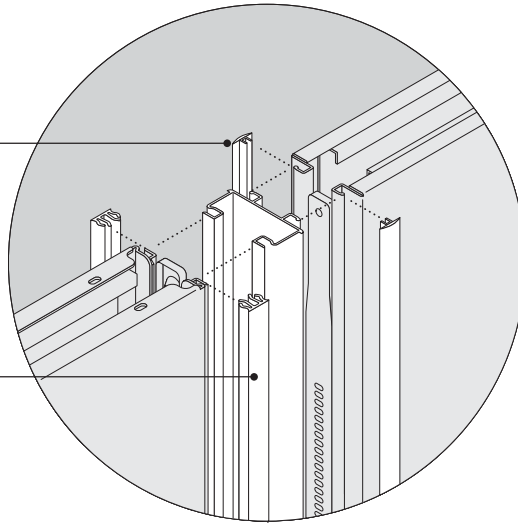

Product Details




Width of I-Line interface post adds $1\frac{1}{4}$ " to the width of any panel it is attached to. Because a Privacy Wall modular panel is $1\frac{1}{4}$ " less wide than a standard panel, using an I-Line interface post with a Privacy Wall modular panel will retain the overall dimension of a regular panel.


Ceiling track, ordered separately, continues uninterrupted from the I-Line panel to the Privacy Wall panel. Ceiling track is available recessed or overlapping.

Continuous base trim on Privacy Wall panels extends over the I-Line interface post. I-Line panels have their own base trim. Height of both I-Line and Privacy Wall base trims may vary slightly.


Connections

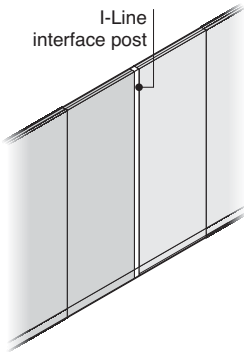


In-line connections are possible by adding an I-Line interface post between Privacy Wall and I-Line panels.



Any Privacy Wall panel or door frame can connect to I-Line using an I-Line interface post.



I-Line interface posts attach to adjacent posts in L-, T-, X-, V-, and Y-configurations.



T- and X-adapters can be used to connect Privacy Wall to I-Line Moveable Walls.

Wiring & Cabling

Power cannot be routed vertically inside an I-Line interface post. The post allows horizontal cable routing at the base.

Surface Materials

I-Line interface post

- Paint

Tip: Not all Privacy Wall paint colors match classic I-Line paint colors.

- Fabric
- Vinyl

Etched and Pattern Glass Planning

Planning Guidelines

You should consider the orientation of the faces of etched and pattern glass in relation to the insides and outsides of rooms.

Etched glass should be installed with the rough side facing the inside of the room and the smooth side facing the corridor. This placement allows for easier cleaning of the more heavily traveled corridor.

Pattern glass should be installed with the rough side facing the corridor and the smooth side facing the inside of the room. This placement allows more people to appreciate the visually interesting and attractive side of the glass.

Clerestory panels that are ordered with split finish surfaces or single sided electricals will be oriented to side one and side two. When determining how to order these, keep in mind that glass surfaces are always oriented as follows: for etched glass, the rough side will be oriented to side two; for pattern glass, the rough side will be oriented to side one.

Etched glass






Satin

Pattern glass

Bamboo
Harp
Mirage

All other glass types

are either rough on both faces or smooth on both faces.

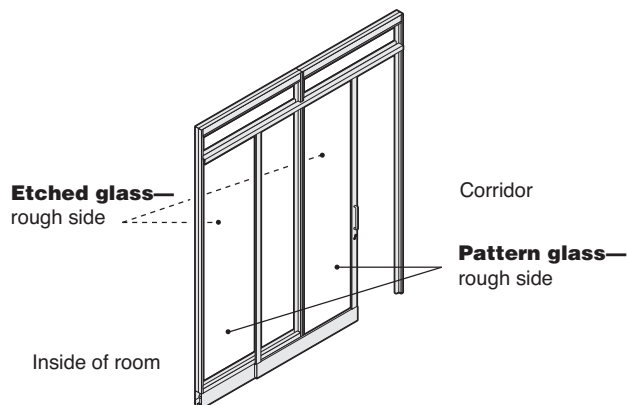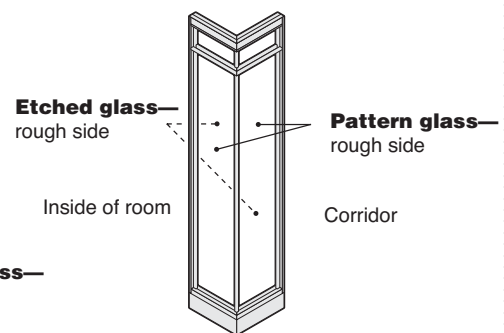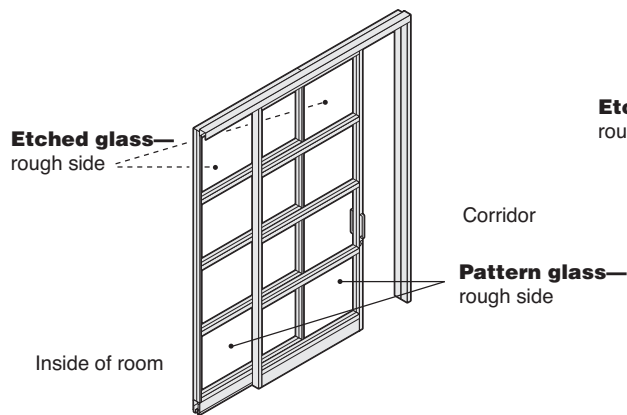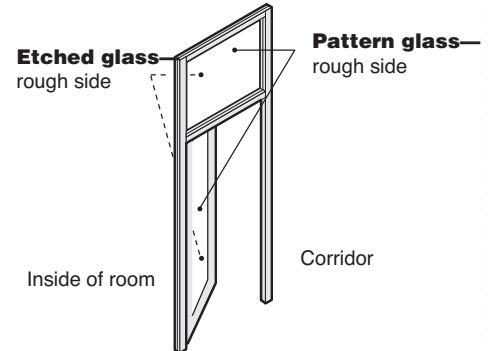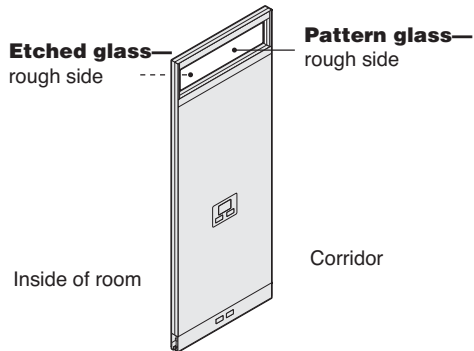

How to Power a Panel

Factory-installed components are available to power panels with receptacles at desk height, ADA height, or at the base of the panel. Power infeeds can feed through the ceiling or the floor.

Tip: Bypass cover may be required when specifying recessed ceiling track.
▶ Page 234

Ceiling infeed can be factory installed in panel to ADA or desk height, or field installed at base height.

Communication cable, field installed.

Power and communication receptacles are factory installed at ADA height, desk height, or base height.

Modular harness, field installed

Vertical jumper, factory installed to extend power between power blocks at base height, desk height, and ADA height.

Power blocks, factory or field installed at base height.


Base power infeed
Tip: Multipurpose infeeds can be installed to route power to base from floor or ceiling.

Floor infeed can be factory installed in panel at ADA or desk height, or field installed at base height.


Power blocks can be factory or field installed at ADA height, desk height, or base height. ADA and desk-height power blocks are available in hollow core panels only.
Tip: For power installation at ADA or desk height in the field, you must use a power and communication powerkit and cover plate. Powerkits with power blocks and communication openings can only be installed in the field at ADA- or desk-height locations.

Powering a Privacy Wall panel requires five things—power blocks, receptacles, cutouts in the surface of the panel to access the receptacles, a harness or infeed to bring power to the power block, and a cover plate or power and communication base trim to trim the opening.

Power Blocks



Power blocks must be installed in a panel in order to accommodate power receptacles. Power blocks can accommodate receptacles on one side or both sides of a panel.




Desk height
ADA height
Base height

Three different heights

are possible for power blocks—desk height, ADA height, and base height. Any combination of these heights is possible. ADA and desk-height power blocks are available in hollow core panels only.


Tip: When placing furniture on or in front of a powered panel, review the furniture type and position to avoid obstructing the power or communication termination.

Utilities can be specified on either side of the panel or on both sides. Receptacles can be installed on either side of the panel or on both sides. Fillers can be installed in any unused cutouts.



Power is located in the center of a panel except in Glass Selections frame kits, where power is located 12" from the panel edge.

Tip: If using base trim with power and communication cutout, plan on placing cutouts at right edge of panel.




Power blocks can be located in the base without cutouts to continue distribution of power between panels.

Panel type determines which receptacle locations are available. For example, solid wall panels can have receptacles in any position, but glass wall panels can have receptacles in the base only.

Panel Type	Desk-height	ADA-height	Base
Solid	•	•	•
Glass	N.A.	N.A.	•
Clerestory	•	•	•


Field-installed power-kits, infeeds, and jumpers can be ordered separately and added on site. For installations at desk or ADA height, solid panel surface must be cut carefully to position power block correctly and to accommodate cover plate. Power and communication is available in panel face only.

Receptacles




Receptacles are ordered separately and field installed in power blocks. Separate duplex receptacles are available to engage each of the different circuits that are possible in the electrical system. Receptacles are coded to indicate which circuit and type of ground they engage.

► Page 247




USB receptacles are ordered separately and installed on site. They are available in three wiring schematics with multiple line options. USB receptacles offer easy access to two charging ports. Each port provides 1 ampere of output. USB receptacles conveniently charge a wide range of electronic devices. Some devices may not be compatible.




Installation is done on site. Receptacles snap into power block. Tools are not required for installation.

Cutouts

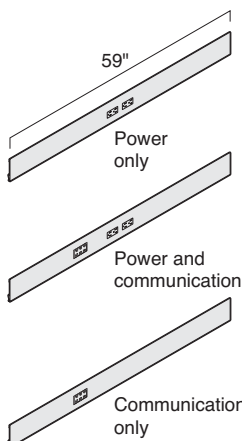


Power and communication base trim, ordered separately, frames receptacles and communication outlets. Three kinds are available—power only, power and communication, and communication only. *Tip: Base communication cutouts are designed to accommodate only NEMA faceplates. Cutout is 3"W x 2"H.*



Power and communication base trim for Chicago and New York City power, ordered separately, frames receptacles and communication outlets. Two kinds are available - power only, and power communication.

Tip: Base communication cutouts are designed to accommodate only NEMA faceplates. Cutout is 3"W x 2"H.

How to Power a Panel, continued



The floor track is factory cut at both ends to provide access for multipurpose infeeds that are routed up from the floor.



Power-only




Power and communication

Plastic cover plate, ordered separately, frames receptacles and communication outlets in the panel face. Two kinds of cover plates are available—power only and power and communication. They are required for utilities in the panel surface.


► Page 249

Width of panel must be adequate to accommodate cutouts.

- Panels that are 30"W (standard or modular) can accommodate power and/or communication in any position or configuration.
- Panels that are smaller than 30"W cannot accommodate power or communication in any configuration.




Communication opening is sized to accommodate a standard NEMA-size faceplate, modular furniture faceplate, or Decora mounting strap style outlet supplied by the electrician.



Fillers, ordered separately, fill empty receptacle and communication openings.

Tip: Power and communication filler is not designed for use with the base communication cutout. Fillers for this NEMA-size cutout should be sourced locally.


Infeeds



Ceiling infeed

Ceiling infeeds are factory installed to bring power to a power block installed at desk height or ADA height. Harness orientation is standard on the left side when facing side 1.

Tip: Panels that are less than 24"W are not factory punched for infeeds.



Floor infeed


Floor infeeds, for use with raised floor systems, are factory installed to bring power to a power block installed at desk height or ADA height. Harness orientation is standard on the left side when facing side 1. Factory-installed infeeds extend a minimum of 12' from the panel.

Tip: Panels that are less than 24"W are not factory punched for infeeds.


Base power blocks

always receive their power from field-installed harnesses or factory-installed jumper harnesses.

► Page 102




Field-installed multipurpose infeed can be used to bring power from the ceiling or floor by routing it through an adjacent component such as a mini end or post.



Base power infeed


Field-installed base power infeed can bring power from a floor monument to a power block in the base of a panel. Floor infeed harness at the base occupies one receptacle location in the base power block.



Modular harness


Field-installed modular harness can bring power from a power block installed in the base of an adjacent panel.

► To calculate harness length, see page 106.



Harness-to-harness connector or branching harness-to-harness connector, ordered separately, links harnesses.

Harness-to-harness connector allows multiple harnesses to connect to allow power networks to branch.




Hardwire


Modular

End of the power infeed

can be hardwire or modular. Hardwire allows the electrician to make a conventional connection to the building's power inside a junction box. Modular allows the infeed to connect to any corresponding modular connector or harness using a harness-to-harness connector. This is the same modular connector used by Answer, Montage, and Architectural Solutions Modular Power System.






Modular infeed cover is included with modular multipurpose infeed to hardwire to a junction box. It allows modular connector to snap into position. This allows walls to be disconnected, moved, and reconnected later.



Vertical jumper

Vertical jumper is factory installed to extend power between power blocks at base height, desk height, and ADA height. Jumper can also be field installed to achieve same configuration.

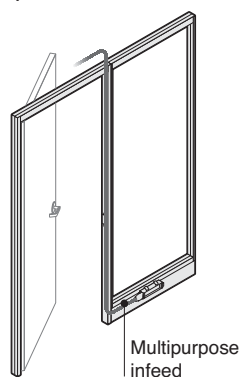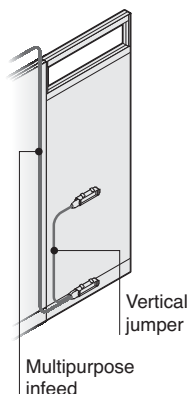

Glass panels cannot accommodate vertical routing of power harnesses through the glass portion of the panel. Use adjacent panels, mini ends, or door frames to accommodate a field-installed multipurpose infeed.


Tip: A power switch installed in a door frame will block the path of a multipurpose infeed.

Chicago and New York City electrical code

requires that all power be hardwired in the field. Modular power systems are not permitted. All panels can be hardwired on site using conventional electrical components.

Desk or ADA power and communication in Chicago and New York City

can be accommodated in two ways.



Specify the Chicago/New York City hardwire power prep option

and the factory will cut the panel at desk and/or ADA height on one side of the panel. This allows the electrician to install a Chicago/New York City junction box and hardwire standard Decora-style receptacle(s) in the field. Order power/communication Chicago/New York City junction box and cover plate separately. Only power/communication is available with this option. *Tip: Hardwire power boxes cannot be double sided.*


New York City/Chicago prep option

requires use of Privacy Wall cover plate, ordered separately.


► Page 249

San Francisco electrical code

requires that base power infeeds be encased in metallic liquid-tight conduit.



Electrician can cut solid or Clerestory panels in the field and install conventional components (junction box, receptacle, outlet cover, and conduit) as in typical drywall construction.



Base power for panels installed in Chicago or New York City

is hardwired in the field using conventional components (Decora-style receptacle, junction box, conduit) supplied by the electrician.

Tip: Order Chicago/New York City base trim.

All Privacy Wall electrical components are listed by Underwriters Laboratory (UL) and certified by the Canadian Standards Association (CSA).

All Steelcase electrical systems are designed in compliance with the National Electrical Code (NEC) and Canadian Electrical Code (CEC) to function as a multi-wire branch circuit. Installations should be made in accordance with the NEC or CEC provisions for multi-wire branch circuits.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical equipment.


Specifying

For guidelines about the steps to specify power components for a panel, see *Power Options*.


► Page 139

Overview of Powered Panels


Power in Base

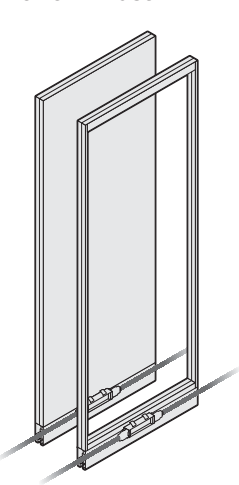


Power in the base of a solid or glass panel can be energized using field-installed harnesses or infeeds.

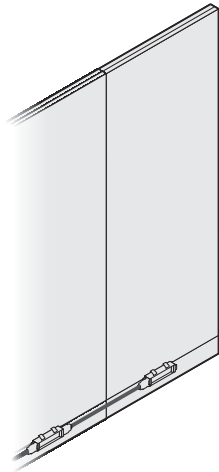

Power source A: Field-installed harness from adjacent panel with power in base.
▶ Page 139

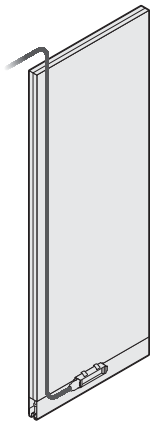

Power source B: Field-installed multipurpose infeed from ceiling through hollow core in solid panel.
▶ Page 139

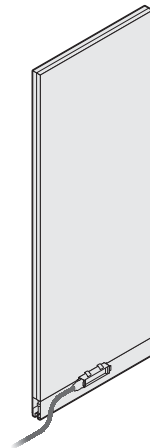


Power source C: Field-installed multipurpose infeed from floor.
▶ Page 139




Power source D: Field-installed base power infeed from floor monument or adjacent wall. Occupies one receptacle location.
▶ Page 139


Power at Desk Height or ADA Height




Power source E: Factory-installed ceiling infeed.
▶ Page 139




Power source F: Factory-installed floor infeed.
▶ Page 139

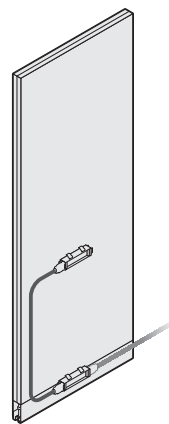

Power source G: Factory-installed vertical jumper. Base must receive power using one of the approaches shown at the top of the page. When base/ADA/desk combinations are specified, a jumper will be factory installed.
▶ Page 139

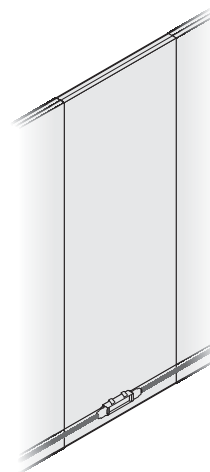


Power blocks can be located in the base without cutouts to allow for distribution of power or to bring power from floor or ceiling.

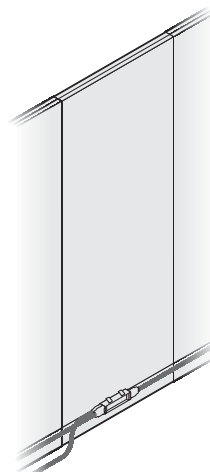


Power in Panels with Glass

Power cannot be routed vertically through the glass portion of a Clerestory panel so desk-height and ADA-height receptacles in glass panels always receive power from below.


Tip: Power block in base doesn't have to be expressed. You may choose to use it only as a connection point for an infeed and not install base trim with receptacle openings.




Power source F:
Factory-installed floor infeed.
► Page 139

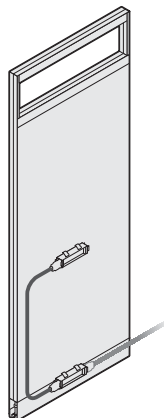

Power source G:
Factory-installed vertical jumper. Base must receive power using one of the approaches shown on previous page.
► Page 139
Tip: When base/ADA/desk combinations are specified, a jumper will be factory installed.

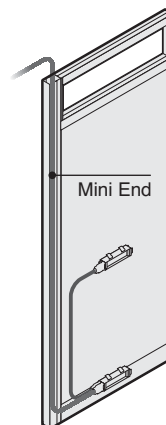

Adjacent mini end can be used to route a field-installed multipurpose infeed. Factory-installed vertical jumper can extend power to desk height or ADA height.
Tip: When base/ADA/desk combinations are specified, a jumper will be factory installed.

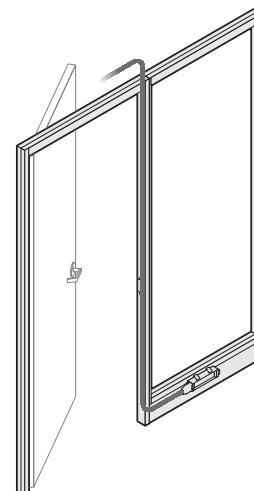

Adjacent door frame can be used to route a field-installed multipurpose infeed.
Exception: Switch installed in routing side of door frame will block harness.

Wiring Schematics

Details for the Electrician

Privacy Wall modular power components

are offered in three different wiring schematics to allow you to match your specific wiring strategy to any typical building wiring plan.

Tip: All the components in an electrical system must use the same wiring schematic. The components are color coded and keyed to make it impossible to connect mismatched parts.

Black = Four-circuit, 3+1

Brown = Four-circuit, 2+2

Rust = Three-circuit, separate neutrals

Shared neutral conductors = 10 gauge


Separate neutral conductors = 12 gauge

Hot conductors = 12 gauge


Grounding conductors = 12 gauge

Four-Circuit, 3+1

Circuit Panel 1

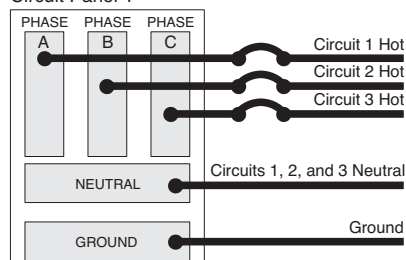


Circuit Panel 2

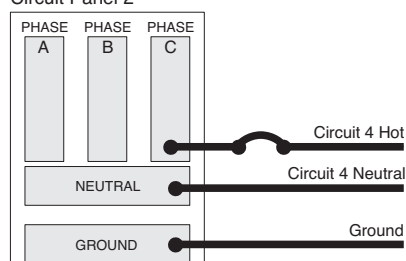

In the four-circuit 3+1 schematic, circuits 1, 2, and 3 are distributed from the first circuit panel and are supported with one shared neutral and one shared ground. Circuit 4 is distributed from a second circuit panel and is supported with a separate neutral and ground.


Single 3-Phase
Circuit Panel

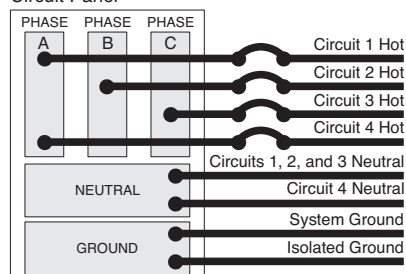


On a single 3-phase circuit panel, all four circuits are distributed as shown.

Four-Circuit, 2+2

Circuit Panel 1

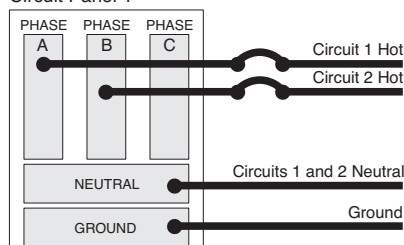


Circuit Panel 2

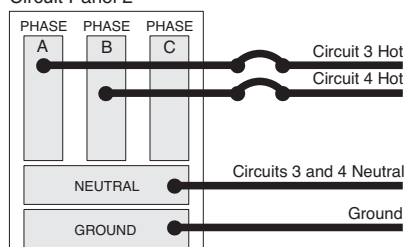


In the four-circuit 2+2 schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel and are supported with one shared neutral and one shared ground. Circuits 3 and 4 are distributed from a second circuit panel and supported by their own shared neutral and ground.

Single 3-Phase
Circuit Panel

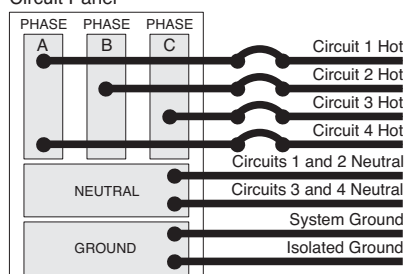

On a single 3-phase circuit panel, all four circuits are distributed as shown.


Split-Phase
Circuit Panel

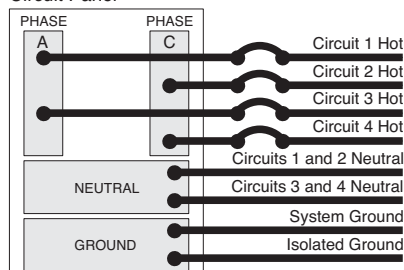


On a split-phase circuit panel, all four circuits are distributed as shown.

Three-Circuit, Separate Neutrals

Circuit Panel 1

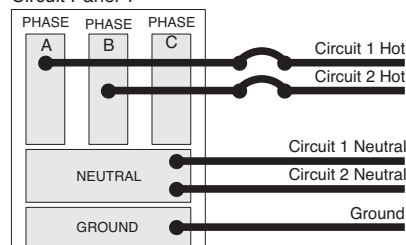


Circuit Panel 2

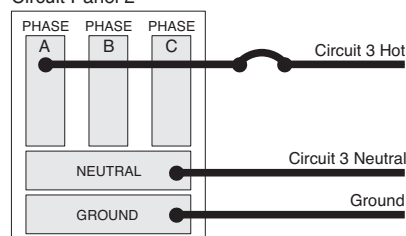


In the three-circuit, separate neutral schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel. Each circuit is supported with its own neutral and a common ground. Circuit 3 is distributed from the second circuit panel and is supported by its own neutral and ground.

Single 3-Phase
Circuit Panel

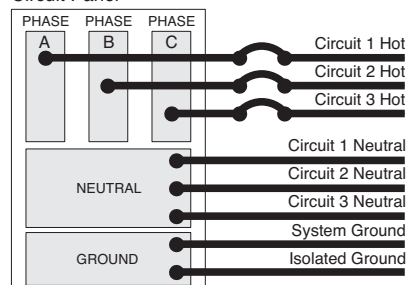

On a single 3-phase circuit panel, three circuits are distributed as shown.

Split-Phase
Circuit Panel

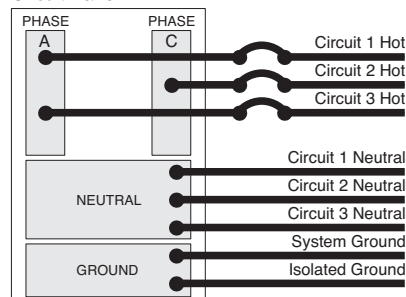

On a split-phase circuit panel, three circuits are distributed as shown.

How to Calculate Power Needs

Use This to Determine How Many Power Infeeds You'll Need

When planning a power network, you must calculate the amperage requirements of all your electrical components so you can provide sufficient electricity to power them.

If your usage is not known in advance:

The National Electrical Code (NEC) allows a maximum of 13 receptacles on each 20-amp circuit. This provides up to 39 receptacles for each 3-circuit power-in and 52 receptacles for each 4-circuit power-in. In Canada, the Canadian Electrical Code allows a maximum of 10 receptacles on each 15-amp circuit. This provides up to 30 receptacles for each 3-circuit power-in and 40 receptacles for each 4-circuit power-in.

If your usage is known in advance:

Add up the amperage used by each piece of equipment in the workstation. Whenever you reach 60 amps—20 amps times 3 circuits—(45 amps in Canada) from items that are likely to be used at the same time, you have reached the limit for a single power-in. Specify another power-in and continue until all equipment is powered.
▶ See table at right for typical and actual amperage usages for components.

To calculate amperage when the wattage of a device is known, divide watts by 120.

If the circuits will normally be subject to a continuous load (three or more hours of continuous use, such as lights or computers), the NEC requires that circuit capacity be “de-rated” by 20 percent. Therefore, treat circuits used for continuous loads as if they were rated at 16 amps (12 amps in Canada) instead of the regular 20 amps.

Try to anticipate future increases in power requirements and build some excess capacity into your plan.

Some appliances, such as large copiers, coffee makers, or space heaters require most of the current available on a circuit. It is recommended that such devices be supplied with their own dedicated circuit.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper planning of electrical circuits in your locale.

Requirements of Office Equipment in Amps

General Equipment (Typical Amperage)

A.C. adapter	0.05
Adding machine	0.05
Answering machine	0.08
Calculator	0.25
Clock	0.03
Coffee pot	10.00
Copy machine	15.00
Desk-top copiers	7.00 to 10.00
Stand-alone copiers	15.00
Electric eraser	0.25
Fan	1.00
Manuscript holder	0.75
Microwave	8.00 to 12.00
Pencil sharpener	0.25
Radio	0.05
Space heater, 1000 watts	8.50
Space heater, 1500 watts	12.50

Electronic Equipment (Typical Amperage)

Desk-top memory storage devices	0.08 to 12.00
Modems	0.15
Desk-top printers	1.20 to 5.00
Stand-alone printers	3.00 to 11.00
VDTs and PCs	0.08 to 4.80

Steelcase Task Lighting (Actual Amperage)


<i>Shelf lights:</i>	
24"W, 17 watts	0.20
36"W, 25 watts	0.30
48"W, 32 watts	0.30

Field-Installed Modular Harness Length Guidelines

Modular harnesses

allow power to be extended from one power block to another. Use the guidelines on this page to determine harness length.


► Page 252



Tip: For field-installed ADA-to-desk connections, order desk-height to ADA-height jumper.




Tip: Harnesses stretch 3". For example, a 33" harness will allow for a 33" to 36" connection.

Tip: When two powered panels are separated by a third panel, calculate the harness length by adding the result of these tables plus the width of the third (middle) panel.



Tip: Power is located in the center of a panel except in Glass Selections frame kits, where the center of the power is located 12" from the panel edge. All GS frame kits connect with the same size harnesses, regardless of width.

GS = Glass Selections

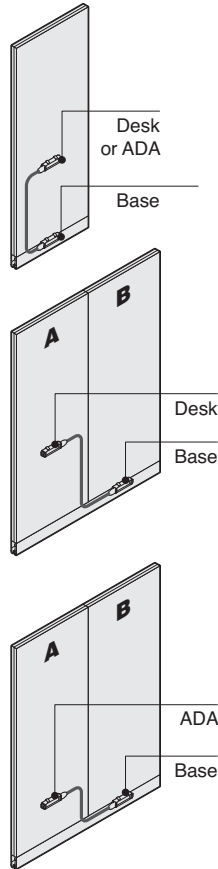

Desk or ADA to Base within Same Panel

Panel 24"W	30"W	36"W	40"W	42"W	48"W	60"W
N.A.	62"	62"	76"	74"	74"	86"

Desk to Base for Two Adjacent Panels

Panel B	Panel A 24"W	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	N.A.	62"	62"	74"	74"	74"	86"
30"W	N.A.	62"	62"	74"	74"	74"	86"
36"W	N.A.	62"	62"	74"	74"	74"	86"
40"W	N.A.	62"	62"	74"	74"	74"	86"
42"W	N.A.	62"	62"	74"	74"	74"	86"
48"W	N.A.	62"	62"	74"	74"	86"	86"
60"W	N.A.	62"	62"	74"	74"	86"	86"

ADA to Base for Two Adjacent Panels

Panel B	Panel A 24"W	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	N.A.	62"	62"	74"	74"	74"	86"
30"W	N.A.	62"	62"	74"	74"	74"	86"
36"W	N.A.	62"	62"	74"	74"	74"	86"
40"W	N.A.	62"	62"	74"	74"	74"	86"
42"W	N.A.	62"	62"	74"	74"	74"	86"
48"W	N.A.	62"	62"	74"	74"	86"	86"
60"W	N.A.	62"	62"	74"	74"	86"	86"

Base to Base for Two Adjacent Panels

Panel B	Panel A GS Frame Kit	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	16"	21"	21"	25"	25"	29"	33"
30"W	21"	21"	25"	29"	29"	33"	37"
36"W	21"	25"	29"	29"	33"	33"	41"
40"W	25"	29"	29"	33"	33"	37"	41"
42"W	25"	29"	33"	33"	33"	37"	46"
48"W	29"	33"	33"	37"	37"	41"	46"
60"W	33"	37"	41"	41"	46"	46"	54"

Base to Base for Two Adjacent Panels Separated by a Post

Panel B	Panel A GS Frame Kit	30"W	36"W	40"W	42"W	48"W	60"W
GS Frame Kit	21"	21"	25"	29"	29"	33"	37"
30"W	21"	25"	29"	29"	33"	33"	41"
36"W	25"	29"	33"	33"	33"	37"	46"
40"W	29"	29"	33"	37"	37"	41"	46"
42"W	29"	33"	33"	37"	37"	41"	46"
48"W	33"	33"	37"	41"	41"	46"	50"
60"W	37"	41"	46"	46"	46"	50"	54"

Specifying Privacy Wall

Specifying

Solid Wall Panels	108
All-Glass Wall Panels	114
Glass Wall Panels with Three Equal Divided Lites	118
Glass Wall Panels with Four Equal Divided Lites	122
Glass Wall Panels with Four Divided Lites	126
Glass Wall Panels with Two Divided Lites	130
Clerestory Wall Panels	134
Power Options	139
Butt-Hinged Door Frames	140
Pivot-Hinged Door Frames	142
Pivot-Hinged Door Frames with Switch Cutout	146
Full-Height Butt-Hinged Door Leaves	148
Transom-Height Butt-Hinged Door Leaves	150
Full-Height Pivot-Hinged Door Leaves	152
Transom-Height Pivot-Hinged Door Leaves	154
Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	156
Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	158
Hardware and Accessories for Swing Doors	160
Privacy Wall Slider Doors with Tubular Pull	166
Back-to-Back Cover	176
Mini Ends	177
Wall Channels	179
Adapters	182
Posts	184
I-Line Interface Post	186
Glass Selections All-Glass Wall Panels	188
Glass Selections All-Glass Frame Kits	190
Glass Selections All-Glass Glass Kits	192
Glass Selections Wall Panels with Two Divided Lites	194
Glass Selections Two Divided Lite Frame Kits	198
Glass Selections Two Divided Lite Glass Kits	200
Glass Selections Clerestory Wall Panels	202

Specifying, continued

Glass Selections Pivot-Hinged Door Frames	206
Glass Selections Full-Height Pivot-Hinged Door Leaves	208
Glass Selections Transom-Height Pivot-Hinged Door Leaves	210
Glass Selections Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	212
Glass Selections Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout	214
Glass Selections Full-Height Polished Edge Slider Doors	216
Glass Selections Transom-Height Polished Edge Slider Doors	218
Glass Selections Polished Edge Slider Door Vertical Seal	220
Glass Selections Mini Ends	221
Glass Selections Adapters	222
Glass Selections Posts	223
Glass Selections Transitions	224
Ceiling Tracks	230
Cornice Track and Brackets	235
Trim and Accessories	236
Post and Beam Attachment Kit	245
Accessories	246
Wiring and Cabling	247

Solid Wall Panels with Hollow Core



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Paint price group 2 is only available on panels 36"W or smaller.

Tip: Vinyl is not available on panels wider than 48"W.

Tip: Panels that are wider than 48" may not be suitable for application in certain areas where local building codes have specific provisions for seismic activity. For more information regarding seismic applications, visit the Architectural Solutions Web site at village.steelcase.com/SalesGuides and more.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Standard Includes		Required to Specify
► Need help? Product details, page 18		1 Style number 2 Ceiling height 3 Paint color number for side 1 4 Paint color number for side 2 5 Post extension 6 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.
- Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel surfaces: paint - Integral slotted verticals - Hollow core panel for cable and power routing - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		
Options	U.S. Price	Required to Specify
Surface Materials		
Panel surfaces 8'0"H through 10'0"H (per side) 6"W to 30"W		
• Paint price group 1	No cost	Specify paint color number for side 1 and/or side 2.
• Paint price group 2	+\$ 17	Specify paint color number for side 1 and/or side 2.
• Paint price group 3	+\$ 29	Specify paint color number for side 1 and/or side 2.
• Fabric price group 1	+\$165	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$223	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$283	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$349	Specify fabric color number for side 1 and/or side 2.
• Vinyl price group A	+\$320	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group B	+\$452	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group C	+\$477	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group D	+\$500	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group E	+\$540	Specify vinyl color number for side 1 and/or side 2.
• Customer's Own Material/ Vinyl (COM)	+\$161	► See <i>Surface Materials Reference Manual</i> .
Panel surfaces 8'0"H through 10'0"H (per side) 36"W to 60"W		
• Paint price group 1	No cost	Specify paint color number for side 1 and/or side 2.
• Paint price group 2	+\$ 29	Specify paint color number for side 1 and/or side 2.
• Paint price group 3	+\$ 44	Specify paint color number for side 1 and/or side 2.
• Fabric price group 1	+\$221	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$326	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$477	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$609	Specify fabric color number for side 1 and/or side 2.
• Vinyl price group A	+\$417	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group B	+\$630	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group C	+\$668	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group D	+\$714	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group E	+\$783	Specify vinyl color number for side 1 and/or side 2.
• Customer's Own Material/ Vinyl (COM)	+\$208	► See <i>Surface Materials Reference Manual</i> .

► Options, continued on next page

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 91	Specify ceiling height in 1" increments.
Electrical Power (for panels 30"W through 60"W)	Power block locations		
	• Base	+\$196	Specify with power block location at base.
	• ADA height	+\$715	Specify with power block location at ADA height.
	• Desk height	+\$715	Specify with power block location at desk height.
	New York City/Chicago Power Prep		
	• NYC/CHI side 1	+\$ 24	Specify with NYC/CHI side 1.
	• NYC/CHI side 2	+\$ 24	Specify with NYC/CHI side 2.
	• NYC/CHI sides 1 and 2	+\$ 48	Specify with NYC/CHI sides 1 and 2.
	Receptacle cutouts		
	• Power side 1	No cost	Specify with power side 1.
	• Power side 2	No cost	Specify with power side 2.
	• Power sides 1 and 2	+\$ 24	Specify with power sides 1 and 2.
	• Power/comm side 1	No cost	Specify with power/comm side 1.
	• Power/comm side 2	No cost	Specify with power/comm side 2.
	• Power/comm sides 1 and 2	+\$ 24	Specify with power/comm sides 1 and 2.
	Power schematic		
	• 3+1	No cost	Specify with 3+1 power.
	• 2+2	No cost	Specify with 2+2 power.
	• 3SN	No cost	Specify with 3SN power.
	Ceiling infeeds		
	• Top left hardwire	No cost	Specify with top left hardwire.
	• Top left modular	+\$ 91	Specify with top left modular.
	Floor infeeds		
	• Bottom left hardwire	No cost	Specify with bottom left hardwire.
	• Bottom left modular	+\$ 91	Specify with bottom left modular.
	Related Products		
	• Ceiling tracks		► Page 230
	• Continuous base trim		► Page 236
	• Feature strips		► Page 240
	• Acoustic packing		► Page 244
	• Power receptacles		► Page 247
	• Power and communication cover plates		► Page 249
	• Infeeds		► Page 250
	• Modular harnesses		► Page 252
	• Field-installed powerkits		► Page 254
	• Cornice track		► Page 235

► Options, continued on next page

Tip: To price power in two locations, add the upcharges together.

Tip: Infeed is included in price of ADA- or desk-height receptacle power location option. Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: NYC/CHI prices replace the receptacle power location option prices when selected.

Tip: Order power and communication and power-only cover plates separately.

Tip: Panels that are less than 24"W are not factory punched for infeeds.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Solid Wall Panels with Hollow Core, continued

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W or 120" in height.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
7610 White Markerboard Surface	6"W through 24"W 25"W through 36"W 37"W through 48"W	+\$475 +\$510 +\$545	Specify with markerboard. Specify with markerboard. Specify with markerboard.
Parametric Ceiling Height (Available in 1" increments)	7'5" through 7'11" 10'1" through 11'0"	No cost +\$159	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	- Non standard widths - Non standard modular widths	+\$ 37 (Add to U.S. Base Price of next larger width) +\$ 37 (Add to U.S. Base Price of next larger width)	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	4"H base	+\$ 61	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Solid Wall Panels			Modular Solid Wall Panels			
6"	GPSS06	\$ 869				
8"	GPSS08	\$ 869	8"	6 ¹¹ / ₁₆ "	GPSM08	\$ 869
18"	GPSS18	\$ 934	18"	16 ¹¹ / ₁₆ "	GPSM18	\$ 934
20"	GPSS20	\$ 934	20"	18 ¹¹ / ₁₆ "	GPSM20	\$ 934
24"	GPSS24	\$ 994	24"	22 ¹¹ / ₁₆ "	GPSM24	\$ 994
30"	GPSS30	\$1042	30"	28 ¹¹ / ₁₆ "	GPSM30	\$1042
36"	GPSS36	\$1073	36"	34 ¹¹ / ₁₆ "	GPSM36	\$1073
40"	GPSS40	\$1115	40"	38 ¹¹ / ₁₆ "	GPSM40	\$1115
42"	GPSS42	\$1115	42"	40 ¹¹ / ₁₆ "	GPSM42	\$1115
48"	GPSS48	\$1150	48"	46 ¹¹ / ₁₆ "	GPSM48	\$1150
60"	GPSS60	\$1494	60"	58 ¹¹ / ₁₆ "	GPSM60	\$1494
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Solid Wall Panels with Enhanced Core



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Paint price group 2 is only available on panels 36"W or smaller.

Tip: Enhanced core panels are intended for use with overlapping ceiling track in order to maximize their acoustical properties.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Standard Includes		Required to Specify
▶ Need help? Product details, page 18	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel surfaces: paint - Integral slotted verticals - Insulated core for improved acoustical performance - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) - Post extension for overlapping ceiling track	1 Style number 2 Ceiling height 3 Paint color number for side 1 4 Paint color number for side 2 5 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials	Panel surfaces 8'0"H through 10'0"H (per side) 6"W to 30"W	
• Paint price group 1	No cost	Specify paint color number for side 1 and/or side 2.
• Paint price group 2	+\$ 17	Specify paint color number for side 1 and/or side 2.
• Paint price group 3	+\$ 29	Specify paint color number for side 1 and/or side 2.
• Fabric price group 1	+\$165	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$223	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$283	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$349	Specify fabric color number for side 1 and/or side 2.
• Vinyl price group A	+\$320	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group B	+\$452	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group C	+\$477	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group D	+\$500	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group E	+\$540	Specify vinyl color number for side 1 and/or side 2.
• Customer's Own Material/Vinyl (COM)	+\$161	▶ See <i>Surface Materials Reference Manual</i> .
	Panel surfaces 8'0"H through 10'0"H (per side) 36"W to 48"W	
• Paint price group 1	No cost	Specify paint color number for side 1 and/or side 2.
• Paint price group 2	+\$ 29	Specify paint color number for side 1 and/or side 2.
• Paint price group 3	+\$ 44	Specify paint color number for side 1 and/or side 2.
• Fabric price group 1	+\$221	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$326	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$477	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$609	Specify fabric color number for side 1 and/or side 2.
• Vinyl price group A	+\$417	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group B	+\$630	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group C	+\$668	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group D	+\$714	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group E	+\$783	Specify vinyl color number for side 1 and/or side 2.
• Customer's Own Material/Vinyl (COM)	+\$208	▶ See <i>Surface Materials Reference Manual</i> .
▶ Options, continued on next page		

► Options, continued from previous page

Options	U.S. Price	Required to Specify
Ceiling Height	• 8'0" through 9'0" • 9'1" through 10'0"	No cost +\$ 91 Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power (for panels 30"W through 60"W)	Power block locations • Base Power schematic • 3+1 • 2+2 • 3SN	+\$196 Specify with power block location at base. No cost No cost No cost Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	• Ceiling tracks • Continuous base trim • Feature strips • Power receptacles • Infeeds • Modular harnesses • Powerkits • Cornice track	► Page 230 ► Page 236 ► Page 240 ► Page 247 ► Page 250 ► Page 252 ► Page 254 ► Page 235

Tip: Multipurpose infeeds are ordered separately, and route through the floor, adjacent posts, mini ends, or door frames.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W or 120" in height.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

SmartTools Options	U.S. Price	Required to Specify
7610 White Markerboard Surface	• 6"W through 24"W • 25"W through 36"W • 37"W through 48"W	+\$475 +\$510 +\$545 Specify with markerboard. Specify with markerboard. Specify with markerboard.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11" • 10'1" through 11'0"	No cost +\$159 Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths • Non standard modular widths	+\$ 37 (Add to U.S. Base Price of next larger width) +\$ 37 (Add to U.S. Base Price of next larger width) Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	• 4"H base	+\$ 61 Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
-------	--------------	-----------------	---------------	---------------	--------------	-----------------

Solid Wall Panels
with Enhanced CoreModular Solid Wall Panels
with Enhanced Core

6"	GPSAS06	\$ 900				
8"	GPSAS08	\$ 900	8"	6 ¹ / ₁₆ "	GPSAM08	\$ 900
18"	GPSAS18	\$ 966	18"	16 ¹ / ₁₆ "	GPSAM18	\$ 966
20"	GPSAS20	\$1027	20"	18 ¹ / ₁₆ "	GPSAM20	\$1027
24"	GPSAS24	\$1027	24"	22 ¹ / ₁₆ "	GPSAM24	\$1027
30"	GPSAS30	\$1078	30"	28 ¹ / ₁₆ "	GPSAM30	\$1078
36"	GPSAS36	\$1112	36"	34 ¹ / ₁₆ "	GPSAM36	\$1112
40"	GPSAS40	\$1153	40"	38 ¹ / ₁₆ "	GPSAM40	\$1153
42"	GPSAS42	\$1153	42"	40 ¹ / ₁₆ "	GPSAM42	\$1153
48"	GPSAS48	\$1191	48"	46 ¹ / ₁₆ "	GPSAM48	\$1191



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

All-Glass Wall Panels



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 23⁄8"-thick panel with steel frame: paint 1⁄4"-thick factory-installed lite: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		1 Style number 2 Ceiling height 3 Paint color number for frame 4 Glass number for lite 5 Post extension 6 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.	
Options	U.S. Price	Required to Specify	
Surface Materials	Glass frame surface		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 27	Specify paint color number.
	• Paint price group 3	+\$ 46	Specify paint color number.
	Panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 98	Specify glass number for lite.
	• Glass price group 3	+\$ 119	Specify glass number for lite.
	• Glass price group 4	+\$ 190	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 372	Specify glass number for lite.	
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 296	Specify glass number for lite.	
• Glass price group 3	+\$ 353	Specify glass number for lite.	
• Glass price group 4	+\$ 566	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	+\$1113	Specify glass number for lite.	
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 443	Specify glass number for lite.	
• Glass price group 3	+\$ 528	Specify glass number for lite.	
• Glass price group 4	+\$ 846	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	+\$1668	Specify glass number for lite.	
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 591	Specify glass number for lite.	
• Glass price group 3	+\$ 702	Specify glass number for lite.	
• Glass price group 4	+\$1130	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	+\$2225	Specify glass number for lite.	
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 60"W			
• Glass price group 1	No cost	Specify glass number for lite.	
• Glass price group 2	+\$ 739	Specify glass number for lite.	
• Glass price group 3	+\$ 878	Specify glass number for lite.	
• Glass price group 4	+\$1409	Specify glass number for lite.	
• Glass price group 5	N.A.	Specify glass number for lite.	
• Glass price group 6	+\$2781	Specify glass number for lite.	
▶ See <i>Surface Materials Reference Manual</i> .			
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately) • Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.

▶ Options, continued on next page



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Ceiling Height	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 91	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic 3+1 2+2 3SN	+\$ 196 +\$ 196 +\$ 196	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	- Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing - Power receptacles - Power and communication cover plates - Infeeds - Modular harnesses - Field-installed powerkits - Cornice track		► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254 ► Page 235

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface, veneer (flat-cut open-pore finish) 6"W through 20"W 21"W through 40"W 41"W through 60"W - Customiz stain	+\$1191 +\$1363 +\$1497 No cost	Specify wood color number. Specify wood color number. Specify wood color number. Specify with Customiz stain. ► See Surface Materials Reference Manual.
Parametric Ceiling Height (Available in 1" increments)	7'5" through 7'11" 10'1" through 11'0"	Use 8'0" price +\$ 159	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	- Non standard widths - Non standard modular widths	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	4"H base	+\$ 222	Specify to accept 4"H base.

► Specification Information, on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.


► See page 1 for details.

All-Glass Wall Panels, continued

► Options, on previous page

Specification Information


Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
All-Glass Wall Panels			Modular All-Glass Wall Panels			
6"	GPGS06	\$ 593				
8"	GPGS08	\$ 593	8"	6 ¹ / ₁₆ "	GPGM08	\$ 593
18"	GPGS18	\$ 657	18"	16 ¹ / ₁₆ "	GPGM18	\$ 657
20"	GPGS20	\$ 657	20"	18 ¹ / ₁₆ "	GPGM20	\$ 657
24"	GPGS24	\$ 720	24"	22 ¹ / ₁₆ "	GPGM24	\$ 720
30"	GPGS30	\$ 733	30"	28 ¹ / ₁₆ "	GPGM30	\$ 733
36"	GPGS36	\$ 827	36"	34 ¹ / ₁₆ "	GPGM36	\$ 827
40"	GPGS40	\$ 838	40"	38 ¹ / ₁₆ "	GPGM40	\$ 838
42"	GPGS42	\$ 838	42"	40 ¹ / ₁₆ "	GPGM42	\$ 838
48"	GPGS48	\$ 936	48"	46 ¹ / ₁₆ "	GPGM48	\$ 936
60"	GPGS60	\$1202	60"	58 ¹ / ₁₆ "	GPGM60	\$1202
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Three Equal Divided Lites



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel frame: paint - Three, 1/4"-thick factory-installed lites: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		1 Style number 2 Ceiling height 3 Paint color number for frame and muntin 4 Glass number for lite 1 (from top) 5 Glass number for lite 2 6 Glass number for lite 3 7 Post extension 8 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.	
Options		U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 27	Specify paint color number.
	• Paint price group 3	+\$ 46	Specify paint color number.
	Panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 33	Specify glass number for lite.
	• Glass price group 3	+\$ 42	Specify glass number for lite.
	• Glass price group 4	+\$ 63	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$126	Specify glass number for lite.	
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W			
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 98	Specify glass number for lite.
	• Glass price group 3	+\$119	Specify glass number for lite.
	• Glass price group 4	+\$190	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$372	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W			
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$148	Specify glass number for lite.
	• Glass price group 3	+\$175	Specify glass number for lite.
	• Glass price group 4	+\$282	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$557	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W			
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$198	Specify glass number for lite.
	• Glass price group 3	+\$236	Specify glass number for lite.
	• Glass price group 4	+\$376	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$741	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .			
Panel surfaces 8'0"H through 10'0"H (per lite), 60"W			
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$246	Specify glass number for lite.
	• Glass price group 3	+\$294	Specify glass number for lite.
	• Glass price group 4	+\$469	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$927	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .			
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
▶ Options, continued on next page			



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Ceiling Height	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 91	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic 3+1 2+2 3SN	+\$ 196 +\$ 196 +\$ 196	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	- Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing - Power receptacles - Power and communication cover plates - Infeeds - Modular harnesses - Field-installed powerkits - Cornice track		► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254 ► Page 235

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface, veneer (flat-cut open-pore finish) 6"W through 20"W 21"W through 40"W 41"W through 60"W - Customiz stain	+\$1420 +\$1767 +\$2036 No cost	Specify wood veneer color number. Specify wood veneer color number. Specify wood veneer color number. Specify with Customiz Stain. ► See Surface Materials Reference Manual.
Muntin	Change muntin size - Change to 1½"W or 2¼"W Change muntin location - Change muntin location	No cost No cost	Specify muntin size. Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	7'5" through 7'11" 10'1" through 11'0"	Use 8'0" price +\$ 159	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	- Non standard widths - Non standard modular widths	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	4"H base	+\$ 222	Specify to accept 4"H base.

► Specification Information, on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.


► See page 1 for details.

Glass Wall Panels with Three Equal Divided Lites, continued

► Options, on previous page

Specification Information


Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS3E06	\$ 903				
8"	GPGS3E08	\$ 903	8"	6 ¹¹ / ₁₆ "	GPGM3E08	\$ 903
18"	GPGS3E18	\$ 950	18"	16 ¹¹ / ₁₆ "	GPGM3E18	\$ 950
20"	GPGS3E20	\$ 950	20"	18 ¹¹ / ₁₆ "	GPGM3E20	\$ 950
24"	GPGS3E24	\$ 995	24"	22 ¹¹ / ₁₆ "	GPGM3E24	\$ 995
30"	GPGS3E30	\$1004	30"	28 ¹¹ / ₁₆ "	GPGM3E30	\$1004
36"	GPGS3E36	\$1068	36"	34 ¹¹ / ₁₆ "	GPGM3E36	\$1068
40"	GPGS3E40	\$1078	40"	38 ¹¹ / ₁₆ "	GPGM3E40	\$1078
42"	GPGS3E42	\$1078	42"	40 ¹¹ / ₁₆ "	GPGM3E42	\$1078
48"	GPGS3E48	\$1143	48"	46 ¹¹ / ₁₆ "	GPGM3E48	\$1143
60"	GPGS3E60	\$1403	60"	58 ¹¹ / ₁₆ "	GPGM3E60	\$1403
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Four Equal Divided Lites



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify
► Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel frame: paint - Four, 1/4"-thick factory-installed lites: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		- Style number - Ceiling height - Paint color number for frame and muntin - Glass number for lite 1 (from top) - Glass number for lite 2 - Glass number for lite 3 - Glass number for lite 4 - Post extension - Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Glass frame surface		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
Panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 24	Specify glass number for lite.
• Glass price group 3	+\$ 31	Specify glass number for lite.
• Glass price group 4	+\$ 48	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 93	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 74	Specify glass number for lite.
• Glass price group 3	+\$ 89	Specify glass number for lite.
• Glass price group 4	+\$141	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$280	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$113	Specify glass number for lite.
• Glass price group 3	+\$133	Specify glass number for lite.
• Glass price group 4	+\$213	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$419	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$148	Specify glass number for lite.
• Glass price group 3	+\$175	Specify glass number for lite.
• Glass price group 4	+\$282	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$557	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Panel surfaces 8'0"H through 10'0"H (per lite), 60"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$186	Specify glass number for lite.
• Glass price group 3	+\$219	Specify glass number for lite.
• Glass price group 4	+\$355	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$696	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

Options		U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify <i>with post extensions for recessed ceiling track interface.</i>
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify <i>with post extensions for overlapping ceiling track interface.</i>
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 91	Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1	+\$ 196	Specify <i>with 3+1 power.</i>
	• 2+2	+\$ 196	Specify <i>with 2+2 power.</i>
	• 3SN	+\$ 196	Specify <i>with 3SN power.</i>
Related Products	• Ceiling tracks		▶ Page 230
	• Continuous base trim		▶ Page 236
	• Feature strips		▶ Page 240
	• Acoustic packing		▶ Page 244
	• Power receptacles		▶ Page 247
	• Power and communication cover plates		▶ Page 249
	• Infeeds		▶ Page 250
	• Modular harnesses		▶ Page 252
	• Field-installed powerkits		▶ Page 254
	• Cornice track		▶ Page 235

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Specify additional muntin(s) for use in five- or six-lite assembly applications. Maximum of six lites. ► See Understanding page 25.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

SmartTools Options		U.S. Price	Required to Specify
Surface Materials	Glass wall panel frame surface, veneer (flat-cut open-pore finish)		
	• 6"W through 20"W	+\$1534	Specify wood veneer color number.
	• 21"W through 40"W	+\$1969	Specify wood veneer color number.
	• 41"W through 60"W	+\$2305	Specify wood veneer color number.
	• Customiz stain	No cost	Specify with Customiz stain.
	▶ See Surface Materials Reference Manual.		
	Glass for 5th and 6th lite opening		
	• See standard options for glass price group above		Specify glass number for lite 5 or 6.
Muntin	Additional muntin		
	• Muntin	+\$ 173	Specify with muntin.
	Veneer on additional muntin (by width)		
	• 6"W through 20"W	+\$ 114	Specify wood veneer color number.
	• 21"W through 40"W	+\$ 202	Specify wood veneer color number.
	• 41"W through 60"W	+\$ 269	Specify wood veneer color number.
	• Customiz Stain	No cost	Specify wood veneer color number.
	▶ See Surface Materials Reference Manual.		
	Change muntin size		
	• Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
	• 10'1" through 11'0"	+\$ 159	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	No cost	Specify panel widths in 1" increments.
	• Non standard modular widths	No cost	Specify panel widths in 1" increments.
Base	• 4"H base	+\$ 222	Specify to accept 4"H base.


► Specification Information, on next page

Glass Wall Panels with Four Equal Divided Lites, continued

► Options, on previous page

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS4E06	\$ 969				
8"	GPGS4E08	\$ 969	8"	6 ¹¹ / ₁₆ "	GPGM4E08	\$ 969
18"	GPGS4E18	\$1019	18"	16 ¹¹ / ₁₆ "	GPGM4E18	\$1019
20"	GPGS4E20	\$1019	20"	18 ¹¹ / ₁₆ "	GPGM4E20	\$1019
24"	GPGS4E24	\$1067	24"	22 ¹¹ / ₁₆ "	GPGM4E24	\$1067
30"	GPGS4E30	\$1077	30"	28 ¹¹ / ₁₆ "	GPGM4E30	\$1077
36"	GPGS4E36	\$1146	36"	34 ¹¹ / ₁₆ "	GPGM4E36	\$1146
40"	GPGS4E40	\$1157	40"	38 ¹¹ / ₁₆ "	GPGM4E40	\$1157
42"	GPGS4E42	\$1157	42"	40 ¹¹ / ₁₆ "	GPGM4E42	\$1157
48"	GPGS4E48	\$1228	48"	46 ¹¹ / ₁₆ "	GPGM4E48	\$1228
60"	GPGS4E60	\$1506	60"	58 ¹¹ / ₁₆ "	GPGM4E60	\$1506
:	:	:	:	:	:	:


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Four Divided Lites

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify
▶ Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel frame: paint - Four, 1/4"-thick factory-installed lites—top lite is transom aligned, bottom three are of equal height: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		1 Style number 2 Ceiling height 3 Paint color number for frame and muntin 4 Glass number for lite 1 (from top) 5 Glass number for lite 2 6 Glass number for lite 3 7 Glass number for lite 4 8 Post extension 9 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials Glass frame surface - Paint price group 1 No cost - Paint price group 2 +\$ 27 - Paint price group 3 +\$ 46		- Specify paint color number. - Specify paint color number. - Specify paint color number.
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
- Glass price group 1 No cost - Glass price group 2 +\$ 17 - Glass price group 3 +\$ 22 - Glass price group 4 +\$ 33 - Glass price group 5 N.A. - Glass price group 6 +\$ 67		- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. ▶ See <i>Surface Materials Reference Manual</i>.
Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
- Glass price group 1 No cost - Glass price group 2 +\$ 27 - Glass price group 3 +\$ 33 - Glass price group 4 +\$ 52 - Glass price group 5 N.A. - Glass price group 6 +\$100		- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. ▶ See <i>Surface Materials Reference Manual</i>.
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
- Glass price group 1 No cost - Glass price group 2 +\$ 54 - Glass price group 3 +\$ 63 - Glass price group 4 +\$100 - Glass price group 5 N.A. - Glass price group 6 +\$198		- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. ▶ See <i>Surface Materials Reference Manual</i>.
Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
- Glass price group 1 No cost - Glass price group 2 +\$ 81 - Glass price group 3 +\$ 96 - Glass price group 4 +\$153 - Glass price group 5 N.A. - Glass price group 6 +\$300		- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. ▶ See <i>Surface Materials Reference Manual</i>.

▶ Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

► Options, continued from previous page

Options	U.S. Price	Required to Specify
Surface Materials	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W	
	- Glass price group 1 No cost - Glass price group 2 +\$ 79 - Glass price group 3 +\$ 93 - Glass price group 4 +\$151 - Glass price group 5 N.A. - Glass price group 6 +\$296	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W	
	- Glass price group 1 No cost - Glass price group 2 +\$121 - Glass price group 3 +\$144 - Glass price group 4 +\$228 - Glass price group 5 N.A. - Glass price group 6 +\$451	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W	
	- Glass price group 1 No cost - Glass price group 2 +\$105 - Glass price group 3 +\$126 - Glass price group 4 +\$200 - Glass price group 5 N.A. - Glass price group 6 +\$394	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W	
	- Glass price group 1 No cost - Glass price group 2 +\$159 - Glass price group 3 +\$192 - Glass price group 4 +\$304 - Glass price group 5 N.A. - Glass price group 6 +\$600	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 60"W	
	- Glass price group 1 No cost - Glass price group 2 +\$133 - Glass price group 3 +\$157 - Glass price group 4 +\$248 - Glass price group 5 N.A. - Glass price group 6 +\$493	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
	Lower three lites glass panels surfaces 8'0"H through 10'0"H (per lite), 60"W	
	- Glass price group 1 No cost - Glass price group 2 +\$200 - Glass price group 3 +\$238 - Glass price group 4 +\$380 - Glass price group 5 N.A. - Glass price group 6 +\$750	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. ► See <i>Surface Materials Reference Manual</i> .
Post Extension	Post extensions modified to accommodate recessed ceiling track (ordered separately) No cost	Specify with post extensions for recessed ceiling track interface.
	Post extensions modified to accommodate overlapping ceiling track (ordered separately) No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	8'0" through 9'0" No cost	Specify ceiling height in 1" increments.
	9'1" through 10'0" +\$ 91	Specify ceiling height in 1" increments.

► Options, continued on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Four Divided Lites Transom-Aligned Top Lite, continued

► Options, continued from previous page

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

	Options	U.S. Price	Required to Specify
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1 • 2+2 • 3SN	+\$ 196 +\$ 196 +\$ 196	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	• Ceiling tracks • Continuous base trim • Feature strips • Acoustic packing • Power receptacles • Power and communication cover plates • Infeeds • Modular harnesses • Field-installed powerkits • Cornice track		► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254 ► Page 235

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass wall panel frame surface, veneer (flat-cut open-pore finish)		
	• 6"W through 20"W • 21"W through 40"W • 41"W through 60"W • Customiz stain	+\$1534 +\$1969 +\$2305 No cost	Specify wood veneer color number. Specify wood veneer color number. Specify wood veneer color number. Specify with customiz stain.
	Glass for 5th and 6th lite opening		
	• See standard options for lower three lites glass price group above		Specify glass number for lite 5 or 6.
Muntin	Additional muntin		
	• Muntin	+\$ 173	Specify with muntin.
	Veneer on additional muntin (by width)		
	• 6"W through 20"W • 21"W through 40"W • 41"W through 60"W	+\$ 114 +\$ 202 +\$ 269	Specify wood veneer color number. Specify wood veneer color number. Specify wood veneer color number.
	Change muntin size		
	• Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11" • 10'1" through 11'0"	Use 8'0" price +\$ 159	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths • Non standard modular widths	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	• 4"H base	+\$ 222	Specify to accept 4"H base.

Tip: Specify additional muntin(s) for use in five- or six-lite assembly applications. Maximum of six lites.
► See Understanding page 25.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".


Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS4L06	\$ 912				
8"	GPGS4L08	\$ 912	8"	6 ¹ / ₁₆ "	GPGM4L08	\$ 912
18"	GPGS4L18	\$ 959	18"	16 ¹ / ₁₆ "	GPGM4L18	\$ 959
20"	GPGS4L20	\$ 959	20"	18 ¹ / ₁₆ "	GPGM4L20	\$ 959
24"	GPGS4L24	\$1005	24"	22 ¹ / ₁₆ "	GPGM4L24	\$1005
30"	GPGS4L30	\$1014	30"	28 ¹ / ₁₆ "	GPGM4L30	\$1014
36"	GPGS4L36	\$1079	36"	34 ¹ / ₁₆ "	GPGM4L36	\$1079
40"	GPGS4L40	\$1088	40"	38 ¹ / ₁₆ "	GPGM4L40	\$1088
42"	GPGS4L42	\$1088	42"	40 ¹ / ₁₆ "	GPGM4L42	\$1088
48"	GPGS4L48	\$1156	48"	46 ¹ / ₁₆ "	GPGM4L48	\$1156
60"	GPGS4L60	\$1418	60"	58 ¹ / ₁₆ "	GPGM4L60	\$1418
:	:	:	:	:	:	:


**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Two Divided Lites

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify
▶ Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with steel frame: paint - Two, 1/4"-thick factory-installed lites—top lite is transom aligned: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		1 Style number 2 Ceiling height 3 Paint color number for frame and muntin 4 Glass number for lite 1 (from top) 5 Glass number for lite 2 6 Post extension 7 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 17	Specify glass number for lite.
• Glass price group 3	+\$ 22	Specify glass number for lite.
• Glass price group 4	+\$ 33	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 67	Specify glass number for lite.
		▶ See <i>Surface Materials Reference Manual</i> .
Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 6"W to 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 81	Specify glass number for lite.
• Glass price group 3	+\$ 96	Specify glass number for lite.
• Glass price group 4	+\$153	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$300	Specify glass number for lite.
		▶ See <i>Surface Materials Reference Manual</i> .
Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 54	Specify glass number for lite.
• Glass price group 3	+\$ 63	Specify glass number for lite.
• Glass price group 4	+\$100	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$198	Specify glass number for lite.
		▶ See <i>Surface Materials Reference Manual</i> .
Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 18"W to 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$240	Specify glass number for lite.
• Glass price group 3	+\$284	Specify glass number for lite.
• Glass price group 4	+\$457	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$900	Specify glass number for lite.
		▶ See <i>Surface Materials Reference Manual</i> .

▶ Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

► Options, continued from previous page

Options	U.S. Price	Required to Specify
Surface Materials	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W	
	- Glass price group 1 No cost - Glass price group 2 +\$ 79 - Glass price group 3 +\$ 93 - Glass price group 4 +\$ 151 - Glass price group 5 N.A. - Glass price group 6 +\$ 296	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
		► See <i>Surface Materials Reference Manual</i> .
	Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 30"W to 36"W	
	- Glass price group 1 No cost - Glass price group 2 +\$ 359 - Glass price group 3 +\$ 428 - Glass price group 4 +\$ 683 - Glass price group 5 N.A. - Glass price group 6 +\$1349	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
		► See <i>Surface Materials Reference Manual</i> .
	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W	
	- Glass price group 1 No cost - Glass price group 2 +\$ 105 - Glass price group 3 +\$ 126 - Glass price group 4 +\$ 200 - Glass price group 5 N.A. - Glass price group 6 +\$ 394	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
		► See <i>Surface Materials Reference Manual</i> .
	Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 40"W to 48"W	
	- Glass price group 1 No cost - Glass price group 2 +\$ 477 - Glass price group 3 +\$ 570 - Glass price group 4 +\$ 911 - Glass price group 5 N.A. - Glass price group 6 +\$1798	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
		► See <i>Surface Materials Reference Manual</i> .
	Top lite glass panel surfaces 8'0"H through 10'0"H (per lite), 60"W	
	- Glass price group 1 No cost - Glass price group 2 +\$ 133 - Glass price group 3 +\$ 157 - Glass price group 4 +\$ 248 - Glass price group 5 N.A. - Glass price group 6 +\$ 493	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
		► See <i>Surface Materials Reference Manual</i> .
	Lower lite glass panel surfaces 8'0"H through 10'0"H (per lite), 60"W	
	- Glass price group 1 No cost - Glass price group 2 +\$ 596 - Glass price group 3 +\$ 711 - Glass price group 4 +\$1140 - Glass price group 5 N.A. - Glass price group 6 +\$2249	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
		► See <i>Surface Materials Reference Manual</i> .
Post Extension	Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost
	Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost
		Specify with post extensions for recessed ceiling track interface.
		Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	8'0" through 9'0"	No cost
	9'1" through 10'0"	+\$ 91
		Specify ceiling height in 1" increments.
		Specify ceiling height in 1" increments.

► Options, continued on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Wall Panels with Two Divided Lites Transom-Aligned Top Lite, continued

► Options, continued from previous page

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

	Options	U.S. Price	Required to Specify
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1 • 2+2 • 3SN	+\$ 196 +\$ 196 +\$ 196	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	• Ceiling tracks • Continuous base trim • Feature strips • Acoustic packing • Power receptacles • Power and communication cover plates • Infeeds • Modular harnesses • Field-installed powerkits • Cornice track		► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254 ► Page 235

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11' are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass wall panel frame surface, veneer (flat-cut open-pore finish)		
	• 6"W through 20"W • 21"W through 40"W • 41"W through 60"W • Customiz stain	+\$1306 +\$1565 +\$1767 No cost	Specify wood veneer color number. Specify wood veneer color number. Specify wood veneer color number. Specify with Customiz stain.
Muntin	Change muntin size		
	• Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11" • 10'1" through 11'0"	Use 8'0" price +\$ 159	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths • Non standard modular widths	No cost No cost	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	• 4"H base	+\$ 222	Specify to accept 4"H base.


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGS2L06	\$ 712				
8"	GPGS2L08	\$ 712	8"	6 ¹¹ / ₁₆ "	GPGM2L08	\$ 712
18"	GPGS2L18	\$ 768	18"	16 ¹¹ / ₁₆ "	GPGM2L18	\$ 768
20"	GPGS2L20	\$ 768	20"	18 ¹¹ / ₁₆ "	GPGM2L20	\$ 768
24"	GPGS2L24	\$ 823	24"	22 ¹¹ / ₁₆ "	GPGM2L24	\$ 823
30"	GPGS2L30	\$ 838	30"	28 ¹¹ / ₁₆ "	GPGM2L30	\$ 838
36"	GPGS2L36	\$ 915	36"	34 ¹¹ / ₁₆ "	GPGM2L36	\$ 915
40"	GPGS2L40	\$ 925	40"	38 ¹¹ / ₁₆ "	GPGM2L40	\$ 925
42"	GPGS2L42	\$ 925	42"	40 ¹¹ / ₁₆ "	GPGM2L42	\$ 925
48"	GPGS2L48	\$1007	48"	46 ¹¹ / ₁₆ "	GPGM2L48	\$1007
60"	GPGS2L60	\$1271	60"	58 ¹¹ / ₁₆ "	GPGM2L60	\$1271
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Clerestory Wall Panels

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Paint price group 2 is only available on panels 36"W or smaller.

Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.

Tip: Customer's Own Glass is available as a special at this time.

Standard Includes

► Need help?
Product details,
page 24

- Frame: paint
- Ceiling height from 8'0"H to 10'0"H, in one-inch increments
- 2³/₈"-thick panel with steel surfaces: paint
- 1/4"-thick factory-installed Clerestory lite: glass
- Integral slotted verticals
- Hollow core panel for cable and power routing
- Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)

Required to Specify

- 1 Style number
 - 2 Paint color number for frame
 - 3 Ceiling height
 - 4 Paint color number for side 1
 - 5 Paint color number for side 2
 - 6 Glass number for Clerestory lite
 - 7 Post extension
 - 8 Options, if selected (see below)
- See *Surface Materials*, page 334.

	Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	• Paint price group 1 • Paint price group 2 • Paint price group 3	No cost +\$ 12 +\$ 22	Specify paint color number. Specify paint color number. Specify paint color number.
	Lower panel solid surfaces 8'0"H through 10'0"H (per side), 18"W to 24"W		
	• Paint price group 1 • Paint price group 2 • Paint price group 3 • Fabric price group 1	No cost +\$ 17 +\$ 31 +\$135	Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$190	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$250	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$316	Specify fabric color number for side 1 and/or side 2.
	• Vinyl price group A	+\$260	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group B	+\$379	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group C	+\$394	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group D	+\$411	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group E	+\$436	Specify vinyl color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$130	► See <i>Surface Materials Reference Manual</i> .
	Clerestory Lite Glass Panels 8'0"H through 10'0"H		
	• Glass price group 1 • Glass price group 2 • Glass price group 3 • Glass price group 4 • Glass price group 5 • Glass price group 6	No cost +\$ 54 +\$ 63 +\$100 N.A. +\$198	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Surface Materials	Lower panel surfaces 8'0"H through 10'0"H (per side), 30"W to 36"W		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 35	Specify paint color number.
	• Paint price group 3	+\$ 54	Specify paint color number.
	• Fabric price group 1	+\$206	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$305	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$452	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$588	Specify fabric color number for side 1 and/or side 2.
	• Vinyl price group A	+\$379	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group B	+\$585	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group C	+\$611	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group D	+\$646	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group E	+\$695	Specify vinyl color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$190	► See <i>Surface Materials Reference Manual</i> .
	Clerestory Lite Glass Panels 8'0"H through 10'0"H		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 79	Specify glass number for lite.
	• Glass price group 3	+\$ 93	Specify glass number for lite.
	• Glass price group 4	+\$151	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$296	Specify glass number for lite.
	Lower panel surfaces 8'0"H through 10'0"H (per side), 40"W to 48"W		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 3	+\$ 54	Specify paint color number.
	• Fabric price group 1	+\$206	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$305	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$452	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$588	Specify fabric color number for side 1 and/or side 2.
	• Vinyl price group A	+\$379	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group B	+\$585	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group C	+\$611	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group D	+\$646	Specify vinyl color number for side 1 and/or side 2.
	• Vinyl price group E	+\$695	Specify vinyl color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$190	► See <i>Surface Materials Reference Manual</i> .
	Clerestory Lite Glass Panels 8'0"H through 10'0"H		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$105	Specify glass number for lite.
	• Glass price group 3	+\$126	Specify glass number for lite.
	• Glass price group 4	+\$200	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$394	Specify glass number for lite.

Tip: Vinyl is not available on 60"W panels.

Tip: Customer's Own Glass is available as a special at this time.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued on next page

Clerestory Wall Panels Transom-Aligned Top Lite, continued

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Surface Materials	Lower panel surfaces 8'0"H through 10'0"H (per side) 60"W		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 3	+\$ 54	Specify paint color number.
	• Fabric price group 1	+\$206	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 2	+\$305	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 3	+\$452	Specify fabric color number for side 1 and/or side 2.
	• Fabric price group 5	+\$588	Specify fabric color number for side 1 and/or side 2.
	• Customer's Own Material/Vinyl (COM)	+\$190	► See <i>Surface Materials Reference Manual</i> .
	Clerestory Lite Glass Panels 8'0"H through 10'0"H		
	• Glass price group 1	No cost	Specify glass number for lite.
Post Extension	• Glass price group 2	+\$133	Specify glass number for lite.
	• Glass price group 3	+\$157	Specify glass number for lite.
	• Glass price group 4	+\$248	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$493	Specify glass number for lite.
	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 91	Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Power block location		
	• Base	+\$196	Specify with power block location at base.
	• ADA height	+\$715	Specify with power block location at ADA height.
	• Desk height	+\$715	Specify with power block location at desk height.
	Power schematic		
	• 3+1	No cost	Specify with 3+1 power.
	• 2+2	No cost	Specify with 2+2 power.
	• 3SN	No cost	Specify with 3SN power.
	New York City/Chicago power prep		
	• NYC/CHI at base	N.A.	Specify with NYC/CHI at base.
	• NYC/CHI at ADA or desk height side 1	+\$ 24	Specify with NYC/CHI at ADA or desk height side 1.
	• NYC/CHI at ADA or desk height side 2	+\$ 24	Specify with NYC/CHI at ADA or desk height side 2.
	• NYC/CHI at ADA or desk height sides 1 and 2	+\$ 48	Specify with NYC/CHI at ADA or desk height sides 1 and 2.
	Receptacle cutouts		
	• Power side 1	No cost	Specify with power side 1.
	• Power side 2	No cost	Specify with power side 2.
	• Power sides 1 and 2	+\$ 24	Specify with power sides 1 and 2.
	• Power/comm side 1	No cost	Specify with power/comm side 1.
	• Power/comm side 2	No cost	Specify with power/comm side 2.
	• Power/comm sides 1 and 2	+\$ 24	Specify with power/comm sides 1 and 2.
	Floor infeeds		
	• Bottom left hardwire	No cost	Specify with bottom left hardwire.
	• Bottom left modular	+\$ 91	Specify with bottom left modular.

Tip: To price power in two locations, add the upcharges together.

Tip: Infeed is included in the price of ADA- or desk-height receptacle power location option. Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: NYC/CHI prices replace the receptacle power location option prices when selected.

Tip: Order power and communication and power-only cover plates separately.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued on next page

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Related Products	- Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing - Power receptacles - Power and communication cover plates - Infeeds - Modular harnesses - Field-installed powerkits - Cornice track		► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254 ► Page 235

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W.

Tip: Maximum of two lites. See Understanding page 30.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

	SmartTools Options	U.S. Price	Required to Specify
7610 White Markerboard Surface	6"W through 24"W 25"W through 36"W 37"W through 48"W	+\$ 475 +\$ 510 +\$ 545	Specify with markerboard. Specify with markerboard. Specify with markerboard.
Surface Materials	Glass Clerestory frame surface, veneer (flat-cut open-pore finish)		
	6"W through 20"W 21"W through 40"W 41"W through 60"W - Customiz stain	+\$ 706 +\$ 881 +\$1016 No cost	Specify wood veneer color number. Specify wood veneer color number. Specify wood veneer color number. Specify with Customiz stain.
Muntin	Additional muntin		
	Muntin	+\$ 204	Specify with muntin.
	Veneer on additional muntin (by width)		
	6"W through 20"W 21"W through 40"W 41"W through 60"W	+\$ 114 +\$ 202 +\$ 269	Specify wood veneer color number. Specify wood veneer color number. Specify wood veneer color number.
	Change muntin size		
	Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location		
	Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	7'11" 10'1" through 11'0"	Use 8'0" price +\$ 159	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	- Non standard widths - Non standard modular widths	+\$ 37 (Add to U.S. Base Price of next larger width) +\$ 37 (Add to U.S. Base Price of next larger width)	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	4"H base	+\$ 61	Specify to accept 4"H base.

► Specification Information, on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Clerestory Wall Panels Transom-Aligned Top Lite, continued

► Options, on previous page

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Clerestory Panels			Modular Clerestory Panels			
18"	GPGSC18	\$1123	18"	16 ¹¹ / ₁₆ "	GPGMC18	\$1123
20"	GPGSC20	\$1123	20"	18 ¹¹ / ₁₆ "	GPGMC20	\$1123
24"	GPGSC24	\$1184	24"	22 ¹¹ / ₁₆ "	GPGMC24	\$1184
30"	GPGSC30	\$1246	30"	28 ¹¹ / ₁₆ "	GPGMC30	\$1246
36"	GPGSC36	\$1287	36"	34 ¹¹ / ₁₆ "	GPGMC36	\$1287
40"	GPGSC40	\$1327	40"	38 ¹¹ / ₁₆ "	GPGMC40	\$1327
42"	GPGSC42	\$1327	42"	40 ¹¹ / ₁₆ "	GPGMC42	\$1327
48"	GPGSC48	\$1372	48"	46 ¹¹ / ₁₆ "	GPGMC48	\$1372
60"	GPGSC60	\$1774	60"	58 ¹¹ / ₁₆ "	GPGMC60	\$1774
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Power Options

This page guides you through specifying Privacy Wall panels. Use these steps to specify factory-installed power components or communication openings in panels, or to have the factory alter panels to accommodate field-installed power.

Tip: Chicago and New York City electrical code requires field-supplied components to be field installed.

Factory-installed power components are available in all Privacy Wall panels. Use the options on this page to tell the factory how to assemble your panels so they include the power components you want.

Field-installed power components are required in New York City and Chicago. To streamline installation, use the options on this page to tell the factory how to modify the panels so they are ready to accept the power components you must order or supply separately. For details about how power is accommodated in Privacy Wall panels, see:

- ▶ *How to Power a Panel*, page 98
- ▶ *Overview of Powered Panels*, page 102

Specifying

Panels

- 1** Choose appropriate panel width to accommodate power and communication receptacles. See the table below for minimum widths.

Power and Communication

Desk height and ADA height

- 30"W standard panel
- 30"W (nominal) modular panel

At base

- 30"W standard panel
- 30"W (nominal) modular panel

2 Power schematic

Specify the power schematic:

- 4-circuit, 3+1
- 4-circuit, 2+2
- 3-circuit, separate neutrals (3SN)
- Chicago and New York City power and communication power prep

3 Power locations

Specify one or more of the following power locations that is available on the panel type you have chosen:

- Desk height
- ADA height
- Base
- Base and desk height
- Base and ADA height
- Desk and ADA
- Desk, ADA, and base

4 Utility choices by locations

Cutouts are only available in the positions you specified for power locations in step 3. See the table below for utility choices and designate side 1, side 2, or both side 1 and side 2.

Tip: For New York City and Chicago power prep options, no specification for utility choice at base height is needed because you add components in the field.

Desk height

- Power only
- Power and communication

ADA height

- Power only
- Power and communication

Base height

- Power only
- Power and communication
- Communication only

5 Remember to specify receptacles, cover plates, and power and communication base trim to finish your panel.

Tip: For Chicago and New York City installations, electrician must supply conduit, receptacles, and junction boxes for base of panel. Junction box for desk or ADA height is available from Steelcase and is required when using Privacy Wall power and communication cover plates.

- ▶ Page 254

Infeeds

6 Power infeeds

Panels with factory-installed power blocks at desk or ADA height can have a factory-installed power infeed harness to supply power from the ceiling or floor. Factory-installed infeeds extend a minimum of 12' from the panel. Specify one of the following:

- Hardwire ceiling infeed
- Modular ceiling infeed
- Hardwire floor infeed
- Modular floor infeed

Tip: If you do not specify one of the above infeeds, a hardwire infeed, located top left in a solid panel and bottom left in a Clerestory panel, will be provided.

When ADA- and/or desk-height power is specified, a factory-installed jumper is included to link the two locations. When ADA-, desk-, ADA- and desk-, and base-height power is specified, a factory-installed jumper is included to link ADA/desk to base.

- ▶ Multipurpose power infeeds, page 250


Tip: Infeeds are not required on panels with the Chicago or New York City power prep option.

Example

- One GPSS60
- 9'0" ceiling height
- 4843 Linen side 1
- 4844 Glacier side 2
- 4750 Champagne Metallic floor track
- 2+2 wiring schematic
- Power base height
- Power only side 1 ADA height
- Power and communication side 2 ADA height
- Modular ceiling infeed

Order receptacles, cover plates, and power and communication base trim separately.

Butt-Hinged Door Frames



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96

Tip: Recommended for use with Privacy Wall only. Not for use with Glass Selections.

Tip: Door frame glass option is available on transom door frames only.

Tip: Remember to specify switch cutout option if you want a butt-hinged door frame with a switch.

Tip: Switch cutout is located in strike jamb of single door frame and not available in pair frames. Order switch separately.
▶ Page 164

Tip: Cutout option is not available on pair door frames.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Standard Includes		Required to Specify
▶ Need help? Product details, page 34	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Factory prep for butt hinges <i>Tip: Order door hardware separately.</i> - Hardware cutout for strike plate - Transom, if selected: glass - Plinths: paint	1 Style number 2 Ceiling height 3 Swing orientation 4 Paint color number for frame and plinths 5 Glass number for transom, if selected 6 Post extension 7 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials	- Paint price group 1 No cost - Paint price group 2 +\$ 27 - Paint price group 3 +\$ 46	Specify paint color number. Specify paint color number. Specify paint color number.
Single door frames with transom 8'0"H through 10'0"H		
- Glass price group 1 No cost - Glass price group 2 +\$ 87 - Glass price group 3 +\$105 - Glass price group 4 +\$165 - Glass price group 5 N.A. - Glass price group 6 +\$328		Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Pair door frames with transom 8'0"H through 10'0"H		
- Glass price group 1 No cost - Glass price group 2 +\$173 - Glass price group 3 +\$211 - Glass price group 4 +\$330 - Glass price group 5 N.A. - Glass price group 6 +\$659		Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Post Extension	- Post extensions modified to accommodate recessed ceiling track (ordered separately) No cost - Post extensions modified to accommodate overlapping ceiling track (ordered separately) No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	Single door frames with transom 8'0" through 9'0" No cost 9'1" through 10'0" +\$ 48 Pair door frames with transom 8'0" through 9'0" No cost 9'1" through 10'0" +\$ 91	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments. Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Swing Orientation	- Left-hand door frame No cost - Right-hand door frame No cost	Specify with left-hand door frame. Specify with right-hand door frame.
Switch Cutout	- Without cutout No cost - With low-voltage switch cutout +\$ 35 - With high-voltage switch cutout +\$ 35	Specify without cutout. Specify with low-voltage switch cutout. Specify with high-voltage switch cutout.
Related Products	- Door leaves - Passage sets and locksets - Hinges - Stops - Switches - Ceiling tracks - Feature strips	▶ Page 148 ▶ Page 160 ▶ Page 162 ▶ Page 162 ▶ Page 164 ▶ Page 230 ▶ Page 240

▶ Options, continued on next page

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Tip: Panels for ceiling height of 10'1" to 11'0" are available in width up to 48"W only.

SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Door frame surface, veneer (flat-cut open-pore finish)	
	Single door frame, 40"W	
• Full height	+\$1304	Specify wood veneer color number.
• With transom	+\$1506	Specify wood veneer color number.
	Pair frames, 76"W	
• Full height	+\$1371	Specify wood veneer color number.
• With transom	+\$1640	Specify wood veneer color number.
Muntin (Transom only)	Additional muntin	
• Muntin	+\$ 204	Specify with muntin.
	Veneer on additional muntin	
• Single door	+\$ 202	Specify wood veneer color number.
• Double door	+\$ 269	Specify wood veneer color number.
	Change muntin size	
• Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location	
• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Transom only)	• 10'1" through 11'0" (Available in 1" increments)	+\$ 159 Specify ceiling height in 1" increments.
Base	• 4"H base	+\$ 61 Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price

Single Door Frames

Full-Height

40"	GPDSBF	\$ 957
-----	---------------	--------

With Transom

40"	GPDSBT	\$1479
:	:	:



Pair Frames

Full-Height


76"	GPDPBF	\$ 977
-----	---------------	--------

With Transom

76"	GPDPBT	\$1569
:	:	:



Pivot-Hinged Door Frames



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged frames work with Privacy Wall door leaves only.

Tip: Strike plate finish is available on single frames only.

Tip: Door frame glass option is available on transom door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96

Tip: Cutout option is not available on pair door frames.

Tip: Swing orientation is available on single pivot-hinged door frame with transom only to properly orient etched and patterned glass.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 40	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Reversible, pivot-hinged door frame with plinths: paint - Factory prep for pivot hinges <i>Tip: Order door hardware separately.</i> - Transom, if selected: glass - Strike plate	1 Style number 2 Ceiling height 3 Swing orientation 4 Paint color number for frame and plinths 5 Glass number for transom, if selected 6 Metal color number for strike plate: 9200 Satin Chrome 9201 Polished Chrome 7 Post extension 8 Factory prep for cylindrical or mortise passage set or lockset, if selected 9 Options, if selected (see below) ▶ See Surface Materials, page 334.	
Surface Materials	Options	U.S. Price	Required to Specify
	Door frame		
	- Paint price group 1 - Paint price group 2 - Paint price group 3	No cost +\$ 27 +\$ 46	Specify paint color number. Specify paint color number. Specify paint color number.
	Strike plate		
	- Satin chrome - Polished chrome	No cost +\$ 24	Specify with 9200 Satin Chrome. Specify with 9201 Polished Chrome.
Single door frames with transom 8'0"H through 10'0"H			
	- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	No cost +\$ 87 +\$105 +\$165 N.A. +\$328	Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Pair door frames with transom 8'0"H through 10'0"H			
	- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	No cost +\$173 +\$211 +\$330 N.A. +\$659	Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom. Specify glass number for transom.
Post Extension	Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	Single door frames		
	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 48	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
	Pair door frames		
	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 91	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Swing Orientation	For single pivot-hinged door frame with transom		
▶ Page 46	- Left-hand door frame - Right-hand door frame	No cost No cost	Specify with left-hand door frame. Specify with right-hand door frame.
Lock Prep	- Strike plate and factory prep for cylindrical passage set or lockset - Strike plate and factory prep for mortise passage set or lockset	No cost +\$ 68	Specify with cylindrical prep. Specify with mortise prep.
▶ Page 42			

▶ Options, continued on next page

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Related Products	• Door leaves		► Page 152
	• Passage sets and locksets		► Page 160
	• Hinges		► Page 162
	• Stops		► Page 162
	• Ceiling tracks		► Page 230
	• Feature strips		► Page 240

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Door frame surface, veneer (flat-cut open-pore finish)		
	Single door frame, 40"W		
	• Full height	+\$1304	Specify wood veneer color number.
	• With transom	+\$1506	Specify wood veneer color number.
	Pair frames, 80"W		
	• Full height	+\$1371	Specify wood veneer color number.
	• With transom	+\$1640	Specify wood veneer color number.
Muntin (Transom only)	Additional muntin		
	• Muntin	+\$ 204	Specify with muntin.
	Veneer on additional muntin		
	• Single door	+\$ 202	Specify wood veneer color number.
	• Double door	+\$ 269	Specify wood veneer color number.
	Change muntin size		
	• Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Transom only)	• 10'1" through 11'0" (Available in 1" increments)	+\$ 159	Specify ceiling height in 1" increments.
Base	• 4"H base	+\$ 61	Specify to accept 4"H base.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Specification Information

Width	Style Number	U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•

Single Door Frames


Full-Height

40"	GPDSPF	\$ 605
-----	---------------	--------

With Transom

40"	GPDSPT	\$1210
-----	---------------	--------

► Specification Information, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Pivot-Hinged Door Frames, continued

► Specification Information, continued from previous page

Specification Information

Width	Style Number	U.S. Base Price
-------	-----------------	-----------------------


Pair Door Frames

Full-Height

80"	GPDPFF	\$ 622
-----	---------------	--------

With Transom


80"	GPDPPT	\$1495
-----	---------------	--------

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Pivot-Hinged Door Frames with Switch Cutout



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged frames work with Privacy Wall door leaves only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96

Tip: Glass surface option for transom door frames only.

Tip: Order switch separately.

Tip: As an alternative to a 42"W frame with switch cutout, you can position a low-voltage switch in an in-line feature strip adjacent to a door frame.
▶ Page 43

Tip: Door frame glass surface option is available on transom door frames only.

Tip: Swing orientation is available on single pivot-hinged door frame with transom only to properly orient etched and patterned glass.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 40	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Left-hand reversible, pivot-hinged door frame with plinths: paint - Factory prep for pivot hinges Tip: Order door hardware separately. - Transom, if selected: glass - Strike plate	1 Style number 2 Ceiling height 3 Swing orientation 4 Paint color number for frame and plinths 5 Glass number for transom, if selected 6 Metal color number for strike plate: 9200 Satin Chrome 9201 Polished Chrome 7 Post extension 8 Factory prep for cylindrical or mortise passage set or lockset, if selected 9 Options, if selected (see below) ▶ See Surface Materials, page 334.	
Options	U.S. Price	Required to Specify	
Surface Materials	Door frame - Paint price group 1 No cost - Paint price group 2 +\$ 27 - Paint price group 3 +\$ 46 Strike plate - Satin chrome No cost - Polished chrome +\$ 24 Single door frames with transom 8'0"H through 10'0"H - Glass price group 1 No cost - Glass price group 2 +\$ 87 - Glass price group 3 +\$105 - Glass price group 4 +\$165 - Glass price group 5 N.A. - Glass price group 6 +\$328	Specify paint color number. Specify paint color number. Specify paint color number. Specify with 9200 satin chrome. Specify with 9201 polished chrome.	
Post Extension	- Post extensions modified to accommodate recessed ceiling track (ordered separately) No cost - Post extensions modified to accommodate overlapping ceiling track (ordered separately) No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.	
Ceiling Height	Single door frames with transom 8'0" through 9'0" No cost 9'1" through 10'0" +\$ 48	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.	
Swing Orientation ▶ Page 46	- Left-hand door frame No cost - Right-hand door frame No cost	Specify with left-hand door frame. Specify with right-hand door frame.	
Switch Cutout ▶ Page 37	- With low-voltage switch cutout No cost - With high-voltage switch cutout No cost	Specify with low-voltage switch cutout. Specify with high-voltage switch cutout.	
Lock Prep ▶ Page 42	- Strike plate and factory prep for cylindrical passage set or lockset No cost - Strike plate and factory prep for mortise passage set or lockset +\$ 68	Specify with cylindrical prep. Specify with mortise prep.	
Related Products	- Door leaves - Passage sets and locksets - Hinges - Stops - Ceiling tracks - Feature strips	▶ Page 152 ▶ Page 160 ▶ Page 162 ▶ Page 162 ▶ Page 230 ▶ Page 240	

▶ Options, continued on next page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

► Options, continued from previous page

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Door frame surface, veneer (flat-cut open-pore finish)		
	Single door frame, 42"W		
	• Full height	+\$1371	Specify wood veneer color number.
	• With transom	+\$1640	Specify wood veneer color number.
Muntin (Transom only)	Additional muntin		
	• Muntin	+\$ 204	Specify with muntin.
	Veneer on additional muntin		
	• Single door	+\$ 202	Specify wood veneer color number.
	Change muntin size		
	• Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Transom only)	• 10'1" through 11'0" (Available in 1" increments)	+\$ 159	Specify ceiling height in 1" increments.
Base	• 4"H base	+\$ 61	Specify to accept 4"H base.

Tip: Standard Privacy Wall ceiling heights are 8'0" through 10'0".

Specification Information

Width	Style Number	U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•

Single Door Frames


Full-Height

42"	GPDSPFS	\$1236
-----	----------------	--------

With Transom

42"	GPDSPTS	\$1678
-----	----------------	--------

•	•	•
---	---	---



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Full-Height Butt-Hinged Door Leaves



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96

Standard Includes	Required to Specify
▶ Need help? Product details, page 34 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> - Butt-hinged door: paint, glass, or flat-cut veneer - Factory prep for butt hinges	- Style number - Ceiling height - Swing orientation - Paint color number for door, if solid door selected - Glass number for glass door, if glass door selected - Paint color number for glass door, if glass door selected - Wood veneer color number, if selected - Factory prep for cylindrical or mortise passage set or lockset, if selected - Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Glass door surface		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
36"W solid single door leaves 8'0"H through 10'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 109	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 173	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
72"W solid pair door leaves 8'0"H through 10'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 215	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 349	Specify with <i>Quarter-cut open pore veneer</i> .
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
Glass single door 8'0"H through 10'0"H		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 386	Specify glass number for lite.
• Glass price group 3	+\$ 461	Specify glass number for lite.
• Glass price group 4	+\$ 741	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1466	Specify glass number for lite.
Ceiling Height		
36"W solid single door leaves butt-hinged 8'0"H through 10'0"H		
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
• 9'1" through 10'0"	+\$ 281	Specify ceiling height in 1" increments.
72"W solid pair door leaves butt-hinged 8'0"H through 10'0"H		
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
• 9'1" through 10'0"	+\$ 561	Specify ceiling height in 1" increments.
Swing Orientation		
• Left-hand door frame	No cost	Specify with <i>left-hand door frame</i> .
• Right-hand door frame	No cost	Specify with <i>right-hand door frame</i> .
Lock Prep		
• Strike plate and factory prep for cylindrical passage set or lockset	No cost	Specify with <i>cylindrical prep</i> .
• Strike plate and factory prep for mortise passage set or lockset	+\$ 44	Specify with <i>mortise prep</i> .
Related Products		
• Door frames		▶ Page 140
• Passage sets and locksets		▶ Page 160
• Hinges		▶ Page 162
• Stops		▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
-------	------------------------------	-----------------	-----------------------


Solid Single Door

35 ¹³ / ₁₆ "	40"	GPLSSBF40	\$1748
------------------------------------	-----	-----------	--------



Glass Single Door with 5"H Bottom Rail


35 ¹³ / ₁₆ "	40"	GPLGSBF40	\$4339
------------------------------------	-----	-----------	--------



5"H

Glass Single Door with 12"H Bottom Rail


35 ¹³ / ₁₆ "	40"	GPLGSBF40B	\$4339
------------------------------------	-----	------------	--------



12"H

Solid Pair Door

71 ⁵ / ₈ "	76"	GPLSPBF76	\$3572
----------------------------------	-----	-----------	--------



For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

▶ See page 1 for details.

Transom-Height Butt-Hinged Door Leaves



Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.

Tip: Door frame glass surface option is available on transom door frames only.

Standard Includes		Required to Specify
► Need help? Product details, page 34	• 7'0"H	1 Style number
	• Butt-hinged door: paint, glass, or flat-cut veneer	2 Paint color number for door, if solid door selected
	• Factory prep for butt hinges	3 Swing orientation
		4 Glass number for glass door, if glass door selected
		5 Paint color number for glass door, if glass door selected
		6 Wood veneer color number, if selected
		7 Factory prep for cylindrical or mortise passage set or lockset, if selected
		8 Options, if selected (see below)
		► See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials	Glass door surface	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
	36"W solid single door leaves 7'0"H	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 109	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 157	Specify with <i>Quarter-cut open pore veneer</i> .
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
	72"W solid pair door leaves 7'0"H	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 215	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 314	Specify with <i>Quarter-cut open pore veneer</i> .
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
	Glass single door 7'0"H	
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 386	Specify glass number for lite.
• Glass price group 3	+\$ 461	Specify glass number for lite.
• Glass price group 4	+\$ 741	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1466	Specify glass number for lite.
Swing Orientation	• Left-hand door frame	No cost
► Page 46	• Right-hand door frame	No cost
		Specify with <i>left-hand door frame</i> .
		Specify with <i>right-hand door frame</i> .
Lock Prep	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
► Page 42	• Strike plate and factory prep for mortise passage set or lockset	+\$ 44
		Specify with <i>cylindrical prep</i> .
		Specify with <i>mortise prep</i> .
Related Products	• Door frames	► Page 140
	• Passage sets and locksets	► Page 160
	• Hinges	► Page 162
	• Stops	► Page 162



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Specification Information

• Width	• Corresponding Frame Width	• Style Number	• U.S. Base Price
---------	--------------------------------	-------------------	-------------------------

Solid Single Door

35 ¹³ / ₁₆ "	40"	GPLSSBT40	\$1548
------------------------------------	-----	------------------	--------



Glass Single Door with 5"H Bottom Rail

35 ¹³ / ₁₆ "	40"	GPLGSBT40	\$4226
------------------------------------	-----	------------------	--------




Glass Single Door with 12"H Bottom Rail

35 ¹³ / ₁₆ "	40"	GPLGSBT40B	\$4226
------------------------------------	-----	-------------------	--------



Solid Pair Door

71 ⁵ / ₈ "	76"	GPLSPBT76	\$3172
----------------------------------	-----	------------------	--------



For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Full-Height Pivot-Hinged Door Leaves



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Door frame glass surface option is available on transom door frames only.

Tip: Ceiling height option is available on solid door leaves only.

Tip: Swing orientation is available on single pivot-hinged door frame with transom only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 40	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> - Reversible pivot-hinged door: paint, glass, or flat-cut veneer - Factory prep for pivot hinges	1 Style number 2 Ceiling height 3 Paint color number for door, if solid door selected 4 Glass number for glass door, if glass door selected 5 Paint color number for glass door, if glass door selected 6 Wood veneer color number, if selected 7 Factory prep for cylindrical or mortise passage set or lockset, if selected 8 Options, if selected (see below) ▶ See Surface Materials, page 334.
Options	U.S. Price	Required to Specify
Surface Materials	Glass door surface	
	- Paint price group 1 No cost - Paint price group 2 +\$ 27 - Paint price group 3 +\$ 46	Specify paint color number.
	37³/₁₆"W solid single door leaf 8'0"H through 10'0"H	
	- Paint price group 1 No cost - Paint price group 3 +\$ 109 - Wood veneer (flat cut) No cost - Quarter-cut wood veneer +\$ 173	Specify paint color number.
	Customiz stain No cost	Specify with Quarter-cut open pore veneer.
	77¹/₂"W solid pair door leaves 8'0"H through 10'0"H	
	- Paint price group 1 No cost - Paint price group 3 +\$ 215 - Wood veneer (flat cut) No cost - Quarter-cut wood veneer +\$ 349 - Customiz stain No cost	Specify paint color number.
	Glass single door 8'0"H through 9'0"H	
	- Glass price group 1 No cost - Glass price group 2 +\$ 386 - Glass price group 3 +\$ 461 - Glass price group 4 +\$ 741 - Glass price group 5 N.A. - Glass price group 6 +\$1466	Specify glass number for lite.
Ceiling Height	Solid single door leaves	
	8'0" through 9'0" No cost 9'1" through 10'0" +\$ 281	Specify ceiling height in 1" increments.
	Solid pair door leaves	
	8'0" through 9'0" No cost 9'1" through 10'0" +\$ 561	Specify ceiling height in 1" increments.
Lock Prep	- Strike plate and factory prep for cylindrical passage set or lockset No cost - Strike plate and factory prep for mortise passage set or lockset +\$ 44	Specify with cylindrical prep.
Related Products	- Door frames - Passage sets and locksets - Hinges - Stops	▶ Page 142 ▶ Page 160 ▶ Page 162 ▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Specification Information

• Width	• Corresponding Frame Width	• Style Number	• U.S. Base Price
---------	--------------------------------	-------------------	-------------------------

Solid Single Door

37 ³ / ₁₆ "	40"	GPLSSPF40	\$2133
-----------------------------------	-----	------------------	--------



Glass Single Door with 5"H Bottom Rail

37 ³ / ₁₆ "	40"	GPLGSPF40	\$4339
-----------------------------------	-----	------------------	--------




Glass Single Door with 12"H Bottom Rail

37 ³ / ₁₆ "	40"	GPLGSPF40B	\$4339
-----------------------------------	-----	-------------------	--------



Solid Pair Door

77 ¹ / ₂ "	80"	GPLSPPF80	\$4343
----------------------------------	-----	------------------	--------



For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Transom-Height Pivot-Hinged Door Leaves



Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.

Standard Includes		Required to Specify
► Need help? Product details, page 40	• 7'0"H • Reversible pivot-hinged door: paint, glass, or flat-cut veneer • Factory prep for pivot hinges	1 Style number 2 Paint color number for door, if solid door selected 3 Glass number for glass door, if glass door selected 4 Paint color number for glass door, if glass door selected 5 Wood veneer color number, if selected 6 Factory prep for cylindrical or mortise passage set or lockset, if selected 7 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials	Transom-height glass door leaves	
	• Paint price group 1	No cost
	• Paint price group 2	+\$ 27
	• Paint price group 3	+\$ 46
	37³/₁₆"W solid single door leaves 7'0"H	
	• Paint price group 1	No cost
	• Paint price group 3	+\$ 109
	• Wood veneer (flat cut)	No cost
	• Quarter-cut wood veneer	+\$ 157
	• Customiz stain	No cost
	77¹/₂"W solid pair door leaves 7'0"H	
	• Paint price group 1	No cost
	• Paint price group 3	+\$ 215
	• Wood veneer (flat cut)	No cost
	• Quarter-cut wood veneer	+\$ 314
	• Customiz stain	No cost
	Glass single door 7'0"H	
	• Glass price group 1	No cost
	• Glass price group 2	+\$ 386
	• Glass price group 3	+\$ 461
	• Glass price group 4	+\$ 741
	• Glass price group 5	N.A.
	• Glass price group 6	+\$1466
Lock Prep ► Page 42	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
	• Strike plate and factory prep for mortise passage set or lockset	+\$ 44
Related Products	• Door frames	► Page 142
	• Passage sets and locksets	► Page 160
	• Hinges	► Page 162
	• Stops	► Page 162



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Specification Information

• Width	• Corresponding Frame Width	• Style Number	• U.S. Base Price
---------	--------------------------------	-------------------	-------------------------


Solid Single Door

37 ³ / ₁₆ "	40"	GPLSSPT40	\$1887
-----------------------------------	-----	------------------	--------




Glass Single Door with 5"H Bottom Rail

37 ³ / ₁₆ "	40"	GPLGSPT40	\$4226
-----------------------------------	-----	------------------	--------




Glass Single Door with 12"H Bottom Rail

37 ³ / ₁₆ "	40"	GPLGSPT40B	\$4226
-----------------------------------	-----	-------------------	--------



Solid Pair Door

77 ¹ / ₂ "	80"	GPLSPPT80	\$3851
----------------------------------	-----	------------------	--------

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Ceiling height option is available on solid door leaves only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 40	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> - Reversible pivot-hinged door: paint, glass, or flat-cut veneer - Factory prep for pivot hinges	1 Style number 2 Ceiling height 3 Paint color number for door, if solid door selected 4 Glass number for glass door, if glass door selected 5 Paint color number for glass door, if glass door selected 6 Wood veneer color number, if selected 7 Factory prep for cylindrical or mortise passage set or lockset, if selected 8 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials	Full-height glass door leaves surface options	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
36³/₈"W solid door leaves 8'0"H through 10'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 109	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 173	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
Glass single door		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 386	Specify glass number for lite.
• Glass price group 3	+\$ 461	Specify glass number for lite.
• Glass price group 4	+\$ 741	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1466	Specify glass number for lite.
Ceiling Height	Solid single door leaves	
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
• 9'1" through 10'0"	+\$ 281	Specify ceiling height in 1" increments.
Lock Prep ▶ Page 42	- Strike plate and factory prep for cylindrical passage set or lockset - Strike plate and factory prep for mortise passage set or lockset	No cost +\$ 44 Specify with <i>cylindrical prep.</i> Specify with <i>mortise prep.</i>
Related Products	- Door frames - Passage sets and locksets - Hinges - Stops	▶ Page 146 ▶ Page 160 ▶ Page 162 ▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Full-Height Pivot-Hinged
Door Leaves for Use with
Switch Cutout

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
-------	------------------------------	-----------------	-----------------------

Solid Single Door

36 ³ / ₈ "	42"	GPLSSPF42	\$2133
----------------------------------	-----	------------------	--------



Glass Single Door with 5"H Bottom Rail

36 ³ / ₈ "	42"	GPLGSPF42	\$4339
----------------------------------	-----	------------------	--------



5"H

Glass Single Door with 12"H Bottom Rail

36 ³ / ₈ "	42"	GPLGSPF42B	\$4339
----------------------------------	-----	-------------------	--------



12"H



For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Privacy Wall pivot-hinged door leaves work with Privacy Wall door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Door frame glass surface option is available on transom door frames only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 40	• 7'0"H	1 Style number
	• Reversible pivot-hinged door: paint, glass, or flat-cut veneer	2 Paint color number for door, if solid door selected
	• Factory prep for pivot hinges	3 Glass number for glass door, if glass door selected
		4 Paint color number for glass door, if glass door selected
		5 Wood veneer color number, if selected
		6 Factory prep for cylindrical or mortise passage set or lockset, if selected
		7 Options, if selected (see below)
		▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Transom-height glass door leaves surface options		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
36³/₈"W solid door leaves 8'0"H through 10'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 109	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 157	Specify wood veneer color number
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
Glass single door 7'0"H		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 386	Specify glass number for lite.
• Glass price group 3	+\$ 461	Specify glass number for lite.
• Glass price group 4	+\$ 741	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1466	Specify glass number for lite.
Lock Prep		
▶ Page 42	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
	• Strike plate and factory prep for mortise passage set or lockset	+\$ 44
		Specify with <i>cylindrical prep</i> .
		Specify with <i>mortise prep</i> .
Related Products		
• Door frames		▶ Page 146
• Passage sets and locksets		▶ Page 160
• Hinges		▶ Page 162
• Stops		▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Transom-Height Pivot-
Hinged Door Leaves for Use
with Switch Cutout

Specification Information

• Width	• Corresponding Frame Width	• Style Number	• U.S. Base Price
---------	--------------------------------	-------------------	-------------------------


Solid Single Door

36 ³ / ₈ "	42"	GPLSSPT42	\$1887
----------------------------------	-----	------------------	--------



Glass Single Door with 5"H Bottom Rail


36 ³ / ₈ "	42"	GPLGSPT42	\$4226
----------------------------------	-----	------------------	--------



5"H

Glass Single Door with 12"H Bottom Rail

36 ³ / ₈ "	42"	GPLGSPT42B	\$4226
----------------------------------	-----	-------------------	--------




12"H

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Hardware and Accessories for Swing Doors

Cylindrical Passage Set and Lockset



Standard Includes	Required to Specify
- Need help? Product details, page 36 - Cylindrical passage set or lockset, keyed randomly - Strike plate	- Style number - Metal color number for passage set or lockset and strike plate: 9200 Satin Chrome 9201 Polished Chrome - Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials 9200 Satin Chrome 9201 Polished Chrome	No cost +\$24	Specify <i>with satin chrome</i> . Specify <i>with polished chrome</i> .

Specification Information

Style Number	U.S. Base Price


Cylindrical Passage Set

GPDCLA	\$608
---------------	-------

Cylindrical Lockset

GPDCLO	\$830
---------------	-------

Mortise Passage Set and Lockset



Tip: Door frame glass surface option is available on transom door frames only.

Tip: Ceiling height option is available on solid door leaves only.

Tip: Swing orientation is available on single-pivot-hinged door frame with transom only.

Standard Includes	Required to Specify
- Need help? Product details, page 36 - Mortise passage set or lockset, keyed randomly - Strike plate	- Style number - Metal color number for passage set or lockset and strike plate: 9200 Satin Chrome 9201 Polished Chrome - Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials 9200 Satin Chrome 9201 Polished Chrome	No cost +\$35	Specify <i>with satin chrome</i> . Specify <i>with polished chrome</i> .

Specification Information

Style Number	U.S. Base Price

Mortise Passage Set

GPDMLA	\$1028
---------------	--------

Mortise Lockset

GPDMLO	\$1228
---------------	--------



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Butt Hinge Kits



Standard Includes	Required to Specify
• Set of butt hinges • Hinge kits for pair doors include flush bolts for inactive doors	1 Style number 2 Metal color number for set of hinges and flush bolts: 9200 Satin Chrome 9201 Polished Chrome 3 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials Three hinges • 9200 Satin Chrome • 9201 Polished Chrome	No cost +\$33	Specify <i>with satin chrome</i> . Specify <i>with polished chrome</i> .
Four hinges • 9200 Satin Chrome • 9201 Polished Chrome	No cost +\$44	Specify <i>with satin chrome</i> . Specify <i>with polished chrome</i> .
Six or eight hinges • 9200 Satin Chrome • 9201 Polished Chrome	No cost +\$65	Specify <i>with satin chrome</i> . Specify <i>with polished chrome</i> .

Specification Information

Number of Hinges	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

Butt Hinges for Single Doors and Frames

For Use with 84"H Door

3	GPDBH3	\$147
---	---------------	-------

For Use with Full-Height Door

4	GPDBH4	\$196
---	---------------	-------

Butt Hinges for Pair Doors and Frames

For Use with 84"H Door

6	GPDBH3P	\$435
---	----------------	-------

For Use with Full-Height Door

8	GPDBH4P	\$485
---	----------------	-------




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Hardware and Accessories for Swing Doors, continued

Pivot Hinge Kits



Standard Includes	Required to Specify
► Need help? Product details, page 40 - Set of pivot hinges: 9200 Satin Chrome - Hinge kits for pair doors include flush bolts for inactive doors	1 Style number 2 Metal color number for flush bolts: 9200 Satin Chrome 9201 Polished Chrome 3 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials 9200 Satin Chrome 9201 Polished Chrome	No cost +\$31	Specify <i>with satin chrome</i>. Specify <i>with polished chrome</i>.

Specification Information

• Style Number	• U.S. Base Price
•	•
•	•
•	•

Pivot Hinges for Single Doors and Frames

GPDPHS	\$299
•	•
•	•

Pivot Hinges for Pair Doors and Frames

GPDPHSP	\$995
•	•
•	•

Magnetic Wall Stop



Tip: For use with painted solid or Clerestory panels only.

Standard Includes	Required to Specify
► Need help? Product details, page 36 Magnetic wall stop	1 Style number 2 Metal color number: 9200 Satin Chrome 9201 Polished Chrome 3 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Surface Materials 9200 Satin Chrome 9201 Polished Chrome	No cost +\$24	Specify <i>with satin chrome</i>. Specify <i>with polished chrome</i>.

Specification Information

• Style Number	• U.S. Base Price
•	•
•	•
•	•

GPDMWS	\$40
•	•
•	•




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Dome-Style Floor Stop



Standard Includes		Required to Specify	
▶ Need help? Product details, page 36	• Dome-style floor stop	1 Style number 2 Metal color number: 9200 Satin Chrome 9201 Polished Chrome 3 Options, if selected (see below)	
Surface Materials	Options	U.S. Price	Required to Specify
	• 9200 Satin Chrome • 9201 Polished Chrome	No cost +\$24	Specify <i>with satin chrome</i> . Specify <i>with polished chrome</i> .
Specification Information			
Style Number	U.S. Base Price		
GPDDFS	\$19		

Screw-In Base Stop




Standard Includes		Required to Specify	
▶ Need help? Product details, page 36	• Screw-in base stop	1 Style number 2 Metal color number: 9200 Satin Chrome 9201 Polished Chrome 3 Options, if selected (see below)	
Surface Materials	Options	U.S. Price	Required to Specify
	• 9200 Satin Chrome • 9201 Polished Chrome	No cost +\$24	Specify <i>with satin chrome</i> . Specify <i>with polished chrome</i> .
Specification Information			
Style Number	U.S. Base Price		
GPDSBS	\$66		



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Hardware and Accessories for Swing Doors, continued

Low-Voltage Switches




Tip: Switches are UL- and CSA-rated.

Tip: Low-voltage switch assemblies are specified by voltage rating to correspond to the voltage of the lighting system. This ensures that the transformer will be compatible with the lighting system.

Standard Includes		Required to Specify
► Need help? Product details, page 37	• Switch: black • 18-gauge wire • Switch plate: black • Transformer	Style number
Specification Information		
• Style • Number	• U.S. • Price	
Low-Voltage Switch (24V) with 120V Transformer		
GPDS120	\$299	
Low-Voltage Switch (24V) with 277V Transformer		
GPDS277	\$310	
Low-Voltage Switch (24V) with 347V Transformer		
GPDS347	\$369	

High-Voltage Switches



Tip: Switches are UL- and CSA-rated.

Standard Includes		Required to Specify
► Need help? Product details, page 37	• Switch: ivory • Electrical box and related hardware • Switch plate: clear anodized satin	Style number
Specification Information		
• Style • Number	• U.S. • Price	
Single Pole Single Switch		
GPDSS1	\$189	
Single Pole Double Switch		
GPDS1	\$287	


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull

All Glass



Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Standard Includes		Required to Specify
► Need help? Product details, page 48	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Slider door: glass 1/4"-thick clear tempered glass - Door frame: paint - Side panel - Slide hardware - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint - Low-voltage knockout for door switch	- Style number - Ceiling height - Paint for frame and muntins - Glass color number for full glass, if selected - Glass color number(s) for three or four equal divided lites, if selected - Glass color number(s) for two or four transom-aligned lites, if selected - Paint color number for floor track - Post extension - Slide orientation - Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify	
Surface Materials	Glass frame surface		
- Paint price group 1 - Paint price group 2 - Paint price group 3	No cost +\$ 50 +\$ 91	Specify paint color number. Specify paint color number. Specify paint color number.	
	80"W doors 96"H through 120"H		
- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	No cost +\$ 985 +\$1174 +\$1881 N.A. +\$3709	Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.	
	96"W doors 96"H through 120"H		
- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	No cost +\$1184 +\$1407 +\$2257 N.A. +\$4450	Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.	
Ceiling Height	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 91	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Pull	No pull and no door prep for pull	–\$ 93	Specify <i>with no pull</i> .
Lock	Door lock with interior thumb latch	+\$ 428	Specify <i>with lock</i> .
Slide Orientation	- Left-hand slider door - Right-hand slider door	No cost No cost	Specify <i>with left-hand slider door</i> . Specify <i>with right-hand slider door</i> .
► Page 49			
Post Extension	- Post extensions modified to accommodate recessed ceiling track (ordered separately) - Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost No cost	Specify <i>with post extensions for recessed ceiling track interface</i> . Specify <i>with post extensions for overlapping ceiling track interface</i> .
Related Products	- Switches - Ceiling tracks - Continuous base trim - Feature strips		► Page 164 ► Page 230 ► Page 236 ► Page 240

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

► Options, continued from previous page


	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5"H through 7'11"H	+\$173	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	• 76"W through 79"W and 81"W through 95"W • 97"W through 113"W	+\$347 +\$520	Specify slider door assembly widths in 1" increments. Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	• 40"W doors: 81"W through 103"W • 48"W doors: 97"W through 111"W	+\$520 +\$520	Specify slider door assembly widths in 1" increments. Specify slider door assembly widths in 1" increments.
Base	• 4"H base	+\$222	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

All Glass

80"	GPDSSTF80	\$3475
96"	GPDSSTF96	\$3604
:	:	:


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull

Two Transom-Aligned Lites



Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Standard Includes	Required to Specify
▶ Need help? Product details, page 48 - Ceiling height from 8'0"H to 120"H, in one-inch increments - Slider door: glass 1/4"-thick clear tempered glass - Door frame: paint - Side panel - Slide hardware - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint - Tubular door pull: brushed stainless - Low-voltage knockout for door switch	- Style number - Ceiling height - Paint for frame and muntins - Glass color number for full glass, if selected - Glass color number(s) for three or four equal divided lites, if selected - Glass color number(s) for two or four transom-aligned lites, if selected - Paint color number for floor track - Post extension - Slide orientation - Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials Glass frame surface - Paint price group 1 No cost - Paint price group 2 +\$ 50 - Paint price group 3 +\$ 91		Specify paint color number. Specify paint color number. Specify paint color number.
80"W doors 96"H through 120"H (per top lite row of glass)		
- Glass price group 1 No cost - Glass price group 2 +\$ 183 - Glass price group 3 +\$ 219 - Glass price group 4 +\$ 351 - Glass price group 5 N.A. - Glass price group 6 +\$ 689		Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
80"W doors 96"H through 120"H (per lower lite row of glass)		
- Glass price group 1 No cost - Glass price group 2 +\$ 837 - Glass price group 3 +\$ 994 - Glass price group 4 +\$1595 - Glass price group 5 N.A. - Glass price group 6 +\$3149		Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
96"W doors 96"H through 120"H (per top lite row of glass)		
- Glass price group 1 No cost - Glass price group 2 +\$ 211 - Glass price group 3 +\$ 250 - Glass price group 4 +\$ 399 - Glass price group 5 N.A. - Glass price group 6 +\$ 789		Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
96"W doors 96"H through 120"H (per lower lite row of glass)		
- Glass price group 1 No cost - Glass price group 2 +\$ 954 - Glass price group 3 +\$1138 - Glass price group 4 +\$1822 - Glass price group 5 N.A. - Glass price group 6 +\$3597		Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
Ceiling Height 8'0" through 9'0" No cost 9'1" through 10'0" +\$ 91		Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Pull No pull and no door prep for pull -\$ 93		Specify with no pull.
Lock Door lock with interior thumb latch +\$ 428		Specify with lock.
Slide Orientation - Left-hand slider door No cost - Right-hand slider door No cost		Specify with left-hand slider door. Specify with right-hand slider door.
▶ Page 49 ▶ Options, continued on next page		



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Related Products	• Switches • Ceiling tracks • Continuous base trim • Feature strips		► Page 164 ► Page 230 ► Page 236 ► Page 240

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.


	SmartTools Options	U.S. Price	Required to Specify
Muntin	Change muntin size		
	• Change to 1½"W or 2¼"W	No cost	Specify change muntin size.
	Change muntin location		
	• Change muntin location	No cost	Specify change muntin location.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	• 76"W through 79"W and 81"W through 95"W	+\$347	Specify slider door assembly widths in 1" increments.
	• 97"W through 113"W	+\$520	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	• 40"W doors: 81"W through 103"W	+\$520	Specify slider door assembly widths in 1" increments.
	• 48"W doors: 97"W through 111"W	+\$520	Specify slider door assembly widths in 1" increments.
Base	• 4"H base	+\$222	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•

Two Transom-Aligned Lites

80"	GPDSST2L80	\$3522
96"	GPDSST2L96	\$3676
•	•	•




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull

Three Equal Divided Lites



Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Standard Includes		Required to Specify	
► Need help? Product details, page 48	• Ceiling height from 8'0"H to 120"H, in one-inch increments • Slider door: glass • 1/4"-thick clear tempered glass • Door frame: paint • Side panel • Slide hardware • Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint • Tubular door pull: brushed stainless • Low-voltage knockout for door switch	1 Style number 2 Ceiling height 3 Paint for frame and muntins 4 Glass color number for full glass, if selected 5 Glass color number(s) for three or four equal divided lites, if selected 6 Glass color number(s) for two or four transom-aligned lites, if selected 7 Paint color number for floor track 8 Post extension 9 Slide orientation 10 Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.	

Options	U.S. Price	Required to Specify
Surface Materials	Glass frame surface	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 50	Specify paint color number.
• Paint price group 3	+\$ 91	Specify paint color number.
80"W doors 8'0"H through 10'0"H (per row of glass)		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 328	Specify glass number for lite.
• Glass price group 3	+\$ 391	Specify glass number for lite.
• Glass price group 4	+\$ 626	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1235	Specify glass number for lite.
96"W doors 8'0"H through 10'0"H (per row of glass)		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 394	Specify glass number for lite.
• Glass price group 3	+\$ 472	Specify glass number for lite.
• Glass price group 4	+\$ 754	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1487	Specify glass number for lite.
Ceiling Height	• 8'0" through 9'0" • 9'1" through 10'0"	- No cost +\$ 91 Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Pull	• No pull	–\$ 93 Specify <i>with no pull</i>.
Lock	• Door lock with interior thumb latch	+\$ 428 Specify <i>with lock</i>.
Slide Orientation	• Left-hand slider door • Right-hand slider door	- No cost - No cost Specify <i>with left-hand slider door</i>. Specify <i>with right-hand slider door</i>.
► Page 49		
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately) • Post extensions modified to accommodate overlapping ceiling track (ordered separately)	- No cost - No cost Specify <i>with post extensions for recessed ceiling track interface</i>. Specify <i>with post extensions for overlapping ceiling track interface</i>.
Related Products	• Switches • Ceiling tracks • Continuous base trim • Feature strips	► Page 164 ► Page 230 ► Page 236 ► Page 240

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

Tip: Muntin quantity and location must match door assembly and side panel. See Privacy Wall Slider Doors.

► Page 49.


	SmartTools Options	U.S. Price	Required to Specify
Muntin	Change muntin size • Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location • Change muntin location	No cost	Specify muntin location.
Parametric Ceiling Height (Available in 1" increments)	• 7'5"W through 7'11"H	+\$173	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	• 76"W through 79"W and 81"W through 95"W	+\$347	Specify slider door assembly widths in 1" increments.
	• 97"W through 113"W	+\$520	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	• 40"W doors: 81"W through 103"W	+\$520	Specify slider door assembly widths in 1" increments.
	• 48"W doors: 97"W through 111"W	+\$520	Specify slider door assembly widths in 1" increments.
Base	• 4"H base	+\$222	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
80"	GPDSST3E80	\$3579
96"	GPDSST3E96	\$3736

Three Equal Divided Lites


80"	GPDSST3E80	\$3579
96"	GPDSST3E96	\$3736



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Privacy Wall Slider Doors with Tubular Pull

Four Equal Divided Lites



Tip: For information regarding Etched and Pattern Glass Planning.

► Page 96.

Tip: Upcharge per lite includes the glass in the door and the side panel.

Standard Includes		Required to Specify	
► Need help? Product details, page 48	- Ceiling height from 8'0"H to 120"H, in one-inch increments - Slider door: glass 1/4"-thick clear tempered glass - Door frame: paint - Side panel - Slide hardware - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint - Tubular door pull: brushed stainless - Low-voltage knockout for door switch	- Style number - Ceiling height - Paint for frame and muntins - Glass color number for full glass, if selected - Glass color number(s) for three or four equal divided lites, if selected - Glass color number(s) for two or four transom-aligned lites, if selected - Paint color number for floor track - Post extension - Slide orientation - Options, if selected (see below)	
		► See <i>Surface Materials</i> , page 334.	

Options		U.S. Price	Required to Specify
Surface Materials	Glass frame surface		
	- Paint price group 1 - Paint price group 2 - Paint price group 3	No cost +\$ 50 +\$ 91	Specify paint color number. Specify paint color number. Specify paint color number.
80"W doors 8'0"H through 10'0"H (per row of glass)			
96"W doors 8'0"H through 10'0"H (per row of glass)			
Ceiling Height	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 91	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Pull	No pull	-\$ 93	Specify <i>with no pull</i> .
Lock	Door lock with interior thumb latch	+\$ 428	Specify <i>with lock</i> .
Slide Orientation	- Left-hand slider door - Right-hand slider door	No cost No cost	Specify <i>with left-hand slider door</i> . Specify <i>with right-hand slider door</i> .
► Page 49			
Post Extension	- Post extensions modified to accommodate recessed ceiling track (ordered separately) - Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost No cost	Specify <i>with post extensions for recessed ceiling track interface</i> . Specify <i>with post extensions for overlapping ceiling track interface</i> .
Related Products	- Switches - Ceiling tracks - Continuous base trim - Feature strips		► Page 164 ► Page 230 ► Page 236 ► Page 240

► Options, continued on next page



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Specify additional muntin(s) for use in five- or six-lite assembly applications. Maximum of six lites. See Privacy Wall Slider Doors.

► Page 49.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.


	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass for 5th and 6th lite opening • See standard options for glass price group above		Specify glass number for lite 5 or 6.
Muntin	Change muntin size • Change to 1½"W or 2¼"W	No cost	Specify muntin size.
	Change muntin location • Change muntin location	No cost	Specify muntin location.
	Additional muntin • Muntin	+\$173	Specify with muntin.
Parametric Ceiling Height (Available in 1" increments)	• 7½"W through 7'11"H	+\$173	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	• 76"W through 79"W and 81"W through 95"W • 97"W through 113"W	+\$347 +\$520	Specify slider door assembly widths in 1" increments. Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	• 40"W doors: 81"W through 103"W • 48"W doors: 97"W through 111"W	+\$520 +\$520	Specify slider door assembly widths in 1" increments. Specify slider door assembly widths in 1" increments.
Base	• 4"H base	+\$222	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
80"	GPDSST4E80	\$3635
96"	GPDSST4E96	\$3796

Four Equal Divided Lites

80"	GPDSST4E80	\$3635
96"	GPDSST4E96	\$3796

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Related Products	• Switches		▶ Page 164
	• Ceiling tracks		▶ Page 230
	• Continuous base trim		▶ Page 236
	• Feature strips		▶ Page 240

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

Tip: Specify additional muntin(s) for use in five- or six-lite assembly applications. Maximum of six lites.
► See Understanding page 49.

Tip: Muntin quantity and location must match door assembly and side panel.
► See Understanding page 49.


	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Glass for 5th and 6th lite opening See standard options for lower lite row glass price group above		Specify glass number for lite 5 or 6.
Muntin	Change muntin size Change to 1½"W or 2¼"W	No cost	Specify change muntin size.
	Change muntin location Change muntin location	No cost	Specify change muntin location.
	Additional muntin Muntin	+\$173	Specify <i>with muntin</i> .
Parametric Width Slider Door Assembly with Equal Width Door and Side Panel	76"W through 79"W and 81"W through 95"W	+\$347	Specify slider door assembly widths in 1" increments.
	97"W through 113"W	+\$520	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel	40"W doors: 81"W through 103"W	+\$520	Specify slider door assembly widths in 1" increments.
	48"W doors: 97"W through 111"W	+\$520	Specify slider door assembly widths in 1" increments.
Base	4"H base	+\$222	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
•	•	•
•	•	•
•	•	•
•	•	•


Four Transom-Aligned Lites

80"	GPDSST4L80	\$3635
96"	GPDSST4L96	\$3796
•	•	•



Back-to-Back Cover

For Privacy Wall Slider Doors



Standard Includes		Required to Specify	
► Need help? Product details, page 50	- Back-to-back cover: paint price group 1 - Plinth: paint	- Style number - Paint color number for cover and plinth - Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.	
Options		U.S. Price	Required to Specify
Surface Materials	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 8	Specify paint color number.
	• Paint price group 3	+\$15	Specify paint color number.
Specification Information			
Style Number	U.S. Base Price		
GPDSCB	\$167		




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Mini Ends



Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Veneer (flat-cut open-pore finish) • Mini end	+\$961	Specify wood veneer color number.
Parametric Ceiling Height	• 7'5" through 7'11" • 10'1" through 11'0"	+\$ 18 +\$ 18	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Modified Angle (45° to 135° in 5° increments)	• For GPMES • For GPMEM • For GPMEL	+\$163 +\$173 +\$186	Specify <i>with modified angle</i> . Specify <i>with modified angle</i> . Specify <i>with modified angle</i> .
Base	• 4"H base	+\$ 18	Specify to accept 4"H base.

Specification Information


• Size	• Style Number	• U.S. Base Price
1 1/2" to 2 1/8"	GPMES	\$259
2 1/8" to 3 1/2"	GPMEM	\$259
3 1/2" to 6"	GPMEL	\$335



▶ See page 1 for details.

Mini Ends, continued

Mini Ends to the Floor



Tip: Mini ends should be specified to the floor when positioned next to a door frame. Mini ends will be field-cut by installer to final length.

► Page 68

Standard Includes		Required to Specify	
► Need help? Product details, page 68	- Mini end: 10'1"H - Telescoping mini end: paint	1 Style number 2 Paint color number for mini end 3 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.	

	Options	U.S. Price	Required to Specify
Surface Materials	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 8	Specify paint color number.
	• Paint price group 3	+\$ 15	Specify paint color number.
	• Fabric price group 1	+\$ 83	Specify fabric color number.
	• Fabric price group 2	+\$108	Specify fabric color number.
	• Fabric price group 3	+\$142	Specify fabric color number.
	• Fabric price group 5	+\$175	Specify fabric color number.
	• Vinyl price group A	+\$ 83	Specify vinyl color number.
	• Vinyl price group B	+\$108	Specify vinyl color number.
	• Vinyl price group C	+\$121	Specify vinyl color number.
	• Vinyl price group D	+\$161	Specify vinyl color number.
	• Vinyl price group E	+\$180	Specify vinyl color number.
	• Customer's Own Material/ Vinyl (COM)	+\$ 83	► See <i>Surface Materials Reference Manual</i> .
Related Product	• Wall panels		► Page 108

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Veneer (flat-cut open-pore finish)		
	• Mini end	+\$961	Specify wood veneer color number.
Parametric Ceiling Height	• 10'1" through 11'0"	+\$ 18	Specify ceiling height in 1" increments.
Modified Angle (45° to 135° in 5° increments)	• For GPMESF	+\$163	Specify <i>with modified angle</i> .
	• For GPMEMF	+\$173	Specify <i>with modified angle</i> .
	• For GPMELF	+\$186	Specify <i>with modified angle</i> .

Specification Information

• Size	• Style Number	• U.S. Base Price
11/2" to 21/8"	GPMESF	\$259
21/8" to 31/2"	GPMEMF	\$259
31/2" to 6"	GPMELF	\$335
•	•	•




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Wall Channels

Wall Channels



Tip: Wall channels are cut to size in the field.

Tip: Specify an end filler cut kit when cutting a panel into a wall channel. The end filler cut kit includes a wall channel and spreader.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 72	• Wall channel, 10'0": paint	1 Style number 2 Paint color number for wall channel 3 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.	
Surface Materials	Options	U.S. Price	Required to Specify
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 8	Specify paint color number.
	• Paint price group 3	+\$ 15	Specify paint color number.
	• Fabric price group 1	+\$ 83	Specify fabric color number.
	• Fabric price group 2	+\$108	Specify fabric color number.
	• Fabric price group 3	+\$142	Specify fabric color number.
	• Fabric price group 5	+\$175	Specify fabric color number.
	• Vinyl price group A	+\$ 83	Specify vinyl color number.
	• Vinyl price group B	+\$108	Specify vinyl color number.
	• Vinyl price group C	+\$121	Specify vinyl color number.
	• Vinyl price group D	+\$161	Specify vinyl color number.
	• Vinyl price group E	+\$180	Specify vinyl color number.
	• Customer's Own Material/ Vinyl (COM)	+\$ 83	▶ See <i>Surface Materials Reference Manual</i> .
Ceiling Height	• 8'0" through 10'0"	No cost	Specify ceiling height in 1" increments.

Surface Materials	SmartTools Options	U.S. Price	Required to Specify
	Veneer (flat-cut open-pore finish)		
	• Wall channel	+\$477	Specify wood veneer color number.
Parametric Ceiling Height	• 10'1" through 11'0"	+\$ 18	Specify ceiling height in 1" increments.
(Available in 1" increments)			

Specification Information			
Size	Length	Style Number	U.S. Base Price
1"	10'	GPWC1	\$136
2 1/4"	10'	GPWC2	\$136
4"	10'	GPWC4	\$160
:	:	:	:



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Panel End Cut Kit



Tip: Slider door assembly widths are displayed in nominal sizes. Actual sizes vary in height and width.

Standard Includes		Required to Specify	
► Need help? Product details, page 76	• Panel spreader • Leveler for 5" base • Leveler reinforcement • Finished end: paint	1 Style number 2 Paint color number 3 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.	
Surface Materials	Options	U.S. Price	Required to Specify
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 8	Specify paint color number.
	• Paint price group 3	+\$ 15	Specify paint color number.
	• Fabric price group 1	+\$ 83	Specify fabric color number.
	• Fabric price group 2	+\$108	Specify fabric color number.
	• Fabric price group 3	+\$142	Specify fabric color number.
	• Fabric price group 5	+\$175	Specify fabric color number.
	• Vinyl price group A	+\$ 83	Specify vinyl color number.
	• Vinyl price group B	+\$108	Specify vinyl color number.
	• Vinyl price group C	+\$121	Specify vinyl color number.
	• Vinyl price group D	+\$161	Specify vinyl color number.
	• Vinyl price group E	+\$180	Specify vinyl color number.
	• Customer's Own Material/ Vinyl (COM)	+\$ 83	Specify vinyl color number. ► See <i>Surface Materials Reference Manual</i> .
Related Product	• Wall panels		► Page 108

Specification Information

Height	Style Number	U.S. Base Price
10'	GPWCCP	\$164




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

End Filler Cut Kit



Standard Includes		Required to Specify	
► Need help? Product details, page 76	• Panel spreader	1 Style number	
	• Leveler for 5" base	2 Paint color number	
	• Leveler reinforcement	3 Options, if selected (see below)	
	• Wall channel: paint	► See <i>Surface Materials</i> , page 334.	

Surface Materials	Options	U.S. Price	Required to Specify
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 8	Specify paint color number.
	• Paint price group 3	+\$ 15	Specify paint color number.
	• Fabric price group 1	+\$ 83	Specify fabric color number.
	• Fabric price group 2	+\$108	Specify fabric color number.
	• Fabric price group 3	+\$142	Specify fabric color number.
	• Fabric price group 5	+\$175	Specify fabric color number.
	• Vinyl price group A	+\$ 83	Specify vinyl color number.
	• Vinyl price group B	+\$108	Specify vinyl color number.
	• Vinyl price group C	+\$121	Specify vinyl color number.
	• Vinyl price group D	+\$161	Specify vinyl color number.
	• Vinyl price group E	+\$180	Specify vinyl color number.
	• Customer's Own Material/Vinyl (COM)	+\$ 83	Specify vinyl color number.
			► See <i>Surface Materials Reference Manual</i> .

Related Product	• Wall panels	► Page 108
------------------------	---------------	------------

Specification Information

Style Number	U.S. Base Price
GPWCCPSK	\$114

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Adapters



Tip: T- and X-adapter do not require finishes as those are not visible.

Tip: Panel end aligns to top of 5"H base.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify
► Need help? Product details, page 78	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Finished-end adapter or L-adapter: paint - Plinth for finished-edge: paint	1 Style number 2 Ceiling height on adapters 3 Paint color number for finished-end and L-adapter, if selected 4 Paint color number for plinths 5 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials	Finished-end and L-adapters	
- Paint price group 1 - Paint price group 2 - Paint price group 3 - Fabric price group 1 - Fabric price group 2 - Fabric price group 3 - Fabric price group 5 - Vinyl price group A - Vinyl price group B - Vinyl price group C - Vinyl price group D - Vinyl price group E - Customer's Own Material/Vinyl (COM)	- No cost +\$ 4 +\$ 8 +\$ 37 +\$ 53 +\$ 66 +\$ 83 +\$ 37 +\$ 53 +\$ 55 +\$ 83 +\$ 94 +\$ 37	- Specify paint color number. - Specify paint color number. - Specify paint color number. - Specify fabric color number. - Specify fabric color number. - Specify fabric color number. - Specify fabric color number. - Specify vinyl color number. - Specify vinyl color number. - Specify vinyl color number. - Specify vinyl color number. - Specify vinyl color number. - Specify vinyl color number. ► See <i>Surface Materials Reference Manual</i>.
	Finished-end base plinth 96"W doors 96"H through 120"H	
- Paint price group 1 - Paint price group 2 - Paint price group 3	- No cost +\$ 2 +\$ 4	- Specify paint color number. - Specify paint color number. - Specify paint color number.

Ceiling Height for L-, T-, and X-adapters	8'1" through 10'0"	No cost	Specify ceiling height in 1" increments.
--	--	---------	--

Related Products	- Continuous base trim - Feature strips	► Page 236 ► Page 240
-------------------------	---	---

SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Veneer (flat-cut open-pore finish)	
Finished-end adapter and L-adapter only	+\$477	Specify wood veneer color number.

Parametric Ceiling Height (Available in 1" increments)	7'5" through 7'11" 10'1" through 11'0"	+\$ 18 +\$ 18	- Specify ceiling height in 1" increments. - Specify ceiling height in 1" increments.
--	--	---	---




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.


► See page 1 for details.

Specification Information


• Style • Number	• U.S. • Base • Price
---------------------	-----------------------------

**Finished-End Adapter with Base**


GPAFEB	\$152
:	:

**L-Adapter**

GPAL	\$152
:	:

**T-Adapter**

GPAT	\$ 80
:	:

**X-Adapter**

GPAX	\$112
:	:

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.



Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify	
► Need help? Product details, page 82	• Ceiling height from 8'0"H to 10'0"H, in one-inch increments • Post: paint (except X-post)	1 Style number 2 Ceiling height 3 Paint color number for post 4 Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.	

Options	U.S. Price	Required to Specify
Surface Materials Post (except X-post) • Paint price group 1 • Paint price group 2 • Paint price group 3 • Fabric price group 1 • Fabric price group 2 • Fabric price group 3 • Fabric price group 5 • Vinyl price group A • Vinyl price group B • Vinyl price group C • Vinyl price group D • Vinyl price group E • Customer's Own Material/Vinyl (COM)	No cost +\$ 8 +\$ 15 +\$ 83 +\$108 +\$142 +\$175 +\$ 83 +\$108 +\$121 +\$161 +\$180 +\$ 83	Specify paint color number. Specify paint color number. Specify paint color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify vinyl color number. Specify vinyl color number. Specify vinyl color number. Specify vinyl color number. Specify vinyl color number. Specify vinyl color number. ► See <i>Surface Materials Reference Manual</i>.
Ceiling Height • 8'0" through 10'0"	No cost	Specify ceiling height in 1" increments.


SmartTools Options	U.S. Price	Required to Specify
Surface Materials Post, veneer (flat-cut open-pore finish) • Posts (except X-post)	+\$477	Specify wood veneer color number.
Parametric Ceiling Height (Available in 1" increments) • 7'5" through 7'11" • 10'1" through 11'0"	+\$ 18 +\$ 18	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Base • 4"H base	+\$ 18	Specify to accept 4"H base.
Modified Angle (70° to 175° in 5° increments) • For GPP120V 70°-85° • For GPP120V 95°-115° • For GPP135V 125°-175°	+\$459 +\$406 +\$406	Specify <i>with modified angle</i>. Specify <i>with modified angle</i>. Specify <i>with modified angle</i>.



▶ See page 1 for details.

Specification Information

L-Post




•Style
Number

•U.S.
Base
Price

GPPL \$162

T-Post




•Style
Number

•U.S.
Base
Price

GPPT \$192

X-Post




•Style
Number

•U.S.
Base
Price

GPPX \$218

In-Line Post




•Style
Number

•U.S.
Base
Price

GPPI \$162

V-Posts



•Configuration


•Style
Number

•U.S.
Base
Price

120° V-Post **GPP120V** \$192

135° V-Post **GPP135V** \$192

135° Y-Post



•Style
Number

•U.S.
Base
Price


GPP135Y \$218

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

I-Line Interface Post



Standard Includes		Required to Specify
► Need help? Product details, page 20	• Interface post: paint	1 Style number 2 Paint color number 3 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.

Options		U.S. Price	Required to Specify
Surface Materials	I-Line post		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 8	Specify paint color number.
	• Paint price group 3	+\$ 15	Specify paint color number.
	• Fabric price group 1	+\$ 83	Specify fabric color number.
	• Fabric price group 2	+\$108	Specify fabric color number.
	• Fabric price group 3	+\$142	Specify fabric color number.
	• Fabric price group 5	+\$175	Specify fabric color number.
	• Vinyl price group A	+\$ 83	Specify vinyl color number.
	• Vinyl price group B	+\$108	Specify vinyl color number.
	• Vinyl price group C	+\$121	Specify vinyl color number.
	• Vinyl price group D	+\$161	Specify vinyl color number.
• Vinyl price group E	+\$180	Specify vinyl color number.	
• Customer's Own Material/Vinyl (COM)	+\$ 83	► See <i>Surface Materials Reference Manual</i> .	

Related Products	• Feature strips	► Page 240
------------------	------------------	------------

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Post, veneer (flat-cut open-pore finish)		
	• I-line post	+\$477	Specify wood veneer color number.
Parametric Ceiling Height (Available in 1" increments)	• 10'1" through 11'0"	+\$ 18	Specify ceiling height in 1" increments.

Specification Information

Length	Style Number	U.S. Base Price
10'	GPIA	\$138



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Glass Selections All-Glass Wall Panels



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify
▶ Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with clear anodized aluminum frame 1/4"-thick factory-installed lite: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		1 Style number 2 Ceiling height 3 Glass number for lite 4 Post extension 5 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials		
Panels 96"H through 120"H, 6"W to 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 98	Specify glass number for lite.
• Glass price group 3	+\$ 119	Specify glass number for lite.
• Glass price group 4	+\$ 190	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 372	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Panels 96"H through 120"H, 18"W to 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 296	Specify glass number for lite.
• Glass price group 3	+\$ 353	Specify glass number for lite.
• Glass price group 4	+\$ 566	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1113	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Panels 96"H through 120"H, 30"W to 36"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 443	Specify glass number for lite.
• Glass price group 3	+\$ 528	Specify glass number for lite.
• Glass price group 4	+\$ 846	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1668	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Panels 96"H through 120"H, 40"W to 48"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 591	Specify glass number for lite.
• Glass price group 3	+\$ 702	Specify glass number for lite.
• Glass price group 4	+\$1130	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$2225	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Panels 96"H through 120"H, 60"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 739	Specify glass number for lite.
• Glass price group 3	+\$ 878	Specify glass number for lite.
• Glass price group 4	+\$1409	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$2781	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Post Extension		
• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height		
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
• 9'1" through 10'0"	+\$ 91	Specify ceiling height in 1" increments.

▶ Options, continued on next page



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

► Options, continued from previous page

Tip: Base power block location does not include infeed. Infeed must be ordered separately, if needed.

Options	U.S. Price	Required to Specify
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic • 3+1 +\$196 • 2+2 +\$196 • 3SN +\$196	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products	• Power options • Ceiling tracks • Continuous base trim • Feature strips • Acoustic packing • Power receptacles • Power and communication cover plates • Infeeds • Modular harnesses • Field-installed powerkits	► Page 139 ► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Painted Glass Selections frame • 6"W through 18"W +\$186 • 19"W through 36"W +\$214 • 37"W through 48"W +\$255 • 49"W through 60"W +\$286	Specify paint color number. Specify paint color number. Specify paint color number. Specify paint color number.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11" Use 8'0" price	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths Use U.S. Base Price of next larger width • Non standard modular widths Use U.S. Base Price of next larger width	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	• 2½"H base +\$ 90 • 4"H base +\$222	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
-------	--------------	-----------------	---------------	---------------	--------------	-----------------

All-Glass Wall Panels

Modular All-Glass Wall Panels

6"	GPGSSG06	\$ 761				
8"	GPGSSG08	\$ 761	8"	61¼"	GPGSMG08	\$ 761
18"	GPGSSG18	\$ 844	18"	161¼"	GPGSMG18	\$ 844
20"	GPGSSG20	\$ 844	20"	181¼"	GPGSMG20	\$ 844
24"	GPGSSG24	\$ 937	24"	221¼"	GPGSMG24	\$ 937
30"	GPGSSG30	\$ 990	30"	281¼"	GPGSMG30	\$ 990
36"	GPGSSG36	\$1101	36"	341¼"	GPGSMG36	\$1101
40"	GPGSSG40	\$1157	40"	381¼"	GPGSMG40	\$1157
42"	GPGSSG42	\$1157	42"	401¼"	GPGSMG42	\$1157
48"	GPGSSG48	\$1300	48"	461¼"	GPGSMG48	\$1300
60"	GPGSSG60	\$1561	60"	581¼"	GPGSMG60	\$1561




Tip: Ceiling height panels from 10'0"H through 11'0"H are available in widths up to 48" only.



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ► See page 1 for details.

Glass Selections All-Glass Frame Kits



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: When power option is specified, connector harness is included to join power blocks with frame kit.

Tip: Frame kits include two power blocks per kit.

Tip: Frame kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
► Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with clear anodized aluminum frame - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)	- Style number - Ceiling height - Post extension - Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify												
Post Extension - Post extensions modified to accommodate recessed ceiling track (ordered separately) - Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.												
Ceiling Height 8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 48	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.												
Electrical Power <table border="1"> <thead> <tr> <th>Base power</th> <th>Block power</th> <th>Schematic</th> </tr> </thead> <tbody> <tr> <td>• 3+1</td> <td></td> <td>+\$478</td> </tr> <tr> <td>• 2+2</td> <td></td> <td>+\$478</td> </tr> <tr> <td>• 3SN</td> <td></td> <td>+\$478</td> </tr> </tbody> </table>	Base power	Block power	Schematic	• 3+1		+\$478	• 2+2		+\$478	• 3SN		+\$478		Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Base power	Block power	Schematic												
• 3+1		+\$478												
• 2+2		+\$478												
• 3SN		+\$478												
Related Products - Power options - Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing - Power receptacles - Power and communication cover plates - Infeeds - Modular harnesses - Field-installed powerkits		► Page 139 ► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254												


	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Painted Glass Selections	frame	
	• 61"W through 71"W	+\$286	Specify paint color number.
	• 72"W through 80"W	+\$326	Specify paint color number.
	• 81"W through 96"W	+\$367	Specify paint color number.
	• 97"W through 120"W	+\$408	Specify paint color number.
	• 121"W through 144"W	+\$449	Specify paint color number.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths	Use U.S. Base Price of next larger width	Specify panel widths in 1" increments.
	• Non standard modular widths	Use U.S. Base Price of next larger width	Specify panel widths in 1" increments.
Base	• 2½"H base	+\$182	Specify to accept 2½"H base.
	• 4"H base	+\$335	Specify to accept 4"H base.



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ► See page 1 for details.

Specification Information


Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
All-Glass Frame Kits			Modular All-Glass Frame Kits			
72"	GPSSGFK72	\$1087	72"	70 ¹¹ / ₁₆ "	GPSSMGFK72	\$1087
80"	GPSSGFK80	\$1165	80"	78 ¹¹ / ₁₆ "	GPSSMGFK80	\$1165
84"	GPSSGFK84	\$1249	84"	82 ¹¹ / ₁₆ "	GPSSMGFK84	\$1249
96"	GPSSGFK96	\$1338	96"	94 ¹¹ / ₁₆ "	GPSSMGFK96	\$1338
108"	GPSSGFK108	\$1426	108"	106 ¹¹ / ₁₆ "	GPSSMGFK108	\$1426
120"	GPSSGFK120	\$1530	120"	118 ¹¹ / ₁₆ "	GPSSMGFK120	\$1530
144"	GPSSGFK144	\$1637	144"	142 ¹¹ / ₁₆ "	GPSSMGFK144	\$1637
.	.	.	.	.	.	.

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections All-Glass Glass Kits



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Glass kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: Glass kits 72"W to 96"W have two pieces of glass. Kits 108"W to 144"W have three pieces of glass.

Standard Includes		Required to Specify
► Need help? Product details, page 24	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments 3/8"-thick clear tempered glass	1 Style number 2 Ceiling height 3 Glass number for lite 4 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials		
Glass Panels 8'0" through 10'0" for 72"W and 80"W Kits		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$1867	Specify glass number for lite.
• Glass price group 3	+\$2263	Specify glass number for lite.
• Glass price group 4	+\$2581	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$5030	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Glass Panels 8'0" through 10'0" for 84"W and 96"W Kits		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$2240	Specify glass number for lite.
• Glass price group 3	+\$2718	Specify glass number for lite.
• Glass price group 4	+\$3097	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$6039	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Glass Panels 8'0" through 10'0" for 108"W, 120"W, and 144"W Kits		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$2801	Specify glass number for lite.
• Glass price group 3	+\$3399	Specify glass number for lite.
• Glass price group 4	+\$3872	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$7550	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Ceiling Height	• 8'0"H through 9'0"H No cost • 9'1"H through 10'0"H +\$ 48	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products	- Power options - Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing - Power receptacles - Power and communication cover plates - Infeeds - Modular harnesses - Field-installed powerkits	► Page 139 ► Page 230 ► Page 236 ► Page 240 ► Page 244 ► Page 247 ► Page 249 ► Page 250 ► Page 252 ► Page 254
► Options, continued on next page		



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

► Options, continued from previous page

	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5"H through 7'11"H (for widths less than 96"W)	+\$ 71	Specify ceiling height in 1" increments.
	• 7'5"H through 7'11"H (for widths 96"W and greater)	+\$112	Specify ceiling height in 1" increments.
Parametric Panel Widths (Available in 1" increments)	Overall unit widths • 61"W through 95"W (excludes standard widths)	+\$ 71	Specify panel widths in 1" increments.
	• 97"W through 143"W (excludes standard widths)	+\$112	Specify panel widths in 1" increments.
Base	2½"H base		
	• 61"W through 95"W	+\$ 20	Specify to accept 2½"H base.
	• 96"W through 144"W	+\$ 30	Specify to accept 2½"H base.
	4"H base		
	• 4"H base	No cost	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
All-Glass Glass Kits						
72"	GPGSSGGK72	\$1724	72"	70 ¹¹ / ₁₆ "	GPGSMGGK72	\$1724
80"	GPGSSGGK80	\$1918	80"	78 ¹¹ / ₁₆ "	GPGSMGGK80	\$1918
84"	GPGSSGGK84	\$2014	84"	82 ¹¹ / ₁₆ "	GPGSMGGK84	\$2014
96"	GPGSSGGK96	\$2303	96"	94 ¹¹ / ₁₆ "	GPGSMGGK96	\$2303
108"	GPGSSGGK108	\$2590	108"	106 ¹¹ / ₁₆ "	GPGSMGGK108	\$2590
120"	GPGSSGGK120	\$2878	120"	118 ¹¹ / ₁₆ "	GPGSMGGK120	\$2878
144"	GPGSSGGK144	\$3347	144"	142 ¹¹ / ₁₆ "	GPGSMGGK144	\$3347
:	:	:	:	:	:	:
Modular All-Glass Glass Kits						

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Wall Panels with Two Divided Lites

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Standard Includes		Required to Specify
▶ Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2³/₈"-thick panel with clear anodized aluminum frame - Two, 1/4"-thick factory-installed lites—top lite is transom aligned: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)		1 Style number 2 Ceiling height 3 Glass number for lite 1 (from top) 4 Glass number for lite 2 5 Post extension 6 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Top Lite Glass Panels 8'0" through 10'0", 6"W through 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 17	Specify glass number for lite.
• Glass price group 3	+\$ 22	Specify glass number for lite.
• Glass price group 4	+\$ 33	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 67	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 6"W through 8"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 81	Specify glass number for lite.
• Glass price group 3	+\$ 96	Specify glass number for lite.
• Glass price group 4	+\$ 153	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 300	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 18"W through 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 54	Specify glass number for lite.
• Glass price group 3	+\$ 63	Specify glass number for lite.
• Glass price group 4	+\$ 100	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 198	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 18"W through 24"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 240	Specify glass number for lite.
• Glass price group 3	+\$ 284	Specify glass number for lite.
• Glass price group 4	+\$ 457	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 900	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 30"W through 36"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 79	Specify glass number for lite.
• Glass price group 3	+\$ 93	Specify glass number for lite.
• Glass price group 4	+\$ 151	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$ 296	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 30"W through 36"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 359	Specify glass number for lite.
• Glass price group 3	+\$ 428	Specify glass number for lite.
• Glass price group 4	+\$ 683	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1349	Specify glass number for lite.
▶ See <i>Surface Materials Reference Manual</i> .		

▶ Options, continued on next page



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Surface Materials	Top Lite Glass Panels 8'0" through 10'0", 40"W through 48"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 105	Specify glass number for lite.
	• Glass price group 3	+\$ 126	Specify glass number for lite.
	• Glass price group 4	+\$ 200	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$ 394	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .			
	Lower Lite Glass Panels 8'0" through 10'0" (per lite), 40"W through 48"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 477	Specify glass number for lite.
	• Glass price group 3	+\$ 570	Specify glass number for lite.
	• Glass price group 4	+\$ 911	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$1798	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .			
	Top Lite Glass Panels 8'0" through 10'0", 60"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 133	Specify glass number for lite.
	• Glass price group 3	+\$ 157	Specify glass number for lite.
	• Glass price group 4	+\$ 248	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$ 493	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .			
	Lower Lite Glass Panels 8'0" through 10'0" (per lite), 60"W		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 596	Specify glass number for lite.
	• Glass price group 3	+\$ 711	Specify glass number for lite.
	• Glass price group 4	+\$1140	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$2249	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .			
Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Ceiling Height	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 91	Specify ceiling height in 1" increments.
Electrical Power (For panels 30"W through 60"W)	Base power block power schematic		
	• 3+1	+\$ 196	Specify with 3+1 power.
	• 2+2	+\$ 196	Specify with 2+2 power.
	• 3SN	+\$ 196	Specify with 3SN power.
Related Products	• Power options		► Page 139
	• Ceiling tracks		► Page 230
	• Continuous base trim		► Page 236
	• Feature strips		► Page 240
	• Acoustic packing		► Page 244
	• Power receptacles		► Page 247
	• Power and communication cover plates		► Page 249
	• Infeeds		► Page 250
	• Modular harnesses		► Page 252
	• Field-installed powerkits		► Page 254

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

► Options, continued on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Wall Panels with Two Divided Lites Transom-Aligned Top Lite, continued

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Painted Glass Selections frame • 6"W through 18"W • 19"W through 36"W • 37"W through 48"W • 49"W through 60"W	+\$186 +\$214 +\$255 +\$286	Specify with painted frame. Specify with painted frame. Specify with painted frame. Specify with painted frame.
Parametric Panel Widths (Available in 1" increments)	• Non standard widths • Non standard modular widths	Use U.S. Base Price of next larger standard width Use U.S. Base Price of next larger standard width	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	• 2½"H base • 4"H base	+\$ 90 +\$222	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Glass Wall Panels			Modular Glass Wall Panels			
6"	GPGSS2L06	\$ 868				
8"	GPGSS2L08	\$ 868	8"	611/16"	GPGSM2L08	\$ 868
18"	GPGSS2L18	\$ 941	18"	1811/16"	GPGSM2L18	\$ 941
20"	GPGSS2L20	\$ 941	20"	1811/16"	GPGSM2L20	\$ 941
24"	GPGSS2L24	\$1002	24"	2211/16"	GPGSM2L24	\$1002
30"	GPGSS2L30	\$1024	30"	2811/16"	GPGSM2L30	\$1024
36"	GPGSS2L36	\$1120	36"	3411/16"	GPGSM2L36	\$1120
40"	GPGSS2L40	\$1124	40"	3811/16"	GPGSM2L40	\$1124
42"	GPGSS2L42	\$1124	42"	4011/16"	GPGSM2L42	\$1124
48"	GPGSS2L48	\$1227	48"	4611/16"	GPGSM2L48	\$1227
60"	GPGSS2L60	\$1544	60"	5811/16"	GPGSM2L60	\$1544
•	•	•	•	•	•	•



For Canadian Pricing


Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections
Wall Panels with
Two Divided Lites

Glass Selections Two Divided Lite Frame Kits

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Frame kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: Frame kits include two power blocks per kit.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
▶ Need help? Product details, page 24 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2 3/8"-thick panel with clear anodized aluminum frame - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)	1 Style number 2 Ceiling height 3 Post extension 4 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Post Extension - Post extensions modified to accommodate recessed ceiling track (ordered separately) - Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost No cost	Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Ceiling Height 8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 48	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power	Base power block power schematic 3+1 +\$478 2+2 +\$478 3SN +\$478	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
Related Products - Power options - Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing - Power receptacles - Power and communication cover plates - Infeeds - Modular harnesses - Field-installed powerkits		▶ Page 139 ▶ Page 230 ▶ Page 236 ▶ Page 240 ▶ Page 244 ▶ Page 247 ▶ Page 249 ▶ Page 250 ▶ Page 252 ▶ Page 254


SmartTools Options	U.S. Price	Required to Specify
Surface Materials	Painted Glass Selections frame 61"W through 71"W +\$286 72"W through 80"W +\$326 81"W through 96"W +\$367 97"W through 120"W +\$408 121"W through 144"W +\$449	Specify with painted frame. Specify with painted frame. Specify with painted frame. Specify with painted frame. Specify with painted frame.
Parametric Panel Widths (Available in 1" increments)	- Non standard widths Use U.S. Base Price of next larger standard width - Non standard modular widths Use U.S. Base Price of next larger standard width	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base 2 1/2"H base 4"H base	+\$182 +\$330	Specify to accept 2 1/2"H base. Specify to accept 4"H base.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.



Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Two Divided Lite Frame Kits			Modular Two Divided Lite Frame Kits			
72"	GPGSS2FK72	\$1242	72"	70 ¹¹ / ₁₆ "	GPGSM2FK72	\$1242
80"	GPGSS2FK80	\$1328	80"	78 ¹¹ / ₁₆ "	GPGSM2FK80	\$1328
84"	GPGSS2FK84	\$1422	84"	82 ¹¹ / ₁₆ "	GPGSM2FK84	\$1422
96"	GPGSS2FK96	\$1522	96"	94 ¹¹ / ₁₆ "	GPGSM2FK96	\$1522
108"	GPGSS2FK108	\$1628	108"	106 ¹¹ / ₁₆ "	GPGSM2FK108	\$1628
120"	GPGSS2FK120	\$1744	120"	118 ¹¹ / ₁₆ "	GPGSM2FK120	\$1744
144"	GPGSS2FK144	\$1864	144"	142 ¹¹ / ₁₆ "	GPGSM2FK144	\$1864


**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Selections Two Divided Lite Glass Kits

Transom-Aligned Top Lite



Tip: Order ceiling track, feature strip, and continuous base trim separately.

Tip: Glass kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: Glass kits 72"W to 96"W have two pieces of glass. Kits 108"W to 144"W have three pieces of glass.

Standard Includes		Required to Specify
► Need help? Product details, page 24	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments 3/8"-thick clear tempered glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)	1 Style number 2 Ceiling height 3 Glass number for lite 1 (from top) 4 Glass number for lite 2 5 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Top Lite Glass Panels 8'0" through 10'0", 72"W through 80"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 455	Specify glass number for lite.
• Glass price group 3	+\$ 572	Specify glass number for lite.
• Glass price group 4	+\$ 661	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1363	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 72"W through 80"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$1377	Specify glass number for lite.
• Glass price group 3	+\$1675	Specify glass number for lite.
• Glass price group 4	+\$1914	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$3747	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 84"W through 96"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 572	Specify glass number for lite.
• Glass price group 3	+\$ 707	Specify glass number for lite.
• Glass price group 4	+\$ 818	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$1659	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 84"W through 96"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$1589	Specify glass number for lite.
• Glass price group 3	+\$1933	Specify glass number for lite.
• Glass price group 4	+\$2201	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$4301	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Top Lite Glass Panels 8'0" through 10'0", 108"W through 144"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 741	Specify glass number for lite.
• Glass price group 3	+\$ 913	Specify glass number for lite.
• Glass price group 4	+\$1051	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$2104	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Lower Lite Glass Panels 8'0" through 10'0" (per lite), 108"W through 144"W		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$2018	Specify glass number for lite.
• Glass price group 3	+\$2445	Specify glass number for lite.
• Glass price group 4	+\$2781	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$5404	Specify glass number for lite.
► See <i>Surface Materials Reference Manual</i> .		
Ceiling Height	• 8'0" through 9'0" • 9'1" through 10'0"	No cost +\$ 48 Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
► Options, continued on next page		



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ► See page 1 for details.

► Options, continued from previous page


	Options	U.S. Price	Required to Specify
Related Products	• Power options		► Page 139
	• Ceiling tracks		► Page 230
	• Continuous base trim		► Page 236
	• Feature strips		► Page 240
	• Acoustic packing		► Page 244
	• Power receptacles		► Page 247
	• Power and communication cover plates		► Page 249
	• Infeeds		► Page 250
	• Modular harnesses		► Page 252
	• Field-installed powerkits		► Page 254

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

	SmartTools Options	U.S. Price	Required to Specify
Parametric Panel Widths (Available in 1" increments)	Overall unit widths		
	• 61"W through 95"W (excludes standard widths)	+\$ 71	Specify panel widths in 1" increments.
	• 97"W through 143"W (excludes standard widths)	+\$112	Specify panel widths in 1" increments.
Base	2 1/2"H base		
	• 61"W through 95"W	+\$ 20	Specify to accept 2 1/2"H base.
	• 96"W through 144"W	+\$ 30	Specify to accept 2 1/2"H base.
	4"H base		
	• 4"H base	No cost	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Two Divided Lite Glass Kits			Modular Two Divided Lite Glass Kits			
72"	GPGSS2GK72	\$1792	72"	70 11/16"	GPGSM2GK72	\$1792
80"	GPGSS2GK80	\$1960	80"	78 11/16"	GPGSM2GK80	\$1960
84"	GPGSS2GK84	\$2044	84"	82 11/16"	GPGSM2GK84	\$2044
96"	GPGSS2GK96	\$2292	96"	94 11/16"	GPGSM2GK96	\$2292
108"	GPGSS2GK108	\$2542	108"	106 11/16"	GPGSM2GK108	\$2542
120"	GPGSS2GK120	\$2792	120"	118 11/16"	GPGSM2GK120	\$2792
144"	GPGSS2GK144	\$3290	144"	142 11/16"	GPGSM2GK144	\$3290

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Clerestory Wall Panels

Transom-Aligned Top Lite



Tip: Order ceiling track feature strip, and continuous base trim separately.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Metallic paint is available on panel skins that are 36" wide or less.

Standard Includes	Required to Specify
▶ Need help? Product details, page 24 • Frame: clear anodized aluminum • Ceiling height from 8'0"H to 10'0"H, in one-inch increments • 2³/₈"-thick panel with steel surfaces: paint • Factory-installed Clerestory lite: glass • Integral slotted verticals • Hollow core panel for cable and panel routing • Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)	1 Style number 2 Ceiling height 3 Paint color number for side 1 4 Paint color number for side 2 5 Glass number for Clerestory lite 6 Post extension 7 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Lower panel surfaces 8'0"H through 10'0"H (per side), 18"W to 24"W		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 17	Specify paint color number.
• Paint price group 3	+\$ 31	Specify paint color number.
• Fabric price group 1	+\$135	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$190	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$250	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$316	Specify fabric color number for side 1 and/or side 2.
• Vinyl price group A	+\$260	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group B	+\$379	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group C	+\$394	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group D	+\$411	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group E	+\$436	Specify vinyl color number for side 1 and/or side 2.
• Customer's Own Material/Vinyl (COM)	+\$130	▶ See <i>Surface Materials Reference Manual</i> .
Clerestory lite glass panels 8'0"H through 10'0"H		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$ 54	Specify glass number for lite.
• Glass price group 3	+\$ 63	Specify glass number for lite.
• Glass price group 4	+\$100	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$198	Specify glass number for lite.
Lower panel surfaces 8'0"H through 10'0"H (per side), 30"W to 36"W		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 35	Specify paint color number.
• Paint price group 3	+\$ 54	Specify paint color number.
• Fabric price group 1	+\$206	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 2	+\$305	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 3	+\$452	Specify fabric color number for side 1 and/or side 2.
• Fabric price group 5	+\$588	Specify fabric color number for side 1 and/or side 2.
• Vinyl price group A	+\$379	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group B	+\$585	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group C	+\$611	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group D	+\$646	Specify vinyl color number for side 1 and/or side 2.
• Vinyl price group E	+\$695	Specify vinyl color number for side 1 and/or side 2.
• Customer's Own Material/Vinyl (COM)	+\$190	▶ See <i>Surface Materials Reference Manual</i> .



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

▶ Options, continued on next page

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Surface Materials	Clerestory lite glass panels 8'0"H through 10'0"H		
	- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	- No cost +\$ 79 +\$ 93 +\$151 - N.A. +\$296	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
	Lower panel surfaces 8'0"H through 10'0"H (per side) 40"W to 48"W		
	- Paint price group 1 - Paint price group 3 - Fabric price group 1 - Fabric price group 2 - Fabric price group 3 - Fabric price group 5 - Vinyl price group A - Vinyl price group B - Vinyl price group C - Vinyl price group D - Vinyl price group E - Customer's Own Material/Vinyl (COM)	- No cost +\$ 54 +\$206 +\$305 +\$452 +\$588 +\$379 +\$585 +\$611 +\$646 +\$695 +\$190	- Specify paint color number. - Specify paint color number. - Specify fabric color number for side 1 and/or side 2. - Specify fabric color number for side 1 and/or side 2. - Specify fabric color number for side 1 and/or side 2. - Specify fabric color number for side 1 and/or side 2. - Specify vinyl color number for side 1 and/or side 2. - Specify vinyl color number for side 1 and/or side 2. - Specify vinyl color number for side 1 and/or side 2. - Specify vinyl color number for side 1 and/or side 2. - Specify vinyl color number for side 1 and/or side 2. ► See <i>Surface Materials Reference Manual</i>.
	Clerestory lite glass panels 8'0"H through 10'0"H		
	- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	- No cost +\$105 +\$126 +\$200 - N.A. +\$394	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
	Lower panel surfaces 8'0"H through 10'0"H (per side) 60"W		
	- Paint price group 1 - Paint price group 3 - Fabric price group 1 - Fabric price group 2 - Fabric price group 3 - Fabric price group 5 - Customer's Own Material/Vinyl (COM)	- No cost +\$ 54 +\$206 +\$305 +\$452 +\$588 +\$190	- Specify paint color number. - Specify paint color number. - Specify fabric color number for side 1 and/or side 2. - Specify fabric color number for side 1 and/or side 2. - Specify fabric color number for side 1 and/or side 2. - Specify fabric color number for side 1 and/or side 2. ► See <i>Surface Materials Reference Manual</i>.
	Clerestory lite glass panels 8'0"H through 10'0"H		
	- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	- No cost +\$133 +\$157 +\$248 - N.A. +\$493	- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
Post Extension	- Post extensions modified to accommodate recessed ceiling track (ordered separately) - Post extensions modified to accommodate overlapping ceiling track (ordered separately)	- No cost - No cost	- Specify with post extensions for recessed ceiling track interface. - Specify with post extensions for overlapping ceiling track interface.

Tip: Vinyl is not available on 60"W panels.

Tip: Customer's Own Glass is available as a special at this time.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Options, continued on next page

Glass Selections Clerestory Wall Panels Transom-Aligned Top Lite, continued

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Ceiling Height	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 91	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Electrical Power (30"W through 60"W)	Power block location - Base - ADA height - Desk height	+\$196 +\$715 +\$715	Specify with power block location at base. Specify with power block location at ADA height. Specify with power block location at desk height.
	Power schematic 3+1 2+2 3SN	No cost No cost No cost	Specify with 3+1 power. Specify with 2+2 power. Specify with 3SN power.
	New York City/Chicago power prep - NYC/CHI at base - NYC/CHI at ADA or desk height side 1 - NYC/CHI at ADA or desk height side 2 - NYC/CHI at ADA or desk height sides 1 and 2	N.A. +\$ 24 +\$ 24 +\$ 48	Specify with NYC/CHI at base. Specify with NYC/CHI at ADA or desk height side 1. Specify with NYC/CHI at ADA or desk height side 2. Specify with NYC/CHI at ADA or desk height sides 1 and 2.
	Receptacle cutouts - Power side 1 - Power side 2 - Power sides 1 and 2 - Power/comm side 1 - Power/comm side 2 - Power/comm sides 1 and 2	No cost No cost +\$ 24 No cost No cost +\$ 24	Specify with power side 1. Specify with power side 2. Specify with power sides 1 and 2. Specify with power/comm side 1. Specify with power/comm side 2. Specify with power/comm sides 1 and 2.
	Floor Infeeds - Bottom left hardwire - Bottom left modular	No cost +\$ 91	Specify with bottom left hardwire. Specify with bottom left modular.

Tip: To price power in two locations, add the upcharges together.

Tip: Infeed is included in the price of ADA- or desk-height receptacle power location option. Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: Base power block location does not include infeed. It must be ordered separately, if needed.

Tip: NYC/CHI prices replace the receptacle power location option prices when selected.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Markerboard surface cannot exceed 48"W.

	SmartTools Options	U.S. Price	Required to Specify
7610 White Markerboard Surface	6"W through 24"W 25"W through 36"W 37"W through 48"W	+\$475 +\$510 +\$545	Specify with markerboard. Specify with markerboard. Specify with markerboard.
Surface Materials	Painted Glass Selections frame 6"W through 18"W 19"W through 36"W 37"W through 48"W 49"W through 60"W	+\$ 92 +\$106 +\$129 +\$143	Specify paint color number. Specify paint color number. Specify paint color number. Specify paint color number.
Parametric Panel Widths (Available in 1" increments)	- Non standard widths - Non standard modular widths	+\$ 37 (Add to U.S. Base Price of next larger width) +\$ 37 (Add to U.S. Base Price of next larger width)	Specify panel widths in 1" increments. Specify panel widths in 1" increments.
Base	2 1/2"H base 4"H base	+\$ 82 +\$ 61	Specify to accept 2 1/2"H base. Specify to accept 4"H base.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.



Specification Information


Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
Clerestory Panels			Modular Clerestory Panels			
18"	GPSSC18	\$1142	18"	16 ¹ / ₁₆ "	GPSSMC18	\$1142
20"	GPSSC20	\$1142	20"	18 ¹ / ₁₆ "	GPSSMC20	\$1142
24"	GPSSC24	\$1208	24"	22 ¹ / ₁₆ "	GPSSMC24	\$1208
30"	GPSSC30	\$1268	30"	28 ¹ / ₁₆ "	GPSSMC30	\$1268
36"	GPSSC36	\$1309	36"	34 ¹ / ₁₆ "	GPSSMC36	\$1309
40"	GPSSC40	\$1349	40"	38 ¹ / ₁₆ "	GPSSMC40	\$1349
42"	GPSSC42	\$1349	42"	40 ¹ / ₁₆ "	GPSSMC42	\$1349
48"	GPSSC48	\$1396	48"	46 ¹ / ₁₆ "	GPSSMC48	\$1396
60"	GPSSC60	\$1798	60"	58 ¹ / ₁₆ "	GPSSMC60	\$1798
:	:	:	:	:	:	:

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Pivot-Hinged Door Frames



Tip: Glass door is available up to 9'0"H ceiling height.

Tip: Recommended for use with Glass Selections panels only.

Tip: Glass Selections pivot-hinged door frames work with Glass Selections door leaves only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Order switch separately.

Tip: Swing orientation is available on single pivot-hinged door frame with transom only to properly orient etched and patterned glass.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 40	• Ceiling height from 8'0"H to 10'0"H, in one-inch increments		1 Style number
	• Reversible, pivot-hinged door frame with plinths: clear anodized aluminum only		2 Ceiling height
	• Factory prep for pivot hinges		3 Swing orientation
	Tip: Order door hardware separately.		4 Glass number for transom, if selected
	• Transom, if selected: glass		5 Metal color number for strike plate, if selected:
			9200 Satin Chrome
			9201 Polished Chrome
			6 Post extension
			7 Factory prep for cylindrical or mortise passage set or lockset, if selected
			8 Options, if selected (see below)
		▶ See Surface Materials, page 334.	

Options	U.S. Price	Required to Specify	
Surface Materials	Strike plate		
	• Satin chrome	No cost	Specify with 9200 Satin Chrome.
	• Polished chrome	+\$ 24	Specify with 9201 Polished Chrome.
	Single door frames with transom 8'0"H through 10'0"H		
	• Glass price group 1	No cost	Specify glass number for transom.
	• Glass price group 2	+\$ 87	Specify glass number for transom.
	• Glass price group 3	+\$105	Specify glass number for transom.
	• Glass price group 4	+\$165	Specify glass number for transom.
	• Glass price group 5	N.A.	Specify glass number for transom.
	• Glass price group 6	+\$328	Specify glass number for transom.
Pair door frames with transom 8'0"H through 10'0"H			
• Glass price group 1	No cost	Specify glass number for transom.	
• Glass price group 2	+\$173	Specify glass number for transom.	
• Glass price group 3	+\$211	Specify glass number for transom.	
• Glass price group 4	+\$330	Specify glass number for transom.	
• Glass price group 5	N.A.	Specify glass number for transom.	
• Glass price group 6	+\$659	Specify glass number for transom.	

Post Extension	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.	
Ceiling Height	Single door frames		
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.	
• 9'1" through 10'0"	+\$ 48	Specify ceiling height in 1" increments.	
Pair door frames			
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.	
• 9'1" through 10'0"	+\$ 91	Specify ceiling height in 1" increments.	
Swing Orientation	For single pivot-hinged door frame with transom		
▶ Page 46	• Left-hand door frame	No cost	Specify with left-hand door frame.
	• Right-hand door frame	No cost	Specify with right-hand door frame.
Lock Prep	• Strike plate and factory prep for cylindrical passage set or lockset	No cost	Specify with cylindrical prep.
▶ Page 42	• Strike plate and factory prep for mortise passage set or lockset	+\$ 68	Specify with mortise prep.

Related Products	• Door leaves	▶ Page 240
	• Passage sets and locksets	▶ Page 160
	• Hinges	▶ Page 162
	• Stops	▶ Page 162
	• Ceiling tracks	▶ Page 230
	• Feature strips	▶ Page 250

▶ Options, continued on next page

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Surface Materials	SmartTools Options	U.S. Price	Required to Specify
	Glass Selections painted frame		
	• Painted frame	+\$286	Specify paint color number.
Base	• 2½"H base	+\$ 57	Specify to accept 2½"H base.
	• 4"H base	+\$ 61	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

Single Door Frames

Full-Height

40"	GPGSDSPF	\$ 738
-----	-----------------	--------

With Transom

40"	GPGSDSPT	\$1475
-----	-----------------	--------

:	:	:
---	---	---

Pair Frames

Full-Height

80"	GPGSDPPF	\$ 789
-----	-----------------	--------

With Transom

80"	GPGSDPPT	\$1574
-----	-----------------	--------

:	:	:
---	---	---

Single Door Frames for Use with Switch Cutout




Full-Height

42"	GPGSDSPFS	\$1309
-----	------------------	--------

With Transom

42"	GPGSDSPTS	\$2041
-----	------------------	--------

:	:	:
---	---	---



 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Glass Selections Full-Height Pivot-Hinged Door Leaves



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Ceiling height option is available on solid door leaves only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 40	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> - Reversible pivot-hinged door: paint, glass, flat-cut veneer, or anodized aluminum - Factory prep for pivot hinges	1 Style number 2 Ceiling height 3 Paint color number for door, if solid door selected 4 Glass number for glass door, if glass door selected 5 Paint color number for glass door, if glass door selected 6 Wood veneer color number, if selected 7 Factory prep for cylindrical or mortise passage set or lockset, if selected 8 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials	Glass door frame surface	
	• Paint price group 1	No cost
	• Paint price group 2	+\$ 27
	• Paint price group 3	+\$ 46
	• Anodized aluminum	+\$ 223
	37³/₁₆"W solid single door leaf 8'0"H through 10'0"H	
	• Paint price group 1	No cost
	• Paint price group 3	+\$ 109
	• Wood veneer (flat cut)	No cost
	• Quarter-cut wood veneer	+\$ 173
	• Customiz stain	No cost
	77¹/₂"W solid pair door leaves 8'0"H through 10'0"H	
	• Paint price group 1	No cost
	• Paint price group 3	+\$ 215
	• Wood veneer (flat cut)	No cost
	• Quarter-cut wood veneer	+\$ 349
	• Customiz stain	No cost
	Glass single door 8'0"H through 9'0"H	
	• Glass price group 1	No cost
	• Glass price group 2	+\$ 386
	• Glass price group 3	+\$ 461
	• Glass price group 4	+\$ 741
	• Glass price group 5	N.A.
	• Glass price group 6	+\$1466
Ceiling Height	Solid single door leaves	
	• 8'0" through 9'0"	No cost
	• 9'1" through 10'0"	+\$ 281
	Solid pair door leaves	
	• 8'0" through 9'0"	No cost
	• 9'1" through 10'0"	+\$ 561
Lock Prep ▶ Page 42	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
	• Strike plate and factory prep for mortise passage set or lockset	+\$ 44
Related Products	• Door frames	▶ Page 142
	• Passage sets and locksets	▶ Page 160
	• Hinges	▶ Page 162
	• Stops	▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
-------	------------------------------	-----------------	-----------------------

Solid Single Door

37 ³ / ₁₆ "	40"	GPGSLSPF40	\$2091
-----------------------------------	-----	-------------------	--------



Glass Single Door with 5"H Bottom Rail

37 ³ / ₁₆ "	40"	GPGSLGSPF40	\$4467
-----------------------------------	-----	--------------------	--------



5"H

Glass Single Door with 12"H Bottom Rail


37 ³ / ₁₆ "	40"	GPGSLGSPF40B	\$4339
-----------------------------------	-----	---------------------	--------



12"H

Solid Pair Door

77 ¹ / ₂ "	80"	GPGSLSPF80	\$4258
----------------------------------	-----	-------------------	--------



 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Glass Selections Transom-Height Pivot-Hinged Door Leaves



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Standard Includes		Required to Specify
▶ Need help? Product details, page 40	• 7'0"H • Reversible pivot-hinged door: paint, glass, flat-cut veneer, or anodized aluminum • Factory prep for pivot hinges	1 Style number 2 Paint color number for door, if solid door selected 3 Glass number for glass door, if glass door selected 4 Paint color number for glass door, if glass door selected 5 Wood veneer color number, if selected 6 Factory prep for cylindrical or mortise passage set or lockset, if selected 7 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Transom-height glass door frame leaves		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
• Anodized aluminum	+\$ 223	Specify anodized aluminum.
37³/₁₆"W solid single door leave 7'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 109	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 157	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
77¹/₂"W solid pair door leaves 7'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 215	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 314	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
Glass single door 7'0"H		
• Glass price group 1	No cost	Specify glass number for door.
• Glass price group 2	+\$ 386	Specify glass number for door.
• Glass price group 3	+\$ 461	Specify glass number for door.
• Glass price group 4	+\$ 741	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.
• Glass price group 6	+\$1466	Specify glass number for door.
Lock Prep		
▶ Page 42	• Strike plate and factory prep for cylindrical passage set or lockset • Strike plate and factory prep for mortise passage set or lockset	Specify with <i>cylindrical prep</i> . Specify with <i>mortise prep</i> .
Related Products		
• Door frames • Passage sets and locksets • Hinges • Stops		▶ Page 142 ▶ Page 160 ▶ Page 162 ▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:


Solid Single Door

37 ³ / ₁₆ "	40"	GPGSLSSPT40	\$1850
:	:	:	:




Glass Single Door with 5"H Bottom Rail

37 ³ / ₁₆ "	40"	GPGSLGSPT40	\$3954
:	:	:	:




Glass Single Door with 12"H Bottom Rail

37 ³ / ₁₆ "	40"	GPGSLGSPT40B	\$4226
:	:	:	:



Solid Pair Door

75 ⁵ / ₈ "	80"	GPGSLSPPT80	\$3775
:	:	:	:



For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Selections Full-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: Ceiling height option is available on solid door leaves only.

Standard Includes		Required to Specify
▶ Need help? Product details, page 40	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments <i>Exception: Maximum ceiling height of glass doors is 9'0"H.</i> - Reversible pivot-hinged door: paint, glass, flat-cut veneer, or anodized aluminum - Factory prep for pivot hinges	1 Style number 2 Ceiling height 3 Swing orientation 4 Paint color number for door, if solid door selected 5 Glass number for glass door, if glass door selected 6 Paint color number for glass door, if glass door selected 7 Wood veneer color number, if selected 8 Factory prep for cylindrical or mortise passage set or lockset, if selected 9 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials	Full-height glass door frame leaves surface options	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 98	Specify paint color number.
• Paint price group 3	+\$ 178	Specify paint color number.
• Anodized aluminum	+\$ 223	Specify paint color number.
	36³/₈"W solid door leaves 8'0"H through 10'0"H	
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 109	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 173	Specify wood veneer color number.
• Customiz stain	No cost	Specify <i>with Customiz stain</i> .
	Glass single door 8'0"H through 9'0"H	
• Glass price group 1	No cost	Specify glass number for door.
• Glass price group 2	+\$ 386	Specify glass number for door.
• Glass price group 3	+\$ 461	Specify glass number for door.
• Glass price group 4	+\$ 741	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.
• Glass price group 6	+\$1466	Specify glass number for door.
Ceiling Height	Solid single door leaves	
	• 8'0" through 9'0"	No cost
	• 9'1" through 10'0"	+\$ 281
		Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Swing Orientation	For single pivot-hinged door frame	
▶ Page 46	• Left-hand door frame	No cost
	• Right-hand door frame	No cost
		Specify <i>with left-hand door frame</i> . Specify <i>with right-hand door frame</i> .
Lock Prep	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
▶ Page 42	• Strike plate and factory prep for mortise passage set or lockset	+\$ 44
		Specify <i>with cylindrical prep</i> . Specify <i>with mortise prep</i> .
Related Products	- Door frames - Passage sets and locksets - Hinges - Stops	▶ Page 146 ▶ Page 160 ▶ Page 162 ▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Glass Selections Full-Height
Pivot-Hinged Door Leaves for
Use with Switch Cutout

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
:	:	:	:

Solid Single Door

36 ³ / ₈ "	42"	GPGSLSPF42	\$2091
:	:	:	:



Glass Single Door with 5"H Bottom Rail

36 ³ / ₈ "	42"	GPGSLGSPF42	\$4467
:	:	:	:



5"H

Glass Single Door with 12"H Bottom Rail

36 ³ / ₈ "	42"	GPGSLGSPF42B	\$4339
:	:	:	:



12"H



For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Glass Selections Transom-Height Pivot-Hinged Door Leaves for Use with Switch Cutout



Tip: Glass Selections pivot-hinged door leaves work with Glass Selections door frames only.

Tip: In a Glass Selections door frame with glass transom, switch wiring must run down through the floor only. Wiring cannot run up to the ceiling.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Standard Includes		Required to Specify
▶ Need help? Product details, page 40	• 7'0"H	1 Style number
	• Reversible pivot-hinged door: paint, glass, flat-cut veneer, or anodized aluminum	2 Swing orientation
	• Factory prep for pivot hinges	3 Paint color number for door, if solid door selected
		4 Glass number for glass door, if glass door selected
		5 Paint color number for glass door, if glass door selected
		6 Wood veneer color number, if selected
		7 Factory prep for cylindrical or mortise passage set or lockset, if selected
		8 Options, if selected (see below)
		▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials		
Transom-height glass frame door leaves surface options		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 2	+\$ 27	Specify paint color number.
• Paint price group 3	+\$ 46	Specify paint color number.
• Anodized aluminum	+\$ 223	Specify anodized aluminum.
36³/₈"W solid door leaves 7'0"H		
• Paint price group 1	No cost	Specify paint color number.
• Paint price group 3	+\$ 109	Specify paint color number.
• Wood veneer (flat cut)	No cost	Specify wood veneer color number.
• Quarter-cut wood veneer	+\$ 157	Specify wood veneer color number.
• Customiz stain	No cost	Specify with <i>Customiz stain</i> .
Glass single door 7'0"H		
• Glass price group 1	No cost	Specify glass number for door.
• Glass price group 2	+\$ 386	Specify glass number for door.
• Glass price group 3	+\$ 461	Specify glass number for door.
• Glass price group 4	+\$ 741	Specify glass number for door.
• Glass price group 5	N.A.	Specify glass number for door.
• Glass price group 6	+\$1466	Specify glass number for door.
Lock Prep		
▶ Page 42	• Strike plate and factory prep for cylindrical passage set or lockset	No cost
	• Strike plate and factory prep for mortise passage set or lockset	+\$ 44
		Specify with <i>cylindrical prep</i> .
		Specify with <i>mortise prep</i> .
Related Products		
• Door frames		▶ Page 146
• Passage sets and locksets		▶ Page 160
• Hinges		▶ Page 162
• Stops		▶ Page 162



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Glass Selections
Transom-Height Pivot-Hinged
Door Leaves for Use
with Switch Cutout

Specification Information

Width	Corresponding Frame Width	Style Number	U.S. Base Price
-------	------------------------------	-----------------	-----------------------


Solid Single Door

36 ³ / ₈ "	42"	GPGSLSSPT42	\$1850
----------------------------------	-----	--------------------	--------



Glass Single Door with 5"H Bottom Rail

36 ³ / ₈ "	42"	GPGSLGSPT42	\$3954
----------------------------------	-----	--------------------	--------



5"H

Glass Single Door with 12"H Bottom Rail


36 ³ / ₈ "	42"	GPGSLGSPT42B	\$4226
----------------------------------	-----	---------------------	--------



12"H

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Glass Selections Full-Height Polished Edge Slider Doors



Tip: Full-height doors less than 108" ceiling height are standard with 3/8" thick glass. 1/2" thick glass can be selected for enhanced rigidity. Doors that are higher than 108" ceiling height are standard with 1/2" thick glass.

Tip: High-voltage switch is not available on Glass Selections slider door.

Tip: For information regarding Etched and Pattern Glass Planning.
▶ Page 96.

Tip: All locks are random keyed.

Tip: High-voltage switch is not available for Glass Selections slider door.

Standard Includes	Required to Specify
▶ Need help? Product details, page 54 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Slider door: glass with polished edges - Frame: clear anodized aluminum - Side panel - Door base: paint - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately) - Slide hardware - Door pull: satin chrome - Door: 3/8" thick for full-height doors 9'-0" and less	1 Style number 2 Ceiling height 3 Glass thickness for door (if less than 108") 4 Glass number for slider door 5 Glass number for all-glass side panel 6 Paint color number for door base 7 Post extension 8 Slide orientation 9 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials - Base - Paint price group 1: No cost - Paint price group 2: +\$ 15 - Paint price group 3: +\$ 24 - Full-height slider doors - Glass price group 1: No cost - Glass price group 2: N.A. - Glass price group 3: +\$1361 - Glass price group 4: N.A. - Glass price group 5: N.A. - Glass price group 6: N.A. - Full-height slider door panels - Glass price group 1: No cost - Glass price group 2: +\$ 574 - Glass price group 3: +\$ 683 - Glass price group 4: +\$1096 - Glass price group 5: N.A. - Glass price group 6: +\$2159		Specify paint color number. Specify paint color number. Specify paint color number. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door. Specify glass number for door.
Glass Thickness 3/8"-thick glass: No cost 1/2"-thick glass: +\$ 267		Specify with 3/8". Specify with 1/2".
Post Extension - Post extensions modified to accommodate recessed ceiling track (ordered separately): No cost - Post extensions modified to accommodate overlapping ceiling track (ordered separately): No cost		Specify with post extensions for recessed ceiling track interface. Specify with post extensions for overlapping ceiling track interface.
Ceiling Height 8'0" through 9'0": No cost 9'1" through 10'0": +\$ 195		Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Slide Orientation - Left-hand door frame: No cost - Right-hand door frame: No cost		Specify with left-hand door frame. Specify with right-hand door frame.
Switch Cutout - Without cutout: No cost - With low-voltage switch cutout: +\$ 35		Specify without cutout. Specify with low-voltage switch cutout.
Lock Door lock with interior thumb latch: +\$1162		Specify with lock.
Related Products - Switches - Ceiling tracks - Continuous base trim - Feature strips		▶ Page 164 ▶ Page 230 ▶ Page 236 ▶ Page 240

▶ Options, continued on next page



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

► Options, continued from previous page

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

Tip: For slider with frame kit as side panel, glass kit is ordered separately.


SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11" +\$306	Specify ceiling height in 1" increments.
Parametric Width Slider Door Assembly with Equal Width Door and Slide Panel (Available in 1" increments)	• 78"W through 95"W (excludes standard widths) +\$338	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel (Available in 1" increments)	• 81"W through 108"W (excludes standard widths) +\$490	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Variable Width Frame Kit (Available in 1" increments)	With 40" doors	
	• 112"W through 136"W +\$136	Specify slider door assembly widths in 1" increments.
	• 137"W through 184"W +\$398	Specify slider door assembly widths in 1" increments.
	With 42" doors	
	• 114"W through 136"W +\$136	Specify slider door assembly widths in 1" increments.
	• 137"W through 186"W +\$398	Specify slider door assembly widths in 1" increments.
	With 48" doors	
	• 120"W through 136"W +\$136	Specify slider door assembly widths in 1" increments.
	• 137"W through 192"W +\$398	Specify slider door assembly widths in 1" increments.
Painted Glass Selections Frame	• Painted glass frame +\$510	Specify paint color number.
Base	• 2½"H base No cost	Specify to accept 2½"H base.
	• 4"H base +\$222	Specify to accept 4"H base.

Specification Information


Width	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

Full-Height Slider Doors

80"	GPGSDFFS80	\$5692
84"	GPGSDFFS84	\$5804
96"	GPGSDFFS96	\$6213
:	:	:



Glass Selections Transom-Height Polished Edge Slider Doors



► Need help?
Product details,
page 54

Standard Includes

- Ceiling height from 8'0"H to 10'0"H, in one-inch increments
- Slider door: glass with polished edges
- Frame: clear anodized aluminum
- Side panel
- Door base: paint
- Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately)
- Slide hardware
- Door pull: satin chrome
- Door: 3/8" thick

Required to Specify

- 1 Style number
 - 2 Ceiling height
 - 3 Glass thickness for door
 - 4 Glass number for door frame top lite (door 1)
 - 5 Glass number for slider door (door 2)
 - 6 Glass number for side panel top lite (glass 1)
 - 7 Glass number for side panel (glass 2)
 - 8 Paint color number for door base
 - 9 Post extension
 - 10 Slide orientation
 - 11 Options, if selected (see below)
- See *Surface Materials*, page 334.

Tip: Door height is always 7'. Transom height varies depending on ceiling height.

Tip: Transom-height doors are standard with 3/8" thick glass. 1/2" thick glass can be selected for enhanced rigidity.

Tip: High-voltage switch is not available on Glass Selections slider door.

Tip: All locks are random keyed.

Tip: For information regarding Etched and Pattern Glass Planning.
► Page 96.

	Options	U.S. Price	Required to Specify
Surface Materials	Base		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 15	Specify paint color number.
	• Paint price group 3	+\$ 24	Specify paint color number.
	Transom-height slider door		
Glass Thickness	• Glass price group 1	No cost	Specify glass number for door.
	• Glass price group 2	N.A.	Specify glass number for door.
	• Glass price group 3	+\$1233	Specify glass number for door.
	• Glass price group 4	N.A.	Specify glass number for door.
	• Glass price group 5	N.A.	Specify glass number for door.
	• Glass price group 6	N.A.	Specify glass number for door.
	Transom-height side panel		
	• Glass price group 1	No cost	Specify glass number for door.
	• Glass price group 2	+\$ 479	Specify glass number for door.
	• Glass price group 3	+\$ 570	Specify glass number for door.
	• Glass price group 4	+\$ 913	Specify glass number for door.
	• Glass price group 5	N.A.	Specify glass number for door.
	• Glass price group 6	+\$1800	Specify glass number for door.
	Transom aligned top lites (per lite)		
	• Glass price group 1	No cost	Specify glass number for lite.
	• Glass price group 2	+\$ 107	Specify glass number for lite.
	• Glass price group 3	+\$ 126	Specify glass number for lite.
	• Glass price group 4	+\$ 200	Specify glass number for lite.
	• Glass price group 5	N.A.	Specify glass number for lite.
	• Glass price group 6	+\$ 397	Specify glass number for lite.
Post Extension	• 3/8"-thick glass	No cost	Specify with 3/8".
	• 1/2"-thick glass	+\$ 226	Specify with 1/2".
Ceiling Height	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Slide Orientation	• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
	• 9'1" through 10'0"	+\$ 112	Specify ceiling height in 1" increments.
Switch Cutout	• Left-hand door frame	No cost	Specify with left-hand door frame.
	• Right-hand door frame	No cost	Specify with right-hand door frame.
Lock	• Without cutout	No cost	Specify without cutout.
	• With low-voltage switch cutout	+\$ 35	Specify with low-voltage switch cutout.

► Page 55

► Page 37

► Options, continued on next page



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

► Options, continued from previous page

	Options	U.S. Price	Required to Specify
Related Products	• Switches • Ceiling tracks • Continuous base trim • Feature strips		► Page 164 ► Page 230 ► Page 236 ► Page 240

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: Slider door assembly widths are displayed in actual sizes. Relative width of door and side panel may vary.

Tip: For slider with frame kit as side panel, glass kit is ordered separately.


	SmartTools Options	U.S. Price	Required to Specify
Parametric Width Slider Door Assembly with Equal Width Door and Slide Panel (Available in 1" increments)	• 78"W through 95"W (excludes standard widths)	+\$340	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Fixed Width Door and Variable Width Side Panel (Available in 1" increments)	• 81"W through 108"W (excludes standard widths)	+\$510	Specify slider door assembly widths in 1" increments.
Parametric Width Slider Door Assembly with Variable Width Frame Kit (Available in 1" increments)	With 40" doors		
	• 112"W through 136"W	+\$272	Specify slider door assembly widths in 1" increments.
	• 137"W through 184"W	+\$586	Specify slider door assembly widths in 1" increments.
	With 42" doors		
	• 114"W through 136"W	+\$272	Specify slider door assembly widths in 1" increments.
	• 137"W through 186"W	+\$586	Specify slider door assembly widths in 1" increments.
	With 48" doors		
	• 120"W through 136"W	+\$272	Specify slider door assembly widths in 1" increments.
	• 137"W through 192"W	+\$586	Specify slider door assembly widths in 1" increments..
Painted Glass Selections Frame	• Painted glass frame	+\$510	Specify paint color number.
Base	• 2½"H base	No cost	Specify to accept 2½"H base.
	• 4"H base	+\$222	Specify to accept 4"H base.

Specification Information

Width	Style Number	U.S. Base Price
80"	GPGSDFTS80	\$5711
84"	GPGSDFTS84	\$5798
96"	GPGSDFTS96	\$6244
•	•	•

Transom-Height Slider Doors

80"	GPGSDFTS80	\$5711
84"	GPGSDFTS84	\$5798
96"	GPGSDFTS96	\$6244
•	•	•



Glass Selections Polished Edge Slider Door Vertical Seal



Tip: Vertical seal assemblies are 120" long and are cut to the appropriate height during installation.


Standard Includes		Required to Specify
▶ Need help? Product details, page 56	• Vertical seal	Style number
Specification Information		
• Style • Number	• U.S. • Price	
GPGSDFSVS	\$57	



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Glass Selections Mini Ends

Glass Selections Mini Ends to the Floor



Tip: Mini ends should be specified to the floor when positioned next to a door frame. Mini ends will be field-cut by installer to final length.

Tip: For painted mini ends, use Privacy Wall mini ends.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.


Standard Includes	Required to Specify
▶ Need help? Product details, page 68 • Mini end: 10'1"H • Outer channel: clear anodized aluminum • Inner channel: platinum paint	1 Style number 2 Options, if selected (see below)

SmartTools Options	U.S. Price	Required to Specify
Modified Angle (45° to 135° in 5° increments)	• For GPGSMESEF +\$163 • For GPGSMEMF +\$173 • For GPGSMELEF +\$186	Specify with modified angle. Specify with modified angle. Specify with modified angle.

Specification Information

Size	Style Number	U.S. Base Price
1 1/2" to 2 1/8"	GPGSMESEF	\$256
2 1/8" to 3 1/2"	GPGSMEMF	\$285
3 1/2" to 6"	GPGSMELEF	\$342
:	:	:

Glass Selections Mini Ends



Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: For painted mini ends, use Privacy Wall mini ends.



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

Standard Includes	Required to Specify
▶ Need help? Product details, page 68 • Ceiling height from 8'0"H to 10'0"H, in one-inch increments • Telescoping mini end: clear anodized aluminum • Aligns to top of 5"H base	1 Style number 2 Ceiling height 3 Options, if selected (see below)

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11" +\$ 20	Specify ceiling height in 1" increments.
Modified Angle (45° to 135° in 5° increments)	• For GPGSMESEF +\$163 • For GPGSMEMF +\$173 • For GPGSMELEF +\$186	Specify with modified angle. Specify with modified angle. Specify with modified angle.
Base	• 2 1/2"H base No cost • 4"H base +\$ 18	Specify to accept 2 1/2"H base. Specify to accept 4"H base.

Specification Information

Size	Style Number	U.S. Base Price
1 1/2" to 2 1/8"	GPGSMESEF	\$256
2 1/8" to 3 1/2"	GPGSMEMF	\$285
3 1/2" to 6"	GPGSMELEF	\$342
:	:	:



Glass Selections Adapters



Tip: There are no T-adapters for Glass Selections, since all surfaces are concealed. For T-adapters, see Privacy Wall adapters.
▶ Page 182

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: For painted adapters, use Privacy Wall adapters.



Standard Includes		Required to Specify
▶ Need help? Product details, page 78	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Adapter: clear anodized aluminum - Plinth for finish-end: paint	1 Style number 2 Ceiling height 3 Paint color number for plinths 4 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials Finished-end base plinth - Paint price group 1 - Paint price group 2 - Paint price group 3	No cost +\$ 2 +\$ 4	Specify paint color number. Specify paint color number. Specify paint color number.

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments) 7'5" through 7'11"	+\$20	Specify ceiling height in 1" increments.
Base 2½"H base 4"H base	No cost +\$18	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

• Style Number	• U.S. Base Price
•	•
•	•
•	•

Finished-End Adapter with Base

GPGSAFEB	\$177
•	•

L-Adapter

GPGSAL	\$155
•	•



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

Glass Selections Posts



Tip: There are no X-posts for Glass Selections, since all surfaces are concealed. For X-posts, see Privacy Wall Posts.

► Page 184

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.


Tip: For painted posts, use Privacy Wall posts.

Standard Includes	Required to Specify
- Need help? Product details, page 82 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments - Post: clear anodized aluminum	1 Style number 2 Ceiling height on L-post 3 Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	7'5" through 7'11" +\$20	Specify ceiling height in 1" increments.
Base	2½"H base No cost 4"H base +\$18	Specify to accept 2½"H base. Specify to accept 4"H base.


Specification Information

L-Post




Style Number	U.S. Base Price
GP GSPL	\$217

T-Post




Style Number	U.S. Base Price
GP GSPT	\$252

In-Line Post



Style Number	U.S. Base Price
GP GSPI	\$217

V-Posts




Configuration
120° V-Post
135° V-Post

Style Number
GP GSP120V
GP GSP135V

U.S. Base Price
\$241
\$241

135° Y-Post



Style Number
GP GSP135Y

U.S. Base Price
\$304




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Transitions

All-Glass L-Corner Units and All-Glass L-Corner Units with Two Transom-Aligned Lites



Tip: L-corner units are factory-assembled. Glass joint is silicone-glazed as part of the installation process.

Tip: L-corner units plan dimensionally in the same manner as individual panels that are joined by a post.

Standard Includes		Required to Specify
► Need help? Product details, page 26 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2 3/8"-thick panel with anodized aluminum frame: paint - All glass, if selected - Two factory-installed lites—top lite is transom aligned: glass - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint		- Style number - Ceiling height - Glass finish - Options, if selected (see below) ► See <i>Surface Materials</i>, page 334.


Options	U.S. Price	Required to Specify
Surface Materials		
L-corner unit glass panels 8'0" through 10'0"		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$426	Specify glass number for lite.
• Glass price group 3	+\$489	Specify glass number for lite.
• Glass price group 4	+\$552	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$685	Specify glass number for lite.
L-corner unit with two transom-aligned lites, top lite glass panels 8'0" through 10'0"		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$100	Specify glass number for lite.
• Glass price group 3	+\$115	Specify glass number for lite.
• Glass price group 4	+\$133	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$161	Specify glass number for lite.
L-corner unit with two transom-aligned lites, lower lite glass panels 8'0" through 10'0"		
• Glass price group 1	No cost	Specify glass number for lite.
• Glass price group 2	+\$324	Specify glass number for lite.
• Glass price group 3	+\$374	Specify glass number for lite.
• Glass price group 4	+\$424	Specify glass number for lite.
• Glass price group 5	N.A.	Specify glass number for lite.
• Glass price group 6	+\$522	Specify glass number for lite.
Ceiling Height		
• 8'0" through 9'0"	No cost	Specify ceiling height in 1" increments.
• 9'1" through 10'0"	+\$ 91	Specify ceiling height in 1" increments.
Related Products		
- Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing		► Page 230 ► Page 236 ► Page 240 ► Page 244

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal *Specials RFQ (Request For Quote)* process.

SmartTools Options	U.S. Price	Required to Specify
Painted Glass Selections Frame		
• Painted glass frame	+\$214	Specify paint color number.
Parametric Ceiling Height (All glass L-corner units only)		
• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
Base		
• 2 1/2"H base	+\$167	Specify to accept 2 1/2"H base.
• 4"H base	+\$335	Specify to accept 4"H base.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.



Specification Information

• Width	• Style Number	• U.S. Base Price	• Nominal Width	• Modular Width	• Style Number	• U.S. Base Price
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•


**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections Transitions, continued

Glass Selections T-Corner Unit All-Glass Frame Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
▶ Need help? Product details, page 26 • Ceiling height from 8'0"H to 10'0"H, in one-inch increments • 23/8"-thick panel with clear anodized aluminum frame: paint • Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint	1 Style number 2 Ceiling height 3 Glass number for lite ▶ See <i>Surface Materials</i>, page 334.

	Options	U.S. Price	Required to Specify
Ceiling Height	• 8'0" through 9'0" • 9'1" through 10'0"	No cost +\$ 48	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products	• Ceiling tracks • Continuous base trim • Feature strips • Acoustic packing		▶ Page 230 ▶ Page 236 ▶ Page 240 ▶ Page 244

	SmartTools Options	U.S. Price	Required to Specify
Painted Glass Selections Frame	• Painted glass frame	+\$286	Specify paint color number.
Parametric Ceiling Height (Available in 1" increments)	• 7'5" through 7'11"	Use 8'0" price	Specify ceiling height in 1" increments.
Base	• 2 1/2"H base • 4"H base	+\$167 +\$335	Specify to accept 2 1/2"H base. Specify to accept 4"H base.

Specification Information						
• Width	• Style Number	• U.S. Base Price	• Nominal Width	• Modular Width	• Style Number	• U.S. Base Price
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•

All-Glass Frame Kits

18" x 18" x 18"	GPGSSGFKT	\$1349
•	•	•
•	•	•

Modular All-Glass Frame Kits

18" x 18" x 18"	16 3/4" x 16 3/4" x 16 3/4"	GPGSMGFKT	\$1349
•	•	•	•
•	•	•	•



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Glass Selections T-Corner Units All-Glass Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: T-corner glass kits include three pieces of glass.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini-end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
► Need help? Product details, page 26 - Ceiling height from 8'0"H to 10'0"H, in one-inch increments 2$\frac{3}{8}$"-thick panel with clear anodized aluminum frame: paint - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint	1 Style number 2 Ceiling height 3 Glass number for lite ► See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials - Top lite glass panels 8'0" through 10'0" - Glass price group 1: No cost - Glass price group 2: +\$ 795 - Glass price group 3: +\$1440 - Glass price group 4: +\$2082 - Glass price group 5: N.A. - Glass price group 6: +\$3735		- Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite. - Specify glass number for lite.
Ceiling Height 8'0" through 9'0": No cost 9'1" through 10'0": +\$ 48		- Specify ceiling height in 1" increments. - Specify ceiling height in 1" increments.
Related Products - Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing		► Page 230 ► Page 236 ► Page 240 ► Page 244

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments) 7'5" through 7'11": Use 8'0" price		Specify ceiling height in 1" increments.
Base 2$\frac{1}{2}$"H base: +\$ 39 4"H base: No cost		- Specify to accept 2$\frac{1}{2}$"H base. - Specify to accept 4"H base.

Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
.	.	.	.	.	.	.
.	.	.	.	.	.	.
.	.	.	.	.	.	.

All-Glass Glass Kits			Modular All-Glass Glass Kits			
18" x 18" x 18"	GP GSSGGKT	\$506	18" x 18" x 18"	16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ "	GP GSMGGKT	\$506
.	.	.	.	.	.	.




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Glass Selections T-Corner Units Two Divided Lite Frame Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a mini end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
▶ Need help? Product details, page 26 • Ceiling height from 8'0"H to 10'0"H, in one-inch increments • 2$\frac{3}{8}$"-thick panel with clear anodized aluminum frame: paint • Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint	1 Style number 2 Ceiling height 3 Glass number for lite 4 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Ceiling Height • 8'0" through 9'0" • 9'1" through 10'0"	No cost +\$ 48	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products • Ceiling tracks • Continuous base trim • Feature strips • Acoustic packing		▶ Page 230 ▶ Page 236 ▶ Page 240 ▶ Page 244

SmartTools Options	U.S. Price	Required to Specify
Surface Materials • Painted glass frame	+\$286	Specify paint color number.
Base • 2$\frac{1}{2}$"H base • 4"H base	+\$167 +\$335	Specify to accept 2 $\frac{1}{2}$ "H base. Specify to accept 4"H base.

Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
...	...	...	...	...	...	...

Two Divided Lite Frame Kits			Modular Two Divided Lite Frame Kits			
18" x 18" x 18"	GPGSS2FKT	\$1420	18" x 18" x 18"	16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ "	GPGSM2FKT	\$1420
...	...	...	...	...	...	...




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Glass Selections T-Corner Units Two Divided Lite Glass Kits



Tip: Frame and glass kits are assembled in the field. Butt joints must be sealed with silicone sealant to be code-compliant.

Tip: T-corner frame kits plan dimensionally in the same manner as individual 18" panels that are joined by a post.

Tip: T-corner glass kits include three pieces of glass.

Tip: Due to the process steps involved in installation of glass, T-corner frame kits can be placed no closer than 20" to a single mini-end or wall channel.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes		Required to Specify
▶ Need help? Product details, page 26	- Ceiling height from 8'0"H to 10'0"H, in one-inch increments 23⁄8"-thick panel with clear anodized aluminum frame: paint - Floor track with adjustable levelers to accommodate continuous 5"H base trim (ordered separately): paint	1 Style number 2 Ceiling height 3 Glass number for lite 4 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.
Options	U.S. Price	Required to Specify
Surface Materials	Top Lite Glass Panels 8'0" through 10'0"	
- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	No cost +\$ 240 +\$ 433 +\$ 620 N.A. +\$1109	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
	Lower Lite Glass Panels 8'0" through 10'0"	
- Glass price group 1 - Glass price group 2 - Glass price group 3 - Glass price group 4 - Glass price group 5 - Glass price group 6	No cost +\$ 572 +\$1033 +\$1490 N.A. +\$2670	Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite. Specify glass number for lite.
Ceiling Height	8'0" through 9'0" 9'1" through 10'0"	No cost +\$ 48 Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Related Products	- Ceiling tracks - Continuous base trim - Feature strips - Acoustic packing	▶ Page 230 ▶ Page 236 ▶ Page 240 ▶ Page 244

	SmartTools Options	U.S. Price	Required to Specify
Base	• 2½"H base • 4"H base	+\$ 39 No cost	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information						
Width	Style Number	U.S. Base Price	Nominal Width	Modular Width	Style Number	U.S. Base Price
...	...	...	...	...	...	...


Two Divided Lite Glass Kits			Modular Two Divided Lite Glass Kits			
18" x 18" x 18"	GPGSS2GKT	\$499	18" x 18" x 18"	16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ " x 16 $\frac{3}{4}$ "	GPGSM2GKT	\$499
...	...	...	...	...	...	...




For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

Ceiling Tracks

Ceiling Tracks



Recessed



Overlapping



Tip: No ceiling clip is included unless selected as an option.

Tip: For finished end ceiling track.
► See page 60.

Tip: Ceiling clip option is on straight and finished-end ceiling tracks only.

Tip: When required by the local seismic design criteria, additional ceiling fasteners and/or structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.



Standard Includes	Required to Specify
► Need help? Product details, page 60 Ceiling track: paint	1 Style number 2 Ceiling track 3 Paint color number for ceiling track 4 Options, if selected (see below) ► See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials - Paint price group 1 - Paint price group 2 - Paint price group 3	No cost +\$ 15 +\$ 24	Specify paint color number. Specify paint color number. Specify paint color number.
Ceiling Track - Recessed ceiling track - Overlapping ceiling track	No cost No cost	Specify <i>with recessed ceiling track</i> . Specify <i>with overlapping ceiling track</i> .
Ceiling Clips - No fastener 1" x 1/4"D tegular 1" x 3/8"D tegular 1" x 1/2"D tegular 1" x 5/8"D tegular - Donn Finline 1/4" slot - Donn Finline 1/8" slot 1"W exposed T 1" fluted runner 1/4" – 20" 1" tee quick clip 9/16"W exposed tee 9/16" x 1/4"D tegular 9/16" x 5/16"D tegular	No cost No cost No cost No cost No cost No cost No cost No cost No cost No cost No cost No cost No cost	Specify <i>with no fastener</i> . Specify <i>with 1" x 1/4"D tegular clip</i> . Specify <i>with 1" x 3/8"D tegular clip</i> . Specify <i>with 1" x 1/2"D tegular clip</i> . Specify <i>with 1" x 5/8"D tegular clip</i> . Specify <i>with Donn Finline with 1/4" slot clip</i> . Specify <i>with Donn Finline with 1/8" slot clip</i> . Specify <i>with 1"W exposed T clip</i> . Specify <i>with 1" fluted runner 1/4" – 20" clip</i> . Specify <i>with 1" tee quick clip</i> . Specify <i>with 9/16"W exposed tee clip</i> . Specify <i>with 9/16" x 1/4"D tegular clip</i> . Specify <i>with 9/16" x 5/16"D tegular clip</i> .

SmartTools Options	U.S. Price	Required to Specify
Surface Materials Ceiling track, Veneer (flat-cut open-pore finish)	+\$445	Specify wood veneer color number.
Modified Angle (70° to 175° in 5° increments) - For GPCT120V 70°-115° - For GPCT135V 125°-175°	+\$ 35 +\$ 35	Specify <i>with modified angle</i> . Specify <i>with modified angle</i> .

Specification Information

Width	Style Number	U.S. Base Price
120"	GPCTS	\$152

Straight Ceiling Track

120"	GPCTS	\$152
------	-------	-------

Finished-End Ceiling Track

120"	GPCTFE	\$177
------	--------	-------

Corner L Ceiling Track

24"	GPCTLS	\$149
-----	--------	-------

► Specification Information, continued on next page

► Specification Information, continued from previous page

Specification Information



• Width	• Style • Number	• U.S. • Base • Price
---------	---------------------	-----------------------------

120° Corner V Ceiling Track

24"	GPCT120V	\$149
:	:	:

135° Corner V Ceiling Track

24"	GPCT135V	\$149
:	:	:


**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Ceiling Tracks, continued

Ceiling Track Clip Kits



Tip: Ceiling clip attachment hardware is included with ceiling track. Additional ceiling clip kits can be ordered separately for inventory or changes.

Standard Includes		Required to Specify	
► Need help? Product details, page 61	• Quantity of 200 ceiling track clips and necessary attachment hardware	1 Style number 2 Options, if selected (see below)	
Options		U.S. Price	Required to Specify
Post Extensions	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.

Specification Information

• Style Number	• U.S. Price
----------------	--------------

1" x 1/4"D Tegal

GPCFKT	\$1715
---------------	--------

1" x 3/8"D Tegal

GPCFKX	\$1715
---------------	--------

1" x 1/2"D Tegal

GPCFKY	\$2067
---------------	--------

1" x 5/8"D Tegal

GPCFKZ	\$2067
---------------	--------

Donn Fineline 1/4" Slot

GPCFKM	\$ 314
---------------	--------

Donn Fineline 1/8" Slot

GPCFKU	\$ 785
---------------	--------

1"W Exposed T

GPCFKA	\$ 536
---------------	--------

1" Fluted Runner 1/4"-20"

GPCFKP	\$ 27
---------------	-------

1" Tee Quick Clip

GPCFKQ	\$ 997
---------------	--------

► Specification Information, continued on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Specification Information, continued from previous page

Specification Information

• Style Number	• U.S. Price
-------------------	-----------------

9/16"W Exposed Tee


GPCFKR	\$ 536
--------	--------

9/16" x 1/4"D Tegular

GPCFKT5	\$1865
---------	--------

9/16" x 5/16"D Tegular

GPCFKX5	\$1865
---------	--------



For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Ceiling Tracks, continued

Ceiling Track T-Clip




T-clip for recessed ceiling track



T-clip for overlapping ceiling track

Standard Includes		Required to Specify	
▶ Need help? Product details, page 61	• T-clip for ceiling track: black paint only	1 Style number	2 Options, if selected (see below)
Options		U.S. Price	Required to Specify
Post Extensions	• Post extensions modified to accommodate recessed ceiling track (ordered separately)	No cost	Specify with post extensions for recessed ceiling track interface.
	• Post extensions modified to accommodate overlapping ceiling track (ordered separately)	No cost	Specify with post extensions for overlapping ceiling track interface.
Specification Information			
• Style Number	• U.S. Price		
GPCTT	\$6		

Ceiling Track Bypass Cover



Tip: Bypass cover is required if you are using a recessed ceiling track and the track is on the ceiling grid.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 61	• Bypass cover: paint	1 Style number	2 Paint color number for bypass cover
		3 Options, if selected (see below)	▶ See <i>Surface Materials</i> , page 334.
Options		U.S. Price	Required to Specify
Surface Materials	Bypass cover surface options		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$4	Specify paint color number.
	• Paint price group 3	+\$6	Specify paint color number.
Specification Information			
• Style Number	• U.S. Base Price		
GPCTB	\$180		



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Cornice Track and Brackets

Tip: When required by the local seismic design criteria, structural bracing may be required. For more information regarding seismic applications, visit the Architectural Solutions web site at village.steelcase.com.

► Need help?
Product details,
page 64

Standard Includes

- Cornice track: paint

Required to Specify

- 1 Style number
 - 2 Paint color number for cornice track
 - 3 Options, if selected (see below)
- See *Surface Materials*, page 334.

	Options	U.S. Price	Required to Specify
Surface Materials	L, T, and X Cornice Brackets		
	• Paint price group 1 • Paint price group 2 • Paint price group 3	No cost +\$ 4 +\$ 6	Specify paint color number. Specify paint color number. Specify paint color number.
	Straight Cornice Track		
	• Paint price group 1 • Paint price group 2 • Paint price group 3	No cost +\$15 +\$24	Specify paint color number. Specify paint color number. Specify paint color number.

Specification Information

Length	Style Number	U.S. Base Price
:	:	:
:	:	:
:	:	:

Straight Cornice Track

120"	GPRTS	\$242
:	:	:

L Cornice Bracket



	GPRTL	\$ 47
:	:	:

T Cornice Bracket

	GPRTT	\$ 47
:	:	:

X Cornice Bracket


	GPRTX	\$ 47
:	:	:



 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Trim and Accessories

Continuous Base Trim



Standard Includes	Required to Specify
▶ Need help? Product details, page 19 • 5"H base trim: paint	1 Style number 2 Paint color number for base trim 3 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials Base trim surface options • Paint price group 1 • Paint price group 2 • Paint price group 3	- No cost +\$ 15 +\$ 24	- Specify paint color number. - Specify paint color number. - Specify paint color number.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

SmartTools Options	U.S. Price	Required to Specify
Surface Materials Base trim, veneer (flat-cut open-pore finish) • 5"H base only	+\$445	Specify wood veneer color number.
Base • 2½"H base • 4"H base	+\$ 10 +\$ 39	- Specify 2½"H base. - Specify 4"H base.

Specification Information		
Width	Style Number	U.S. Base Price
120"	GPBTC	\$89



For Canadian Pricing
 Multiply U.S. Price by the Canadian price factor.
 ▶ See page 1 for details.

Corner Base Trim

Standard Includes	Required to Specify
- Need help? Product details, page 82 5"H base trim: paint	1 Style number 2 Paint color number for base trim 3 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials Base trim surface options - Paint price group 1 - Paint price group 2 - Paint price group 3	- No cost +\$ 15 +\$ 24	- Specify paint color number. - Specify paint color number. - Specify paint color number.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

SmartTools Options	U.S. Price	Required to Specify
Surface Materials Corner base trim, veneer (flat-cut open-pore finish) 5"H base only	+\$239	Specify wood veneer color number.
Base 2½"H base 4"H base	+\$ 39 +\$ 39	- Specify 2½"H base. - Specify 4"H base.
Modified Angle (70° to 175° in 5° increments) - For GPCNRBT120 70°-85° - For GPCNRBT120 95°-115° - For GPCNRBT135 125°-175°	+\$100 +\$ 50 +\$ 50	- Specify <i>with modified angle</i>. - Specify <i>with modified angle</i>. - Specify <i>with modified angle</i>.

Specification Information

Width	Style Number	U.S. Base Price
90° Corner Base Trim		
18"	GPCNRBT90	\$89
120° Corner Base Trim		
18"	GPCNRBT120	\$89
135° Corner Base Trim		
18"	GPCNRBT135	\$89
:	:	:



90° corner



120° corner



135° corner




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Trim and Accessories, continued

Power and Communication Base Trim

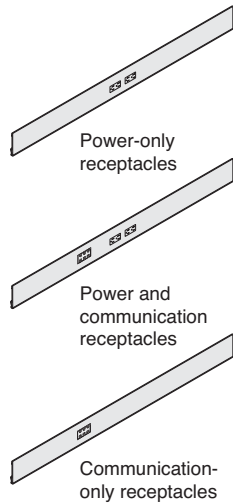

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Standard Includes	Required to Specify
▶ Need help? Product details, page 21 • 5"H base trim with cutouts: paint	1 Style number 2 Paint color number for base trim 3 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 334.

Options	U.S. Price	Required to Specify
Surface Materials Base trim surface options • Paint price group 1 • Paint price group 2 • Paint price group 3	No cost +\$ 15 +\$ 24	Specify paint color number. Specify paint color number. Specify paint color number.
Related Products • Acoustic packing		▶ Page 244

SmartTools Options	U.S. Price	Required to Specify
Surface Materials Base trim, veneer (flat-cut open-pore finish) • 5"H base only	+\$208	Specify wood veneer color number.

Specification Information

Width	Style Number	U.S. Base Price
59"	GPBTP	\$26
59"	GPBTPC	\$26
59"	GPBTCC	\$26
59"	GPBTCHIP	\$26
59"	GPBTCHIPC	\$26
59"	GPBTCC	\$26

Power and Communication Base Trim

Power Only

59"	GPBTP	\$26
-----	-------	------

Power and Communication

59"	GPBTPC	\$26
-----	--------	------

Communication Only

59"	GPBTCC	\$26
-----	--------	------

Chicago Base Trim

Power Only

59"	GPBTCHIP	\$26
-----	----------	------

Power and Communication

59"	GPBTCHIPC	\$26
-----	-----------	------

Communication Only

59"	GPBTCC	\$26
-----	--------	------



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Feature Strips

In-line
feature
stripHalf
feature
strip

Tip: Single feature strips are 120" long and are cut to size in the field. They are required when joining door frames to other components.

Tip: To determine quantity and length of feature strips, see Feature Strip Application.
▶ Page 86.

Tip: Feature strip(s) may be shipped slightly longer than needed. Excess will be concealed behind base trim and no cutting is required.

Tip: Half feature strips are used in combination with in-line feature strips for inside corner applications.

Tip: For correct fit of feature strips, you must specify type of components that will be used in conjunction with feature strips. Example: One painted component and one upholstered component.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 18	• Feature strip(s): paint	1 Style number	
	• Ceiling height from 8'0"H to 10'0"H, in one-inch increments, if package of 25 selected	2 Paint color number for feature strip(s)	
		3 Ceiling height, if package of 25 selected	
		4 Wall application	
		5 Options, if selected (see below)	
		▶ See <i>Surface Materials</i> , page 334.	

Surface Materials	Options	U.S. Price	Required to Specify
	Single feature strips		
	Paint		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 4	Specify paint color number.
	• Paint price group 3	+\$ 8	Specify paint color number.
	Fabric		
	• Fabric price group 1	+\$ 37	Specify fabric color number.
	• Fabric price group 2	+\$ 53	Specify fabric color number.
	• Fabric price group 3	+\$ 66	Specify fabric color number.
	• Fabric price group 5	+\$ 83	Specify fabric color number.
	Vinyl		
	• Vinyl price group 1	+\$ 37	Specify vinyl color number.
	• Vinyl price group 2	+\$ 53	Specify vinyl color number.
	• Customer's Own Material/Vinyl (COM)	+\$ 37	▶ See <i>Surface Materials Reference Manual</i> .
	Package of 25 feature strips		
	Paint		
	• Paint price group 1	No cost	Specify paint color number.
	• Paint price group 2	+\$ 8	Specify paint color number.
	• Paint price group 3	+\$ 15	Specify paint color number.
	Fabric		
	• Fabric price group 1	+\$ 83	Specify fabric color number.
	• Fabric price group 2	+\$108	Specify fabric color number.
	• Fabric price group 3	+\$142	Specify fabric color number.
	• Fabric price group 5	+\$175	Specify fabric color number.
	Vinyl		
	• Vinyl price group 1	+\$ 83	Specify vinyl color number.
	• Vinyl price group 2	+\$108	Specify vinyl color number.
	• Customer's Own Material/Vinyl (COM)	+\$ 83	▶ See <i>Surface Materials Reference Manual</i> .
Wall Application	• For use with two painted components	No cost	Specify <i>with two painted components</i> .
	• For use with two upholstered components	No cost	Specify <i>with two upholstered components</i> .
	• For use with one painted and one upholstered component	No cost	Specify <i>with one painted and one upholstered component</i> .
Ceiling Height	• 8'0" through 10'0"	No cost	Specify ceiling height in 1" increments.

▶ Options, continued on next page

**For Canadian Pricing**

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

► Options, continued from previous page

	SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments)	7'5"H through 7'11"H (for GPFS and GPFSH only) 10'1"H through 11'0"H	Use 8'0" price No cost	Specify ceiling height in 1" increments. Specify ceiling height in 1" increments.
Full Feature Strip, Veneer (Flat-cut open-pore finish)	- Full feature strip (for GPFS1 only) - Half feature strip (for GPFSH1 only)	+\$180 +\$224	Specify wood veneer color number. Specify wood veneer color number.
Base	2½"H base (for GPFS and GPFSH only) 4"H base (for GPFS and GPFSH only)	No cost No cost	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

Height	Style Number	U.S. Base Price
.	.	.
.	.	.
.	.	.

Package of 25 Feature Strips

In-Line

8'0"–10'0"	GPFS	\$521
------------	-------------	-------

Half

8'0"–10'0"	GPFSH	\$521
------------	--------------	-------

Package of 1 Feature Strip

In-Line

120"	GPFS1	\$ 26
------	--------------	-------

Half

120"	GPFSH1	\$ 26
------	---------------	-------

In-line
feature
strip



Half
feature
strip




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Trim and Accessories, continued

Anodized Feature Strips



Tip: Single feature strips are 120" long and are cut to size in the field. They are required when joining door frames to other components.

Tip: To determine quantity and length of feature strips, see Feature Strip Application.
▶ Page 86.

Tip: Feature strip(s) may be shipped slightly longer than needed. Excess will be concealed behind base trim and no cutting is required.

Tip: Half feature strips are used in combination with in-line feature strips for inside corner applications.

Tip: Anodized feature strips are designed for use with Glass Selection anodized door and glass frames. They are not compatible with upholstered panels.

Tip: SmartTools options are available and easily ordered when using SmartTools software. If you do not have access to SmartTools software, these options can also be ordered using the normal Specials RFQ (Request For Quote) process.

Tip: For painted feature strips, use Privacy Wall feature strips.

Standard Includes	Required to Specify
▶ Need help? Product details, page 18 • Feature strip(s): anodized aluminum • Ceiling height from 8'0"H to 10'0"H, in one-inch increments, if package of 25 selected	1 Style number 2 Ceiling height, if package of 25 selected 3 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Ceiling Height on Half Feature Strips • 8'0" through 10'0"	No cost	Specify ceiling height in 1" increments.

SmartTools Options	U.S. Price	Required to Specify
Parametric Ceiling Height (Available in 1" increments) • 7'5"H through 7'11"H (for GPFSA and GPFSHA only)	No cost	Specify ceiling height in 1" increments.
Base • 2½"H base (for GPFSA and GPFSHA only) • 4"H base (for GPFSA and GPFSHA only)	No cost No cost	Specify to accept 2½"H base. Specify to accept 4"H base.

Specification Information

Height	Style Number	U.S. Price
8'0"–10'0"	GPFSA	\$757
8'0"–10'0"	GPFSHA	\$757

Package of 25 Feature Strips

In-Line

8'0"–10'0"	GPFSA	\$757
------------	-------	-------

Half

8'0"–10'0"	GPFSHA	\$757
------------	--------	-------

Package of 1 Feature Strip

In-Line

120"	GPFS1A	\$ 38
------	--------	-------

Half

120"	GPFSH1A	\$ 38
------	---------	-------



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Furniture Reveal Strips



Tip: Furniture reveal strips are used when hanging components on Privacy Wall panels. The furniture reveal strip finishes off one half of an in-line panel joint, while allowing access to panel slots. They are cut to size from a 34" length as part of the installation process. Typically, one 34" strip is adequate to trim out both edges of a worksurface or storage cabinet.

Standard Includes	Required to Specify
▶ Need help? Product details, page 19 • Furniture reveal strip(s): paint	1 Style number 2 Paint color number 3 Wall application 4 Options, if selected (see below) ▶ See <i>Surface Materials</i>, page 334.

Options	U.S. Price	Required to Specify
Surface Materials • Package of 25 furniture reveal strips • Paint price group 1 No cost • Paint price group 2 +\$ 8 • Paint price group 3 +\$15 • Package of 4 furniture reveal strips • Paint price group 1 No cost • Paint price group 2 +\$ 4 • Paint price group 3 +\$ 8		- Specify paint color number. - Specify paint color number. - Specify paint color number.
Wall Application • For use with two painted components No cost • For use with two upholstered components No cost • For use with one painted and one upholstered component No cost		- Specify <i>with two painted components</i>. - Specify <i>with two upholstered components</i>. - Specify <i>with one painted and one upholstered component</i>.

Specification Information

• Height	• Style Number	• U.S. Base Price
•	•	•
•	•	•
•	•	•

Package of 25 Furniture Reveal Strips

34"	GPFRS	\$237
•	•	•

Package of 4 Furniture Reveal Strips

34"	GPFRS4	\$ 47
•	•	•




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Trim and Accessories, continued

Acoustic Packing



Standard Includes		Required to Specify
► Need help? Product details, page 19	• 120" of acoustic packing for mini ends or wall channels to help improve acoustic performance	Style number
Specification Information		
• Style Number	• U.S. Price	
GPACoust	\$34	

Acoustic Seals



Standard Includes		Required to Specify
► Need help? Product details, page 87	• Acoustic seal: black • Package of 10	Style number
Specification Information		
• Height	• Style Number	• U.S. Price
18"	GPAS	\$82


**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

Post and Beam Attachment Kit

Post and Beam
Attachment Kit




Tip: The Post and Beam attachment kit is designed for use in overhead applications only. It should not be used in fence application.

Standard Includes		Required to Specify
▶ Need help? Product details, page 20	• Attachment kit: anodized aluminum	Style number
Specification Information		
• Style • Number	• U.S. • Price	
GPPBKIT	\$231	

 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.


Accessories

Universal Floor Gripper



Standard Includes		Required to Specify
► Need help? Product details, page 20	- Floor gripper - Double-sided hook and eye tape - Double-sided adhesive tape	Style number
Specification Information		
• Height	• Style Number	• U.S. Price
16 ¹ / ₈ "	GPUFG	\$24

Wall-Lifting Tools



Standard Includes		Required to Specify
- Wall-lifting tool - Package quantity: 2		Style number
Specification Information		
• Style Number	• U.S. Price	
GPWT	\$109	




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Receptacles



Standard Includes

► Need help?
Product details,
page 99

- Receptacle: plastic

Required to Specify

- 1 Style number
- 2 Plastic color number for receptacle
- See *Surface Materials*, page 334.

Specification Information

15-Amp Receptacles

Line	Style Number	U.S. Price	Style Number	U.S. Price
------	--------------	------------	--------------	------------

20-Amp Receptacles

Style Number	U.S. Price	Style Number	U.S. Price
--------------	------------	--------------	------------

4-Circuit, 3+1 Wiring Schematic

	System Ground		Isolated Ground		System Ground		Isolated Ground	
Line 1	GP1R1SGX	\$32	GP1R1IGX	\$32	GP1R1SGHX	\$49	GP1R1IGHX	\$49
Line 2	GP1R2SGX	\$32	GP1R2IGX	\$32	GP1R2SGHX	\$49	GP1R2IGHX	\$49
Line 3	GP1R3SGX	\$32	GP1R3IGX	\$32	GP1R3SGHX	\$49	GP1R3IGHX	\$49
Line 4	GP1R4SGX	\$32	GP1R4IGX	\$32	GP1R4SGHX	\$49	GP1R4IGHX	\$49

4-Circuit, 2+2 Wiring Schematic

	System Ground		Isolated Ground		System Ground		Isolated Ground	
Line 1	GP2R1SGY	\$32	GP2R1IGY	\$32	GP2R1SGHY	\$49	GP2R1IGHY	\$49
Line 2	GP2R2SGY	\$32	GP2R2IGY	\$32	GP2R2SGHY	\$49	GP2R2IGHY	\$49
Line 3	GP2R3SGY	\$32	GP2R3IGY	\$32	GP2R3SGHY	\$49	GP2R3IGHY	\$49
Line 4	GP2R4SGY	\$32	GP2R4IGY	\$32	GP2R4SGHY	\$49	GP2R4IGHY	\$49
.	.	.	.	.	.	.	.	.

3-Circuit, Separate Neutrals Wiring Schematic

	System Ground		Isolated Ground		System Ground		Isolated Ground	
Line 1	GP3R1SGZ	\$32	GP3R1IGZ	\$32	GP3R1SGHZ	\$49	GP3R1IGHZ	\$49
Line 2	GP3R2SGZ	\$32	GP3R2IGZ	\$32	GP3R2SGHZ	\$49	GP3R2IGHZ	\$49
Line 3	GP3R3SGZ	\$32	GP3R3IGZ	\$32	GP3R3SGHZ	\$49	GP3R3IGHZ	\$49




For Canadian Pricing

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

USB Receptacles



Standard Includes	Required to Specify
▶ Need help? Product details, page 99 • Receptacle: plastic	1 Style number 2 Plastic color number for receptacle ▶ See <i>Surface Materials</i>, page 334.

Specification Information

Line	Style Number	U.S. Price
------	--------------	------------

4-Circuit, 3+1 Wiring Schematic

Line 1	GPR1USBX	\$77
Line 2	GPR2USBX	\$77
Line 3	GPR3USBX	\$77
Line 4	GPR4USBX	\$77
:	:	:

4-Circuit, 2+2 Wiring Schematic

Line 1	GPR1USBY	\$77
Line 2	GPR2USBY	\$77
Line 3	GPR3USBY	\$77
Line 4	GPR4USBY	\$77
:	:	:

3-Circuit, Separate Neutrals Wiring Schematic

Line 1	GPR1USBZ	\$77
Line 2	GPR2USBZ	\$77
Line 3	GPR3USBZ	\$77
:	:	:




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Cover Plates



Standard Includes	Required to Specify
- Need help? Product details, page 99 - Cover plate: plastic	1 Style number 2 Plastic color number for cover plate ▶ See <i>Surface Materials</i>, page 334.

Specification Information

Style Number	U.S. Price

Power and Communication

GPPDC	\$49

Power Only

GPPC	\$45

Power and Communication Fillers



Tip: This filler is not designed for use with the base communication cutout. Fillers for this NEMA-size cutout should be sourced locally.

Standard Includes	Required to Specify
- Need help? Product details, page 100 - Package of 20	1 Style number 2 Plastic color number for filler ▶ See <i>Surface Materials</i>, page 334.

Specification Information

Style Number	U.S. Price

GPRCE	\$93




For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Multipurpose Power Infeeds



Hardwire



Modular

Tip: If an infeed is needed, it must be ordered separately when you order a panel with base power option. When you order a panel with ADA- or desk-height power option, a factory-installed hardwire infeed is included.

Tip: Infeed is included in the price of ADA- or desk-height receptacle power location option. Base receptacle power location does not include infeed. It must be ordered separately, if needed.

	Standard Includes	Required to Specify
► Need help? Product details, pages 98, 139	• Hardwire infeed — Junction box fittings — Conduit: metal • Modular infeed — Conduit: metal • Modular infeed cover	Style number

Specification Information

Length and Connection	Style Number	U.S. Price
-----------------------	--------------	------------

4-Circuit, 3+1 Wiring Schematic

24' Hardwire	GP1PIH24X	\$469
24' Modular	GP1PIM24X	\$566
:	:	:

4-Circuit, 2+2 Wiring Schematic

24' Hardwire	GP2PIH24Y	\$469
24' Modular	GP2PIM24Y	\$566
:	:	:

3-Circuit, Separate Neutrals Wiring Schematic

24' Hardwire	GP3PIH24Z	\$469
24' Modular	GP3PIM24Z	\$566
:	:	:




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.


Base Power Infeeds



Tip: For base power infeeds for use in San Francisco, see below.

Standard Includes		Required to Specify
► Need help? Product details, pages 98, 139	• Junction box fittings for hardwired connection • Liquid-tight flexible conduit: black plastic	Style number
Specification Information		
Length	Style Number	U.S. Price
4-Circuit, 3+1 Wiring Schematic		
12'	GP1BPI12X	\$273
4-Circuit, 2+2 Wiring Schematic		
12'	GP2BPI12Y	\$273
3-Circuit, Separate Neutrals Wiring Schematic		
12'	GP3BPI12Z	\$273

Base Power Infeeds for Use in San Francisco




Standard Includes		Required to Specify
► Need help? Product details, page 101	• Junction box fittings for hardwired connection • Metallic liquid-tight flexible conduit: black plastic	Style number
Specification Information		
Length	Style Number	U.S. Price
4-Circuit, 3+1 Wiring Schematic		
16"	GP1BPISF12X	\$273
4-Circuit, 2+2 Wiring Schematic		
16"	GP2BPISF12Y	\$273
3-Circuit, Separate Neutrals Wiring Schematic		
16"	GP3BPISF12Z	\$273



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Modular Harnesses



Tip: For field-installed jumpers, order a 29" harness for desk to ADA height, order a 64" harness for ADA to base height, and order a 76" harness for desk to base height.

Tip: Harnesses stretch 3". For example, a 33" harness will allow for a 33" to 36" connection.

Standard Includes	Required to Specify
- Need help? Product details, page 100 - Harness	1 Style number 2 Harness length (see below) 3 Options, if selected (see below)

Options	U.S. Price	Required to Specify
Harness Length • Harness length from 18" to 50" • Harness length from 54" to 103" • Harness length from 107" to 196" • Harness length 288"	- No cost +\$ 54 +\$157 +\$424	- Specify <i>harness length of xx"</i> (designate length of 18", 21", 25", 29", 33", 37", 41", 46", or 50"). - Specify <i>harness length of xx"</i> (designate length of 54", 58", 62", 66", 70", 74", 78", 82", 90", 94", 99", or 103"). - Specify <i>harness length of xx"</i> (designate length of 107", 111", 115", 120", 124", 128", 132", 136", 140", 144", 148", 152", 156", 160", 166", 171", 175", 180", 184", 190", or 196"). - Specify <i>harness length of 288"</i>.

Specification Information

Length	Style Number	U.S. Base Price
18" to 50"	GP1MHAX	\$126
54" to 103"	GP2MHAY	\$126
107" to 196"	GP3MHAZ	\$126

4-Circuit, 3+1 Wiring Schematic

18" to 50"	GP1MHAX	\$126
54" to 103"	GP2MHAY	\$126
107" to 196"	GP3MHAZ	\$126

4-Circuit, 2+2 Wiring Schematic

18" to 50"	GP2MHAY	\$126
54" to 103"	GP3MHAZ	\$126

3-Circuit, Separate Neutrals Wiring Schematic

18" to 50"	GP3MHAZ	\$126
------------	---------	-------




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Harness-to-Harness Connectors



Standard Includes	Required to Specify
► Need help? Product details, page 100 Connector: black plastic only	Style number

Specification Information

Description	Style Number	U.S. Price
.	.	.

4-Circuit, 3+1 Wiring Schematic

Harness-to-harness	GP1HHX	\$32
Branching harness-to-harness	GP1BHX	\$32
.	.	.

4-Circuit, 2+2 Wiring Schematic

Harness-to-harness	GP2HHY	\$32
Branching harness-to-harness	GP2BHY	\$32
.	.	.

3-Circuit, Separate Neutrals Wiring Schematic

Harness-to-harness	GP3HHZ	\$32
Branching harness-to-harness	GP3BHZ	\$32
.	.	.



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Wiring and Cabling, continued

Field-Installed Powerkits

Tip: These powerkits are suitable for use in New York City.

Tip: Power and communication cover plate and base trim are ordered separately.
▶ Pages 238 and 249

Tip: Power and communication can be field installed in panel face. Power only cannot be field installed in panel face.

Tip: Powerkits can be installed in hollow core panels only.


Standard Includes	Required to Specify
▶ Need help? Product details, page 99 • Power block • Mounting bracket	Style number

Related Products

• Power and communication base trim	▶ Page 238
• Cover plates	▶ Page 249
• Multipurpose power infeeds	▶ Page 250
• Base power infeeds	▶ Page 251
• Harness-to-harness connectors	▶ Page 253


Specification Information

Base Powerkit




• Style Number
• U.S. Price

ADA/Desk Single Powerkit



• Style Number
• U.S. Price

ADA/Desk Double Powerkit



• Style Number
• U.S. Price

4-Circuit, 3+1 Wiring Schematic

GP1PKBX	\$170	GP1PKPSX	\$200	GP1PKPX	\$200
•	•	•	•	•	•


4-Circuit, 2+2 Wiring Schematic

GP2PKBY	\$170	GP2PKPSY	\$200	GP2PKPY	\$200
•	•	•	•	•	•

3-Circuit, Separate Neutrals Wiring Schematic

GP3PKBZ	\$170	GP3PKPSZ	\$200	GP3PKPZ	\$200
•	•	•	•	•	•

Chicago & NYC Junction Box



Tip: Junction boxes for base power are provided by the electrician.

Tip: Powerkits can be installed in hollow core panels only.

Standard Includes	Required to Specify
▶ Need help? Product details, pages 101, 139 • Field-installed junction box for panel	Style number


Specification Information

Dimensions	Style Number	U.S. Price
D W H		
7 ²³ / ₃₂ " 5 ³ / ₄ " 1 ³ / ₃₂ "	GPJCH	\$205
•	•	•

Understanding Thread


	
Statement of Line	256
	
Product Details	
Thread	258

Statement of Line




Three-Prong Plug Adapter

Understanding
▶ Page 258
Specifying
▶ Page 264




Power Hub

Understanding
▶ Page 258
Specifying
▶ Page 265



Power Track Infeed

Understanding
▶ Page 258
Specifying
▶ Page 266



Power Track

Understanding
▶ Page 258
Specifying
▶ Page 267




Connectors

Understanding
▶ Page 258
Specifying
▶ Page 268

Thread


Power Track and Power Track Infeeds

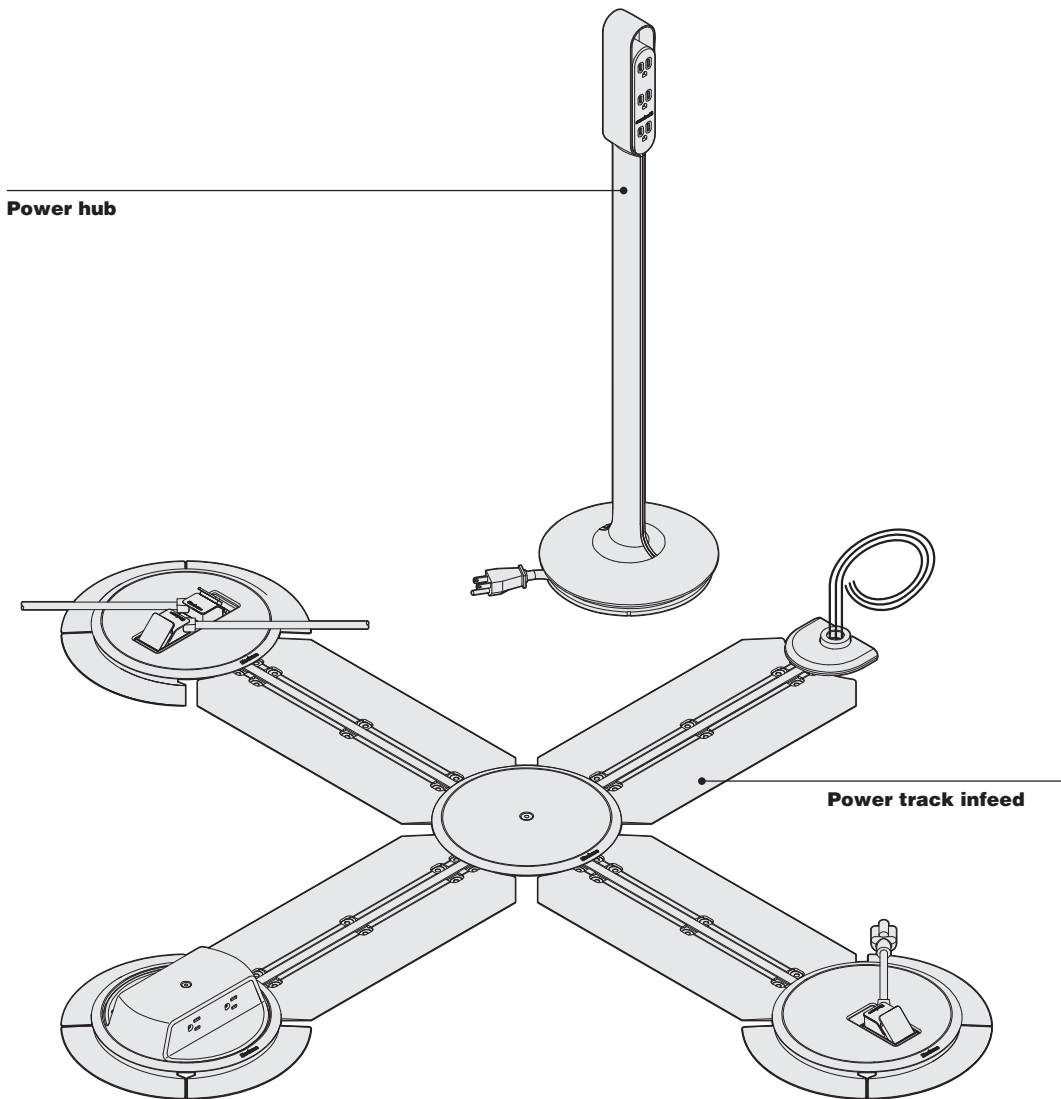


Product Details

Power track infeed lengths are available from 24" to 144" in 12" increments. Infeed is used to connect the Thread system to building power.


Power track lengths are available from 24" to 144" in 12" increments. It connects to an infeed to distribute power.




Connectors, four varieties: Blank (No power access), one-door low profile (provides one access point utilizing Steelcase's proprietary low profile plug), two-door low profile (provides two access points utilizing Steelcase's proprietary low profile plug), and the NEMA monument, which provides four standard three-prong plug (NEMA 5-15) receptacles.



Power hub is available in lounge height and desk height and with a standard three-prong plug or Steelcase's proprietary low-profile plug. The hub provides a user interface for power that is off the floor and capable of moving around the space. It features an integrated cord wrap in the design of the base.



Low-profile plug adapter is an 8¾" long adapter that allows a single three-prong plug to connect to Steelcase's proprietary low-profile connectors.



Power track infeed
24" to 144"
(12" increments)

Thread power track and power track infeeds are prefabricated modular tracks capable of distributing up to 20 amps of power and come in lengths of 24" to 144" in 12" increments. These tracks must be fastened to subfloor, but can be reconfigured or removed without leaving substantial damage to the subfloor like more permanent solutions do.

► Please refer to page 260 for more information on applications and reconfiguration.

Proprietary low-profile plug can only be used with the Thread system and will not interface with existing receptacles. In order to achieve ADA compliance for connectors in an egress location, we developed our own plug design.

Note: Always consult your local inspector prior to purchasing the Thread system to ensure all local codes and ordinances are satisfied since local regulations may supersede those spelled out in the National Electric Code.


Connections

12 gauge insulated wires


End View of Track

The power track and power track infeeds utilize three standard 12 gauge insulated wires encased in a riveted metal housing that stands 3/16" off the subfloor.


The infeed track comes with 12' of extra wiring to easily connect to the building power through a new or existing junction box.




Each power track and infeed track comes with two flexible ramps that ease the transition between the subfloor and the height of the track. These ramps simply rest on top of the track and do not need to be adhered or fastened.




The Thread power hub provides six standard three-prong (NEMA 5-15) receptacles to provide power access where users need it.



The power hub is available in two heights, lounge height and desk height. The lounge height hub is 30" tall overall with the user interface starting at 22". The desk height hub is 36" tall overall with the user interface starting at 28".




Standard three-prong plug




Low-profile plug


The cord is 5' long and is available with either a standard three-prong plug for use with standard receptacles or with Steelcase's proprietary low-profile plug for use with one-door and two-door low-profile connectors.




The metal connector cover on the low-profile connectors is a stamped, painted steel plate. This connector cover is ADA compliant for egress locations.



The low-profile connector doors are made of cast zinc. They are spring loaded and gasketed to ensure compliance with water exclusion requirements.



The plastic trim ring is spring loaded to provide a tight fit against the carpet. It provides a simple ramp transition to the 1/2" maximum height of the connector cover and hides any imperfections in the access hole cut in the carpet.



The NEMA monument is made of a two piece plastic housing that provides access to four standard three-prong receptacles. This connector is not ADA compliant for egress locations.

Thread, Power Track and Power Track Infeeds, continued

Technical Electrical Information and Power Planning

The Thread system is listed as a 20 amp branch circuit. It utilizes three standard 12 gauge wires (hot, neutral, and ground). When more than one circuit is required to support a space or application, additional circuits will need to be provided using Thread power track infeeds connected to other circuits in the building. The number of circuits available to pull from will be determined by building construction. Please consult your electrician if you are unsure of the building power capabilities.


The Thread power track infeed begins with a universal connector that is capable of connecting to any standard 1/2" conduit or other listed product such as Wiremold or Panduit. Please consult with your electrician if you have questions regarding what type of conduit will be used.

Electrical code limits the number of outlets on a single circuit to 10, but our connectors count differently than typical wall mounted receptacles. Blank covers do not count towards the number of receptacles because no access points are present. One-door and two-door profile connectors each count as a single receptacle and the NEMA monument counts as two receptacles. In practice, you can have up to 10 low-profile connectors per infeed or up to five NEMA monuments or some combination like three NEMA monuments and four low-profile connectors. While code permits up to 10 low-profile connectors per infeed, it is important to conduct proper power planning so as not to overload the circuit. If power hubs are used with each connector, it is easy to see how a single circuit could be overloaded quickly given that each hub has six standard receptacles available.

Due to voltage drop, the National Electric Code (NEC) recommends that the distance between the building circuit box and the user access point not exceed 75–150 feet (depending on gauge of wires running from the building circuit box to the Thread infeed junction). Since the distance from the Thread infeed junction to the building circuit box may be difficult to ascertain, we recommend planning conservatively for the total distance of any individual Thread branch and keep it as short as possible. Thread branches longer than 70 feet may risk contributing to voltage drop exceeding acceptable levels.

Listing categories: Thread power track is listed as a multi-outlet assembly and is considered a 20 amp branch circuit, which means it meets the same requirements as the hard wire outlets in the wall. The power hub is listed as a relocatable power tap (RPT, which means it is treated the same as a typical power strip). The plug adapter is listed as an accessory to the Thread system.

UL 5 is the standard for multi-outlet assembly (which correlates to article 380 in the National Electric Code) and UL1363 is the standard for RPT, but has no direct correlation in the NEC.



The power hub has a circuit breaker in the base that is intended to trip should excessive power draw occur. If the total draw from all receptacles on a hub exceed 15 amps, the breaker will trip and a black button will pop out of the base where it meets the stalk. Pressing the black button back in will reset the circuit.

It is important to plan for expected power consumption in a given application to ensure enough infeeds are present to prevent tripping the circuit breaker either at a hub or at the building circuit box.

Applications

Floor Specifications

The Thread power distribution system is designed to be used with carpet and works best with carpet tiles, though broadloom carpet may also be used. Each connector in the system will require a hole to be cut in the carpet to permit access to the system. This is true for every connection point, even if only using a blank cover where no power access is needed. For this reason, we strongly recommend carpet tile over broadloom carpet. See installation guide for tools and direction.


Each piece of Thread power track or power track infeed must be fastened to the subfloor using one screw at each end of the track and one additional screw every 48". This means for power track that are shorter than 48" only two screws are required. For tracks 60" to 96" in length, three screws are required and for tracks longer than 96", four screws are required. Connectors require additional screws in to the subfloor. The track itself has multiple holes to allow it to be screwed down and has many more holes than are needed. For example, at the end of each track you will find four holes placed closely together but only one screw needs to be used. The extra holes are available in case of a damaged screw or some form of interference in the subfloor (like a rock in concrete) that might prevent a hole from being used. The same is true for holes all the rest of the way down the track; there are holes on both sides of the track and they are placed approximately every 12" to provide multiple options in case of interference in the subfloor. Please see installation guide for detailed instructions regarding this topic, including recommended types of fasteners and locating pilot holes.

A power track infeed may be installed perpendicular to a wall or at any angle between 45° and 135°. However, it should be noted that once the infeed track is installed, all subsequent track connections will be either inline or at right angles to this track. There is no ability to create an angled connection between two tracks. Please refer to the installation guide for detailed instructions and drawings.

The Thread system does have some flexibility to accommodate uneven floors, however flooring elevation changes greater than 1/4" should be filled in or sanded down to even out the surface. The area underneath and immediately surrounding a junction (connector of any type, including a blank) must be flat within 1/16" in a 9" radius from the center of the junction. Please refer to the installation guide for additional details.

For connectors that will be in an ADA defined egress location, in order for the low-profile connector to be considered ADA compliant, the carpet thickness (including pad) must be between 0.225" and 0.450". Carpets thicker than 0.450" will not work with the Thread system and carpets thinner than 0.225" may be used but will not be ADA compliant in egress locations.

Floor covering materials such as tile or wood are not compatible with the Thread system.

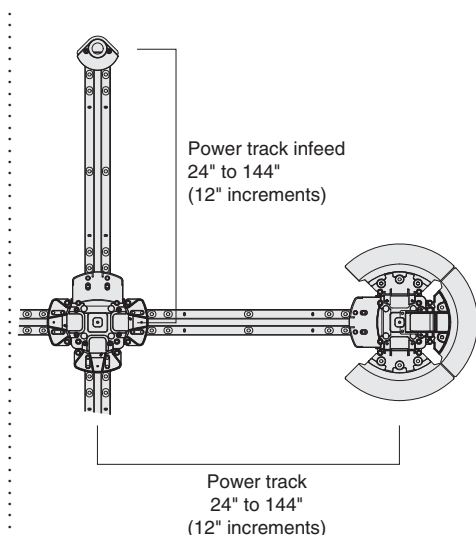

The length of a track is measured from the center of one connector to the center of another connector; a 24" power track by itself may not be precisely 24". This is intended to simplify planning and layouts.

Note: While this system has been developed to minimize its impact on the physical environment and to work with a broad range of existing furniture, certain conditions exist that may create undesirable interactions with other products. One example is the use of sled-base chairs since it may not sit flat when interacting with the track or connectors. Chairs utilizing pneumatic cylinders with minimum clearance of less than 1/2" should be used with care as the bottom of the cylinder can catch on a connector cover or on the slightly raised profile of the track beneath the carpet. Steelcase always strives to exceed the 1/2" clearance on our seating products but if you identify a seating product that does not have this level of clearance, a spacer ring is available from our service parts that can be placed between the cylinder and the base to increase the clearance. Please see part number 895446201SR in the Service Parts catalog, or part number 895446201MP for a quantity of 10 spacers.

Notice Regarding Installation: Thread must be anchored to the building floor for safe and proper use. Building construction varies and there may be components hidden below the floor surface that must be avoided when drilling holes to anchor the power track infeed and power track. Sub-flooring, including concrete, may contain electrical wiring, structural cabling, radiant heating lines, etc. To avoid potential property damage or unsafe conditions, consult with the building's architect or Engineer of Record to plan accordingly.

How to Calculate Power Needs

Use This to Determine How Many Power-Ins You Will Need

When planning a power network, you must calculate the amperage requirements of all your electrical components so you can provide sufficient electricity to power them.

Requirements of Office Equipment in Amps

General Equipment (Typical Amperage)

A.C. adapter	0.05
Adding machine	0.05
Answering machine	0.08
Calculator	0.025
Clock	0.03
Coffee pot	10.00
Copy machine	15.00
Desk-top copiers	7.00 to 10.00
Electric eraser	0.25
Fan	0.50
Manuscript holder	0.75
Microwave	8.00 to 12.00
Pencil sharpener	0.25
Radio	0.05
Space heater, 1000 watts	8.50
Space heater, 1500 watts	12.50
Stand-alone copiers	15.00

Electronic Equipment (Typical Amperage)

Desk-top memory storage devices	0.08 to 0.15
Desk-top printers	1.20 to 2.00
DVD players	0.13 to 0.20
Flat-panel screens	3.50
Laptops	3.50 to 5.00
Modems	0.15
Stand-alone printers	1.50 to 2.50
VDTs and PCs	0.08 to 4.80

Steelcase Lighting (Actual Amperage)


<i>Shelf lights</i>	
24" wide, 17 watts	0.20
36" wide, 25 watts	0.30
48" wide, 32 watts	0.30

Specifying Thread

Specifying

Thread Plug Adapter	264
Thread Power Hub	265
Thread Power Track Infeed	266
Thread Power Track	267
Thread Connector	268

Thread Plug Adapter



Standard Includes		Required to Specify
▶ Need help? Product details, page 258	• Plug adapter • Low profile plug end: 6053 Seagull plastic	Style number

Related Products	
• Power hub • Power track • Power track infeed	▶ Page 265 ▶ Page 267 ▶ Page 266


Specification Information				
Dimensions			Style Number	U.S. Price
D	W	H		
8 3/4"	2"	1 1/2"	PFLADPTR	\$50



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.



Tip: Plugtop cap finish is 6053 Seagull. Hub receptacle faceplates are 7360 Merle.

Tip: Power cord is 5' in length.

Tip: 30" high power hub's lowest user interface is 22" off the floor. 36" high power hub's lowest user interface is 28" off the floor.

Tip: Neck is 1³/₄" wide and 1¹/₂" deep.

Tip: Head is 2" wide and 1¹/₂" deep.


Standard Includes	Required to Specify
▶ Need help? Product details, page 258 • Power hub: 7360 Merle paint • Six NEMA outlets (three on each side) • Integrated cord wrap • Reset button • Weighted base • Power cord with low profile plug or NEMA plug	1 Style number 2 Options, if selected (see below)

	Options	U.S. Price	Required to Specify
Surface Materials	• 7360 Merle • 4799 Platinum Metallic • 4140 Arctic White Gloss	- No cost +\$10 +\$18	- Specify with 7360 Merle. - Specify with 4799 Platinum Metallic. - Specify with 4140 Arctic White Gloss.
Height Options	• 30" lounge height • 36" desk height	- No cost +\$ 5	- Specify with lounge height. - Specify with desk height.
Plug Configuration Options	• Low profile plug • Standard NEMA three-prong plug	- No cost –\$25	- Specify with low profile plug. - Specify with standard NEMA three-prong plug.
Related Products	• Power track • Power track infeed • Plug adapter • Connector		▶ Page 267 ▶ Page 266 ▶ Page 264 ▶ Page 268

Specification Information		
• Dimensions	• Style	• U.S.
• Diameter	• Number	• Base
•	•	• Price
•	•	•
•	•	•
8"	PFLHUB	\$415
•	•	•
•	•	•


For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Thread Power Track Infeed



Tip: Length of power track infeed is measured from center of building infeed to center of connector.

Tip: Conduit and conduit collar are not included.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 258	• Power track infeed	1 Style number	
	• Power track ramps	2 Options, if selected (see below)	
	• Infeed cover: 12' of insulated color-coded wires for hard-wire connection to building power source		

Surface Materials	Options	U.S. Price	Required to Specify
	Trim ring finish		
	• 7360 Merle	No cost	Specify with 7360 Merle.
	• 7190 Platinum	No cost	Specify with 7190 Platinum.

Lengths	Options	U.S. Price	Required to Specify
	• 24"	No cost	Specify with 24".
	• 36"	+\$ 28	Specify with 36".
	• 48"	+\$ 56	Specify with 48".
	• 60"	+\$ 84	Specify with 60".
	• 72"	+\$112	Specify with 72".
	• 84"	+\$140	Specify with 84".
	• 96"	+\$168	Specify with 96".
	• 108"	+\$196	Specify with 108".
	• 120"	+\$224	Specify with 120".
	• 132"	+\$252	Specify with 132".
	• 144"	+\$280	Specify with 144".

Related Products	Options	U.S. Price	Required to Specify
	• Power track		▶ Page 267
	• Power hub		▶ Page 265
	• Plug adapter		▶ Page 264
	• Connector		▶ Page 268

Specification Information

• Dimensions		• Style	• U.S.
W	H	Number	Base Price
8"	1"	PFLTRKINF	\$230
:	:	:	:




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Thread Power Track



Tip: Length of power track is measured from center of connector to center of another connector.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 258	• Power track	1 Style number	
	• Power track ramps	2 Options, if selected (see below)	

Lengths	Options	U.S. Price	Required to Specify
	• 24"	No cost	Specify with 24".
	• 36"	+\$ 28	Specify with 36".
	• 48"	+\$ 56	Specify with 48".
	• 60"	+\$ 84	Specify with 60".
	• 72"	+\$112	Specify with 72".
	• 84"	+\$140	Specify with 84".
	• 96"	+\$168	Specify with 96".
	• 108"	+\$196	Specify with 108".
	• 120"	+\$224	Specify with 120".
	• 132"	+\$252	Specify with 132".
	• 144"	+\$280	Specify with 144".

Related Products		
• Power hub	▶ Page 265	
• Power track infeed	▶ Page 266	
• Plug adapter	▶ Page 264	
• Connector	▶ Page 268	

Specification Information

Dimensions		Style	U.S.
W	H	Number	Base Price
8"	3/4"	PFLTRK	\$200



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Thread Connector



Standard Includes		Required to Specify	
▶ Need help? Product details, page 258	• Connector cover	1 Style number	
	• Connector trim ring	2 Options, if selected (see below)	
	• Fillers: 6000 Black		
	• Hardware		

Surface Materials	Options	U.S. Price	Required to Specify
	Cover		
	• 7360 Merle	No cost	Specify with 7360 Merle.
	• 7190 Platinum Solid	No cost	Specify with 7190 Platinum Solid.
	• 4990 Perfect Match	+\$103	Specify with 4990 Perfect Match.
	Trim ring		
	• 6527 Merle	No cost	Specify with 6527 Merle.
	• 6249 Platinum	No cost	Specify with 6249 Platinum.

Configurations	• Blank low profile connector, 9½" diameter x ¾" height	No cost	Specify with blank low profile connector.
	• One-door low profile connector, 9½" diameter x ¾" height	+\$ 25	Specify with one-door low profile connector.
	• Two-door low profile connector, 9½" diameter x ¾" height	+\$ 50	Specify with two-door low profile connector.
	• NEMA monument connector 9½" diameter and 2½" height	+\$ 75	Specify with NEMA monument connector.

Related Products	• Power track	▶ Page 267
	• Power track infeed	▶ Page 266
	• Plug adapter	▶ Page 264

Specification Information

•Style •Number	•U.S. •Base •Price
PFLCNCTR	\$150
•	•



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.


Understanding Low-Profile Floor

	
Statement of Line	270

	
Product Details	
Low-Profile Floor Power and Communication Overview	271
Low-Profile Floor	272
Low-Profile Floor Specification Examples	276


Statement of Line

Low-Profile Floor




Triangle Tiles

Understanding
▶ Page 273
Specifying
▶ Page 280




Grommet Triangle Tiles

Understanding
▶ Page 273
Specifying
▶ Page 280




Seismic Triangle Tile

Understanding
▶ Page 273
Specifying
▶ Page 281




Rectangle Tiles

Understanding
▶ Page 273
Specifying
▶ Page 281




Square Tiles

Understanding
▶ Page 273
Specifying
▶ Page 281




Distribution Tiles

Understanding
▶ Page 273
Specifying
▶ Page 282



Ramp Kits

Understanding
▶ Page 273
Specifying
▶ Page 284




Corner Ramp Kit

Understanding
▶ Page 273
Specifying
▶ Page 285

Low-Profile Floor Power and Communication Overview

Architectural Power System

Low-Profile Floor Power and
Communication Overview

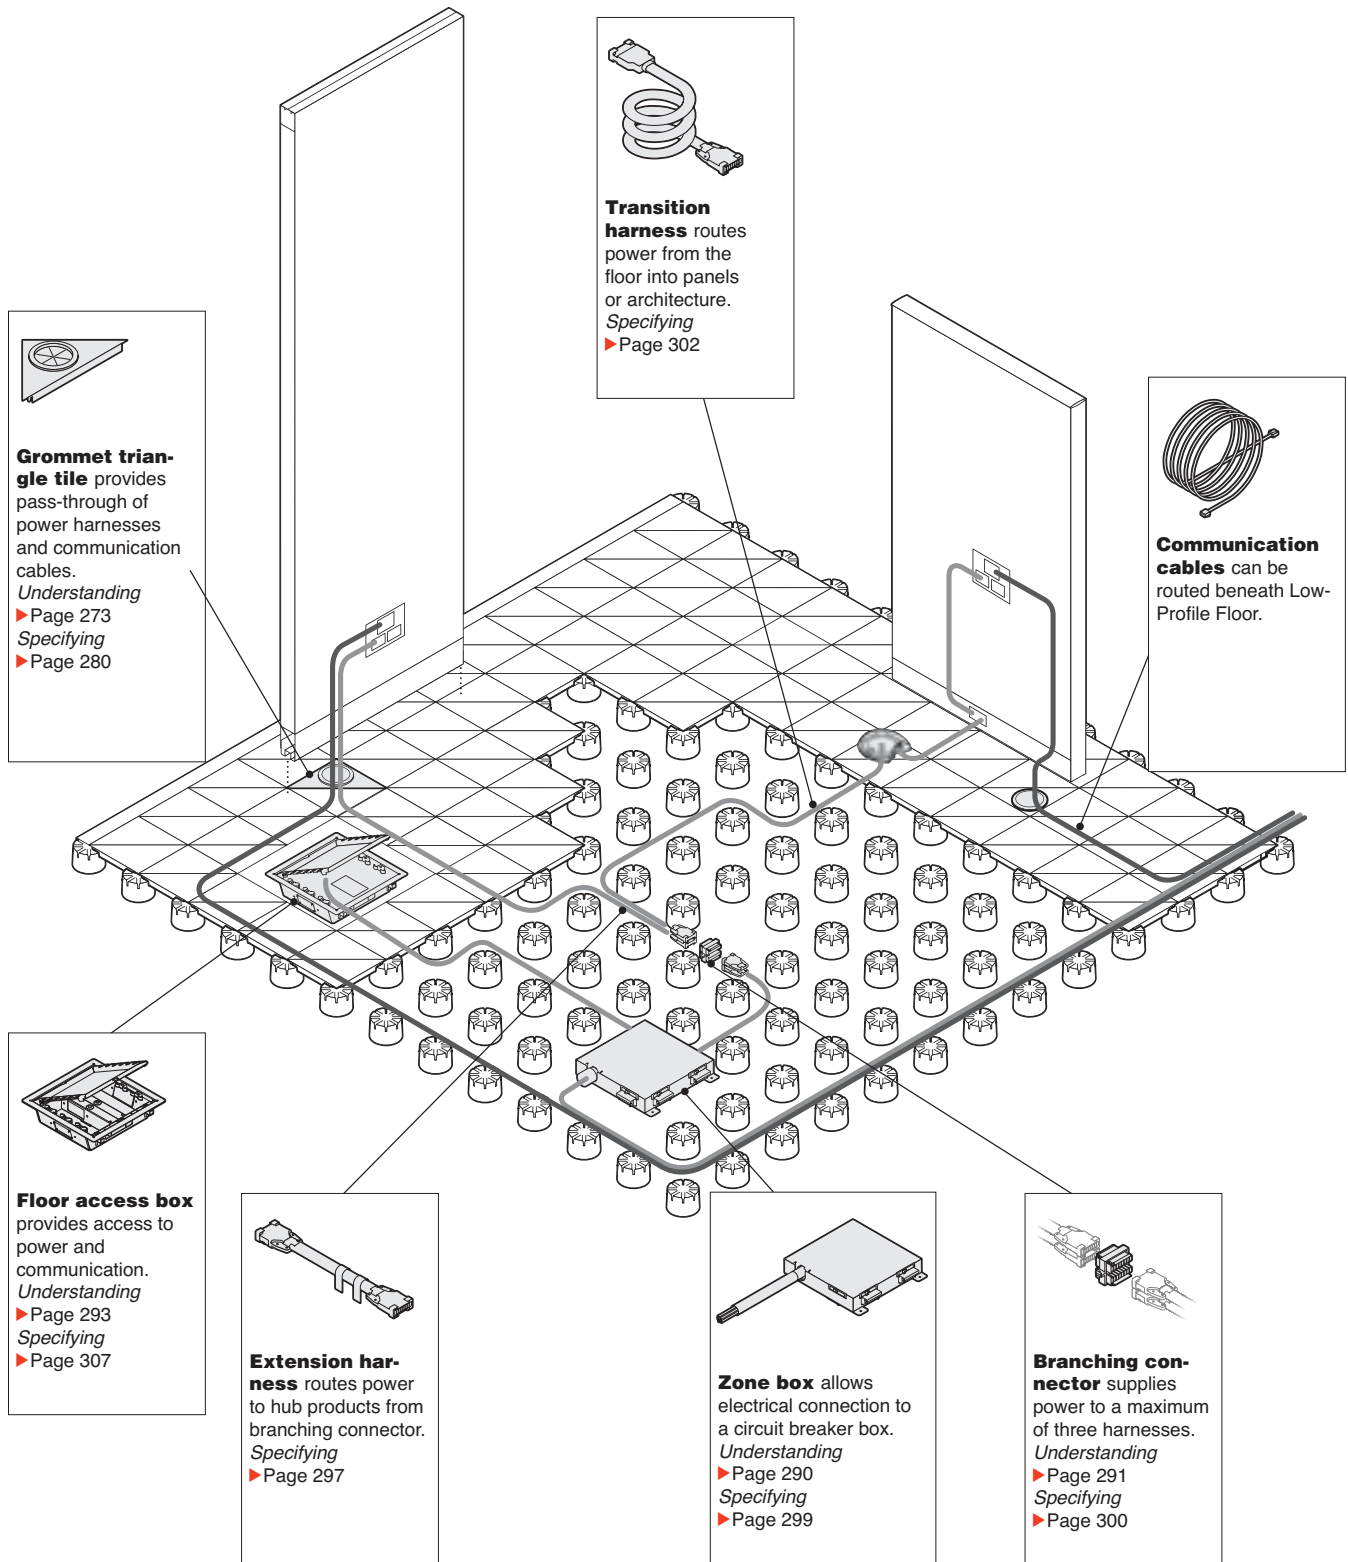

Low-Profile Floor

Architectural Solutions

Low-Profile Floor is a raised platform of triangular tiles on 2½"H supports. It is designed for routing wiring and cabling to access tile locations determined by the user. It can be reconfigured to support changing utility needs.

► Specifying, page 280

Floor access boxes provide access to power and communication routed beneath Architectural Solutions Low-Profile Floor. Modular and hardwire versions are available.

Customer-supplied carpet tiles cover Low-Profile Floor tiles, trim, and ramps.


Edge trim is cut on site to finish exposed edges. It is available in two depths—2"D and 4"D.

Tiles interlock with supports without screws or adhesives.

Wall scribe trim is cut on site to accommodate field conditions such as building walls or structural columns.

Supports interlock with tiles for a tight fit.


Ramp kits provide a gradual transition from the subfloor to Architectural Solutions Low-Profile Floor.

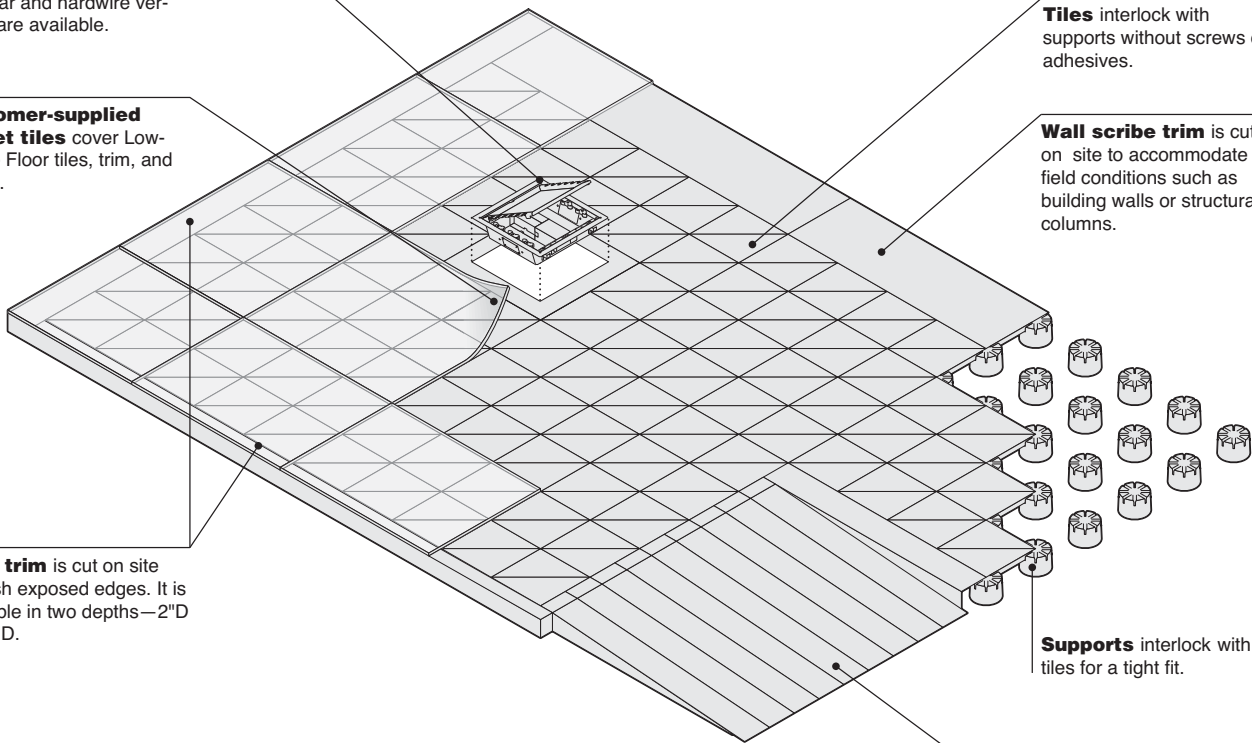


Actual Dimensions

► Page 275


Product Details




Supports are 2 1/2"H. The overall height when tiles are installed is 2 9/16"H.




Customer-supplied carpet tiles are used to cover Architectural Solutions Low-Profile Floor tiles, trim, and ramps. Follow floor covering manufacturer's recommendations concerning floor preparation, adhesive coverage and dry time.



Triangle tile is the primary tile used in an Low-Profile Floor installation. Triangle tiles cannot be used against a wall. Instead use wall scribe trim or edge trim.




Grommet triangle tile provides pass-through of power harnesses and communication cables.




Seismic triangle tile provides lateral bracing of the Architectural Solutions Low-Profile Floor in areas of seismic activity as required by local building codes. The seismic triangular tile Z bracket can also be used by the electrical contractor to make electrical ground connections of the floor installation to ground.


Tip: Any requirements for ground wiring should be addressed as part of the electrical contractor's work, along with other power connections to the building source.




Rectangular and square tiles are cut on site to accommodate field conditions such as structural columns. Extra supports are placed underneath the tiles to support the infill condition. Wall scribe trim can also be used for infill conditions.




Floor box access tile provides a factory formed opening for the Architectural Power low-profile floor box.




Distribution tile must be positioned over a power distribution module, transition module, zone box, and consolidation point.





Edge trim is cut on site to finish exposed edges.




Corner edge trim has closed ends to finish the exposed edge at the end of the run. Both ends are closed so corner edge trim can be used in either left- or right-hand position.




Wall scribe trim is cut on site for a flush, finished edge against a building wall. Wall scribe trim requires extra supports underneath.




Transition trim finishes angled corners. Sizes are available to accommodate depth changes between ramp edge trim and the trim on the surrounding edges.



Ramp kit includes ramp tiles that can be inset or out-set. A corner ramp kit is also available.



Ramp edge trim finishes the exposed sides of a ramp. Edge trim is included with the ramp kit.



When positioning Privacy Wall on Low-Profile Floor, include universal floor grippers in the wall specification.

► Page 20

Commercial handrails are customer-supplied. Most codes will not require handrails when the low-profile floor height is less than 6 inches above the slab or the length of the ramp is less than 72 inches.

Architectural Solutions Low-Profile Floor Performance Data (per CISCA)

Concentrated point load - 32 square inches per triangular tile. 500 lb on 1 square inch.

Deflection 0.057"

Permanent set 0.002"

Recovery > 99%

Ultimate point load - 32 square inches per triangular tile. Edge - 1,291 lb on 1 square inch. Safety factor ultimate to concentrated > 2.5:1. Center - 2,399 lb on 1 square inch. Safety factor ultimate to concentrated > 4.5:1.


Rolling load (net weight per wheel)
500 lb (3" hard phenolic tread wheel at 10 cycles < 0.02" permanent set.)
350 lb (6" soft alathane tread wheel at 10,000 cycles < 0.02 permanent set.)

Supports Axial load 4,200 lb Slow buckling in failure.


System uniform load 320 psf < 0.02" deflection.

Low-Profile Floor, continued

Connections




Tiles interlock tightly into grooves on supports. Screws and glue are not needed.




Recommended Not Recommended

Place tiles in the recommended pattern for maximum stability.

8" Outset ramp




11 1/4" Outset ramp




Ramp tiles can be positioned on the 8" side or 11 1/4" side of the triangle tile. Connect as many ramp tiles as needed to create the ramp width needed. Individual ramp sections are manufactured at 8.3% slope (ratio of rise: run of 1:12) and designed to connect into the top of the individual supports when installed.

Wiring & Cabling



Routing space between supports is 4 3/8" W and 1 7/8" H.

Architectural power components are used to distribute and terminate power in Architectural Solutions Low-Profile Floor and zone cabling.



Fire stop creates a draft-tight enclosure and accommodates routing of wiring and cabling. Local codes may require fire stops to be installed every 100 square feet.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of electrical equipment. *Tip: Any requirements for ground wiring should be addressed as part of the electrical contractor's work, along with other power connections to the building source.*

Surface Materials

Tile

- Galvanized steel only

Support

- Black plastic only

Grommet on tile

- 6653 Solar Black plastic only

Access cover

- Galvanized steel only

Edge trim

- Paint

Transition trim

- Paint

Wall scribe trim

- Galvanized steel only

Ramp surface

- Galvanized steel only

Ramp edge

- Paint

Fire stop

- Galvanized steel only

Application Topics


Low-Profile Floor Specification Examples

► Page 276


Low-Profile Floor Power and Communication Overview

► Page 271


Actual Dimensions




Triangle Tile




Grommet Triangle Tile




Seismic Triangle Tile




Rectangle Tile




Square Tile




Edge Trim




Corner Edge Trim




Ramp Kit




Ramp Kit

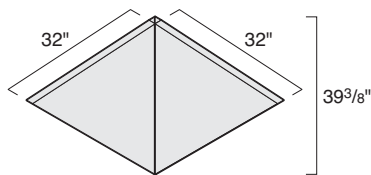


Corner Ramp




Wall Scribe Trim




Support



Fire Stop




Distribution Tile



Transition Trim


Low-Profile Floor Specification Examples

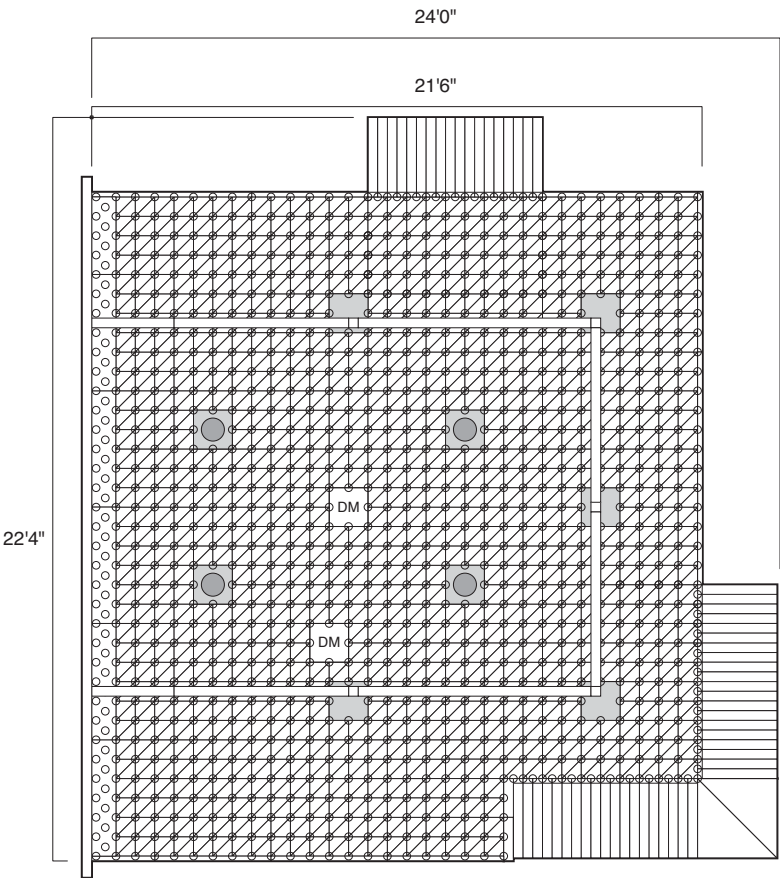

DM Distribution tile that covers a branching connector, zone box, distribution box, or consolidation point

Floor access box

Quantity	Style Number	Description
5	GUNTR450	Triangle tiles
14	GUNSU100	Supports
1	GUNSQ8161	Square tiles
1	GUNSQ8164	Square tiles
1	GUNCR3232	Corner ramp
2	GUNDS16161	Distribution tiles
3	GUNET248	2" Edge trim
1	GUNET448	4" Edge trim
1	GUNCT224	2" Corner edge trim
1	GUNCT424	4" Corner edge trim
1	GUNWT10486	Wall scribe trim
1	GUNRA36328	Ramp tiles
4	GUNRA48328	Ramp tiles
4	GAPFBD_(X,Y, or Z suffix)	Floor access box
4	GUNFBT1616	Floor box access tile

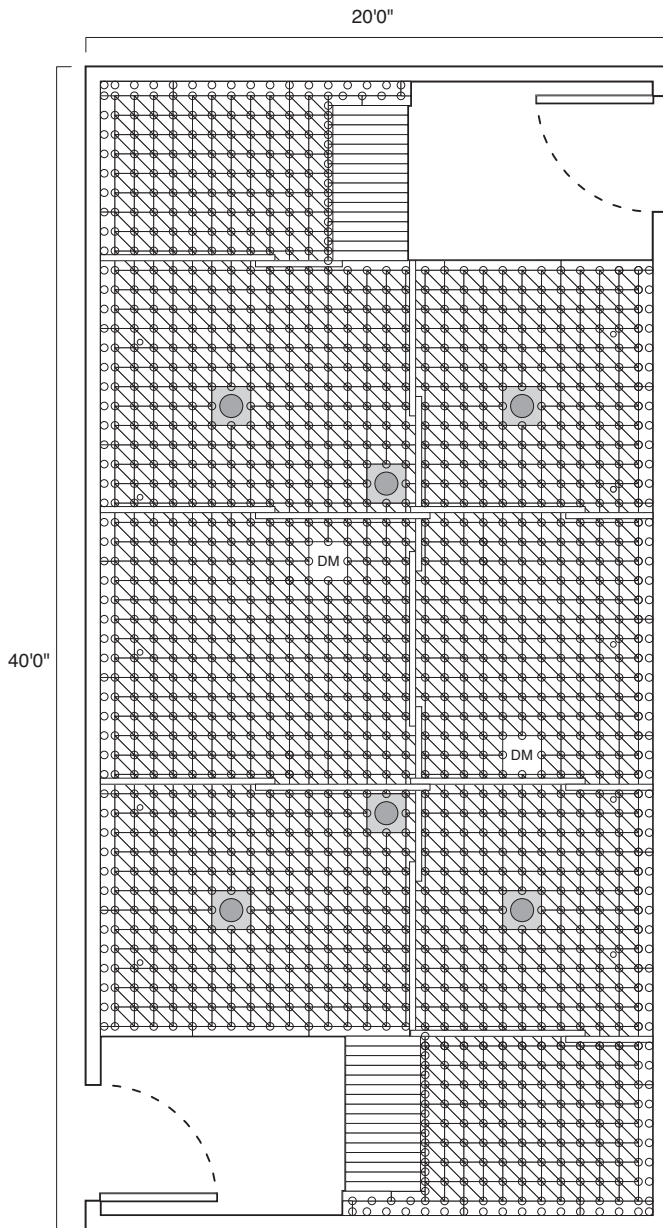

DM Distribution tile that covers a branching connector, zone box, distribution box, or consolidation point

 Floor access box

Quantity	Style Number	Description
5	GUNTR450	Triangle tiles
6	GUNTR48	Triangle tiles
17	GUNSU100	Supports
2	GUNDS16161	Distribution tiles
1	GUNET448	4" Edge trim
1	GUNCT424	4" Corner edge trim
4	GUNRA36328	Ramp tiles
4	GUNWT10486	Wall scribe trim
3	GUNFS726	Fire stop
6	GUNFBT1616	Floor box access tile
6	GAPFBD_(X,Y, or Z suffix)	Floor access box

Specifying Low-Profile Floor

Specifying


Low-Profile Floor

Triangle Tiles	280
Supports	280
Grommet Triangle Tiles	280
Seismic Triangle Tiles	281
Rectangle Tiles	281
Square Tiles	281
Distribution Tiles	282
Floor Box Access Tile	282
Edge Trim	282
Corner Edge Trim	283
Transition Trim	283
Wall Scribe Trim	284
Ramp Kits	284
Corner Ramp Kit	285
Fire Stop	285

Low-Profile Floor

Low-Profile Floor

Triangle Tiles



Tip: Packages accommodate the approximate areas shown below:
48 pkg. = 10 sq. ft. approx.
450 pkg. = 100 sq. ft. approx.

Tip: The 450-piece package requires a forklift or pallet jack to facilitate transportation to the installation site.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 273		• Tile: galvanized steel only	Style number
Specification Information			
• Dimensions D W	• Quantity in Package	• Style Number	• U.S. Price
8"	8"	48	GUNTR48 \$ 181
8"	8"	450	GUNTR450 \$1659

Supports




Tip: For projects 1000-3000 square feet in size, one package of 100 supports is needed for approximately every 40 square feet. For projects 3000 square feet and up in size, one package of 100 supports is needed for approximately every 42 square feet.

Standard Includes		Required to Specify
▶ Need help? Product details, page 272	• Supports, package of 100: black plastic only	Style number

Specification Information			
• Height	• Diameter	• Style Number	• U.S. Price
• • •	• • •	• • •	• • •
21½"	37⁄8"	GUNSU100	\$178
• • •	• • •	• • •	• • •

Grommet Triangle Tiles




Standard Includes			Required to Specify	
▶ Need help? Product details, page 273		• Tile: galvanized steel only • Grommet: 6653 Solar Black plastic only		Style number
Specification Information				
• Dimensions • D W •	• Quantity in • Package •	• Style • Number •	• U.S. • Price •	
8"	8"	2	GUNGR2	\$ 37
8"	8"	10	GUNGR10	\$155
•	•	•	•	•




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Seismic Triangle Tiles




Standard Includes		Required to Specify	
► Need help? Product details, page 273 • Tile: galvanized steel only • Mounting bracket		Style number	
Specification Information			
• Dimensions D W	• Quantity in Package	• Style Number	• U.S. Price
8" 8"	8	GUNST8	\$130
• •	•	•	•

Rectangle Tiles



Standard Includes		Required to Specify	
► Need help? Product details, page 273		• Tile: galvanized steel only	Style number
Specification Information			
• Dimensions D W	• Quantity in Package	• Style Number	• U.S. Price
8" 16"	1	GUNRC8161	\$ 65
8" 16"	4	GUNRC8164	\$213

Square Tiles




Standard Includes		Required to Specify	
► Need help? Product details, page 273		• Tile: galvanized steel only	Style number
Specification Information			
• Dimensions • D W •	• Quantity in • Package •	• Style • Number •	• U.S. • Price •
16" 16"	1	GUNSQ16161	\$ 87
16" 16"	4	GUNSQ16164	\$279
•	•	•	•



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.


Low-Profile Floor, continued

Distribution Tiles




Standard Includes			Required to Specify		
▶ Need help? Product details, page 273			• Distribution tile: galvanized steel only		Style number
Specification Information					
• Dimensions			• Quantity in Package	• Style Number	• U.S. Price
D	W	H			
16"	16"	2½"	1	GUNDS16161	\$ 99
16"	16"	2½"	4	GUNDS16164	\$334

Floor Box Access Tile



Standard Includes			Required to Specify	
▶ Need help? Product details, page 273			• Floor box access tile: galvanized steel only	Style number
Specification Information				
• Dimensions			• Style	• U.S.
D	W	H	Number	Price
16"	16"	2½"	GUNFBT1616	\$111

Edge Trim




Tip: Edge trim can be cut on site to fit the exact dimensions.

Standard Includes			Required to Specify		
▶ Need help? Product details, page 272		• Trim: 0835 Black paint only		Style number	
Specification Information					
• Dimensions			• Quantity in	• Style	
D	W	H	Package	Number	
			• U.S.	Price	
2"	48"	2½"	6	GUNET248	\$195
4"	48"	2½"	6	GUNET448	\$241



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.



Corner Edge Trim



Tip: Corner edge trim can be cut on site to fit the exact dimensions.

Standard Includes			Required to Specify		
▶ Need help? Product details, page 273			• Trim: 0835 Black paint only		Style number
Specification Information					
• Dimensions			• Quantity in Package	• Style Number	• U.S. Price
D	W	H			
2"	24"	2½"	2	GUNCT224	\$101
4"	24"	2½"	2	GUNCT424	\$224
.	.	.	.	.	.

Transition Trim




Standard Includes			Required to Specify			
▶ Need help? Product details, page 273			• Trim: 0835 Black paint only		Style number	
Specification Information						
• Dimensions			• Orientation	• Quantity in Package	• Style Number	• U.S. Price
D	W	H				
2" to 2"						
2"	8"	2½"	Left hand	1	GUNTT22L	\$93
2"	8"	2½"	Right hand	1	GUNTT22R	\$93
2" to 4"						
4"	8"	2½"	Left hand	1	GUNTT42L	\$99
4"	8"	2½"	Right hand	1	GUNTT42R	\$99



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Low-Profile Floor, continued

Wall Scribe Trim





Tip: Wall scribe trim can be cut on site to fit the exact dimensions.

Standard Includes		Required to Specify	
▶ Need help? Product details, page 273		• Wall scribe trim: galvanized steel only	Style number
Specification Information			
• Dimensions D W	• Quantity in Package	• Style Number	• U.S. Price
10" 48"	6	GUNWT10486	\$286


Ramp Kits

Standard Includes				Required to Specify	
► Need help? Product details, page 273		• Ramp tiles with 1:12 incline: galvanized steel only • Two ramp edge trims: 0835 Black paint only		Style number	
Specification Information					
• Dimensions			• Quantity in	• Style	• U.S.
D	W	H	Package	Number	Price
8 Module to Attach to 8" Side of Triangle Tiles					
30"	36"	2½"	1	GUNRA36328	\$643
30"	48"	2½"	1	GUNRA48328	\$823
11 Module to Attach to 11¼" Side of Triangle Tiles					
30"	37"	2½"	1	GUNRA363211	\$643
30"	48"	2½"	1	GUNRA483211	\$823




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Corner Ramp Kit



Standard Includes			Required to Specify	
► Need help? Product details, page 273 > >			• Outside corner ramp kit with 1:12 incline: galvanized steel only • Kit contains two pieces Style number	
Specification Information				
• Dimensions			• Style	• U.S.
D	W	H	Number	Price
32"	32"	21½"	GUNCR3232	\$265

Fire Stop



Standard Includes			Required to Specify		
► Need help? Product details, page 274			• Fire stop barrier: galvanized steel only		
			Style number		
Specification Information					
• Dimensions			• Quantity in	• Style	• U.S.
D	W	H	Package	Number	Price
3"	72"	2½"	6	GUNFS726	\$241



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Understanding Modular Power

	
Statement of Line	288


	
Product Details	
Modular Power	289

Statement of Line


Modular Power

Modular components

provide branch circuit power distribution through a raised access floor or above a suspended ceiling. Eight, #10 gauge AWG conductors can be configured as 3+1, 2+2, or 3 circuits with separate neutrals.

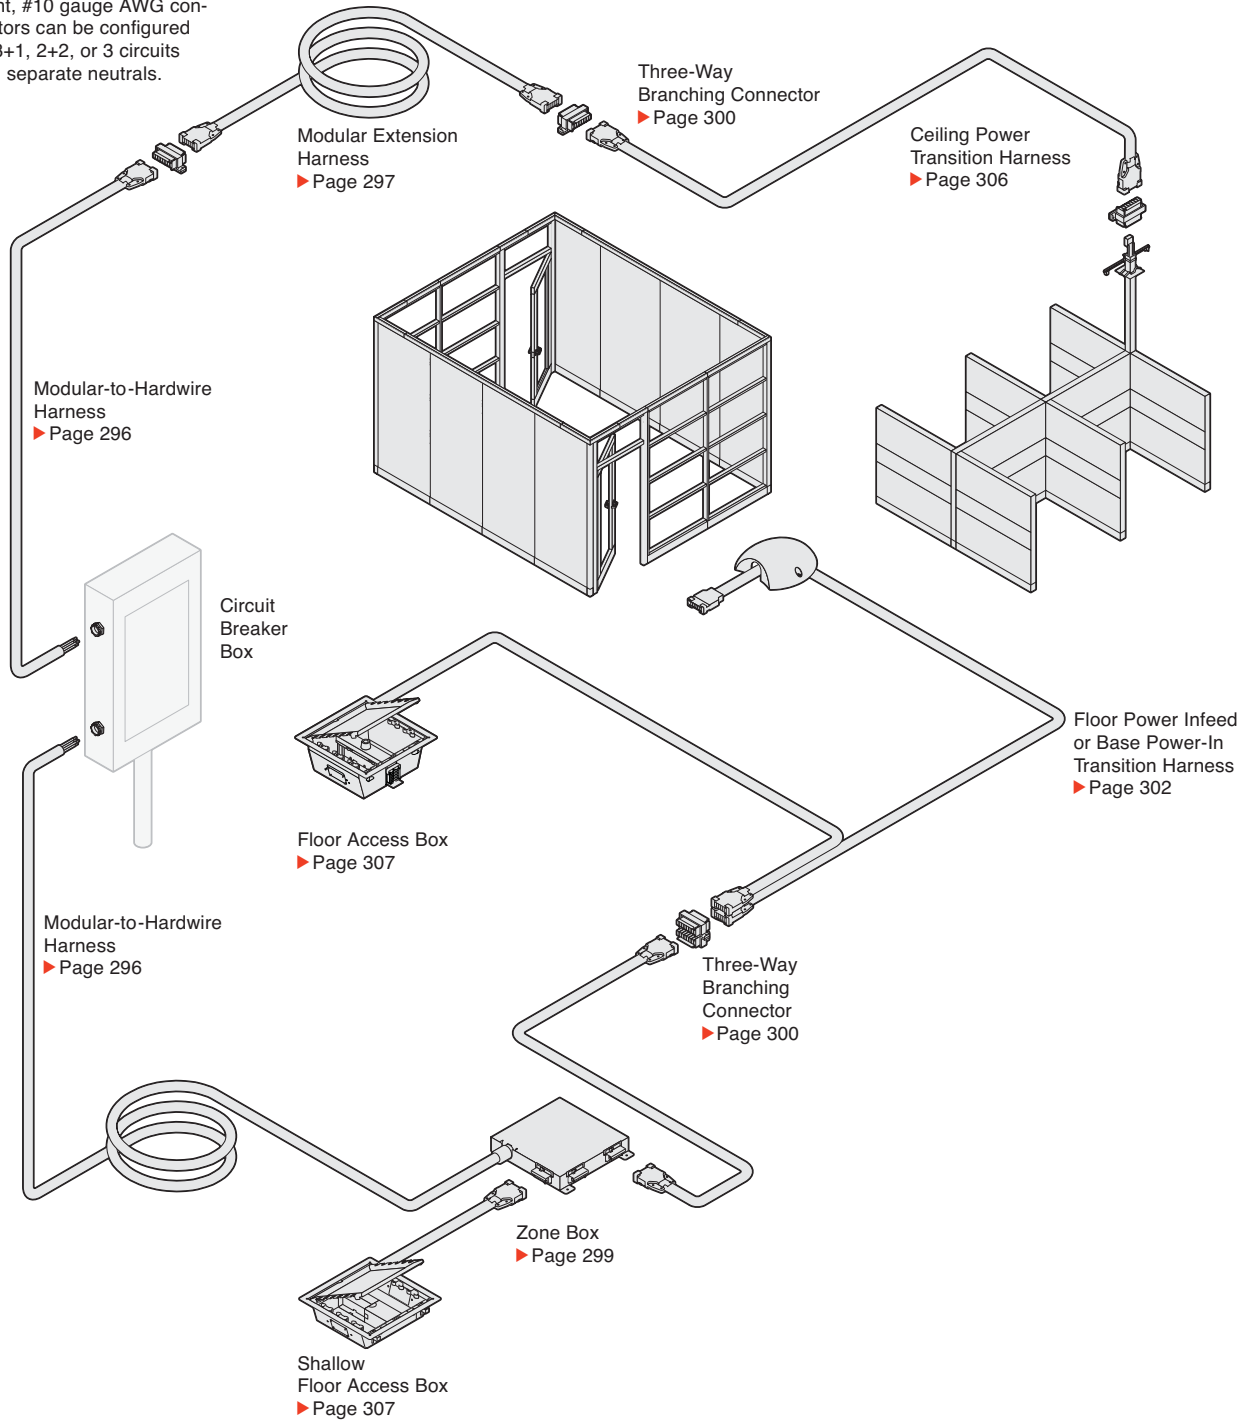

Modular-to-Hardwire Harnesses



► Specifying, page 296

Product Details

Modular-to-hardwire harness routes power from the building power source to modular components or to provide power to a customer-supplied device. It can be used either above a suspended ceiling or below a raised floor.

Connections

Modular connector located on one end of the harness connects to a modular extension harness or transition harness, using a harness-to-harness connector, or to a branching connector or access box.


Surface Materials

Modular-to-hardwire harness is concealed when it is properly installed.

Actual Dimensions

Lengths 5', 10', 30', and 50'

Modular Extension Harnesses



► Specifying, page 297

Product Details

Modular extension harness routes power from three-way branching connectors or lengthens the overall harness distance by using harness-to-harness connectors.

Modular extension harnesses can be connected or disconnected as needed with:

- Architectural Solutions Modular Power
- Answer
- Montage
- Post and Beam

Connections

Modular connectors located on each end of the modular extension harness, allow the harness to be relocated as power needs change.

Two modular extension harnesses can be connected together to extend the length by using a harness-to-harness connector.


Surface Materials

Harness is concealed when it is properly installed.

Actual Dimensions

Modular extension harness
Lengths 5', 10', 20', 30', 40', and 50'

Modular Connector Faceplates



► Specifying, page 298

Product Details

Modular connection faceplate provides a way to add a modular connection to a junction box. Faceplate available with a flush or 90° connection.

Connections

Faceplate is attached to junction box with screws. Hardwire connection to power source within conventional 4" x 4" junction box is completed by electrician in the field. Modular extension harness can be connected or disconnected from faceplate as needed.

Surface Materials


Faceplate is zinc-plated steel. Modular connector is black plastic for 3+1, brown plastic for 2+2, and rust plastic for 3 circuits with separate neutrals.

Actual Dimensions

Depth 4¹¹/₁₆"
Width 4¹¹/₁₆"
Height 6"

Modular Power, continued

Zone Boxes



► Specifying, page 299

Product Details

Zone box includes an infeed harness to allow electrical connection to a circuit breaker box. Zone box includes three modular output connection points for power distribution for 10-gauge zone boxes, and two modular output connection points for 8-gauge zone boxes.

Connections

Zone boxes have either two or three output connection points. For 4-circuit, 3+1 and 2+2 configurations, twelve circuits are distributed to provide four circuits at each of the three connection points for 10-gauge zone boxes. For 8-gauge zone boxes, 8 circuits are distributed to provide four circuits at each of the two connection points. For 3-circuit, separate neutrals or configurations, nine circuits are distributed to provide three circuits at each of the three connection points for 10-gauge zone boxes and six circuits are distributed to provide three circuits at each end of the two connection points for 8-gauge zone boxes.


Surface Materials

Zone box is concealed when it is properly installed.

Actual Dimensions

Depth	11"
Width	10½"
Height	17⁄8"

Hardwired Zone Boxes



► Specifying, page 299

Product Details

Hardwired zone box is designed to be hardwired to power source by the electrician in the field.

Boxes that will be wired up to 150 feet have three output connection points (maximum of 12 circuits). Boxes that will be wired 150 feet up to a maximum of 200 feet have two output connection points (maximum of 8 circuits). All connectors are pre-wired to terminal base inside the box.

Connections

Connection from terminal bars to the circuit-breaker box should be done by a qualified electrician using 10-gauge wire for 12-circuit boxes and 8-gauge wire for 8-circuit boxes.

Boxes that have three output connectors can be 3+1, 2+2, or 3 circuits with separate neutrals. The 3+1 and 2+2 systems have a total of 12 circuits—four circuits at each connector. The 3 circuits with separate neutrals system has a total of nine circuits—three at each connector.

Boxes that have two output connectors can be 3+1, 2+2, or 3 circuits with separate neutrals. The 3+1 and 2+2 systems have a total of 8 circuits—four circuits at each connector. The 3 circuits with separate neutrals system has a total of six circuits—three at each connector.


Surface Materials

Hardwired zone box is concealed when it is properly installed.

Actual Dimensions

Depth	11"
Width	10½"
Height	17⁄8"

Three-Way Branching Connectors



► Specifying, page 300

Product Details

Three-way branching connector has one power-infeed and three modular connection points for power distribution.

Connections

Three-way branching connector can route power to daisy chain power components such as floor boxes.


Surface Materials

Three-way branching connector is concealed beneath Architectural Solutions Low-Profile Floor when it is properly installed.

Actual Dimensions

Depth	2 ⁵ / ₈ "
Width	1 ¹ / ₂ "
Height	1 ³ / ₄ "

Harness-to-Harness Connectors



► Specifying, page 300

Product Details

Harness-to-harness connector has one power-infeed and one modular connection point for power distribution.

Connections

Harness-to-harness connectors join modular harnesses together to lengthen the overall harness distance.


Surface Materials

Harness-to-harness connector is concealed beneath the floor when it is properly installed.

Actual Dimensions

Depth	2 ⁵ / ₈ "
Width	1 ¹ / ₂ "
Height	1"

Transition Harnesses for Floor Power-Infeed or Base Power-In



► Specifying, page 302

Product Details

Transition harness modularly connects the Modular Power system to Internode power kits. It also connects to Answer, Avenir, Montage, and Series 9000 in place of a standard base power-in.

Connections

Modular connector to connect to compatible system is included on one end of the transition harness.

Surface Materials

Transition harness is concealed beneath the floor when it is properly installed.

Actual Dimensions


Power harness length	6'
Infeed harness length	3'

Power transition cover

- Black plastic

Modular Power, continued

Ceiling Power Transition Harnesses



► Specifying, page 306

Product Details

Ceiling power transition harness modularly connects Modular Power routed above a suspended ceiling to Kick, Avenir, and Series 9000.

Connections

Modular connector to connect to compatible system is included on one end of the ceiling power transition harness.


Surface Materials

Ceiling power transition harness is concealed when it is properly installed.

Actual Dimensions

Lengths 12' and 24'

Shallow Floor Access Boxes



Shallow floor access box

► Specifying, page 306



Shallow floor access box for hardwire connection

► Specifying, page 307

Product Details

Shallow floor access box includes a modular power block accepting two receptacles. Modular power block is available in three keying options, 3+1, 2+2, and 3-circuit, separate neutrals. Receptacle is specified separately for different lines and accommodates two modular furniture faceplates for communication outlets. A modular extension harness, ordered separately, of any length will connect to the shallow floor access box.

Shallow floor access box for hardwire connection includes two duplex receptacle openings. Decora-style receptacles must be supplied in the field.

Shallow floor access boxes should be used with Low-Profile Floor and raised floors 2½"H or higher.

Connections

Shallow access box for hardwire connection can be used with a hardwire extension harness.

Surface Materials


Shallow floor access box lid

- Black zinc


Actual Dimensions

Depth	11½"
Width	11½"
Height	2½"

Floor Access Boxes



Floor access box
► Specifying, page 307



Floor access box for hardwire connection
► Specifying, page 308

Product Details

Floor access box includes a modular power block accepting four receptacles—two on each side of the block. Modular power block is available in three keying options, 3+1, 2+2, and 3-circuit separate neutrals. Receptacle is specified separately for different lines and accommodates two NEMA single-gang outlet faceplates. A modular extension harness, ordered separately, of any length will connect to the shallow floor access box.

Floor access box for hardwire connection includes four duplex receptacle openings. Decora-style receptacles must be supplied in the field.

Floor access boxes should be used with raised floors 5"H or higher.

Connections

Floor access box for hardwire connection can be used with a hardwire extension harness.


Surface Materials

Floor access box lid
• Black zinc


Actual Dimensions

Depth	11½"
Width	11½"
Height	4½"

Modular Receptacles



¾"



¾"

► Specifying, page 309

Product Details

15-amp and 20-amp duplex receptacles, ordered separately, are field installed inside floor access boxes. System ground and isolated ground receptacles are available to connect to 15-amp and 20-amp systems.

Connections

Modular receptacles snap into the power block in floor access boxes.

Surface Materials

Modular receptacles
• Black plastic

Actual Dimensions

Depth	¾"	¾"
Width	37/16"	1¾"
Height	37/16"	1¾"

Specifying Modular Power


Specifying

Modular Power

Modular-to-Hardwire Harnesses	296
Modular Extension Harnesses	297
Modular Connector Faceplates	298
Zone Boxes	299
Three-Way Branching Connectors	300
Harness-to-Harness Connectors	300
Dust Caps for Modular Connector	301
Floor Power-Infeeds or Base Power-In Transition Harnesses	302
Ceiling Power Transition Harnesses	306
Shallow Floor Access Boxes	306
Floor Access Boxes	307
Shallow Floor Access Box for Hardwire Connection	307
Floor Access Box for Hardwire Connection	308
Receptacles for Use with Floor Access Boxes	309

Modular Power

Modular-to-Hardwire Harnesses



Standard Includes	Required to Specify
- Need help? Product details, page 289 - Harness - Male modular connector - Pigtail for hardwire connection to electrical panel	Style number

Specification Information

Harness Length	Style Number	U.S. Price
----------------	--------------	------------

4-Circuit, 3+1

5'	GAPMH5X	\$159
10'	GAPMH10X	\$164
30'	GAPMH30X	\$343
50'	GAPMH50X	\$522
:	:	:

4-Circuit, 2+2

5'	GAPMH5Y	\$159
10'	GAPMH10Y	\$164
30'	GAPMH30Y	\$343
50'	GAPMH50Y	\$522
:	:	:

3-Circuit, Separate Neutrals

5'	GAPMH5Z	\$159
10'	GAPMH10Z	\$164
30'	GAPMH30Z	\$343
50'	GAPMH50Z	\$522
:	:	:




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Modular Extension Harnesses



Tip: Connect multiple harnesses together for longer runs.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes	Required to Specify
- Need help? Product details, page 289 - Harness - Male modular connectors	Style number

Specification Information

Harness Length	Style Number	U.S. Price
----------------	--------------	------------

4-Circuit, 3+1

5'	GAPHM5X	\$149
10'	GAPHM10X	\$186
15'	GAPHM15X	\$251
20'	GAPHM20X	\$315
30'	GAPHM30X	\$426
40'	GAPHM40X	\$532
50'	GAPHM50X	\$619
:	:	:

4-Circuit, 2+2

5'	GAPHM5Y	\$149
10'	GAPHM10Y	\$186
15'	GAPHM15Y	\$251
20'	GAPHM20Y	\$315
30'	GAPHM30Y	\$426
40'	GAPHM40Y	\$532
50'	GAPHM50Y	\$619
:	:	:

3-Circuit, Separate Neutrals

5'	GAPHM5Z	\$149
10'	GAPHM10Z	\$186
15'	GAPHM15Z	\$251
20'	GAPHM20Z	\$315
30'	GAPHM30Z	\$426
40'	GAPHM40Z	\$532
50'	GAPHM50Z	\$619
:	:	:




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Modular Connector Faceplates



Standard Includes		Required to Specify
► Need help? Product details, page 289	• Faceplate with flush connection: galvanized steel	Style number
	• Faceplate with 90° connection: black paint	
	• Female modular connector	
	• Pigtail for hardwire connection	
Specification Information		
• Connection	• Style Number	• U.S. Price
•	•	•
•	•	•
•	•	•
4-Circuit, 3+1		
Flush	GAPFCMX	\$ 58
90°	GAPFCM90X	\$106
•	•	•
4-Circuit, 2+2		
Flush	GAPFCMY	\$ 58
90°	GAPFCM90Y	\$106
•	•	•
3-Circuit, Separate Neutrals		
Flush	GAPFCMZ	\$ 58
90°	GAPFCM90Z	\$106
•	•	•




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Zone Boxes



Tip: Zone boxes accommodating 150' and 200' infeed harnesses are 8 gauge.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes	Required to Specify
► Need help? Product details, page 290 • Zone box: black zinc • Lengths of 50 to 125 feet are 10 gauge home run conductors with 3 harness ports and strain reliefs • Lengths of 150 and 200 feet are 8 gauge home run conductors with 2 harness ports and strain reliefs • One power infeed • Built-in anchoring tabs	Style number

Specification Information

Harness Length	Style Number	U.S. Price
----------------	--------------	------------

4-Circuit, 3+1

Hardwired, 8 gauge	GAPZBHW8X	\$ 609
Hardwired, 10 gauge	GAPZBHW10X	\$ 609
50'	GAPZBM50X	\$1565
75'	GAPZBM75X	\$2176
100'	GAPZBM100X	\$2781
125'	GAPZBM125X	\$3299
150'	GAPZBM150X	\$3824
200'	GAPZBM200X	\$5031
:	:	:

4-Circuit, 2+2

Hardwired, 8 gauge	GAPZBHW8Y	\$ 609
Hardwired, 10 gauge	GAPZBHW10Y	\$ 609
50'	GAPZBM50Y	\$1565
75'	GAPZBM75Y	\$2176
100'	GAPZBM100Y	\$2781
125'	GAPZBM125Y	\$3299
150'	GAPZBM150Y	\$3824
200'	GAPZBM200Y	\$5031
:	:	:


3-Circuit, Separate Neutrals

Hardwired, 8 gauge	GAPZBHW8Z	\$ 609
Hardwired, 10 gauge	GAPZBHW10Z	\$ 609
50'	GAPZBM50Z	\$1565
75'	GAPZBM75Z	\$2176
100'	GAPZBM100Z	\$2781
125'	GAPZBM125Z	\$3299
150'	GAPZBM150Z	\$3824
200'	GAPZBM200Z	\$5031
:	:	:



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Three-Way Branching Connectors




Tip: Branching connector distributes all circuits to each connection point.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes		Required to Specify
► Need help? Product details, page 291	• Branching connector: Ultramid nylon	Style number
	• Three modular connection attachment points	
	• One power infeed harness connection point	
Specification Information		
• Style Number	• U.S. Price	
4-Circuit, 3+1		
GAP3HCX	\$25	
•	•	
4-Circuit, 2+2		
GAP3HCY	\$25	
•	•	
3-Circuit, Separate Neutrals		
GAP3HCZ	\$25	
•	•	

Harness-to-Harness Connectors



Standard Includes		Required to Specify
► Need help? Product details, page 291	• Branching connector: Ultramid nylon	Style number
	• One modular connection attachment point	
	• One power infeed harness connection point	
Specification Information		
• Style Number	• U.S. Price	
4-Circuit, 3+1		
GAPHHCX	\$25	
•	•	
4-Circuit, 2+2		
GAPHHCY	\$25	
•	•	
3-Circuit, Separate Neutrals		
GAPHHCZ	\$25	
•	•	



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

Dust Caps for Modular Connector



Standard Includes	Required to Specify
- Dust caps for modular connector: Ultramid nylon - Package of 20 caps	Style number

Specification Information	
Style Number	U.S. Price
GAPDC20	\$91




For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Floor Power-Infeeds or Base Power-In Transition Harnesses

Tip: Transition harnesses require a 3" diameter hole in floor tile.

Tip: Length of conduit between connection point wall or panel and transition point into floor is 3'.

Tip: A transition harness is not required for Answer and Montage where the power can be directly fed into the panel.



Standard Includes	Required to Specify
- Need help? Product details, page 291 - Power transition harness - Male modular connector to Modular Power system - Modular connector to connect to compatible system - Power transition cover: black plastic only	Style number

Specification Information

Length	Style Number	U.S. Price
:	:	:

For Post and Beam Floor Power-Infeeds Connecting to Powerkit Blocks

4-Circuit, 3+1

6'	GAPTHFLX	\$399
----	-----------------	-------

4-Circuit, 3+1 for New York

6'	GAPTHFNYX	\$370
----	------------------	-------

4-Circuit, 3+1 for San Francisco

6'	GAPTHFLSFX	\$399
----	-------------------	-------

4-Circuit, 2+2

6'	GAPTHFLY	\$399
----	-----------------	-------

4-Circuit, 2+2 for New York

6'	GAPTHFNYY	\$370
----	------------------	-------

4-Circuit, 2+2 for San Francisco

6'	GAPTHFLSFY	\$399
----	-------------------	-------

3-Circuit, Separate Neutrals

6'	GAPTHFLZ	\$399
----	-----------------	-------

3-Circuit, Separate Neutrals for New York

6'	GAPTHFNZY	\$370
----	------------------	-------

3-Circuit, Separate Neutrals for San Francisco

6'	GAPTHFLSFZ	\$399
----	-------------------	-------

► **Specification Information, continued on next page**



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

► Specification Information, continued from previous page

Specification Information

• Length	• Style • Number	• U.S. • Price
----------	---------------------	-------------------

For Internode Floor Power-Infeeds**4-Circuit, 3+1**

6'	GAPTHINTX	\$399
----	------------------	-------

4-Circuit, 3+1 for New York

6'	GAPTHINNYX	\$370
----	-------------------	-------

4-Circuit, 3+1 for San Francisco

6'	GAPTHINTSFX	\$399
----	--------------------	-------

4-Circuit, 2+2

6'	GAPTHINTY	\$399
----	------------------	-------

4-Circuit, 2+2 for New York

6'	GAPTHINNY	\$370
----	------------------	-------

4-Circuit, 2+2 for San Francisco

6'	GAPTHINTSFY	\$399
----	--------------------	-------

3-Circuit, Separate Neutrals

6'	GAPTHINTZ	\$399
----	------------------	-------


3-Circuit, Separate Neutrals for New York

6'	GAPTHINNYZ	\$370
----	-------------------	-------

3-Circuit, Separate Neutrals San Francisco

6'	GAPTHINTSFZ	\$399
----	--------------------	-------

► Specification Information, continued on next page



 **For Canadian Pricing**
Multiply U.S. Price by the
Canadian price factor.
► See page 1 for details.

► Specification Information, continued from previous page

Specification Information

• Length	• Style Number	• U.S. Price
•	•	•

For Answer and Montage Base Power-Ins at a Powerkit Receptacle Location**4-Circuit, 3+1**

6'	GAPTHFBPX	\$399
----	------------------	-------

4-Circuit, 3+1 for New York

6'	GAPTHFBPNYX	\$370
----	--------------------	-------

4-Circuit, 3+1 for San Francisco

6'	GAPTHFBPSFX	\$399
----	--------------------	-------

4-Circuit, 2+2

6'	GAPTHFBPY	\$399
----	------------------	-------

4-Circuit, 2+2 for New York

6'	GAPTHFBPNYY	\$370
----	--------------------	-------

4-Circuit, 2+2 for San Francisco

6'	GAPTHFBPSFY	\$399
----	--------------------	-------

3-Circuit, Separate Neutrals

6'	GAPTHFBPZ	\$399
----	------------------	-------


3-Circuit, Separate Neutrals for New York

6'	GAPTHFBPNYZ	\$370
----	--------------------	-------

3-Circuit, Separate Neutrals for San Francisco

6'	GAPTHFBPSFZ	\$399
•	•	•

► Specification Information, continued on next page

**For Canadian Pricing**

Multiply U.S. Price by the
Canadian price factor.

► See page 1 for details.

► Specification Information, continued from previous page

Specification Information

Length	Style Number	U.S. Price
--------	--------------	------------

For Kick, Series 9000, and Avenir Base Power-Ins at a Powerkit Receptacle Location

4-Circuit, 3+1

6'	GAPTHBPX	\$399
----	-----------------	-------

4-Circuit, 3+1 for New York

6'	GAPTHBPNYX	\$370
----	-------------------	-------

4-Circuit, 3+1 for San Francisco

6'	GAPTHBPSFX	\$399
----	-------------------	-------

4-Circuit, 2+2

6'	GAPTHBPY	\$399
----	-----------------	-------

4-Circuit, 2+2 for New York

6'	GAPTHBPNY	\$370
----	------------------	-------

4-Circuit, 2+2 for San Francisco

6'	GAPTHBPSFY	\$399
----	-------------------	-------

3-Circuit, Separate Neutrals

6'	GAPTHBPZ	\$399
----	-----------------	-------


3-Circuit, Separate Neutrals for New York

6'	GAPTHBPNYZ	\$370
----	-------------------	-------

3-Circuit, Separate Neutrals for San Francisco

6'	GAPTHBPSFZ	\$399
----	-------------------	-------

• Length • Style Number • U.S. Price




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Ceiling Power Transition Harnesses



Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes		Required to Specify
► Need help? Product details, page 292	• Power transition harness • Male modular connector to Modular Power system • Modular connector to connect to compatible system	Style number
Specification Information		
Length	Style Number	U.S. Price

For Kick, Series 9000, and Avenir Modular Connectors

4-Circuit, 3+1

12'	GAPTHPMP12X	\$329
24'	GAPTHPMP24X	\$449


4-Circuit, 2+2

12'	GAPTHPMP12Y	\$329
24'	GAPTHPMP24Y	\$449

3-Circuit, Separate Neutrals

12'	GAPTHPMP12Z	\$329
24'	GAPTHPMP24Z	\$449

Shallow Floor Access Boxes



Tip: Access box requires a Low-Profile floor box access tile or a 10½" square cut-out in floor.

Tip: Remember to order receptacles for field installation.

► Page 309

Standard Includes		Required to Specify
► Need help? Product details, page 292	• Lid with frame and carpet insert space: black zinc • Low-profile floor access box: black zinc • Modular power block kit for two duplex receptacles • Furniture faceplate-size opening for communications faceplates • Furniture voice/data mounting adapter kit	Style number

Specification Information

Dimensions	Style	U.S.
D W H	Number	Price

4-Circuit, 3+1

11½" 11½" 2½"	GAPFBSX	\$362

4-Circuit, 2+2

11½" 11½" 2½"	GAPFBSY	\$362


3-Circuit, Separate Neutrals

11½" 11½" 2½"	GAPFBSZ	\$362



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
► See page 1 for details.

Floor Access Boxes



Tip: Access box requires a 10½" square cut-out in floor.

Tip: Remember to order receptacles for field installation.

► Page 309

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes			Required to Specify	
► Need help? Product details, page 293			Style number	
• Lid with frame and carpet insert space: black zinc • Standard floor access box: black zinc • Modular power block kit for four duplex receptacles • Two furniture faceplate-size openings adaptable to single gang size for communications faceplates • Furniture voice/data mounting adapter kit				


Specification Information				
• Dimensions			• Style	• U.S.
D	W	H	Number	Price

4-Circuit, 3+1				
11½"	11½"	4½"	GAPFBDX	\$421

4-Circuit, 2+2				
11½"	11½"	4½"	GAPFBDY	\$421

3-Circuit, Separate Neutrals				
11½"	11½"	4½"	GAPFBDZ	\$421

Shallow Floor Access Box for Hardwire Connection



Tip: Decora-style receptacles must be supplied in the field.

Tip: Access box requires a Low-Profile floor box access tile or 10½" square cut-out in floor.

Standard Includes			Required to Specify	
► Need help? Product details, page 292			Style number	
• Lid with frame and carpet insert space: black zinc • Low-profile floor access box: black zinc • Two duplex receptacle openings • Furniture faceplate-size opening for communications faceplates • Furniture voice/data mounting adapter kit				

Specification Information				
• Dimensions			• Style	• U.S.
D	W	H	Number	Price
11½"	11½"	2½"	GAPFBSHW	\$199




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

► See page 1 for details.

Floor Access Box for Hardwire Connection



Tip: Decora-style receptacles must be supplied in the field.

Tip: Access box requires a 10½" square cut-out in floor.

Standard Includes			Required to Specify
▶ Need help? Product details, page 293	• Lid with frame and carpet insert space: black zinc • Standard floor access box: black zinc • Four duplex receptacle openings • Two furniture faceplate-size openings adaptable to single gang size for communications faceplates • Furniture voice/data mounting adapter kit		Style number
Specification Information			
• Dimensions			• U.S.
D	W	H	Style Number Price
11½"	11½"	4½"	GAPFBDHW \$234




For Canadian Pricing


Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Receptacles for Use with Floor Access Boxes



3/4"



3/8"

Tip: All receptacle faces are 3/4" nominal height except 15-amp receptacles in the 3+1 and 2+2 wiring schematic.

Tip: Modular power manufactured before May 2004 (round conduit) are not interchangeable after May 2004 (oval conduit). A power-out modular harness is available from Steelcase Service Parts to make a modular connection between the two versions.

Standard Includes

- ▶ Need help? Product details, page 293
- Receptacle: black plastic

Required to Specify

Style number

Specification Information

15-Amp Receptacles

Line	Style Number	U.S. Price	Style Number	U.S. Price
:	:	:	:	:

4-Circuit, 3+1 Wiring Schematic

	System Ground		Isolated Ground	
Line 1	GAPR15L1SGX	\$25	GAPR15L1IGX	\$25
Line 2	GAPR15L2SGX	\$25	GAPR15L2IGX	\$25
Line 3	GAPR15L3SGX	\$25	GAPR15L3IGX	\$25
Line 4	GAPR15L4SGX	\$25	GAPR15L4IGX	\$25
:	:	:	:	:

4-Circuit, 2+2 Wiring Schematic

	System Ground		Isolated Ground	
Line 1	GAPR15L1SGY	\$25	GAPR15L1IGY	\$25
Line 2	GAPR15L2SGY	\$25	GAPR15L2IGY	\$25
Line 3	GAPR15L3SGY	\$25	GAPR15L3IGY	\$25
Line 4	GAPR15L4SGY	\$25	GAPR15L4IGY	\$25
:	:	:	:	:

3-Circuit, Separate Neutrals (3SN) Wiring Schematic

	System Ground		Isolated Ground	
Line 1	GAPR15L1SGZ	\$25	GAPR15L1IGZ	\$25
Line 2	GAPR15L2SGZ	\$25	GAPR15L2IGZ	\$25
Line 3	GAPR15L3SGZ	\$25	GAPR15L3IGZ	\$25
:	:	:	:	:



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Understanding QtPro Soundmasking


	
Statement of Line	312

	
Product Details	
QtPro Soundmasking	314
Sonet Individual Soundmasking	318

Statement of Line

QtPro Soundmasking

Control Modules

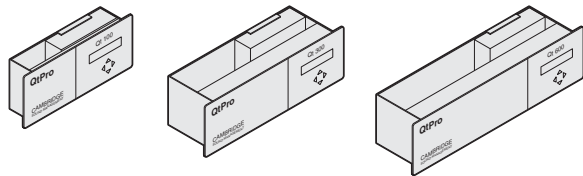

QtPro Control Modules


Understanding

► Page 316

Specifying

► Page 322

Emitters



Emitters, Four Pack


Understanding

► Page 316

Specifying

► Page 326

Cabling and Components

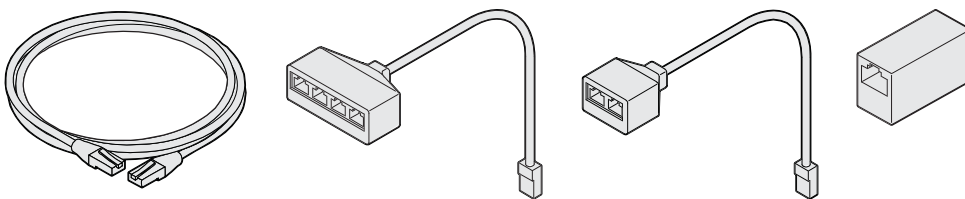


Understanding

► Page 317

Specifying

► Page 327

Mounting Components

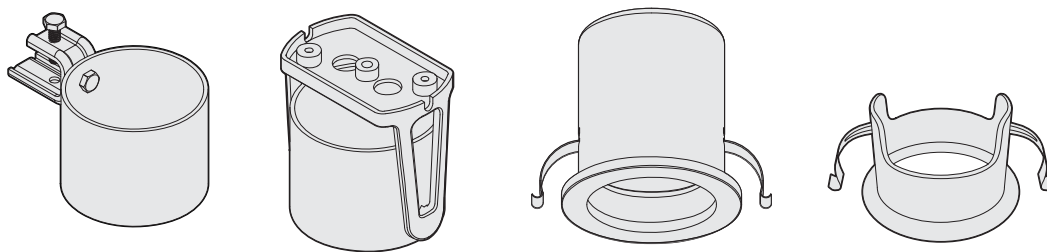


Understanding

► Page 316

Specifying


► Page 330

Sonet Individual Soundmasking



Soundmasking System with Two Speakers

- Understanding
- ▶ Page 319
- Specifying
- ▶ Page 332




Two Speaker Extension Kit

- Understanding
- ▶ Page 319
- Specifying
- ▶ Page 332

QtPro Soundmasking

Soundmasking is the adding of background sound to an environment in order to make existing sounds less intelligible and less distracting. This added background sound is designed to cover up or mask unwanted conversation because it contains the same frequencies as human speech.


Qt quiet technology is a patented, low-voltage, direct field, distributed audio system designed for soundmasking, paging, and music distribution. Qt quiet technology overcomes significant design and installation issues with previous generations of soundmasking systems. Qt quiet technology is a technology that is flexible, uncomplicated, and cost effectively installed.

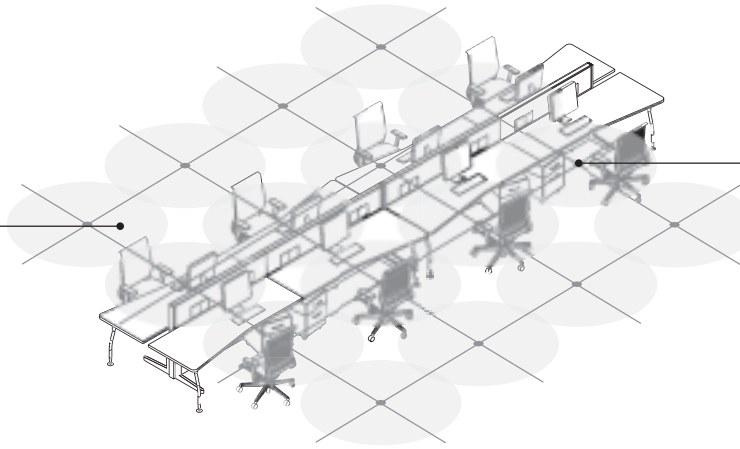

QtPro Soundmasking is typically installed in suspended ceiling tiles or in open plenum spaces. A network of emitters is interconnected with low-voltage cable. The entire system is operated via centrally located control modules.

QtPro Qt 100 Configuration


QtPro Qt 100 control module provides one zone of soundmasking and provides one input for music or paging.

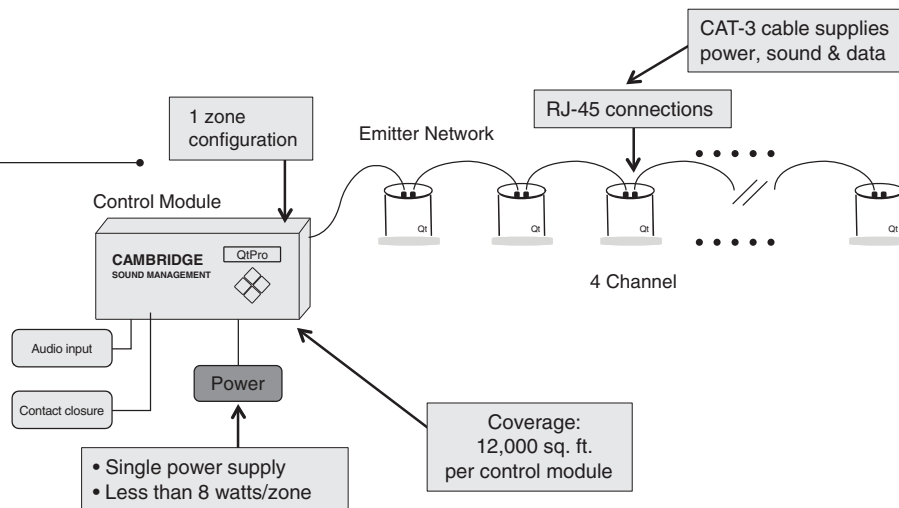

QtPro Qt 300 Configuration


Emitters are direct-field miniature ceiling-mounted speakers. The emitters are driven directly from the control modules and require no external power. To compensate for different acoustic conditions within a zone, the emitters are adjustable. The soundmasking input can be reduced by up to 9dB in 3dB decrements.

QtPro Qt 300 control module provides three zones of soundmasking and provides two inputs for music or paging. Qt 300 and Qt 600 include preinstalled software for control and monitoring accessed via direct-PL connection or via Local Area Network.

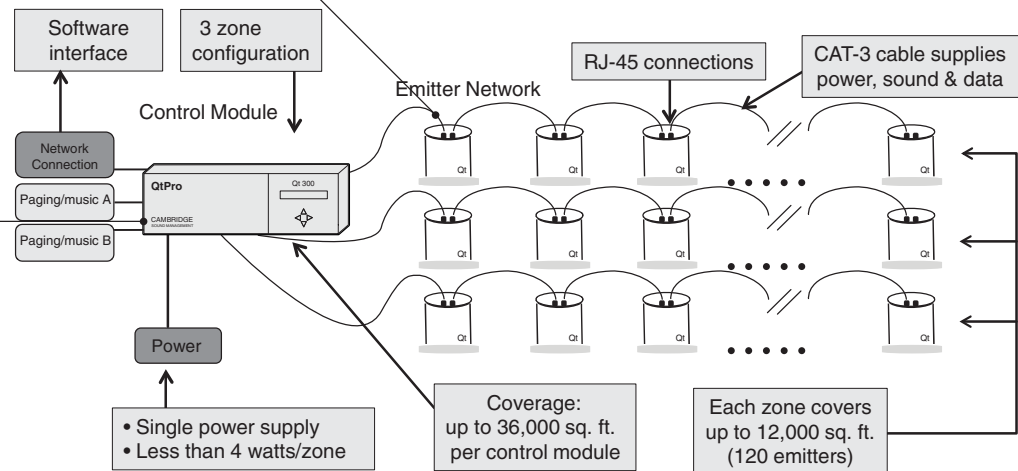

QtPro Qt 600 Configuration

QtPro Qt 600 control module provides six zones of soundmasking and provides two inputs for music or paging. Qt 600 includes pre-installed software for control and monitoring accessed via direct-PL connection or via Local Area Network.

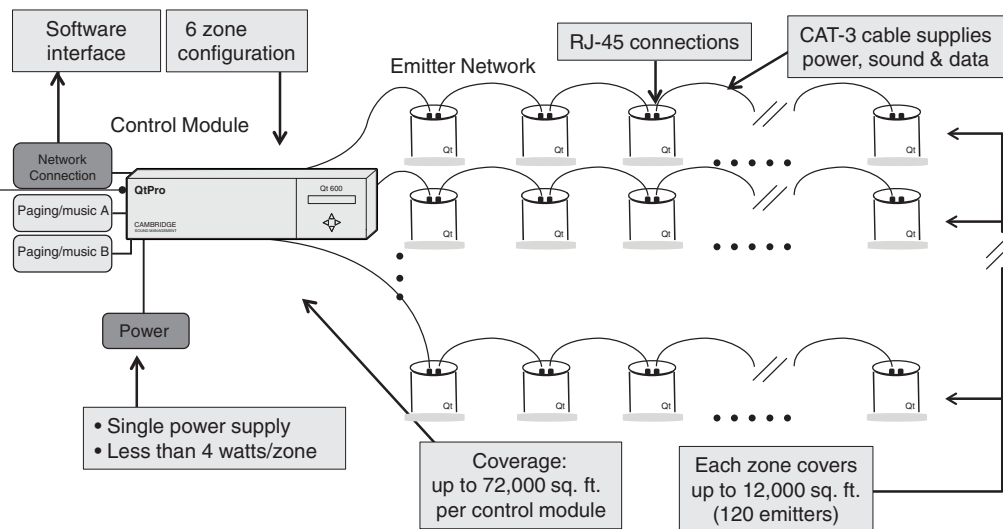

Actual Dimensions

	Qt 100	Qt 300	Qt 600
Length	7"	11"	13 1/2"
Width	3 1/2"	3 1/2"	3 1/2"
Depth	7/8"	3 1/2"	3 1/2"


QtPro 100 supports up to 120 emitters on one zone, covering up to 12,000 square feet.

QtPro 300 supports up to 360 emitters on three zones, covering up to 36,000 square feet.

QtPro 600 supports up to 720 emitters on six zones, covering up to 72,000 square feet.

QtPro Soundmasking, continued

Product Details

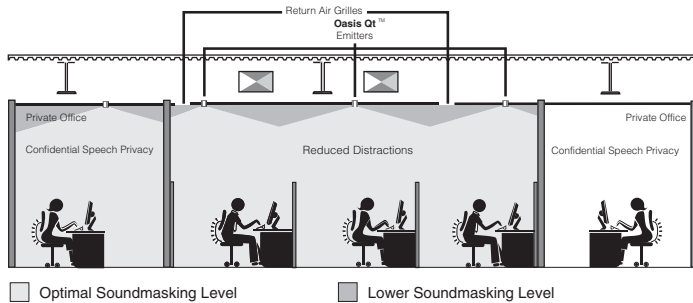


Qt quiet technology systems project sound directly into the workspace. The emitters disperse a uniform, pre-programmed sound that requires no tuning.

QtPro soundmasking system can be controlled both at the control module and also by a connected computer by using the pre-installed software. The software allows remote control of time-of-date ramping, equalizer functions for acoustic professional, email notifications of problems, and day/night customization.

QtPro soundmasking can be applied in many environments, including open plan workstations, private offices, reception and lobby areas, cafes and break rooms, banks, waiting areas, doctors', dentists' and other practitioners' offices, and in libraries.


QtPro soundmasking is designed to cover normal human voice, light office sounds such as keyboard and paper shuffling, some echoes in reverberant space, and light traffic noise.





Emitters have an adjustable sleeve that captures the emitter in the ceiling tile from 1/2" to 1 1/2". Additional components are available for mounting emitters external to the ceiling, to rafters, or into drywall.

Connections

QtPro control modules typically mount onto walls or inside utility closets. Screws and drywall sleeves included. The Qt 300 and Qt 600 control modules can mount in equipment racks with the use of the rack mount bracket.





Emitters generally are mounted in acoustical ceiling tiles. A holesaw (provided with each control module) is used to create the opening for the emitters.



For ceilings with beams or open plenum spaces, external mounting brackets or external mounting clamps can be used.

Wiring & Cabling




QtPro emitters are plug and play ready with pre-terminated, industry standard RJ 45 connectors.


Emitters are adjustable. Soundmasking input can be reduced up to 9dB in 3dB decrements lower than what the volume is set from the control module.

Emitters are available with 16' or 30' cables. 30' cables are typically used for open-plenum installations.




Emitters are daisy-chained together using input and output jacks and Cat 3 cables. The chains of emitters then route back to zone panels within the control module.



Emitters can also be mounted in drywall ceilings by using the drywall mounting bracket or conduit mounting bracket.



Standard cables are available in lengths of 10, 15, 25, 50, 75, and 100 feet. Custom lengths can be created onsite with cable couplers, two way splitters, and four way splitters.



Couplers and splitters are used to create custom cable lengths and also join together different sections of soundmasking zones.

Surface Materials

Emitters are off-white plastic while mounting components are white. Couplers and splitters are grey plastic.

Control modules are dark grey.

Application Topics

QtPro control modules should be placed in a location with access to standard AC outlets and routing for zone cabling.

A Qt 100 control module has a capacity of 120 emitters.

A Qt 300 control module has a capacity of 360 emitters.

A Qt 600 control module has a capacity of 720 emitters.

Emitters are planned generally one emitter per each 10' x 10' space. In private offices, balanced soundmasking is achieved with two emitters placed per 120 square feet.

For non-acoustical tile ceilings, additional mounting components may be required.

Technical Specifications

QtPro Qt 100 power consumption: 7 watts per unit.

QtPro Qt 300 power consumption: 15 watts per unit.

QtPro Qt 600 power consumption: 27 watts per unit.

QtPro Qt 100 is a modular 100-240 VAC 50/60Hz - 0.6A input, 24.0 VDC 1.0A output CE/ETL/UL/GS/FCC/TUV - rated unit (included).

QtPro Qt 300 and Qt 600 power supply is a modular 100-240 VAC 50/60Hz - 0.9A input, 24.0 VDC 1.5A output CE/UL/CUL - rated unit (included).

QtPro page input impedance: 10K ohms, differential input.

QtPro music input impedance: 10K ohms, single ended. Two inputs mixed to mono.


QtPro digital compression and limiting: performed via DSP.

QtPro frequency response (paging and music): band pass limited from 315 Hz to 25k Hz (+/- 1.5 dB).


Sonet Individual Soundmasking

Soundmasking is the adding of background sound to an environment in order to make existing sounds less intelligible and less distracting. This added background sound is designed to cover up or mask unwanted conversation because it contains the same frequencies as human speech.

Qt quiet technology is a patented, low-voltage, direct field, distributed audio system designed for soundmasking, paging, and music distribution. Qt quiet technology overcomes significant design and installation issues with previous generations of soundmasking systems. Qt quiet technology is a technology that is flexible, uncomplicated, and cost effectively installed.

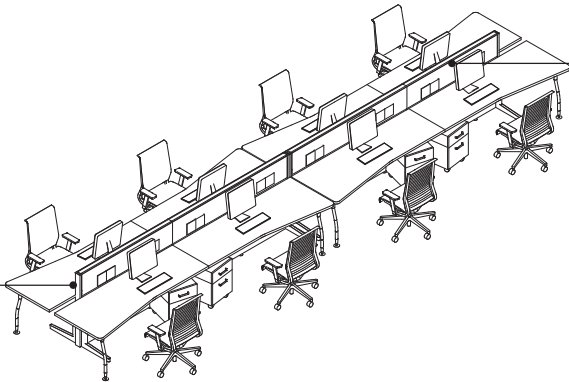

Sonet individual soundmasking is an individual speech privacy system based on Qt quiet technology, consisting of two emitters (can be expanded to four) and a volume control that is plugged into any wall outlet.



Sonet individual soundmasking system


Actual Dimensions		
	Emitters	Volume Control
Length	5"	3 ² / ₃ "
Width	3"	6 ¹ / ₃ "
Depth	1 ¹ / ₂ "	1 ¹ / ₂ "

Product Details

Sonet is a cost-effective solution for spot treatment of situations where one individual is being distracted by voices or other noise around them.

Sonet installs in an individual workstation and gives the user control over the placement and level of their soundmasking.

Connections



Soft wall mount




Hard wall mount

The Sonet emitters and volume control

mount to the walls or panels in a workstation. A mounting plate is included for soft walls and Velcro pulls are included for hard walls.

The Sonet volume control should be placed wherever there is access to an electrical outlet.

Wiring and Cabling



The Sonet emitters are connected to the volume control with pre-terminated modular telephone cords (included).

Surface Materials

The Sonet emitters and volume control are light gray plastic.

Application Topics

Sonet is designed for individual use and is meant for applications no larger than 400 square feet. The two speakers that come standard will provide coverage for 200 square feet. To cover 400 square feet, the two speaker extension kit must be ordered. For larger spaces, QtPro is recommended.

Technical Specifications

Sonet power consumption: 4 watts

Sonet radiated acoustic power: 0.001 acoustic watts.

Sonet power supply is 110v 50-60Hz. AC.

Specifying QtPro Soundmasking

Specifying

QtPro Qt 100, Qt 300, and Qt 600 Control Modules	322
Rack Mount Bracket	323
Hole Saw Blade	324
Power Supply	325
Emitters	326
Cables	327
Splitters	328
Couplers	329
Mounting Components	330
Sonet Qt Individual Soundmasking	332

QtPro Qt 100, Qt 300, and Qt 600 Control Modules

	Standard Includes	Required to Specify
▶ Need help? Product details, page 316	• One, three, or six soundmasking zones • Music or paging input jacks for Qt 100 • Music and paging input jacks for Qt 300 and Qt 600 • Installation and operations guide • Power cord • Attachment hardware • Holesaw driver bit	Style number

Related Products

• Emitters	▶ Page 326
• Cables	▶ Page 327
• Couplers	▶ Page 329
• Mounting components	▶ Page 330

Specification Information

Dimensions	Quantity in	Style	U.S.
D W H	Package	Number	Price

QtPro Qt 100, Qt 300, and Qt 600 Control Modules

Qt 100 - One Zone Control Module



7/8"	7"	3 1/2"	1	GSMQT100	\$1298
------	----	--------	---	-----------------	--------

Qt 300 - Three Zone Control Module

3 1/2"	11"	3 1/2"	1	GSMQT300	\$3360
--------	-----	--------	---	-----------------	--------

Qt 600 - Six Zone Control Module

3 1/2"	13 1/2"	3 1/2"	1	GSMQT600	\$5034
--------	---------	--------	---	-----------------	--------



Tip: The Qt 300 and Qt 600 can be mounted in an equipment rack using the rack mount bracket.



For Canadian Pricing


Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Rack Mount Bracket

For Qt 300 and Qt 600

Rack Mount Bracket



Tip: The rack mount bracket is required to mount the QtPro Qt 300 and Qt 600 control modules in an equipment rack.

Tip: If the QtPro Qt 300 and Qt 600 are to be mounted on the wall, the rack mount bracket is not required.

Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|--|
| ▶ Need help?
Product details,
page 316 | • Rack Mount Bracket

Style number |
|--|--|


Specification Information		
---------------------------	--	--

• Style • Number	• Quantity in • Package	• U.S. • Price
GSM600RM	1	\$60



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Hole Saw Blade



Tip: One holesaw blade is included with every control module. Order GSMHS1 for replacement or extra hole-saw blades.

Standard Includes	Required to Specify
-------------------	---------------------

- | | |
|--|--------------------------------------|
| ▶ Need help?
Product details,
page 316 | • Hole saw blade

Style number |
|--|--------------------------------------|

Specification Information		
---------------------------	--	--


• Style • Number	• Quantity in • Package	• U.S. • Price
GSMHS1	1	\$57
•	•	•
•	•	•



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Power Supply

For QtPro Control Modules



Tip: Power supply is included with control modules. Order GSMPS3 to replace lost or damaged power supply for Qt 300 and Qt 600 control modules.

Standard Includes	Required to Specify
▶ Need help? Product details, page 317 • 100-240V AC power supply	Style number

Specification Information


Style Number	Quantity in Package	U.S. Price

QtPro Qt 300 and Qt 600 Power Supply

GSMPS3	1	\$298

 **For Canadian Pricing**
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Emitters



Tip: Emitters are used to project soundmasking, paging, and music.

Tip: Each emitter includes a 16' or 30' cable used to daisy chain to adjacent emitters.

Tip: Emitters with 16' cables will be used for most standard installations.

Tip: Emitters with 30' cables will be used for open-plenum installations to allow for appropriate visual management of cables.

Standard Includes

- ▶ Need help? Product details, page 316
- Miniature direct field speaker with adjustable attachment sleeve
- 16' or 30' CAT-3 or equivalent plenum-rated cable with RJ45 plugs attached to ends
- 3 dip switches that adjust volume down on each emitter 3dB, 6dB, or 9dB lower increments than the overall system volume level

Required to Specify

Style number

Related Products

- QtPro control modules ▶ Page 322
- QtPro cables ▶ Page 327
- QtPro couplers ▶ Page 329
- QtPro mounting components ▶ Page 330

Specification Information

• Dimensions		• Quantity in	• Style	• U.S.
W	H	Package	Number	Price
:	:	:	:	:

Four Pack Emitters with 16' Cables

3 1/2"	2 1/2"	4	GSMEMIT4	\$596
:	:	:	:	:

Four Pack Emitters with 30' Cables

3 1/2"	2 1/2"	4	GSM30EMIT4	\$728
:	:	:	:	:



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Cables


Standard Includes	Required to Specify
▶ Need help? Product details, page 317 • CAT-3 or equivalent plenum-rated cables with RJ45 plugs attached to ends	Style number

Related Products
• QtPro control modules ▶ Page 322 • Emitters ▶ Page 326 • Couplers ▶ Page 329 • Mounting components ▶ Page 330

Specification Information			
Dimensions	Quantity in	Style	U.S.
L	Package	Number	Price

Cables

10'	1	GSMCABLE10	\$ 47
25'	1	GSMCABLE25	\$ 73
50'	1	GSMCABLE50	\$135
75'	1	GSMCABLE75	\$255
100'	1	GSMCABLE100	\$334
16' Cables, Package of 4	4	GSMCPAK4	\$118

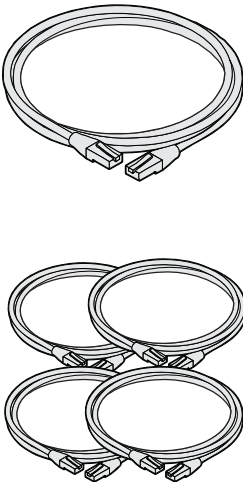


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Splitters

Standard Includes	Required to Specify
▶ Need help? Product details, page 317 • Two way or four way splitter with 10" male cable, if selected: grey • Two or four female RJ 45 jacks, if selected	Style number

Related Products

• QtPro control modules	▶ Page 322
• Emitters	▶ Page 326
• Couplers	▶ Page 329
• Mounting components	▶ Page 330

Specification Information


Quantity in Package	Style Number	U.S. Price
1	GSM2WSPLIT	\$76

Two-Way Splitter

1	GSM2WSPLIT	\$76
---	------------	------

Four-Way Splitter

1	GSM4WSPLIT	\$73
---	------------	------

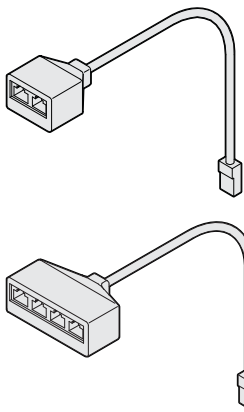


For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Couplers



Standard Includes		Required to Specify
▶ Need help? Product details, page 317	• Two female RJ 45 jacks: grey	Style number


Related Products	
• QtPro control modules	▶ Page 322
• Emitters	▶ Page 326
• Couplers	▶ Page 329
• Mounting components	▶ Page 330

Specification Information		
• Quantity in • Package	• Style • Number	• U.S. • Price
1	GSMFFCOUP	\$27
.	.	.


For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
▶ See page 1 for details.

Mounting Components

External Mounting Bracket



Tip: For traditional drop down ceiling tiles, emitters are installed in the tiles and no additional mounting components are needed. The mounting components are used in open plenum or special ceiling conditions.

Tip: In open plenum or in special ceiling conditions, additional components may be required.

Tip: Emitters are not included with mounting components.

Standard Includes	Required to Specify
- Need help? Product details, page 316 - Enclosure with ceiling and wall mount	Style number


Related Products

• QtPro control modules	▶ Page 322
• Emitters	▶ Page 326
• Couplers	▶ Page 329

Specification Information

Quantity in Package	Style Number	U.S. Price
1	GSMEEM1	\$57
.	.	.

External Mounting Clamp



Tip: External mounting clamp is used to mount emitters to a beam. It is important to verify beam dimensions, the clamp requires a minimum beam thickness of 1/4" and no more than a maximum thickness of 3/4" for proper installation.

Tip: Emitters are not included with mounting components.

Standard Includes	Required to Specify
- Need help? Product details, page 316 - Emitter sleeve - Beam C clamp, fits beams 1/4" to 3/4" in thickness.	Style number

Related Products

• QtPro control modules	▶ Page 322
• Emitters	▶ Page 326
• Couplers	▶ Page 329

Specification Information

Quantity in Package	Style Number	U.S. Price
1	GSMEEM2	\$59
.	.	.




For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Conduit Mounting Bracket



Tip: For traditional drop down ceiling tiles, emitters are installed in the tiles and no additional mounting components are needed. The mounting components are used in open plenum or special ceiling conditions.

Tip: Emitters are not included with mounting components.

Tip: Conduit mounting bracket attaches to conduit and can be used in a drywall ceiling.

Tip: In drop ceilings, open plenum, or in special ceiling conditions, additional components may be required.

Standard Includes	Required to Specify
▶ Need help? Product details, page 316 • Enclosure • Housing collar • Two clips	Style number


Related Products

• QtPro control modules	▶ Page 322
• Emitters	▶ Page 326
• Couplers	▶ Page 329
• Mounting components	▶ Page 330

Specification Information

Quantity in Package	Style Number	U.S. Price
1	GSMDEM2	\$78
.	.	.

Drywall Mounting Bracket



Tip: For traditional drop down ceiling tiles, emitters are installed in the tiles and no additional mounting components are needed. The mounting components are used in open plenum or special ceiling conditions.

Tip: Emitters are not included with mounting components.

Standard Includes	Required to Specify
▶ Need help? Product details, page 316 • Enclosure • Two clips • Installation key	Style number

Related Products

• QtPro control modules	▶ Page 322
• Emitters	▶ Page 326
• Couplers	▶ Page 329
• Mounting components	▶ Page 330

Specification Information


Quantity in Package	Style Number	U.S. Price
1	GSMDEM3	\$31
.	.	.



For Canadian Pricing
Multiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.

Sonet Qt Individual Soundmasking

Sonet Qt Individual Soundmasking System with Two Speakers




Tip: Sonet Qt provides coverage for up to 200 square feet. To reach the maximum coverage of 400 square feet, also specify the extension kit, GSMSONETXT.

Standard Includes	Required to Specify
▶ Need help? Product details, page 318 • Sonet Qt controller • Two Sonet emitters • All required wiring • Mounting hardware • Power supply	Style number

Specification Information

Quantity in Package	Style Number	U.S. Price
1	GSMSONET	\$418
⋮	⋮	⋮

Sonet Two Speaker Extension Kit



Tip: The Sonet extension kit can be specified to add two speakers to Sonet Qt, extending the coverage for up to 400 square feet.

Standard Includes	Required to Specify
▶ Need help? Product details, page 318 • Two Sonet emitters • Wiring and mounting hardware	Style number

Specification Information

Quantity in Package	Style Number	U.S. Price
1	GSMSONETXT	\$154
⋮	⋮	⋮



For Canadian Pricing

Multiply U.S. Price by the Canadian price factor.

▶ See page 1 for details.

Surface Materials

Surface Materials	334
Availability Matrices	338

Surface Materials

This listing includes all the surface material choices that are available for the products in this specification guide.

Tip: See Availability Matrices on page 338 for exact surface material availability on each Privacy Wall component.

Resources

For more information about surface materials, refer to the following resources:

Additional surface materials specification tools are available to assist you in the specification process—the Surface Materials Binders.

The global surface materials palette is a core collection of finishes that is available across multiple geographies (Americas/EMEA – Europe, Middle East, and Africa/APAC – Asia Pacific) and on global product lines, where applicable. For a list of finishes included in the offering, see the *Surface Materials Reference Manual*. Additional details, like product approvals by geography and finish number conversions, can also be found in the *Surface Materials Reference Manual* or see steelcase.com/surfacematerials.

Surface Materials

Binders include:

- Surface Materials Reference Manual
- A complete set of swatch cards for hard surfaces, vertical surface fabrics, and seating upholstery

Architectural Solutions Binder includes:

- Brochures
- Swatch cards

Paint

Steelcase Surfaces

Applies to:

- Privacy Wall solid swing door

Price Group 1

Architectural Paint

- 4843 Linen
- 4844 Glacier
- 4849 Vapor

Smooth Paint

- 4242 Milk
- 4858 Seagull
- 4859 Silk

Applies to:

- Privacy Wall panel surface
- Privacy Wall panel frame
- Privacy Wall glass swing door
- Privacy Wall glass door frame
- Privacy Wall slider door
- Privacy Wall door frame
- Privacy Wall ceiling track
- Privacy Wall base trim
- Privacy Wall post, wall channel, adapter, and mini end
- Privacy Wall feature strips
- Privacy Wall furniture reveal strips
- Clerestory Panel surface

Price Group 1

Architectural Paint

- 4843 Linen
- 4844 Glacier
- 4849 Vapor

Smooth Paint

- 4242 Milk
- 4858 Seagull
- 4859 Silk

Textured Paint

- 7207 Black
- 7225 Sand
- 7230 Basalt
- 7236 Fog **E**
- 7237 Slate **E**
- 7238 Fieldstone
- 7239 Midnight
- 7241 Arctic White
- 7243 Seagull
- 7278 Dark Bronze
- 7360 Merle

Price Group 2

Smooth Metallic Paint

- 4743 Mineral Metallic
- 4744 Pearl Metallic
- 4750 Champagne Metallic
- 4752 Steel Metallic **E**
- 4788 Gold Dust Metallic **E**
- 4798 Sterling Metallic
- 4799 Platinum Metallic
- 4803 Near Black Metallic

Textured Metallic Paint

- 7245 Carbon Metallic
- 7246 Midnight Metallic

Tip: Metallic paint is not available on solid and Clerestory panels larger than 36"W.

Tip: Textured and metallic paint is difficult to field repair and replicate original finish on large solid and Clerestory panel surfaces.

Select Surfaces

Price Group 3

Accent paint

Accent paints allow you to choose from a pre-matched color palette of trend driven colors that are available without the PerfectMatch registration fee. Refer to the *Surface Materials Reference Manual* for more information about this program.

Custom Surfaces

Price Group 3

PerfectMatch

PerfectMatch is a service that allows you to create your own paint color. Refer to the *Surface Materials Reference Manual* for more information about this program.

Wood

Applies to:

- Privacy Wall door

Steelcase carefully selects veneer and solid wood for consistent color and grain structure. Wood is a natural material and variations will occur in color, grain and texture. These variations are part of the inherent natural beauty of wood and are not considered defects.

All wood products will darken with age and exposure to ultraviolet light. This is especially apparent with cherry and maple veneer. We recommend that desk accessories be rearranged periodically to ensure even aging of wood surfaces.

When storing your wood furniture, please follow the following guidelines:

- Do not store products in trailers
- Store products in areas that simulate office temperatures (60°F to 90°F)
- Store products in areas that maintain constant, office-like humidity levels
- Keep product away from light. Cover products to make sure they are not exposed to light.

Steelcase Surfaces

Veneer

Veneers are matched for proper balance and consistency. Veneers are available flat cut or quarter cut, except for Oak, which is rift cut. Refer to the *Surface Materials Reference Manual* for descriptions of each cut.

Open-pore finish is a medium gloss finish that leaves the wood grain texture visible to the eye and distinguishable to the touch.

Flat-cut open-pore finish choices

- 3062 FC/OP Graphite Walnut
- 3402 FC/OP Clear Cherry (Aged)
- 3412 FC/OP Natural Cherry **E**
- 3422 FC/OP Medium Cherry
- 3522 FC/OP Clear Maple*
- 3572 FC/OP Amber on Maple **E**
- 3592 FC/OP Blonde on Maple
- 3702 FC/OP Clear Walnut
- 3712 FC/OP Natural Walnut
- 3722 FC/OP Dark Mahogany on Walnut
- 3752 FC/OP Medium Walnut
- 3762 FC/OP Dark Walnut
- 3772 FC/OP Medium Mahogany on Walnut

Quarter-cut open-pore finish choices

- 3222 QC/OP Clear Maple*
- 3272 QC/OP Amber on Maple **E**
- 3292 QC/OP Blonde on Maple

Rift-cut open-pore finish choices

- 3602 RC/OP Desert Oak
- 3612 RC/OP Warm Oak **E**
- 3692 RC/OP Espresso Oak

**To ensure an understanding of the color ranges and characteristic variations of natural veneer, a sign-off sheet is required prior to orders being accepted for this clear-coat finish. The sign-off sheet is available through Steelcase advertising stock. Form number 05-0001370.*

E = Established

Custom Surfaces

Customiz stain is a service that allows you to create your own stain colors and finishes on standard veneer. Customiz stain color is available on all product lines that offer wood veneer.

A \$500 stain-matching fee applies on CUSTOMIZ requests (Exception: The \$500 fee does not apply on matches to Coalesce standard finishes or for a low-gloss finish request on a standard color). The \$500 fee covers the cost of formulating the Customiz color finish and applies regardless of whether or not an order for product is placed.

In addition, an approval form must be signed to indicate customer acceptance of Customiz match. A \$1,500 initiation fee will be charged prior to first order entry. This initiation fee activates the finish for unlimited use on any Steelcase product for an 18 month time period. After the 18 month time period has lapsed, the Customiz finish may be reactivated for another 18 months for a \$1,000 fee at any point within five years after the \$1,500 initiation fee was paid. If the finish is not reactivated within five years after the \$1,500 initiation fee was paid, the finish will be culled and the customer will need to pay the \$1,500 initiation fee again. All style number related Customiz charges products are no cost as of April 2014. The matching and initiation fees are not discountable.

Customiz stain takes 10 days to formulate. Consult the *Surface Materials Reference Manual* for more information. Custom veneers are also available and must be quoted by Steelcase specials group. Customiz stain on custom veneers takes 2 to 4 weeks to formulate.

Ⓔ = Established

Requirements and information on ordering a Customiz stain color are found in the *Surface Materials Reference Manual*.

Plastic

Steelcase Surfaces

Applies to:

- Privacy Wall receptacle and cover plate
- Privacy Wall power and communication filler

6000	Black
6009	Arctic White
6249	Platinum Solid
6618	White
6654	Sand
6695	Midnight
6697	Fog

Metal

Steelcase Surfaces

Applies to:

- Privacy Wall door hardware

Price Group 1

9200	Satin Chrome
------	--------------

Price Group 2

9201	Polished Chrome
------	-----------------

Applies to:

- Glass Selections panel frames
- Glass Selections door frames
- Glass Selections transitions
- Glass Selections pivot door leaf
- Glass Selections slider door pull
- Glass Selections feature strips

Clear Anodized Aluminum

Glass

Steelcase Surfaces

Tip: See Privacy Wall Glass Availability Matrix for glass exceptions on specific products.

► Page 340

Price Group 1

6500	Clear
------	-------

Price Group 2

6540	Clear Laminated
6541	White Laminated

Customer-specified glass is available.

Price Group 3

6542	Satin
------	-------

Price Group 4

6555	Ice
6558	Bamboo

Price Group 5

6553	Wisp
------	------

Vertical Surface Fabric

Applies to:

- Privacy Wall panel surface
- Privacy Wall post, adapter, wall channel, and mini end
- Glass Selections Clerestory panel

Steelcase Surfaces

Price Group 1

Abacus Ⓔ
P122 Entasis
P123 Portico
P124 Opus
P125 Cusp
P126 Artifact
P129 Atlas

Acadia

G031	Tin
G033	Iron
G039	Silica

Alloy

P525	Polar
P526	Skim
P527	Bubbly
P528	Tern
P529	Shore
P530	Asti
P531	Silver
P532	Oxide
P533	Element
P534	Construct
P535	Currency
P536	Iron

Boccie

P200	New Rice
P201	New Almond
P202	New Nutmeg
P203	New Camel
P204	New Opal
P205	New Mist
P206	New Plum
P207	New Lichen
P208	New Spearmint
P209	New Sky

Buzz2

5F01	Camel
5F03	Tomato
5F04	Red
5F05	Burgundy
5F06	Sky
5F07	Blue
5F08	Navy
5F10	Grape
5F11	Eggplant
5F15	Stone
5F16	Grey
5F17	Black
5G50	Dunegrass
5G51	Sable
5G52	Barley
5G53	Sunrise
5G54	Carrot
5G55	Pumpkin
5G56	Timber
5G57	Rouge
5G58	Chocolate
5G59	Meadow
5G60	Ivy
5G61	Cyan
5G62	Atlantic
5G63	Crocus
5G64	Alpine
5G65	Tornado

Charm

P505	Shell
P506	Mimosa
P507	Birch
P508	Sparkle
P509	Ginkgo
P510	Debut
P511	Clover
P512	Spicy
P513	Twilight

Embrasure

P140	Colonnade
P141	Rotunda
P143	Baluster

Optic

P540	Hazel
P541	Twinkle
P542	Orion
P543	Seaglass
P544	Shine
P545	Halo
P546	Whiskey
P547	Bath
P548	Whisper
P549	Breezy
P550	Wry
P551	Glimmer

Rhythm

P555	Allegro
P556	Tempo
P557	Refrain
P558	Pitch
P559	Harmony
P560	Melody
P561	Stanza
P562	Opus

Price Group 2

Amiranté

5664	Mink
5665	Ivory
5666	Silver Frost
5677	Moonglo
5679	Woodbine

Ashanti Reverse

5638	Mink
5648	Moonglo
5650	Woodbine
5654	Quince

Bariolage

G200	New Etude
G201	New Andante
G202	New Cantata
G203	New Adagio
G204	New Melody
G205	New Ballata
G206	New Sonata

Bouquet

P165	Hosta
P166	Dundee
P169	Argenta
P170	Hoya
P173	Camomile

Cogent: Geode Seating

5S47	Coal
5S49	Cobalt
5S50	Ink

**Cogent: Geode
Vertical**

- 5S32 Canyon
- 5S35 Slate
- 5S36 Cement
- 5S38 Oyster
- 5S41 Sesame

Flip: Plain Jane

- 5F70 Mud Pie
- 5F71 Hummus
- 5F72 Petoskey
- 5F73 Pluto
- 5F74 Papyrus
- 5F94 Blizzard
- 5F95 Briquette

Fresco

- G001 Sandrift
- G002 Mistiblu
- G003 Faon
- G006 Chamoline
- G007 Grapenut
- G017 Flint

Milano

- N001 Oyster
- N002 Delft
- N003 Woodland
- N004 Sunshadow
- N005 Olivine
- N012 Teakwood

Select Surfaces

**For information
on products within
Select Surfaces,**
including accent paints
and fabrics from Designtex,
Gabriel, Kvadrat, and
Pollack, please refer to the
*Surface Materials
Reference Manual* or visit
[Steelcase.com/
selectsurfaces](http://Steelcase.com/selectsurfaces).

Custom Surfaces

**Price Group COM
(Customer's Own
Material)**

**Fabric Approval and
Yardage**

To confirm whether a partic-
ular COM material has
already been tested for use
on a specific Steelcase
product or to determine
actual yardage
requirements:
• Visit www.steelcase.com

**For additional informa-
tion regarding
Customer's Own
Material,** call
1.888.STEELCASE
(1.888.783.3522) or
send an e-mail to
lineone@steelcase.com.

 = Established

Availability Matrices

Privacy Wall Paint Availability Matrix

		Archi- tecture Paint	Textured Paint														Smooth Paint	
	Price Group 1	4843 Linen	4844 Glacier	4849 Vapor	7207 Black	7225 Sand	7230 Basalt	7236 Fog ^E	7237 Slate ^E	7238 Fieldstone	7239 Midnight	7241 Arctic White	7243 Seagull	7278 Dark Bronze	7360 Merle	4242 Milk	4858 Seagull	4859 Silk
Privacy Wall solid panel		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall glass panel frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall Clerestory panel—solid panel		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall Clerestory panel—glass panel frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall door frame with transom		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall full-height door frame		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Privacy Wall solid swing door		■	■	■	•	•	•	•	•	•	•	•	•	•	•	■	■	■
Privacy Wall glass swing door		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Privacy Wall ceiling channel		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Privacy Wall base trim		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Privacy Wall post, wall channel, mini end, and adapter		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Privacy Wall feature strips		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Privacy Wall Furniture Reveal Strips		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

Tip: Metallic paint is not available on solid and Clerestory panels larger than 36"W.

Tip: Textured and metallic paint is difficult to field repair and replicate original finish on large solid and Clerestory panel surfaces.

Legend

- = Not available
- = Available
- = Available with exceptions
- ^E = Established
- ▶ See specification pages for details.

[illegible]

- = Not available
- = Available
- = Available with exceptions
- Ⓔ = Established
- ▶ See specification pages for details.

Privacy Wall Glass Availability Matrix

	Price Group 1	Price Group 2	Price Group 3	Price Group 4	Price Group 6		
	6500 Clear	6540 Clear Laminated	6541 White Laminated	6542 Satin	6555 Ice	6558 Bamboo	6553 Wisp
Privacy Wall all-glass wall panels	■	■	■	■	■	■	■
Privacy Wall glass wall panels with three equal divided lites	■	■	■	■	■	■	■
Privacy Wall glass wall panels with four equal divided lites	■	■	■	■	■	■	■
Privacy Wall glass wall panels with four divided lites (transom-aligned top lite)	■	■	■	■	■	■	■
Privacy Wall glass wall panels with two divided lites (transom-aligned top lite)	■	■	■	■	■	■	■
Privacy Wall Clerestory wall panels	■	■	■	■	■	■	■
Privacy Wall door frames with transom	■	■	■	■	■	■	■
Privacy Wall full-height door leaves	■	■	■	■	■	■	■
Privacy Wall transom-height door leaves	■	■	■	■	■	■	■
Privacy Wall all-glass slider doors	■	■	■	■	■	■	■
Privacy Wall three and four equal divided lite slider doors	■	■	■	■	■	■	■
Privacy Wall two and four transom-aligned lite slider doors	■	■	■	■	■	■	■

► See page 96 to ensure that etched and pattern glass types are properly oriented during the planning process.

Legend

- = Not available
- = Available
- See specification pages for details.

Tip: COM glass for frame and glass kits must be 3/8" thick for structural integrity.

Tip: For information regarding vertical directional glass, see page 25.

Privacy Wall Glass Selections Availability Matrix

	Price Group 1	Price Group 2	Price Group 3	Price Group 4	Price Group 5	Price Group 6
	6500 Clear	6540 Clear Laminated	6541 White Laminated	6542 Satin	6555 Ice	6558 Bamboo
Glass Selections all-glass wall panels	■	■	■	■	■	■
Glass Selections all-glass frame and glass kits	■	■	■	■	•	•
Glass Selections wall panels with two divided lites (transom-aligned top lite)	■	■	■	■	■	■
Glass Selections two divided lite frame and glass kits	■	■	■	■	•	•
Glass Selections Clerestory wall panels	■	■	■	■	■	■
Glass Selections door frames with transom	■	■	■	■	■	■
Glass Selections full-height door leaves	■	■	■	■	■	■
Glass Selections transom-height door leaves	■	■	■	■	■	■
Glass Selections polished edge full-height and transom-height slider doors	■	•	•	■	•	•
Glass Selections polished edge slider door all-glass side panel	■	■	■	■	■	■
Glass Selections polished edge slider door transom and transom-height side panel	■	■	■	■	■	■
Glass Selections all-glass L-corner units	■	■	■	■	■	■
Glass Selections transom-height L-corner units	■	■	■	■	■	■
Glass Selections all-glass T-corner unit frame and glass kits	■	■	■	■	■	■
Glass Selections transom-height T-corner unit frame and glass kits	■	■	■	■	■	■

► See page 96 to ensure that etched and pattern glass types are properly oriented during the planning process.

Legend

- = Not available
- = Available
- See specification pages for details.

Tip: COM glass for frame and glass kits must be $\frac{3}{8}$ " thick for structural integrity.

Tip: For information regarding vertical directional glass, see page 25.

Resources

Wiring Schematics	344
Locations with Special Requirements	345
How to Calculate Power Needs	346
Style Number Index	348

Wiring Schematics

Details for the Electrician

Modular power components are offered in three different wiring schematics to allow you to match your specific wiring strategy to any typical building wiring plan.

Tip: All the components in an electrical system must use the same wiring schematic. The components are color coded and keyed to make it impossible to connect mismatched parts.

Black = Four-circuit, 3+1

Brown = Four-circuit, 2+2

Rust = Three-circuit, separate neutrals



Shared neutral conductors = 10 gauge

Separate neutral conductors = 10 gauge

Hot conductors = 10 gauge


Grounding conductors = 10 gauge

Four-Circuit, 3+1

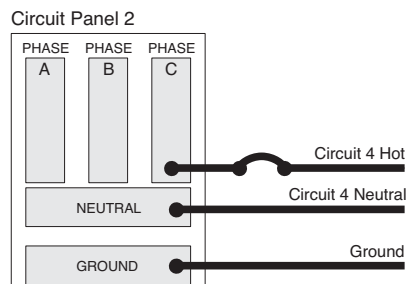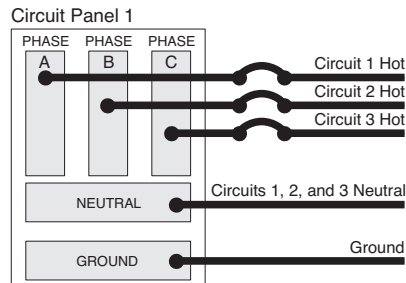



In the four-circuit 3+1 schematic, circuits 1, 2, and 3 are distributed from the first circuit panel and are supported with one shared neutral and one shared ground. Circuit 4 is distributed from a second circuit panel and is supported with a separate neutral and ground.

Single 3-Phase Circuit Panel

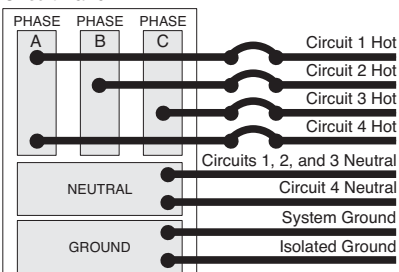


On a single 3-phase circuit panel, all four circuits are distributed as shown.

Four-Circuit, 2+2

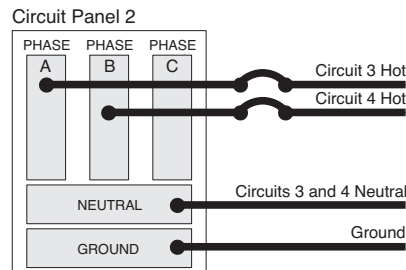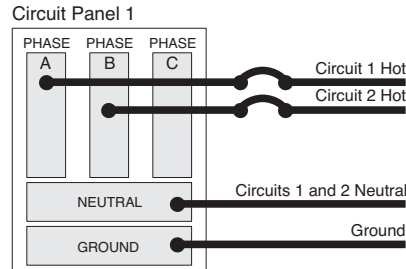


In the four-circuit 2+2 schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel and are supported with one shared neutral and one shared ground. Circuits 3 and 4 are distributed from a second circuit panel and supported by their own shared neutral and ground.

Single 3-Phase Circuit Panel

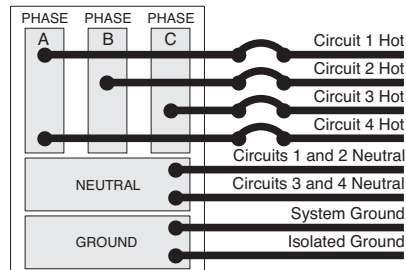



On a single 3-phase circuit panel, all four circuits are distributed as shown.

Split-Phase Circuit Panel

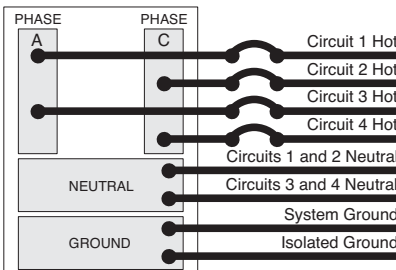


On a split-phase circuit panel, all four circuits are distributed as shown.

Three-Circuit, Separate Neutrals

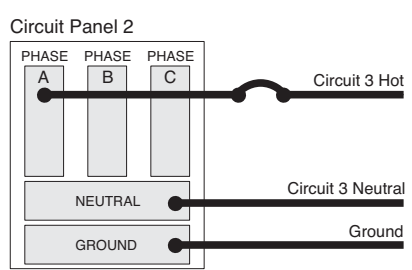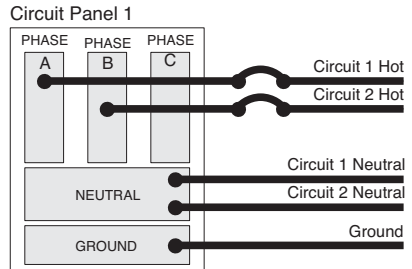


In the three-circuit, separate neutral schematic, circuits 1 and 2 are distributed from two different phases from the first circuit panel. Each circuit is supported with its own neutral and a common ground. Circuit 3 is distributed from the second circuit panel and is supported by its own neutral and ground.

Single 3-Phase Circuit Panel

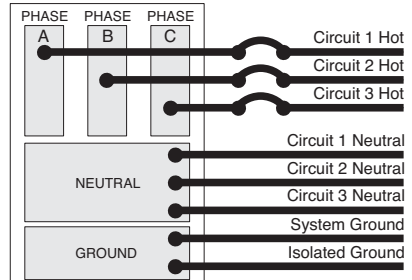

On a single 3-phase circuit panel, three circuits are distributed as shown.

Split-Phase Circuit Panel

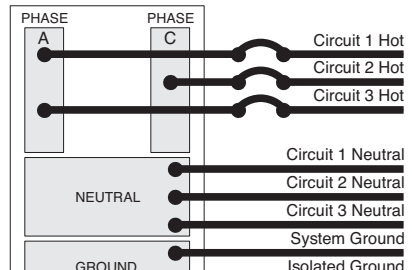

On a split-phase circuit panel, three circuits are distributed as shown.

Locations with Special Requirements

Locations with
Special Requirements

Local electrical codes

vary. Consult a qualified electrical contractor or engineer for the proper installation of all electrical components. Here are the special conditions for the cities of Chicago, New York, Los Angeles, and San Francisco.

Chicago

Chicago electrical code requires the power distribution network to be hardwired on site. There are no hardwired versions of Internode or Modular Power.

Architectural Solutions Low-Profile Floor can accommodate hard-wiring using the standard conduit, wires, junction boxes, and receptacles that electrician's routinely use.

New York City

Privacy Wall modular power components, Architectural Solutions modular power, and Internode modular components are not approved for use in NYC.

Los Angeles

All modular power components are acceptable for use in Los Angeles. Cord-connected power connections are not acceptable. Wire and cable managers are not approved for use in Los Angeles.

San Francisco

Internode components are not approved for use in the city of San Francisco.

Architectural Solutions Low-Profile Floor can accommodate hard-wiring using the standard conduit, wires, junction boxes, and receptacles that electrician's routinely use.

How to Calculate Power Needs

Use This to Determine How Many Power Infeeds You'll Need

When planning a power network, you must calculate the amperage requirements of all your electrical components so you can provide sufficient electricity to power them.

If your usage is not known in advance:

The National Electrical Code (NEC) allows a maximum of 13 receptacles on each 20-amp circuit. This provides up to 39 receptacles for each 3-circuit power-in and 52 receptacles for each 4-circuit power-in. In Canada, the Canadian Electrical Code allows a maximum of 10 receptacles on each 15-amp circuit. This provides up to 30 receptacles for each 3-circuit power-in and 40 receptacles for each 4-circuit power-in.

If your usage is known in advance:

Add up the amperage used by each piece of equipment in the workstation. Whenever you reach 60 amps—20 amps times 3 circuits—(45 amps in Canada) from items that are likely to be used at the same time, you have reached the limit for a single power-in. Specify another power-in and continue until all equipment is powered.

▶ See table at right for typical and actual amperage usages for components.

To calculate amperage when the wattage of a device is known, divide watts by 120.

If the circuits will normally be subject to a continuous load (three or more hours of continuous use, such as lights or computers), the NEC requires that circuit capacity be "de-rated" by 20 percent. Therefore, treat circuits used for continuous loads as if they were rated at 16 amps (12 amps in Canada) instead of the regular 20 amps.

Try to anticipate future increases in power requirements and build some excess capacity into your plan.

Some appliances, such as large copiers, coffee makers, or space heaters require most of the current available on a circuit. It is recommended that such devices be supplied with their own dedicated circuit.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper planning of electrical circuits in your locale.

Requirements of Office Equipment in Amps

General Equipment (Typical Amperage)

A.C. adapter	0.05
Adding machine	0.05
Answering machine	0.08
Calculator	0.25
Clock	0.03
Coffee pot	10.00
Copy machine	15.00
Desk-top copiers	7.00 to 10.00
Stand-alone copiers	15.00
Electric eraser	0.25
Fan	1.00
Manuscript holder	0.75
Microwave	8.00 to 12.00
Pencil sharpener	0.25
Radio	0.05
Space heater, 1000 watts	8.50
Space heater, 1500 watts	12.50

Electronic Equipment (Typical Amperage)

Desk-top memory storage devices	0.08 to 12.00
Modems	0.15
Desk-top printers	1.20 to 5.00
Stand-alone printers	3.00 to 11.00
VDTs and PCs	0.08 to 4.80

Steelcase Task Lighting (Actual Amperage)

Shelf lights:

24"W, 17 watts	0.20
36"W, 25 watts	0.30
48"W, 32 watts	0.30

Style Number Index

Style Number	Page	Description
GAP3HCX	300	Mod Pwr Branch Connector
GAP3HCY	300	Mod Pwr Branch Connector
GAP3HCZ	300	Mod Pwr Branch Connector
GAPDC20	301	Mod Pwr Dust Cap
GAPFBDHW	308	Mod Pwr Floor Access Box
GAPFBDX	307	Mod Pwr Floor Access Box
GAPFBDY	307	Mod Pwr Floor Access Box
GAPFBDZ	307	Mod Pwr Floor Access Box
GAPFBSHW	307	Mod Pwr Shallow Floor Access Box
GAPFBSX	306	Mod Pwr Shallow Floor Access Box
GAPFBSY	306	Mod Pwr Shallow Floor Access Box
GAPFBSZ	306	Mod Pwr Shallow Floor Access Box
GAPFCM90X	298	Modular Connector Faceplate
GAPFCM90Y	298	Modular Connector Faceplate
GAPFCM90Z	298	Modular Connector Faceplate
GAPFCMX	298	Mod Pwr Mod Conn Faceplate
GAPFCMY	298	Mod Pwr Mod Conn Faceplate
GAPFCMZ	298	Mod Pwr Mod Conn Faceplate
GAPHHCX	300	Mod Pwr Branch Connector
GAPHHCY	300	Mod Pwr Branch Connector
GAPHH CZ	300	Mod Pwr Branch Connector
GAPHM10X	297	Mod Pwr Mdlr Ext Harness
GAPHM10Y	297	Mod Pwr Mdlr Ext Harness
GAPHM10Z	297	Mod Pwr Mdlr Ext Harness
GAPHM15X	297	Mod Pwr Mdlr Ext Harness
GAPHM15Y	297	Mod Pwr Mdlr Ext Harness
GAPHM15Z	297	Mod Pwr Mdlr Ext Harness
GAPHM20X	297	Mod Pwr Mdlr Ext Harness
GAPHM20Y	297	Mod Pwr Mdlr Ext Harness
GAPHM20Z	297	Mod Pwr Mdlr Ext Harness
GAPHM30X	297	Mod Pwr Mdlr Ext Harness
GAPHM30Y	297	Mod Pwr Mdlr Ext Harness
GAPHM30Z	297	Mod Pwr Mdlr Ext Harness
GAPHM40X	297	Mod Pwr Mdlr Ext Harness
GAPHM40Y	297	Mod Pwr Mdlr Ext Harness
GAPHM40Z	297	Mod Pwr Mdlr Ext Harness
GAPHM50X	297	Mod Pwr Mdlr Ext Harness
GAPHM50Y	297	Mod Pwr Mdlr Ext Harness
GAPHM50Z	297	Mod Pwr Mdlr Ext Harness
GAPHM5X	297	Mod Pwr Mdlr Ext Harness
GAPHM5Y	297	Mod Pwr Mdlr Ext Harness
GAPHM5Z	297	Mod Pwr Mdlr Ext Harness
GAPMH10X	296	Mod Pwr Mod to Hardwire Harness
GAPMH10Y	296	Mod Pwr Mod to Hardwire Harness
GAPMH10Z	296	Mod Pwr Mod to Hardwire Harness
GAPMH30X	296	Mod Pwr Mod to Hardwire Harness
GAPMH30Y	296	Mod Pwr Mod to Hardwire Harness
GAPMH30Z	296	Mod Pwr Mod to Hardwire Harness
GAPMH50X	296	Mod Pwr Mod to Hardwire Harness
GAPMH50Y	296	Mod Pwr Mod to Hardwire Harness
GAPMH50Z	296	Mod Pwr Mod to Hardwire Harness
GAPMH5X	296	Mod Pwr Mod to Hardwire Harness
GAPMH5Y	296	Mod Pwr Mod to Hardwire Harness
GAPMH5Z	296	Mod Pwr Mod to Hardwire Harness
GAPR15L1IGX	309	Mod Pwr Receptacle

Style Number	Page	Description
GAPR15L1IGY	309	Mod Pwr Receptacle
GAPR15L1IGZ	309	Mod Pwr Receptacle
GAPR15L1SGX	309	Mod Pwr Receptacle
GAPR15L1SGY	309	Mod Pwr Receptacle
GAPR15L1SGZ	309	Mod Pwr Receptacle
GAPR15L2IGX	309	Mod Pwr Receptacle
GAPR15L2IGY	309	Mod Pwr Receptacle
GAPR15L2IGZ	309	Mod Pwr Receptacle
GAPR15L2SGX	309	Mod Pwr Receptacle
GAPR15L2SGY	309	Mod Pwr Receptacle
GAPR15L2SGZ	309	Mod Pwr Receptacle
GAPR15L3IGX	309	Mod Pwr Receptacle
GAPR15L3IGY	309	Mod Pwr Receptacle
GAPR15L3IGZ	309	Mod Pwr Receptacle
GAPR15L3SGX	309	Mod Pwr Receptacle
GAPR15L3SGY	309	Mod Pwr Receptacle
GAPR15L3SGZ	309	Mod Pwr Receptacle
GAPR15L4IGX	309	Mod Pwr Receptacle
GAPR15L4IGY	309	Mod Pwr Receptacle
GAPR15L4SGX	309	Mod Pwr Receptacle
GAPR15L4SGY	309	Mod Pwr Receptacle
GAPTHFBPNYX	304	Mod Pwr Base Power-In
GAPTHFBPNYY	304	Mod Pwr Base Power-In
GAPTHFBPNYZ	304	Mod Pwr Base Power-In
GAPTHFBPSFX	304	Modular Pwr Transition Harness
GAPTHFBPSFY	304	Modular Pwr Transition Harness
GAPTHFBPSFZ	304	Modular Pwr Transition Harness
GAPTHFBPX	304	Mod Pwr Base Power-In
GAPTHFBPY	304	Mod Pwr Base Power-In
GAPTHFBPZ	304	Mod Pwr Base Power-In
GAPTHFLSFX	302	Modular Pwr Transition Harness
GAPTHFLSFY	302	Modular Pwr Transition Harness
GAPTHFLSFZ	302	Modular Pwr Transition Harness
GAPTHFLX	302	Mod Pwr Floor Power-Infeed
GAPTHFLY	302	Mod Pwr Floor Power-Infeed
GAPTHFLZ	302	Mod Pwr Floor Power-Infeed
GAPTHFNXX	302	Mod Pwr Floor Power-Infeed
GAPTHFNYY	302	Mod Pwr Floor Power-Infeed
GAPTHFNZZ	302	Mod Pwr Floor Power-Infeed
GAPTHINNYX	303	Mod Pwr Floor Power-Infeed
GAPTHINNNY	303	Mod Pwr Floor Power-Infeed
GAPTHINNNZ	303	Mod Pwr Floor Power-Infeed
GAPTHINTSFX	303	Modular Pwr Transition Harness
GAPTHINTSFY	303	Modular Pwr Transition Harness
GAPTHINTSFZ	303	Modular Pwr Transition Harness
GAPTHINTX	303	Mod Pwr Floor Power-Infeed
GAPTHINTY	303	Mod Pwr Floor Power-Infeed
GAPTHINTZ	303	Mod Pwr Floor Power-Infeed
GAPTHBPBNYX	305	Mod Pwr Base Power-In
GAPTHBPBNYY	305	Mod Pwr Base Power-In
GAPTHBPBNYZ	305	Mod Pwr Base Power-In
GAPTHBPBSFX	305	Modular Pwr Transition Harness
GAPTHBPBSFY	305	Modular Pwr Transition Harness
GAPTHBPBSFZ	305	Modular Pwr Transition Harness
GAPTHBPBX	305	Mod Pwr Base Power-In

Style Number	Page	Description	Style Number	Page	Description
GAPTHBPY	305	Mod Pwr Base Power-In	GP1R4IGX	247	PW Receptacle
GAPTHBPZ	305	Mod Pwr Base Power-In	GP1R4SGHX	247	PW Receptacle
GAPTHPMP12X	306	Mod Pwr Transition Harness	GP1R4SGX	247	PW Receptacle
GAPTHPMP12Y	306	Mod Pwr Transition Harness	GP2BHY	253	PW Harness-to-Harness Connector
GAPTHPMP12Z	306	Mod Pwr Transition Harness	GP2BPI12Y	251	PW Base Power Infeed
GAPTHPMP24X	306	Mod Pwr Transition Harness	GP2BPISF12Y	251	PW Base Power Infeed
GAPTHPMP24Y	306	Mod Pwr Transition Harness	GP2HHY	253	PW Harness-to-Harness Connector
GAPTHPMP24Z	306	Mod Pwr Transition Harness	GP2MHAY	252	PW Modular Harness
GAPZBHW10X	299	Mod Pwr Zone Box	GP2PIH24Y	250	PW Multipurpose Power Infeed
GAPZBHW10Y	299	Mod Pwr Zone Box	GP2PIM24Y	250	PW Multipurpose Power Infeed
GAPZBHW10Z	299	Mod Pwr Zone Box	GP2PKBY	254	PW Base Powerkit
GAPZBHW8X	299	Mod Pwr Zone Box	GP2PKPSY	254	PW ADA-Desk Single Powerkit
GAPZBHW8Y	299	Mod Pwr Zone Box	GP2PKPY	254	PW Base Powerkit
GAPZBHW8Z	299	Mod Pwr Zone Box	GP2R1IGHY	247	PW Receptacle
GAPZBM100X	299	Mod Pwr Zone Box	GP2R1IGY	247	PW Receptacle
GAPZBM100Y	299	Mod Pwr Zone Box	GP2R1SGHY	247	PW Receptacle
GAPZBM100Z	299	Mod Pwr Zone Box	GP2R1SGY	247	PW Receptacle
GAPZBM125X	299	Mod Pwr Zone Box	GP2R2IGHY	247	PW Receptacle
GAPZBM125Y	299	Mod Pwr Zone Box	GP2R2IGY	247	PW Receptacle
GAPZBM125Z	299	Mod Pwr Zone Box	GP2R2SGHY	247	PW Receptacle
GAPZBM150X	299	Mod Pwr Zone Box	GP2R2SGY	247	PW Receptacle
GAPZBM150Y	299	Mod Pwr Zone Box	GP2R3IGHY	247	PW Receptacle
GAPZBM150Z	299	Mod Pwr Zone Box	GP2R3IGY	247	PW Receptacle
GAPZBM200X	299	Mod Pwr Zone Box	GP2R3SGHY	247	PW Receptacle
GAPZBM200Y	299	Mod Pwr Zone Box	GP2R3SGY	247	PW Receptacle
GAPZBM200Z	299	Mod Pwr Zone Box	GP2R4IGHY	247	PW Receptacle
GAPZBM50X	299	Mod Pwr Zone Box	GP2R4IGY	247	PW Receptacle
GAPZBM50Y	299	Mod Pwr Zone Box	GP2R4SGHY	247	PW Receptacle
GAPZBM50Z	299	Mod Pwr Zone Box	GP2R4SGY	247	PW Receptacle
GAPZBM75X	299	Mod Pwr Zone Box	GP3BHZ	253	PW Harness-to-Harness Connector
GAPZBM75Y	299	Mod Pwr Zone Box	GP3BPI12Z	251	PW Base Power Infeed
GAPZBM75Z	299	Mod Pwr Zone Box	GP3BPISF12Z	251	PW Base Power Infeed
GP1BHX	253	PW Harness-to-Harness Connector	GP3HHZ	253	PW Harness-to-Harness Connector
GP1BPI12X	251	PW Base Power Infeed	GP3MHAZ	252	PW Modular Harness
GP1BPISF12X	251	PW Base Power Infeed	GP3PIH24Z	250	PW Multipurpose Power Infeed
GP1HHX	253	PW Harness-to-Harness Connector	GP3PIM24Z	250	PW Multipurpose Power Infeed
GP1MHAX	252	PW Modular Harness	GP3PKBZ	254	PW Base Powerkit
GP1PIH24X	250	PW Multipurpose Power Infeed	GP3PKPSZ	254	PW ADA-Desk Single Powerkit
GP1PIM24X	250	PW Multipurpose Power Infeed	GP3PKPZ	254	PW ADA-Desk Double Powerkit
GP1PKBX	254	PW Base Powerkit	GP3R1IGHZ	247	PW Receptacle
GP1PKPSX	254	PW ADA-Desk Single Powerkit	GP3R1IGZ	247	PW Receptacle
GP1PKPX	254	PW ADA-Desk Double Powerkit	GP3R1SGHZ	247	PW Receptacle
GP1R1IGHX	247	PW Receptacle	GP3R1SGZ	247	PW Receptacle
GP1R1IGX	247	PW Receptacle	GP3R2IGHZ	247	PW Receptacle
GP1R1SGHX	247	PW Receptacle	GP3R2IGZ	247	PW Receptacle
GP1R1SGX	247	PW Receptacle	GP3R2SGHZ	247	PW Receptacle
GP1R2IGHX	247	PW Receptacle	GP3R2SGZ	247	PW Receptacle
GP1R2IGX	247	PW Receptacle	GP3R3IGHZ	247	PW Receptacle
GP1R2SGHX	247	PW Receptacle	GP3R3IGZ	247	PW Receptacle
GP1R2SGX	247	PW Receptacle	GP3R3SGHZ	247	PW Receptacle
GP1R3IGHX	247	PW Receptacle	GP3R3SGZ	247	PW Receptacle
GP1R3IGX	247	PW Receptacle	GPACoust	244	PW Acoustic Packing
GP1R3SGHX	247	PW Receptacle	GPAFEB	183	PW L-Adapter
GP1R3SGX	247	PW Receptacle	GPAL	183	PW L-Adapter
GP1R4IGHX	247	PW Receptacle	GPAS	244	PW Acoustic Seal

Style Number Index, continued

Style Number	Page	Description
GPAT	183	PW T-Adapter
GPAX	183	PW X-Adapter
GPBTC	236	PW Continuous Base Trim
GPBTCC	238	PW Power and Comm Base Trim
GPBTCHIP	238	PW Power and Comm Base Trim
GPBTCHIPC	238	PW Power and Comm Base Trim
GPBTP	238	PW Power and Comm Base Trim
GPBTPC	238	PW Power and Comm Base Trim
GPCFKA	232	PW Ceiling Track Clip Kit
GPCFKM	232	Ceiling Track Clip Kit
GPCFKP	232	PW Ceiling Track Clip Kit
GPCFKQ	232	PW Ceiling Track Clip Kit
GPCFKR	233	PW Ceiling Track Clip Kit
GPCFKT	232	PW Ceiling Track Clip Kit
GPCFKT5	233	PW Ceiling Track Clip Kit
GPCFKU	232	PW Ceiling Track Clip Kit
GPCFKX	232	PW Ceiling Track Clip Kit
GPCFKX5	233	PW Ceiling Track Clip Kit
GPCFKY	232	PW Ceiling Track Clip Kit
GPCFKZ	232	PW Ceiling Track Clip Kit
GPCNRBT120	237	PW Corner Base Trim
GPCNRBT135	237	PW Corner Base Trim
GPCNRBT90	237	PW Corner Base Trim
GPCT120V	231	PW Corner V Ceiling Track
GPCT135V	231	PW Corner V Ceiling Track
GPCTB	234	PW Ceiling Track Bipass Cover
GPCTFE	230	PW Finished-End Ceiling Track
GPCTLS	230	PW Corner L Ceiling Track
GPCTS	230	PW Straight Ceiling Track
GPCTT	234	PW Ceiling Track T-Clip
GPDBH3	161	PW Butt Hinge Kit
GPDBH3P	161	PW Butt Hinge Kit
GPDBH4	161	PW Butt Hinge Kit
GPDBH4P	161	PW Butt Hinge Kit
GPDCLA	160	PW Cylindrical Passage Set
GPDCLO	160	PW Cylindrical Lockset
GPDDFS	163	PW Door Floor Stop
GPDMLA	160	PW Mortise Passage Set
GPDMLO	160	PW Mortise Lockset
GPDMWS	162	PW Magnetic Wall Stop
GPDPBF	141	PW Butt-Hinged Door Frame
GPDPBT	141	PW Butt-Hinged Door Frame
GPDPHS	162	PW Pivot Hinge Kit
GPDPHSP	162	PW Pivot Hinge Kit
GPDPFF	144	PW Pivot-Hinged Door Frame
GPDPPT	144	PW Pivot-Hinged Door Frame
GPDS120	164	PW Low-Voltage Switch w/120V Transformer
GPDS277	164	PW Low-Voltage Switch w/277V Transformer
GPDS347	164	PW Low-Voltage Switch w/347V Transformer
GPDSBF	141	PW Butt-Hinged Door Frame
GPDSBS	163	PW Screw-In Base Stop
GPDSBT	141	PW Butt-Hinged Door Frame
GPDSCB	176	PW Back-to-Back Cover
GPDS1	164	PW High-Voltage Switch
GPDSPF	143	PW Pivot-Hinged Door Frame

Style Number	Page	Description
GPDSPFS	147	PW Pivot-Hinged Door Frame
GPDSPT	143	PW Pivot-Hinged Door Frame
GPDSPTS	147	PW Pivot-Hinged Door Frame
GPDSS1	164	PW High-Voltage Switch
GPDSST2L80	169	PW Slider Door with Tubular Pull
GPDSST2L96	169	PW Slider Door with Tubular Pull
GPDSST3E80	171	PW Slider Door with Tubular Pull
GPDSST3E96	171	PW Slider Door with Tubular Pull
GPDSST4E80	173	PW Slider Door with Tubular Pull
GPDSST4E96	173	PW Slider Door with Tubular Pull
GPDSST4L80	175	PW Slider Door with Tubular Pull
GPDSST4L96	175	PW Slider Door with Tubular Pull
GPDSSTF80	167	PW Slider Door with Tubular Pull
GPDSSTF96	167	PW Slider Door with Tubular Pull
GPFRS	243	PW Furniture Reveal Strips
GPFRS4	243	PW Furniture Reveal Strips
GPFS	241	PW Feature Strip
GPFS1	241	PW Feature Strip
GPFS1A	242	PW Anodized Feature Strip
GPFSA	242	PW Anodized Feature Strip
GPFSH	241	PW Feature Strip
GPFSH1	241	PW Feature Strip
GPFSH1A	242	PW Anodized Feature Strip
GPFSHA	242	PW Anodized Feature Strip
GPGLGSPF40B	209	PW GS Pivot-Hinged Door Leaf
GPGLGSPF42B	213	PW GS Pivot-Hinged Door Leaf
GPGLGSPT40B	211	PW GS Pivot-Hinged Door Leaf
GPGLGSPT42B	215	PW GS Pivot-Hinged Door Leaf
GPGM08	116	PW All-Glass Wall Panel
GPGM18	116	PW All-Glass Wall Panel
GPGM20	116	PW All-Glass Wall Panel
GPGM24	116	PW All-Glass Wall Panel
GPGM2L08	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L18	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L20	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L24	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L30	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L36	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L40	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L42	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L48	133	PW Glass Wall Panel w/ 2 Lites
GPGM2L60	133	PW Glass Wall Panel w/ 2 Lites
GPGM30	116	PW All-Glass Wall Panel
GPGM36	116	PW All-Glass Wall Panel
GPGM3E08	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E18	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E20	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E24	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E30	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E36	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E40	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E42	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E48	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM3E60	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM40	116	PW All-Glass Wall Panel

Style Number	Page	Description	Style Number	Page	Description
GPGM42	116	PW All-Glass Wall Panel	GPGS3E30	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM48	116	PW All-Glass Wall Panel	GPGS3E36	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM4E08	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS3E40	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM4E18	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS3E42	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM4E20	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS3E48	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM4E24	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS3E60	120	PW Glass Wall Panel w/ 3 Equal Lites
GPGM4E30	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS40	116	PW All-Glass Wall Panel
GPGM4E36	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS42	116	PW All-Glass Wall Panel
GPGM4E40	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS48	116	PW All-Glass Wall Panel
GPGM4E42	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS4E06	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E48	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS4E08	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4E60	124	PW Glass Wall Panel w/ 4 Equal Lites	GPGS4E18	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L08	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E20	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L18	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E24	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L20	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E30	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L24	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E36	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L30	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E40	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L36	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E42	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L40	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E48	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L42	129	PW Glass Wall Panel w/ 4 Lites	GPGS4E60	124	PW Glass Wall Panel w/ 4 Equal Lites
GPGM4L48	129	PW Glass Wall Panel w/ 4 Lites	GPGS4L06	129	PW Glass Wall Panel w/ 4 Lites
GPGM4L60	129	PW Glass Wall Panel w/ 4 Lites	GPGS4L08	129	PW Glass Wall Panel w/ 4 Lites
GPGM60	116	PW All-Glass Wall Panel	GPGS4L18	129	PW Glass Wall Panel w/ 4 Lites
GPGMC18	138	PW Clerestory Wall Panel	GPGS4L20	129	PW Glass Wall Panel w/ 4 Lites
GPGMC20	138	PW Clerestory Wall Panel	GPGS4L24	129	PW Glass Wall Panel w/ 4 Lites
GPGMC24	138	PW Clerestory Wall Panel	GPGS4L30	129	PW Glass Wall Panel w/ 4 Lites
GPGMC30	138	PW Clerestory Wall Panel	GPGS4L36	129	PW Glass Wall Panel w/ 4 Lites
GPGMC36	138	PW Clerestory Wall Panel	GPGS4L40	129	PW Glass Wall Panel w/ 4 Lites
GPGMC40	138	PW Clerestory Wall Panel	GPGS4L42	129	PW Glass Wall Panel w/ 4 Lites
GPGMC42	138	PW Clerestory Wall Panel	GPGS4L48	129	PW Glass Wall Panel w/ 4 Lites
GPGMC48	138	PW Clerestory Wall Panel	GPGS4L60	129	PW Glass Wall Panel w/ 4 Lites
GPGMC60	138	PW Clerestory Wall Panel	GPGS60	116	PW All-Glass Wall Panel
GPGS06	116	PW All-Glass Wall Panel	GPGSAFEB	222	PW GS Finished-End Adapter
GPGS08	116	PW All-Glass Wall Panel	GPGSAL	222	PW GS L-Adapter
GPGS18	116	PW All-Glass Wall Panel	GPGSC18	138	PW Clerestory Wall Panel
GPGS20	116	PW All-Glass Wall Panel	GPGSC20	138	PW Clerestory Wall Panel
GPGS24	116	PW All-Glass Wall Panel	GPGSC24	138	PW Clerestory Wall Panel
GPGS2L06	133	PW Glass Wall Panel w/ 2 Lites	GPGSC30	138	PW Clerestory Wall Panel
GPGS2L08	133	PW Glass Wall Panel w/ 2 Lites	GPGSC36	138	PW Clerestory Wall Panel
GPGS2L18	133	PW Glass Wall Panel w/ 2 Lites	GPGSC40	138	PW Clerestory Wall Panel
GPGS2L20	133	PW Glass Wall Panel w/ 2 Lites	GPGSC42	138	PW Clerestory Wall Panel
GPGS2L24	133	PW Glass Wall Panel w/ 2 Lites	GPGSC48	138	PW Clerestory Wall Panel
GPGS2L30	133	PW Glass Wall Panel w/ 2 Lites	GPGSC60	138	PW Clerestory Wall Panel
GPGS2L36	133	PW Glass Wall Panel w/ 2 Lites	GPGSDFFS80	217	PW GS Polished Edge Slider Door
GPGS2L40	133	PW Glass Wall Panel w/ 2 Lites	GPGSDFFS84	217	PW GS Polished Edge Slider Door
GPGS2L42	133	PW Glass Wall Panel w/ 2 Lites	GPGSDFFS96	217	PW GS Polished Edge Slider Door
GPGS2L48	133	PW Glass Wall Panel w/ 2 Lites	GPGSDFSVS	220	PW GS Slider Door Vertical Seal
GPGS2L60	133	PW Glass Wall Panel w/ 2 Lites	GPGSDFTS80	219	PW GS Polished Edge Slider Door
GPGS30	116	PW All-Glass Wall Panel	GPGSDFTS84	219	PW GS Polished Edge Slider Door
GPGS36	116	PW All-Glass Wall Panel	GPGSDFTS96	219	PW GS Polished Edge Slider Door
GPGS3E06	120	PW Glass Wall Panel w/ 3 Equal Lites	GPGSDPPF	207	PW GS Pivot-Hinged Door Frame
GPGS3E08	120	PW Glass Wall Panel w/ 3 Equal Lites	GPGSDPPT	207	PW GS Pivot-Hinged Door Frame
GPGS3E18	120	PW Glass Wall Panel w/ 3 Equal Lites	GPGSDSPF	207	PW GS Pivot-Hinged Door Frame
GPGS3E20	120	PW Glass Wall Panel w/ 3 Equal Lites	GPGSDSPFS	207	PW Pivot-Hinged Door Frame
GPGS3E24	120	PW Glass Wall Panel w/ 3 Equal Lites	GPGSDSPT	207	PW GS Pivot-Hinged Door Frame

Style Number Index, continued

Style Number	Page	Description
GPGLSDSPTS	207	PW Pivot-Hinged Door Frame
GPGLSGSPF40	209	PW GS Pivot-Hinged Door Leaf
GPGLSGSPF42	213	PW GS Pivot-Hinged Door Leaf
GPGLSGSPT40	211	PW GS Pivot-Hinged Door Leaf
GPGLSGSPT42	215	PW GS Pivot-Hinged Door Leaf
GPGLSPPF80	209	PW GS Pivot-Hinged Door Leaf
GPGLSPPT80	211	PW GS Pivot-Hinged Door Leaf
GPGLSSPF40	209	PW GS Pivot-Hinged Door Leaf
GPGLSSPF42	213	PW GS Pivot-Hinged Door Leaf
GPGLSSPT40	211	PW GS Pivot-Hinged Door Leaf
GPGLSSPT42	215	PW GS Pivot-Hinged Door Leaf
GP GSM2FK108	199	PW GS Two Divided Lite Frame Kit
GP GSM2FK120	199	PW GS Two Divided Lite Frame Kit
GP GSM2FK144	199	PW GS Two Divided Lite Frame Kit
GP GSM2FK72	199	PW GS Two Divided Lite Frame Kit
GP GSM2FK80	199	PW GS Two Divided Lite Frame Kit
GP GSM2FK84	199	PW GS Two Divided Lite Frame Kit
GP GSM2FK96	199	PW GS Two Divided Lite Frame Kit
GP GSM2FKT	228	PW GS All-Glass Frame Kit
GP GSM2GK108	201	PW GS Two Divided Lite Glass Kit
GP GSM2GK120	201	PW GS Two Divided Lite Glass Kit
GP GSM2GK144	201	PW GS Two Divided Lite Glass Kit
GP GSM2GK72	201	PW GS Two Divided Lite Glass Kit
GP GSM2GK80	201	PW GS Two Divided Lite Glass Kit
GP GSM2GK84	201	PW GS Two Divided Lite Glass Kit
GP GSM2GK96	201	PW GS Two Divided Lite Glass Kit
GP GSM2GKT	229	PW GS All-Glass Frame Kit
GP GSM2L08	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L18	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L20	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L24	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L30	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L36	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L40	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L42	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L48	196	PW GS Wall Panel w/ 2 Lites
GP GSM2L60	196	PW GS Wall Panel w/ 2 Lites
GP GSM2LL	225	PW GS Corner Unit
GP GSMC18	205	PW GS Clerestory Wall Panel
GP GSMC20	205	PW GS Clerestory Wall Panel
GP GSMC24	205	PW GS Clerestory Wall Panel
GP GSMC30	205	PW GS Clerestory Wall Panel
GP GSMC36	205	PW GS Clerestory Wall Panel
GP GSMC40	205	PW GS Clerestory Wall Panel
GP GSMC42	205	PW GS Clerestory Wall Panel
GP GSMC48	205	PW GS Clerestory Wall Panel
GP GSMC60	205	PW GS Clerestory Wall Panel
GP GSMEL	221	PW GS Mini End
GP GSMELF	221	PW GS Mini End
GP GSMEM	221	PW GS Mini End
GP GSMEMF	221	PW GS Mini End
GP GSMES	221	PW GS Mini End
GP GSMESF	221	PW GS Mini End
GP GSMG08	189	PW GS All-Glass Wall Panel
GP GSMG18	189	PW GS All-Glass Wall Panel

Style Number	Page	Description
GP GSMG20	189	PW GS All-Glass Wall Panel
GP GSMG24	189	PW GS All-Glass Wall Panel
GP GSMG30	189	PW GS All-Glass Wall Panel
GP GSMG36	189	PW GS All-Glass Wall Panel
GP GSMG40	189	PW GS All-Glass Wall Panel
GP GSMG42	189	PW GS All-Glass Wall Panel
GP GSMG48	189	PW GS All-Glass Wall Panel
GP GSMG60	189	PW GS All-Glass Wall Panel
GP GSMGFK108	191	PW GS All-Glass Frame Kit
GP GSMGFK120	191	PW GS All-Glass Frame Kit
GP GSMGFK144	191	PW GS All-Glass Frame Kit
GP GSMGFK72	191	PW GS All-Glass Frame Kit
GP GSMGFK80	191	PW GS All-Glass Frame Kit
GP GSMGFK84	191	PW GS All-Glass Frame Kit
GP GSMGFK96	191	PW GS All-Glass Frame Kit
GP GSMGFKT	226	PW GS All-Glass Frame Kit
GP GSMGGK108	193	PW GS All-Glass Glass Kit
GP GSMGGK120	193	PW GS All-Glass Glass Kit
GP GSMGGK144	193	PW GS All-Glass Glass Kit
GP GSMGGK72	193	PW GS All-Glass Glass Kit
GP GSMGGK80	193	PW GS All-Glass Glass Kit
GP GSMGGK84	193	PW GS All-Glass Glass Kit
GP GSMGGK96	193	PW GS All-Glass Glass Kit
GP GSMGGKT	227	PW GS All-Glass Frame Kit
GP GSMGL	225	PW GS Corner Unit
GP GSP120V	223	PW GS V-Post
GP GSP135V	223	PW GS V-Post
GP GSP135Y	223	PW GS Y-Post
GP GSPI	223	PW GS In-Line Post
GP GSPL	223	PW GS L-Post
GP GSPT	223	PW GS T-Post
GP GSS2FK108	199	PW GS Two Divided Lite Frame Kit
GP GSS2FK120	199	PW GS Two Divided Lite Frame Kit
GP GSS2FK144	199	PW GS Two Divided Lite Frame Kit
GP GSS2FK72	199	PW GS Two Divided Lite Frame Kit
GP GSS2FK80	199	PW GS Two Divided Lite Frame Kit
GP GSS2FK84	199	PW GS Two Divided Lite Frame Kit
GP GSS2FK96	199	PW GS Two Divided Lite Frame Kit
GP GSS2FKT	228	PW GS All-Glass Frame Kit
GP GSS2GK108	201	PW GS Two Divided Lite Glass Kit
GP GSS2GK120	201	PW GS Two Divided Lite Glass Kit
GP GSS2GK144	201	PW GS Two Divided Lite Glass Kit
GP GSS2GK72	201	PW GS Two Divided Lite Glass Kit
GP GSS2GK80	201	PW GS Two Divided Lite Glass Kit
GP GSS2GK84	201	PW GS Two Divided Lite Glass Kit
GP GSS2GK96	201	PW GS Two Divided Lite Glass Kit
GP GSS2GKT	229	PW GS All-Glass Frame Kit
GP GSS2L06	196	PW GS Wall Panel w/ 2 Lites
GP GSS2L08	196	PW GS Wall Panel w/ 2 Lites
GP GSS2L18	196	PW GS Wall Panel w/ 2 Lites
GP GSS2L20	196	PW GS Wall Panel w/ 2 Lites
GP GSS2L24	196	PW GS Wall Panel w/ 2 Lites
GP GSS2L30	196	PW GS Wall Panel w/ 2 Lites
GP GSS2L36	196	PW GS Wall Panel w/ 2 Lites
GP GSS2L40	196	PW GS Wall Panel w/ 2 Lites

Style Number	Page	Description	Style Number	Page	Description
GPGSS2L42	196	PW GS Wall Panel w/ 2 Lites	GPLSPBF76	149	PW Butt-Hinged Door Leaf
GPGSS2L48	196	PW GS Wall Panel w/ 2 Lites	GPLSPBT76	151	PW Butt-Hinged Door Leaf
GPGSS2L60	196	PW GS Wall Panel w/ 2 Lites	GPLSPPF80	153	PW Pivot-Hinged Door Leaf
GPGSS2LL	225	PW GS Corner Unit	GPLSPPT80	155	PW Pivot-Hinged Door Leaf
GPGSSC18	205	PW GS Clerestory Wall Panel	GPLSSBF40	149	PW Butt-Hinged Door Leaf
GPGSSC20	205	PW GS Clerestory Wall Panel	GPLSSBT40	151	PW Butt-Hinged Door Leaf
GPGSSC24	205	PW GS Clerestory Wall Panel	GPLSSPF40	153	PW Pivot-Hinged Door Leaf
GPGSSC30	205	PW GS Clerestory Wall Panel	GPLSSPF42	157	PW Pivot-Hinged Door Leaf for Cutout
GPGSSC36	205	PW GS Clerestory Wall Panel	GPLSSPT40	155	PW Pivot-Hinged Door Leaf
GPGSSC40	205	PW GS Clerestory Wall Panel	GPLSSPT42	159	PW Pivot-Hinged Door Leaf for Cutout
GPGSSC42	205	PW GS Clerestory Wall Panel	GPMEL	177	PW Mini End
GPGSSC48	205	PW GS Clerestory Wall Panel	GPMELF	178	PW Mini End
GPGSSC60	205	PW GS Clerestory Wall Panel	GPMEM	177	PW Mini End
GPGSSG06	189	PW GS All-Glass Wall Panel	GPMEMF	178	PW Mini End
GPGSSG08	189	PW GS All-Glass Wall Panel	GPMEF	177	PW Mini End
GPGSSG18	189	PW GS All-Glass Wall Panel	GPMEF	178	PW Mini End
GPGSSG20	189	PW GS All-Glass Wall Panel	GPMESF	178	PW Mini End
GPGSSG24	189	PW GS All-Glass Wall Panel	GPP120V	185	PW V-Post
GPGSSG30	189	PW GS All-Glass Wall Panel	GPP135V	185	PW V-Post
GPGSSG36	189	PW GS All-Glass Wall Panel	GPP135Y	185	PW Y-Post
GPGSSG40	189	PW GS All-Glass Wall Panel	GPPBKIT	245	PW Post and Beam Attachment Kit
GPGSSG42	189	PW GS All-Glass Wall Panel	GPPC	249	PW Cover Plate
GPGSSG48	189	PW GS All-Glass Wall Panel	GPPDC	249	PW Cover Plate
GPGSSG60	189	PW GS All-Glass Wall Panel	GPPI	185	PW In-Line Post
GPGSSGFK108	191	PW GS All-Glass Frame Kit	GPPL	185	PW L-Post
GPGSSGFK120	191	PW GS All-Glass Frame Kit	GPPT	185	PW T-Post
GPGSSGFK144	191	PW GS All-Glass Frame Kit	GPPX	185	PW X-Post
GPGSSGFK72	191	PW GS All-Glass Frame Kit	GPR1USBX	248	USB Receptacle
GPGSSGFK80	191	PW GS All-Glass Frame Kit	GPR1USBY	248	USB Receptacle
GPGSSGFK84	191	PW GS All-Glass Frame Kit	GPR1USBZ	248	USB Receptacle
GPGSSGFK96	191	PW GS All-Glass Frame Kit	GPR2USBX	248	USB Receptacle
GPGSSGFKT	226	PW GS All-Glass Frame Kit	GPR2USBY	248	USB Receptacle
GPGSSGFK108	193	PW GS All-Glass Glass Kit	GPR2USBZ	248	USB Receptacle
GPGSSGFK120	193	PW GS All-Glass Glass Kit	GPR3USBX	248	USB Receptacle
GPGSSGFK144	193	PW GS All-Glass Glass Kit	GPR3USBY	248	USB Receptacle
GPGSSGFK72	193	PW GS All-Glass Glass Kit	GPR3USBZ	248	USB Receptacle
GPGSSGFK80	193	PW GS All-Glass Glass Kit	GPR4USBX	248	USB Receptacle
GPGSSGFK84	193	PW GS All-Glass Glass Kit	GPR4USBY	248	USB Receptacle
GPGSSGFK96	193	PW GS All-Glass Glass Kit	GPRCE	249	PW Power/Communication Fillers
GPGSSGFKT	227	PW GS All-Glass Frame Kit	GPRTL	235	Cornice Track
GPGSSGL	225	PW GS Corner Unit	GPRTS	235	Cornice Track
GPIA	186	PW I-Line Interface Post	GPRTT	235	Cornice Track
GPJCH	254	PW Chicago & NYC Junction Box	GPRTX	235	Cornice Track
GPLGSBF40	149	PW Butt-Hinged Door Leaf	GPSAM08	113	Mod Solid Wall Panels with Enhanced Core
GPLGSBF40B	149	PW Butt-Hinged Door Leaf	GPSAM18	113	Mod Solid Wall Panels with Enhanced Core
GPLGSBT40	151	PW Butt-Hinged Door Leaf	GPSAM20	113	Mod Solid Wall Panels with Enhanced Core
GPLGSBT40B	151	PW Butt-Hinged Door Leaf	GPSAM24	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPF40	153	PW Pivot-Hinged Door Leaf	GPSAM30	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPF40B	153	PW Pivot-Hinged Door Leaf	GPSAM36	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPF42	157	PW Pivot-Hinged Door Leaf for Cutout	GPSAM40	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPF42B	157	PW Pivot-Hinged Door Leaf for Cutout	GPSAM42	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPT40	155	PW Pivot-Hinged Door Leaf	GPSAM48	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPT40B	155	PW Pivot-Hinged Door Leaf	GPSAS06	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPT42	159	PW Pivot-Hinged Door Leaf for Cutout	GPSAS08	113	Mod Solid Wall Panels with Enhanced Core
GPLGSPT42B	159	PW Pivot-Hinged Door Leaf for Cutout	GPSAS18	113	Solid Wall Panels with Enhanced Core
			GPSAS20	113	Solid Wall Panels with Enhanced Core

Style Number Index, continued

Style Number	Page	Description
GPSAS24	113	Solid Wall Panels with Enhanced Core
GPSAS30	113	Solid Wall Panels with Enhanced Core
GPSAS36	113	Solid Wall Panels with Enhanced Core
GPSAS40	113	Solid Wall Panels with Enhanced Core
GPSAS42	113	Solid Wall Panels with Enhanced Core
GPSAS48	113	Solid Wall Panels with Enhanced Core
GPSS08	110	PW Solid Wall Panel
GPSS18	110	PW Solid Wall Panel
GPSS20	110	PW Solid Wall Panel
GPSS24	110	PW Solid Wall Panel
GPSS30	110	PW Solid Wall Panel
GPSS36	110	PW Solid Wall Panel
GPSS40	110	PW Solid Wall Panel
GPSS42	110	PW Solid Wall Panel
GPSS48	110	PW Solid Wall Panel
GPSS60	110	PW Solid Wall Panel
GPUFG	246	PPW Universal Floor Gripper
GPWC1	179	PW Wall Channel
GPWC2	179	PW Wall Channel
GPWC4	179	PW Wall Channel
GPWCCP	180	PW Panel End Cut Kit
GPWCCPSK	181	PW End Filler Cut Kit
GPWT	246	PW Wall-Lifting Tools
GSM2WSPLIT	328	Splitter
GSM30EMIT4	326	Emitters
GSM4WSPLIT	328	Splitter
GSM600RM	323	Rack Mount Brkt
GSMCABLE10	327	Cables
GSMCABLE100	327	Cables
GSMCABLE25	327	Cables
GSMCABLE50	327	Cables
GSMCABLE75	327	Cables
GSMCPAK4	327	Cables
GSMDEM2	331	Drywall Mounting Bracket
GSMDEM3	331	Drywall Mount Brkt
GSMEEM1	330	Couplers
GSMEEM2	330	Couplers
GSMEMIT4	326	Emitters
GSMFFCOUP	329	Couplers
GSMHS1	324	Hole Saw Blade
GSMPS3	325	Power Supply
GSMQT100	322	QtPro Qt 100 Ctrl Mod
GSMQT300	322	QtPro Qt 300 Ctrl Mod
GSMQT600	322	QtPro Qt 600 Ctrl Mod

Style Number	Page	Description
GSMSONET	332	Sonet Qt Ind Soundmasking
GSMSONETXT	332	Sonet Qt Ind Soundmasking
GUNCR3232	285	Low-Profile Corner Ramp Kit
GUNCT224	283	Low-Profile Corner Edge Trim
GUNCT424	283	Low-Profile Corner Edge Trim
GUNDS16161	282	Low-Profile Distribution Tile
GUNDS16164	282	Low-Profile Distribution Tile
GUNET248	282	Low-Profile Edge Trim
GUNET448	282	Low-Profile Edge Trim
GUNFBT1616	282	Low-Profile Floor Box Access Tile
GUNFS726	285	Low-Profile Fire Stop
GUNGR10	280	Low-Profile Grom Triangle Tile
GUNGR2	280	Low-Profile Grom Triangle Tile
GUNRA363211	284	Low-Profile Ramp Kit
GUNRA36328	284	Low-Profile Ramp Kit
GUNRA483211	284	Low-Profile Ramp Kit
GUNRA48328	284	Low-Profile Ramp Kit
GUNRC8161	281	Low-Profile Rectangle Tile
GUNRC8164	281	Low-Profile Rectangle Tile
GUNSQ16161	281	Low-Profile Square Tile
GUNSQ16164	281	Low-Profile Square Tile
GUNST8	281	Low-Profile Seismic Triangle Tile
GUNSU100	280	Low-Profile Supports
GUNTR450	280	Low-Profile Triangle Tile
GUNTR48	280	Low-Profile Triangle Tile
GUNTT22L	283	Low-Profile Transition Trim
GUNTT22R	283	Low-Profile Transition Trim
GUNTT42L	283	Low-Profile Transition Trim
GUNTT42R	283	Low-Profile Transition Trim
GUNWT10486	284	Low-Profile Wall Scribe Trim
PFLADPTR	264	Thread Plug Adapter
PFLCNCTR	268	Thread Connector
PFLHUB	265	Thread Power Hub
PFLTRK	267	Thread Power Track
PFLTRKINF	266	Thread Power Track Infeed

Trademark List

- ® The following are registered trademarks for products of Steelcase Inc. or one of its related corporate entities: 4 o'clock, 900 Series, à la carte, Airtouch, Ally, Amia, Answer, Archipelago, Avenir, Ballet, Bix, Brayton International, Cachet, Canopy, Canto, Chancellor, Coalesse, Confidante, Context, Convene, CopyCam, Criterion, Crushed Can, Currency, dash, Designtex, Details, Detour, Drive, Elective Elements, Ellipse, Ember Chrome, Emerge, E-Table 2, FYI, Garland, Gentry, Ginkgo Biloba, Groupwork, Ideo, Jacket, Jenny, Jersey, Kart, Kick, LaCosta, Leap, Let's B, LiveBack, Max-Stacker, media:scape, Metro, Migrations, Mitra, Montage, Nurture, Oriana, Parade, Pathways, PCT, Permiso, Player, PolyVision, Portal, Power Pincher, Progeny, Protégé, R2, Rally, Relevant, Reply, Rizzi Arc, Sensor, Series 9000, Siento, Sieste, Sine, Softcare, Springboard, Steelcase, Steelcase Design Partnership, Stella, Stow Davis, Swathmore, TeamWork, Technique, Texpress, Think, Thunder, Topo, Train, Turnstone, Underline, Unison, Vecta, Viridian, Walden, Werndl, and X-Stack.
- ® The following registered trademarks are under license from AWI Licensing Company, Dover, DE: SoundScapes, DuraBrite, BioBlock, and Armstrong.
- ® The following registered trademarks are under license from Byrne Electrical, Rockford, MI: Interport, Mini-Port, Axil Z, and Ellora.
- ® The following is a registered trademark of DuPont, Wilmington, DE: Corian.
- ® The following is a registered trademark of Genlyte Thomas Company, Louisville, KY: Lightolier.
- ® The following is a registered trademark of Hilti Corporation, FL-9494 Schaan, Principality of Liechtenstein: Hilti.
- ® The following is a registered trademark of Leviton Manufacturing Company, Little Neck, NY: Decora.
- ® The following is a registered trademark of Mechanical Plastics Corp, Elmsford, NY: Toggler.
- ® The following is a registered trademark of Microsoft Corporation, Redmond, WA: Microsoft.
- ® The following is a registered trademark of Panduit Corporation, Lockport, IL: Panduit.
- ® The following is a registered trademark of Trav (Press), Cuneo, Italy: Assisa.
- ® The following is a registered trademark of Virtual Ink, Boston, MA: mimioActive.
- ® The following registered trademarks are under license from Wilkhahn Furniture Products: Avera, Senzo, Versal, and Wilkhahn FS.
- ® The following is a registered trademark of Wilsonart International, Temple, TX: Chemsurf.

- ® The following is a registered trademark of Wiremold, West Hartford, CT: Wiremold.
- ® The following is a registered trademark of EMU Group S.P.A., Perugia, Italy: Emu.
- ™ The following are trademarks for products of Steelcase Inc. or one of its related corporate entities: Access, Active/Passive Shelf, Ainsley, Akira, Alcove, Alerion, aight, Amaris, American Elect, American Tradition, ap40, Arbor, Arriva, Asana, Ascot, Aspekt, Astor, Await, Bira, Bivi, Bottomline, Brook, Buoy, Burton, c:scape, Calla, Calm, Camber, Campfire, Capa, Cappuccino, Cesar, Chester, Chord, Circa, Clarendon, Classic Rectangular, cobi, Collaboration, Community, Company, Convey, Cortex, Coupe, Crea, Crew, Cura, Cypress, Davenport, Dearborn, Deck, Déjà, Denizen, Denska, Derby, Divisio, Donovan, Dune, Duo, e³, e³ ceramicsteel, e³ environmental ceramicsteel, Echo, Edge, Elsna, Empath, Empress, Enea, ño, EnSync, Enviro, Escapade, Exchange, Exponents, Field, Flat Top, FlexFrame, Flip Top, Flute, Folio, FrameOne, FreeFlow, Frontier, Galilei, Gesture, Ginger, Ginkgo, Go Wall, Grip, Groove, Hatchback, Hawthorne, Hitch, Host Collection, Hosu, Huddleboard, i2i, Impact, Indy, InfoLink, IOS, I-Solve, Jack, Jarrah, Jetty, Juice, Kami, Kast, Kathryn, Lagunitas, Lark, L'Attitude, LearnLab, Leela, Lincoln, Linden, LiveSeat, Loria, Lyric, Malibu, Malibu Too, Mansfield, Marathon, Martini, Mason, Masque, Millbrae, Mineral, Mingle, Mystic, Mystic Metal, Mystic Wood, Montreal, Move, Nadia, Neighbor, nesso, Nickel, Nikko, Nod, Node, Norfolk, Ontrak, Oom, Opus, Orchid, Outlook Collection, Ovation, Paloma, Paperflo, Parliament, Pasio, Passerelle, Patriarch, Payback, Peek, Pile File, Pisa, Pool, PUCK, QiVi, Quba, Rave, Reed, Regard, Relay, Reunion, Ripple, Riser, Rocco, Rocky, RoomWizard, Runner, Satellite, Sawyer, ScapeSeries, Senti, Sentinel, Senza, Sequoia, Session, ShareLink, Shield, Shortcut, Sidewalk, Skylar, Slumber, Smoke, Snug, Soft Leaf, Sonata, Sorrel, SOTO, Stationkits, Stiletto, Surprise!, Switch, Symphony, Sync, TagWizard, Tava, TeamStudio, TeamTheater, Tenaro, Terrazzo, Theorem, Thread, Topaz, Touchdown, Tour, Tower Too, Trees, Trillium, Trolley, tX2, U-Free, Uno, V.I.A., Verb, Verge, Victor2, Visalia, Waldorf, Woodruff, Workspring, and X-tenz.
- ™ The following is a trademark of Microsoft Corporation, Redmond, WA: Windows.
- ™ The following is a trademark of Rodman Industries, Inc., Oconomowoc, WI: ResinCore1.
- ™ The following is a trademark of Ultrafabrics, LLC, Elmsford, NY: Ultraleather.
- ™ The following trademarks are under license from Wilkhahn Furniture products: Cana, Linus, Logon, Picto, Range, Stitz, Thema, Timetable, and Tubis.
- ™ The following is a trademark of MBDC, Charlottesville, VA: Cradle to Cradle and C2C.

- ™ The following trademarks are under license from Walter Knoll: Andoo, Bob, Lazlo, Lox, Ribbon, and Together.
 - ™ The following trademarks are under license from PP Möbler: Bar and Flag Halyard.
 - ™ The following trademarks are under license from Viccarbe: Davos, Holy Day, Last Minute, RS, and Wrapp.
 - ™ The following trademarks are under license from Carl Hansen: Elbow, Paddle, Shell, Wing, and Wishbone.
 - ™ The following trademarks are under license from Cambridge Sound Management, LLC, Cambridge, MA: QtPro Soundmasking, Qt Quiet Technology, and Sonet Qt.
 - ™ The following is a trademark of Electri-Cable Assemblies, Shelton, CT: Interact.
- Trademarks used here in are the property of Steelcase, Inc. or of their respective owners.*